

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2215.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	66.5V x 67.1H
	At 50% of Imax	31.8V x 32.0H
	At 90% of Imax	11.7V x 11.9H
Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	788.1 lumens per klm.
	To 50% of Imax	378.1 lumens per klm.
	To 90% of Imax	63.2 lumens per klm.
Upward LOR		2.2 %
Downward LOR		97.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW RED-30D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001870
MFR.:	SUR.:	Shielding Angle:

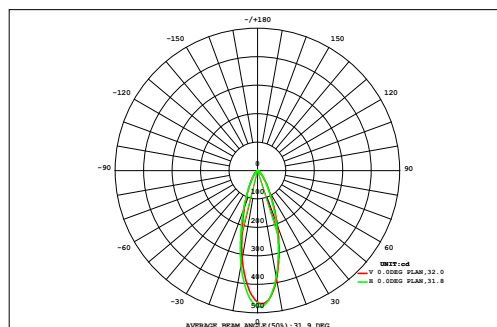

DATA OF LAMP		Eff:38.14lm/W	
MODEL		Imax(cd)	480.8
NOMINAL POWER(W)	5.66	AVAILABILITY(%)	78.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	171.2
NOMINAL FLUX(lm)	217	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	217.0
TEST VOLTAGE(V)	221.4	q @50%(H,V)	32,32DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm			F t	F a
	0.04	0.05	0.07	0.09	0.11	0.13	0.16	0.18	0.20	0.20	0.20	0.19	0.17	0.15	0.12	0.09	0.07	0.05	2.27	0.00	
	40	0.05	0.06	0.09	0.11	0.15	0.19	0.23	0.27	0.30	0.31	0.31	0.29	0.26	0.21	0.16	0.12	0.09	0.06	3.26	0.12
	35	0.05	0.08	0.11	0.15	0.21	0.27	0.34	0.41	0.46	0.49	0.48	0.44	0.38	0.30	0.22	0.16	0.11	0.08	4.74	2.68
	30	0.06	0.09	0.13	0.20	0.28	0.39	0.51	0.63	0.72	0.77	0.75	0.67	0.55	0.42	0.30	0.21	0.14	0.09	6.92	5.42
	25	0.07	0.11	0.17	0.25	0.38	0.55	0.76	0.97	1.14	1.20	1.15	1.00	0.78	0.57	0.40	0.27	0.17	0.11	10.0	8.83
	20	0.08	0.13	0.20	0.31	0.49	0.75	1.08	1.44	1.72	1.81	1.69	1.41	1.06	0.74	0.50	0.32	0.20	0.12	14.0	13.0
	15	0.09	0.14	0.23	0.38	0.60	0.96	1.45	1.99	2.41	2.52	2.32	1.86	1.37	0.93	0.60	0.37	0.22	0.13	18.6	17.7
	10	0.10	0.16	0.26	0.43	0.71	1.15	1.77	2.49	3.05	3.19	2.85	2.25	1.63	1.08	0.67	0.41	0.24	0.14	22.6	21.7
	5	0.10	0.16	0.27	0.45	0.76	1.25	1.94	2.73	3.37	3.56	3.16	2.49	1.78	1.17	0.71	0.42	0.25	0.14	24.7	23.9
	0	0.10	0.16	0.27	0.45	0.75	1.24	1.94	2.74	3.33	3.43	3.08	2.43	1.72	1.13	0.69	0.41	0.24	0.13	24.2	23.4
	-5	0.09	0.15	0.25	0.42	0.69	1.12	1.73	2.38	2.82	2.90	2.60	2.07	1.47	0.97	0.60	0.36	0.21	0.12	21.0	20.1
	-10	0.08	0.13	0.22	0.36	0.58	0.91	1.33	1.76	2.08	2.14	1.92	1.55	1.13	0.76	0.49	0.30	0.18	0.11	16.0	15.1
	-15	0.07	0.11	0.18	0.29	0.45	0.66	0.92	1.19	1.37	1.41	1.29	1.06	0.80	0.56	0.37	0.24	0.15	0.09	11.2	10.1
	-20	0.06	0.09	0.14	0.22	0.32	0.46	0.61	0.75	0.86	0.88	0.81	0.68	0.53	0.39	0.27	0.18	0.12	0.07	7.43	6.06
	-25	0.05	0.07	0.11	0.16	0.23	0.30	0.39	0.47	0.52	0.53	0.50	0.42	0.34	0.26	0.19	0.13	0.09	0.06	4.83	2.89
	-30	0.04	0.06	0.08	0.11	0.15	0.20	0.25	0.29	0.32	0.32	0.30	0.26	0.22	0.17	0.13	0.10	0.07	0.05	3.13	0.21
	-35	0.03	0.04	0.06	0.08	0.11	0.13	0.16	0.18	0.19	0.20	0.19	0.17	0.14	0.12	0.09	0.07	0.05	0.04	2.05	0.00
	-40	0.03	0.03	0.05	0.06	0.07	0.09	0.10	0.11	0.12	0.12	0.12	0.11	0.09	0.08	0.07	0.05	0.04	0.03	1.37	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45	
F t	1.19	1.84	2.88	4.52	7.04	10.7	15.7	21.0	25.0	26.0	23.7	19.4	14.4	10.00	6.57	4.22	2.64	1.62	198	---	
F a	0.00	0.00	0.16	2.54	5.50	9.39	14.4	19.9	23.9	25.0	22.7	18.3	13.3	8.70	5.06	2.29	0.10	0.00	---	171	

one-half-peak spread: U:15.6,D:16.4 , L:15.9,R:16.4


NEMA Beam Type: Type 4

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW RED-30D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001870
MFR.:	SUR.:	Shielding Angle:

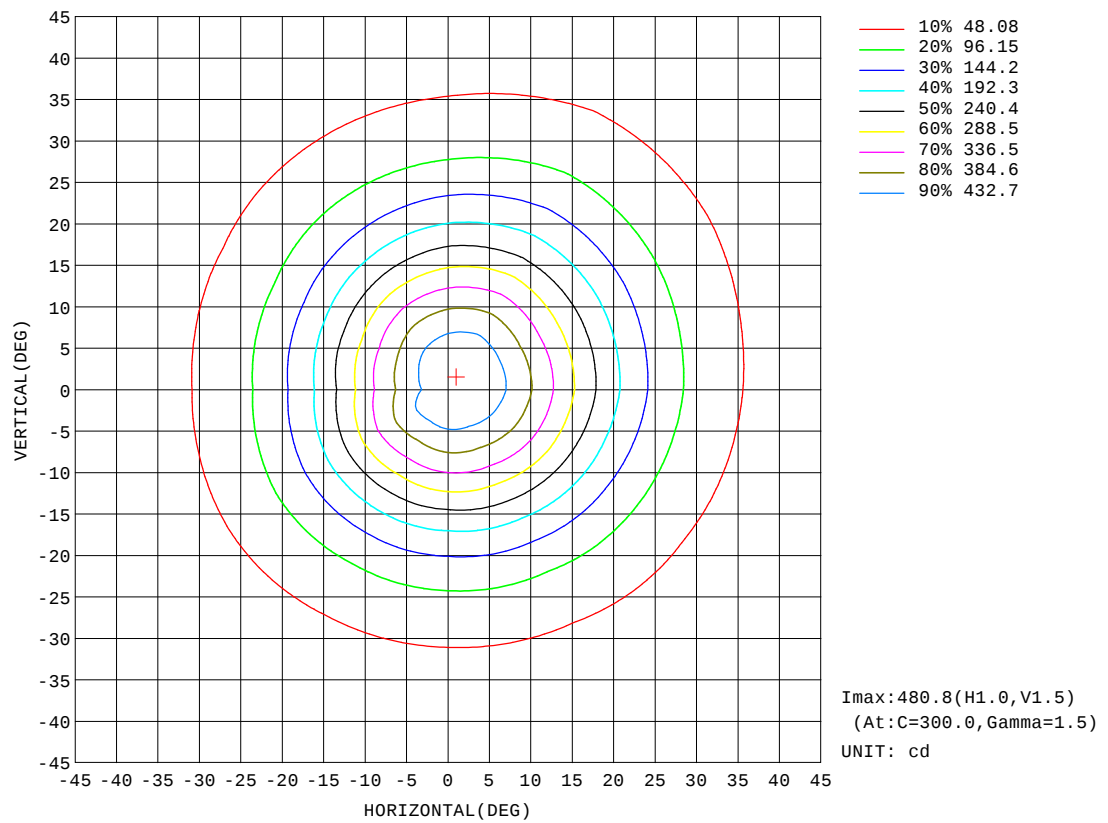


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW RED-30D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001870
MFR.:	SUR.:	Shielding Angle:

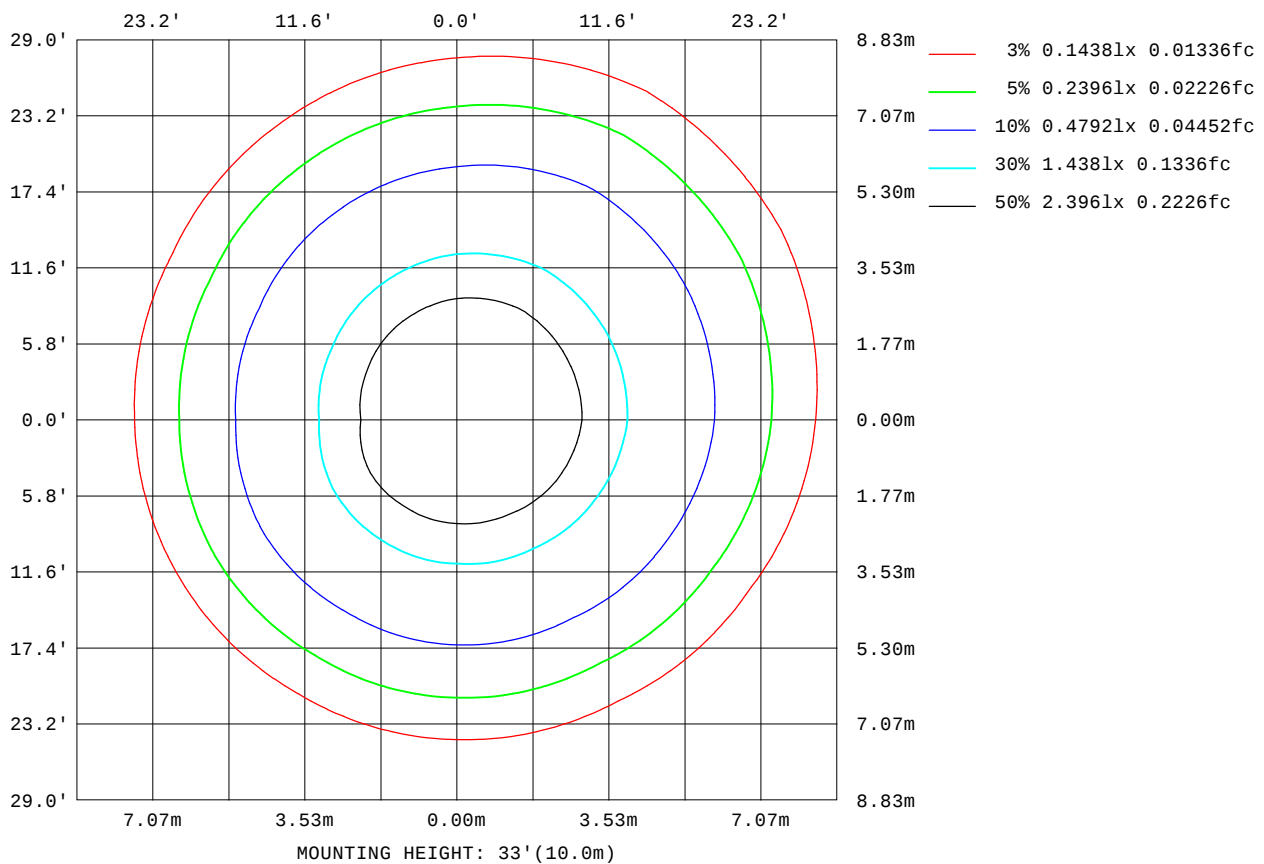

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

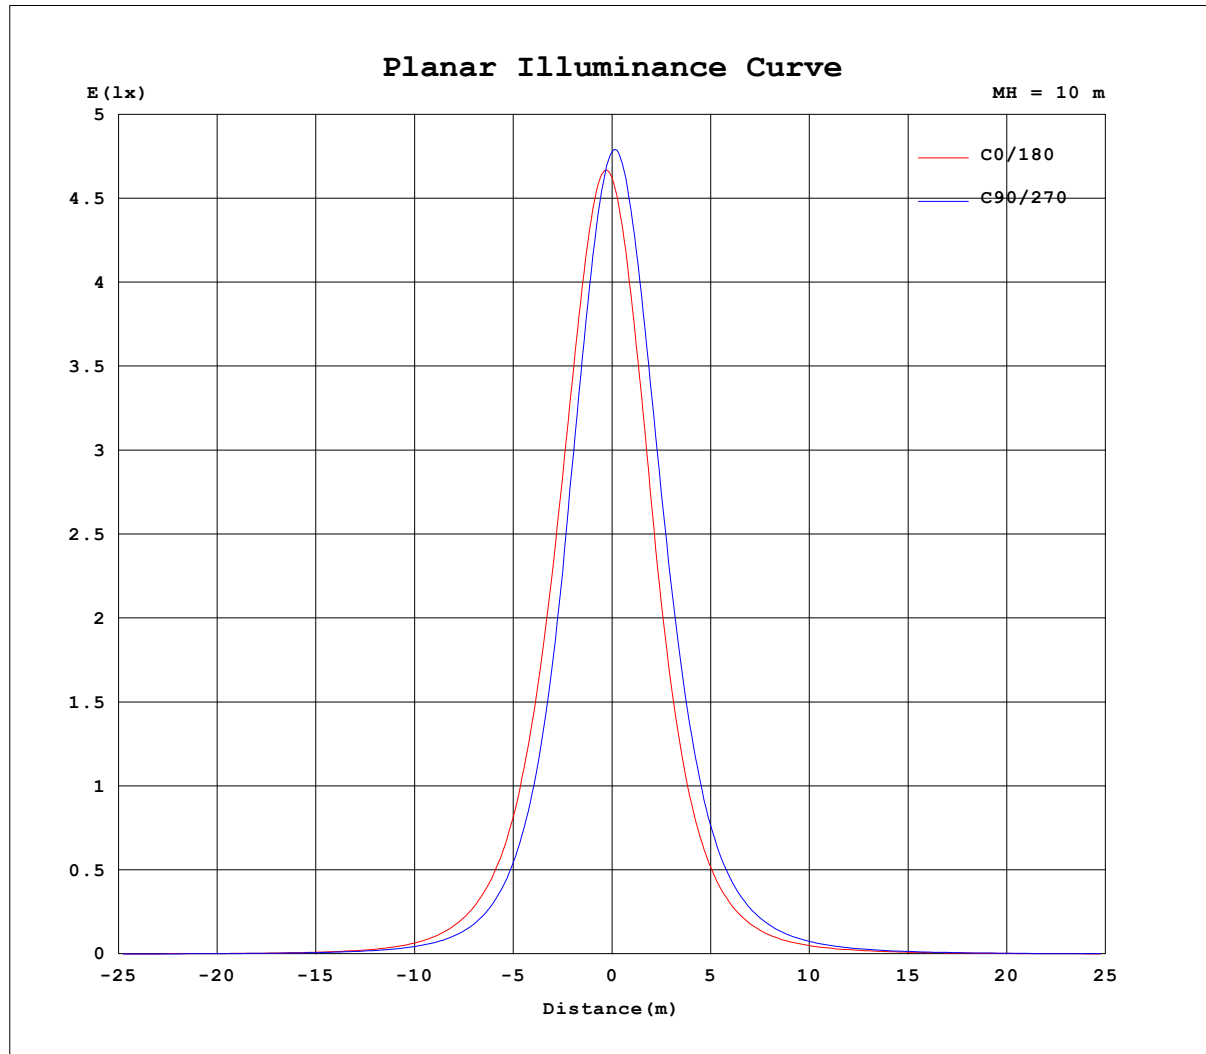


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW RED-30D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001870
MFR.:	SUR.:	Shielding Angle:

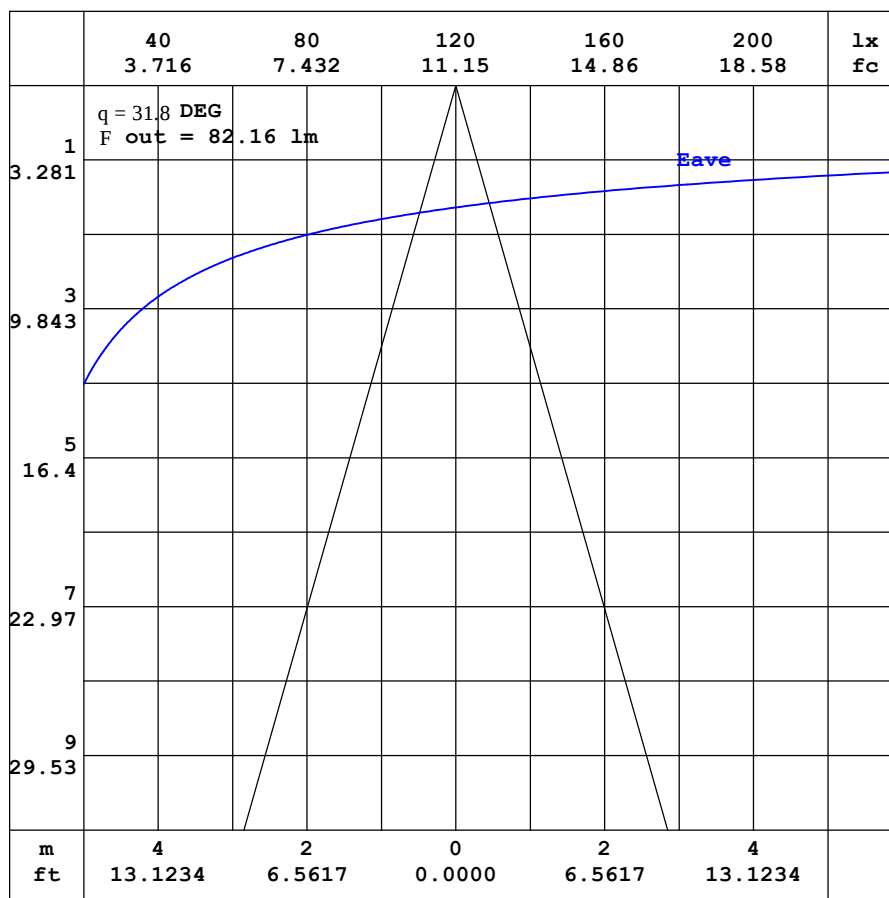

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW RED-30D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001870
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.72	0.67	0.67	0.68	0.72	0.80	0.92	1.06	1.22	1.39	1.53	1.64	1.69	1.73	1.73	1.73	1.73	1.73	1.86
-170	0.72	0.66	0.65	0.65	0.66	0.71	0.79	0.87	0.97	1.07	1.16	1.22	1.26	1.28	1.30	1.36	1.48	1.58	1.69
-160	0.72	0.65	0.62	0.61	0.61	0.62	0.65	0.67	0.71	0.74	0.76	0.77	0.79	0.93	1.06	1.18	1.30	1.39	1.45
-150	0.72	0.64	0.60	0.57	0.55	0.53	0.52	0.50	0.48	0.44	0.42	0.50	0.59	0.69	0.79	0.88	0.97	1.03	1.06
-140	0.72	0.63	0.58	0.54	0.50	0.46	0.42	0.38	0.31	0.29	0.31	0.35	0.39	0.44	0.50	0.56	0.61	0.65	0.67
-130	0.72	0.63	0.57	0.51	0.46	0.41	0.36	0.29	0.27	0.26	0.26	0.26	0.26	0.27	0.29	0.32	0.36	0.38	0.40
-120	0.72	0.63	0.55	0.50	0.43	0.37	0.31	0.26	0.26	0.25	0.25	0.24	0.24	0.24	0.24	0.25	0.25	0.26	0.27
-110	0.72	0.63	0.54	0.48	0.42	0.35	0.29	0.26	0.26	0.25	0.25	0.24	0.24	0.24	0.24	0.24	0.25	0.25	0.26
-100	0.72	0.63	0.55	0.47	0.40	0.33	0.26	0.25	0.25	0.25	0.25	0.24	0.23	0.24	0.24	0.25	0.25	0.25	0.26
-90	0.72	0.64	0.56	0.48	0.40	0.32	0.24	0.24	0.23	0.23	0.23	0.22	0.22	0.22	0.22	0.22	0.22	0.22	0.23
-80	0.72	0.65	0.57	0.50	0.41	0.32	0.22	0.22	0.23	0.25	0.28	0.31	0.34	0.36	0.37	0.38	0.40	0.40	0.40
-70	0.72	0.66	0.61	0.55	0.48	0.44	0.41	0.50	0.64	0.78	0.92	1.07	1.21	1.35	1.46	1.57	1.64	1.69	1.72
-60	0.72	0.68	0.66	0.65	0.70	0.81	0.94	1.11	1.41	1.74	2.07	2.41	2.75	3.06	3.35	3.60	3.80	3.93	4.00
-50	0.72	0.71	0.73	0.83	1.04	1.33	1.63	1.94	2.38	2.97	3.61	4.30	5.03	5.79	6.54	7.27	7.83	8.23	8.40
-40	0.72	0.74	0.82	1.05	1.45	1.92	2.44	3.00	3.64	4.55	5.79	7.32	9.13	11.2	13.5	15.9	17.9	19.4	20.0
-30	0.72	0.77	0.93	1.29	1.87	2.55	3.32	4.23	5.35	6.85	9.02	12.5	17.2	23.0	29.9	37.5	45.1	51.1	53.8
-20	0.72	0.80	1.03	1.52	2.26	3.13	4.18	5.49	7.28	9.87	14.0	20.6	30.6	45.1	64.3	87.7	113	136	146
-10	0.72	0.83	1.11	1.71	2.58	3.62	4.90	6.60	8.98	12.8	18.9	29.1	45.8	72.5	114	172	242	304	337
0	0.72	0.85	1.17	1.84	2.78	3.95	5.39	7.33	10.1	14.3	21.2	32.9	52.3	83.8	135	212	313	406	462
10	0.72	0.85	1.16	1.80	2.72	3.85	5.25	7.10	9.69	13.7	20.1	30.7	47.6	74.6	116	180	260	338	379
20	0.72	0.84	1.12	1.69	2.53	3.57	4.81	6.40	8.56	11.6	16.2	23.4	34.0	50.5	73.6	104	140	173	193
30	0.72	0.83	1.06	1.52	2.25	3.13	4.16	5.40	6.97	9.03	11.8	16.0	21.8	29.4	38.9	50.0	61.7	71.7	78.0
40	0.72	0.81	0.99	1.33	1.89	2.58	3.39	4.29	5.34	6.67	8.38	10.5	13.1	16.2	19.8	23.6	27.2	30.3	32.2
50	0.72	0.79	0.92	1.15	1.50	2.00	2.57	3.20	3.90	4.74	5.68	6.75	7.93	9.17	10.5	11.8	12.9	13.9	14.5
60	0.72	0.78	0.87	0.99	1.19	1.45	1.79	2.19	2.62	3.09	3.60	4.13	4.67	5.22	5.72	6.19	6.60	6.92	7.12
70	0.72	0.76	0.81	0.88	0.96	1.07	1.21	1.36	1.56	1.77	2.00	2.23	2.44	2.66	2.87	3.06	3.21	3.32	3.40
80	0.72	0.74	0.78	0.81	0.84	0.88	0.92	0.94	0.97	1.01	1.05	1.10	1.15	1.20	1.25	1.30	1.33	1.36	1.38
90	0.72	0.73	0.75	0.77	0.78	0.80	0.82	0.81	0.80	0.80	0.79	0.79	0.78	0.79	0.80	0.81	0.82	0.83	0.84
100	0.72	0.72	0.72	0.73	0.73	0.74	0.74	0.72	0.70	0.69	0.67	0.66	0.65	0.65	0.66	0.67	0.67	0.68	0.69
110	0.72	0.71	0.70	0.70	0.70	0.69	0.68	0.67	0.66	0.65	0.65	0.64	0.64	0.64	0.64	0.64	0.64	0.64	0.64
120	0.72	0.71	0.69	0.69	0.68	0.67	0.66	0.65	0.65	0.65	0.66	0.68	0.70	0.71	0.73	0.73	0.73	0.72	0.72
130	0.72	0.69	0.68	0.68	0.67	0.67	0.67	0.66	0.68	0.72	0.77	0.83	0.89	0.94	0.98	1.02	1.04	1.06	1.06
140	0.72	0.68	0.68	0.67	0.67	0.68	0.69	0.73	0.78	0.86	0.96	1.06	1.16	1.26	1.34	1.40	1.43	1.45	1.46
150	0.72	0.68	0.68	0.67	0.68	0.70	0.76	0.83	0.93	1.05	1.17	1.30	1.43	1.53	1.63	1.70	1.74	1.75	1.75
160	0.72	0.68	0.67	0.67	0.70	0.74	0.82	0.93	1.06	1.21	1.36	1.48	1.58	1.68	1.76	1.84	1.90	1.93	1.96
170	0.72	0.67	0.67	0.68	0.71	0.78	0.88	1.01	1.16	1.33	1.47	1.59	1.67	1.72	1.74	1.78	1.83	1.88	1.98
180	0.72	0.67	0.67	0.68	0.72	0.80	0.92	1.06	1.22	1.39	1.53	1.64	1.69	1.73	1.73	1.73	1.73	1.73	1.91

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-12

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW RED-30D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001870
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.65	1.56	1.44	1.26	1.07	0.87	0.69	0.53	0.41	0.29	0.23	0.23	0.23	0.23	0.23	0.22	0.19	0.18	
-170	1.60	1.55	1.43	1.26	1.06	0.86	0.68	0.53	0.42	0.30	0.25	0.24	0.24	0.24	0.24	0.22	0.20	0.18	
-160	1.40	1.31	1.20	1.07	0.91	0.75	0.61	0.48	0.38	0.29	0.26	0.25	0.24	0.24	0.24	0.22	0.20	0.18	
-150	1.03	0.97	0.88	0.78	0.67	0.56	0.47	0.40	0.33	0.29	0.27	0.26	0.25	0.25	0.24	0.22	0.20	0.18	
-140	0.64	0.60	0.54	0.47	0.41	0.37	0.33	0.31	0.30	0.29	0.28	0.26	0.26	0.25	0.24	0.21	0.20	0.18	
-130	0.38	0.35	0.31	0.28	0.27	0.26	0.27	0.27	0.28	0.28	0.28	0.27	0.26	0.25	0.24	0.22	0.20	0.18	
-120	0.27	0.26	0.25	0.25	0.25	0.25	0.26	0.26	0.27	0.27	0.28	0.27	0.26	0.25	0.23	0.21	0.19	0.18	
-110	0.26	0.25	0.25	0.25	0.25	0.25	0.25	0.26	0.27	0.27	0.28	0.27	0.26	0.24	0.22	0.21	0.19	0.18	
-100	0.25	0.25	0.25	0.24	0.24	0.23	0.24	0.25	0.25	0.25	0.25	0.25	0.24	0.22	0.21	0.20	0.19	0.18	
-90	0.22	0.22	0.22	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.20	0.20	0.19	0.19	0.18	
-80	0.40	0.40	0.38	0.37	0.36	0.34	0.31	0.28	0.25	0.22	0.20	0.19	0.20	0.20	0.20	0.20	0.19	0.18	
-70	1.70	1.64	1.57	1.46	1.35	1.22	1.08	0.94	0.80	0.67	0.52	0.39	0.31	0.24	0.21	0.20	0.19	0.18	
-60	3.96	3.85	3.69	3.45	3.16	2.86	2.52	2.17	1.83	1.49	1.18	0.90	0.65	0.43	0.29	0.22	0.19	0.18	
-50	8.35	8.07	7.58	6.92	6.16	5.43	4.67	3.93	3.25	2.61	2.05	1.56	1.12	0.74	0.42	0.26	0.20	0.18	
-40	19.8	18.7	16.9	14.6	12.5	10.4	8.35	6.62	5.18	4.02	3.11	2.31	1.64	1.08	0.61	0.33	0.21	0.18	
-30	52.8	48.0	40.9	33.8	26.8	20.5	15.2	11.0	8.00	5.90	4.32	3.13	2.17	1.41	0.80	0.38	0.21	0.18	
-20	143	125	102	77.4	55.5	38.4	26.4	17.9	12.0	8.11	5.61	3.90	2.65	1.70	0.97	0.43	0.22	0.18	
-10	322	276	212	150	99.5	64.2	40.9	25.8	16.1	10.2	6.76	4.52	3.01	1.90	1.08	0.48	0.23	0.18	
0	455	387	294	204	132	82.8	51.1	31.1	18.7	11.5	7.38	4.84	3.19	2.00	1.13	0.50	0.23	0.18	
10	372	315	243	174	116	75.6	48.3	30.3	18.7	11.8	7.66	5.06	3.33	2.09	1.19	0.53	0.25	0.18	
20	192	175	143	108	78.3	55.1	37.5	24.6	16.0	10.6	7.16	4.86	3.24	2.05	1.17	0.54	0.26	0.18	
30	79.9	76.6	69.0	56.5	44.0	33.2	24.3	17.5	12.4	8.75	6.17	4.32	2.93	1.88	1.08	0.54	0.28	0.18	
40	33.1	32.4	30.4	27.2	22.6	18.2	14.4	11.3	8.76	6.68	4.95	3.56	2.48	1.62	0.93	0.52	0.29	0.18	
50	14.7	14.5	13.9	13.0	11.7	10.0	8.45	7.04	5.79	4.70	3.69	2.75	1.95	1.29	0.79	0.48	0.29	0.18	
60	7.16	7.08	6.84	6.49	6.05	5.44	4.78	4.16	3.57	3.02	2.52	1.96	1.42	0.99	0.68	0.45	0.29	0.18	
70	3.39	3.33	3.24	3.10	2.92	2.71	2.47	2.23	1.99	1.76	1.53	1.31	1.03	0.79	0.59	0.43	0.30	0.18	
80	1.38	1.37	1.35	1.32	1.28	1.23	1.19	1.14	1.09	1.05	1.02	0.97	0.82	0.68	0.55	0.42	0.30	0.18	
90	0.83	0.83	0.82	0.82	0.81	0.81	0.81	0.82	0.83	0.83	0.84	0.85	0.74	0.63	0.52	0.41	0.30	0.18	
100	0.68	0.67	0.67	0.66	0.66	0.66	0.68	0.69	0.71	0.73	0.75	0.76	0.67	0.58	0.49	0.39	0.29	0.18	
110	0.64	0.64	0.64	0.64	0.64	0.64	0.64	0.65	0.65	0.66	0.68	0.67	0.61	0.54	0.46	0.38	0.28	0.18	
120	0.72	0.72	0.72	0.71	0.70	0.68	0.66	0.65	0.65	0.65	0.66	0.61	0.55	0.50	0.43	0.36	0.27	0.18	
130	1.05	1.03	1.00	0.96	0.91	0.85	0.79	0.73	0.69	0.65	0.62	0.56	0.51	0.45	0.40	0.34	0.27	0.18	
140	1.45	1.42	1.38	1.31	1.22	1.11	1.01	0.91	0.81	0.70	0.58	0.51	0.46	0.42	0.37	0.31	0.26	0.18	
150	1.76	1.74	1.70	1.62	1.51	1.39	1.25	1.10	0.88	0.69	0.55	0.46	0.41	0.38	0.33	0.29	0.24	0.18	
160	1.96	1.95	1.89	1.80	1.69	1.58	1.31	1.06	0.82	0.61	0.49	0.41	0.36	0.33	0.31	0.27	0.23	0.18	
170	1.94	1.91	1.88	1.75	1.53	1.29	1.06	0.84	0.67	0.48	0.37	0.32	0.30	0.28	0.27	0.25	0.21	0.18	
180	1.65	1.56	1.44	1.26	1.07	0.87	0.69	0.53	0.41	0.29	0.23	0.23	0.23	0.23	0.23	0.22	0.19	0.18	

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-12

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: