

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1308.6 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	86.0V x 85.3H
	At 50% of Imax	46.2V x 46.4H
	At 90% of Imax	19.3V x 18.6H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	842.7 lumens per klm.
	To 50% of Imax	474.8 lumens per klm.
	To 90% of Imax	103.9 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW 3000K-45D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:45 DEG	DIM.:598MM	SERIAL No.:IES001879
MFR.:	SUR.:	Shielding Angle:

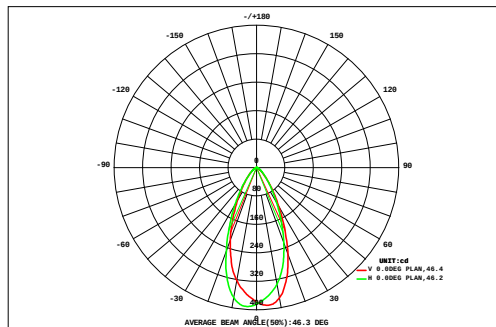

DATA OF LAMP		Eff:41.13lm/W	
MODEL		Imax(cd)	395.1
NOMINAL POWER(W)	7.38	AVAILABILITY(%)	84.2
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	254.3
NOMINAL FLUX(lm)	301.9	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	301.9
TEST VOLTAGE(V)	221.4	q @50%(H,V)	46,46DEG

		AREA FLUX DIAGRAM																UNIT:lm				F t	F a
		0.01	0.02	0.03	0.05	0.07	0.09	0.11	0.12	0.13	0.13	0.12	0.11	0.09	0.07	0.05	0.04	0.02	0.01	1.28	0.00		
VERTICAL (DEG)	72	0.02	0.03	0.05	0.08	0.12	0.15	0.19	0.21	0.23	0.22	0.21	0.18	0.15	0.11	0.08	0.05	0.03	0.01	2.15	0.00		
	64	0.02	0.04	0.08	0.12	0.18	0.24	0.31	0.36	0.39	0.38	0.35	0.30	0.23	0.17	0.12	0.08	0.04	0.02	3.43	0.00		
	56	0.03	0.06	0.10	0.17	0.26	0.38	0.52	0.64	0.71	0.71	0.63	0.50	0.37	0.25	0.16	0.10	0.05	0.02	5.66	0.91		
	48	0.03	0.07	0.13	0.23	0.38	0.61	0.90	1.18	1.36	1.35	1.17	0.88	0.60	0.37	0.22	0.12	0.06	0.03	9.69	6.96		
	40	0.04	0.08	0.16	0.30	0.55	0.96	1.54	2.14	2.53	2.53	2.13	1.52	0.95	0.54	0.29	0.15	0.07	0.03	16.5	14.6		
	32	0.04	0.09	0.19	0.38	0.76	1.42	2.41	3.51	4.24	4.27	3.55	2.45	1.44	0.76	0.37	0.17	0.08	0.03	26.2	24.6		
	24	0.05	0.10	0.21	0.45	0.95	1.88	3.32	4.84	5.88	6.07	5.16	3.53	2.00	0.99	0.44	0.19	0.08	0.03	36.2	34.8		
		0.05	0.11	0.23	0.49	1.06	2.18	3.87	5.62	6.75	7.22	6.38	4.45	2.46	1.16	0.49	0.20	0.09	0.03	42.8	41.5		
		0.05	0.10	0.22	0.48	1.06	2.18	3.93	5.84	7.15	7.57	6.69	4.63	2.55	1.19	0.50	0.20	0.08	0.03	44.5	43.1		
		0.04	0.10	0.20	0.43	0.93	1.90	3.41	5.14	6.46	6.77	5.78	3.95	2.22	1.06	0.45	0.19	0.08	0.03	39.1	37.8		
	-24	0.04	0.09	0.17	0.35	0.73	1.41	2.44	3.65	4.62	4.81	4.07	2.82	1.65	0.82	0.37	0.16	0.07	0.03	28.3	26.8		
	-32	0.03	0.07	0.14	0.26	0.51	0.92	1.49	2.15	2.70	2.79	2.39	1.71	1.06	0.57	0.28	0.13	0.06	0.03	17.3	15.5		
	-40	0.03	0.06	0.11	0.19	0.33	0.55	0.83	1.15	1.39	1.43	1.25	0.95	0.62	0.36	0.20	0.10	0.05	0.02	9.62	7.04		
	-48	0.02	0.04	0.08	0.13	0.21	0.32	0.45	0.58	0.68	0.70	0.63	0.50	0.35	0.23	0.14	0.08	0.04	0.02	5.18	0.83		
	-56	0.02	0.03	0.05	0.09	0.13	0.19	0.25	0.30	0.34	0.34	0.31	0.26	0.20	0.14	0.09	0.05	0.03	0.01	2.84	0.00		
	-64	0.01	0.02	0.04	0.06	0.08	0.11	0.14	0.16	0.18	0.18	0.17	0.14	0.11	0.08	0.06	0.03	0.02	0.01	1.60	0.00		
-72	0.01	0.01	0.02	0.03	0.04	0.06	0.07	0.09	0.09	0.09	0.08	0.07	0.06	0.04	0.03	0.02	0.01	0.00	0.84	0.00			
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72			
F t	0.53	1.14	2.22	4.31	8.36	15.6	26.2	37.7	45.8	47.6	41.1	29.0	17.1	8.91	4.33	2.08	0.98	0.40	293	---			
F a	0.00	0.00	0.00	0.44	5.47	13.1	23.8	35.5	43.7	45.4	38.9	26.7	14.7	6.13	0.61	0.00	0.00	0.00	---	254			

one-half-peak spread: U:20.0,D:26.5 , L:27.0,R:19.7


NEMA Beam Type: Type 5

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW 3000K-45D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:45 DEG	DIM.:598MM	SERIAL No.:IES001879
MFR.:	SUR.:	Shielding Angle:

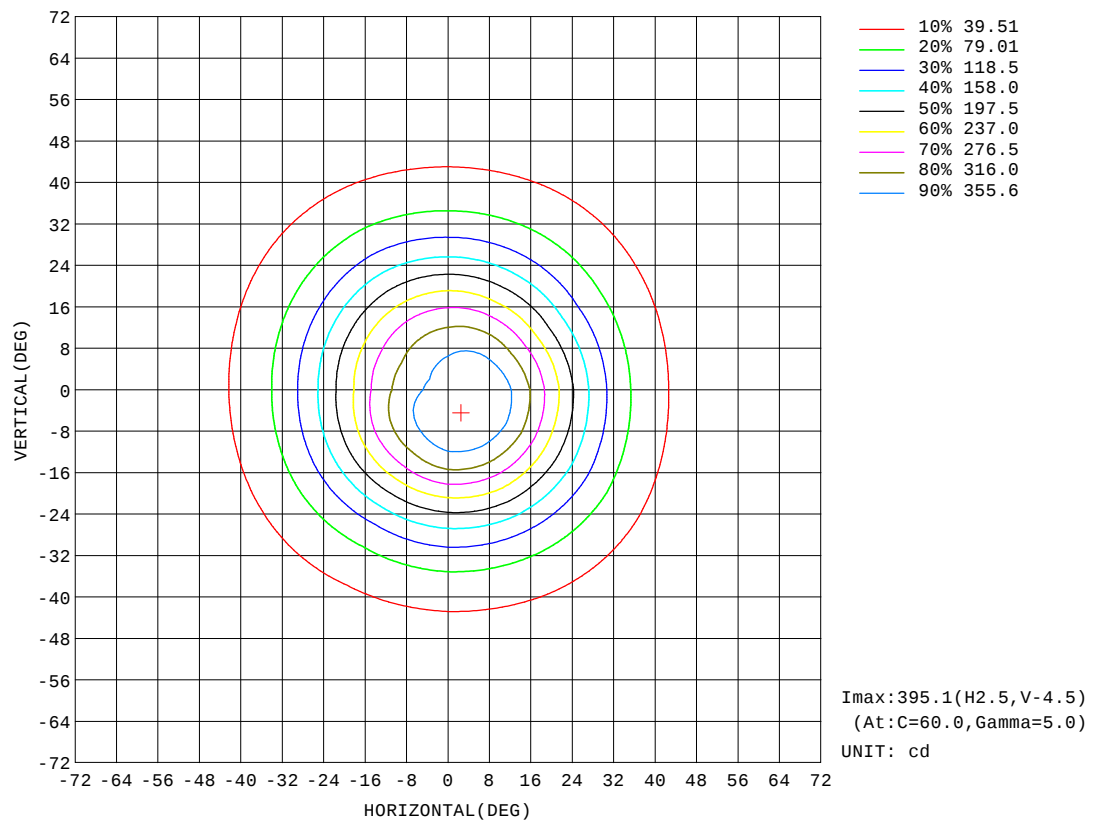


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW 3000K-45D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:45 DEG	DIM.:598MM	SERIAL No.:IES001879
MFR.:	SUR.:	Shielding Angle:

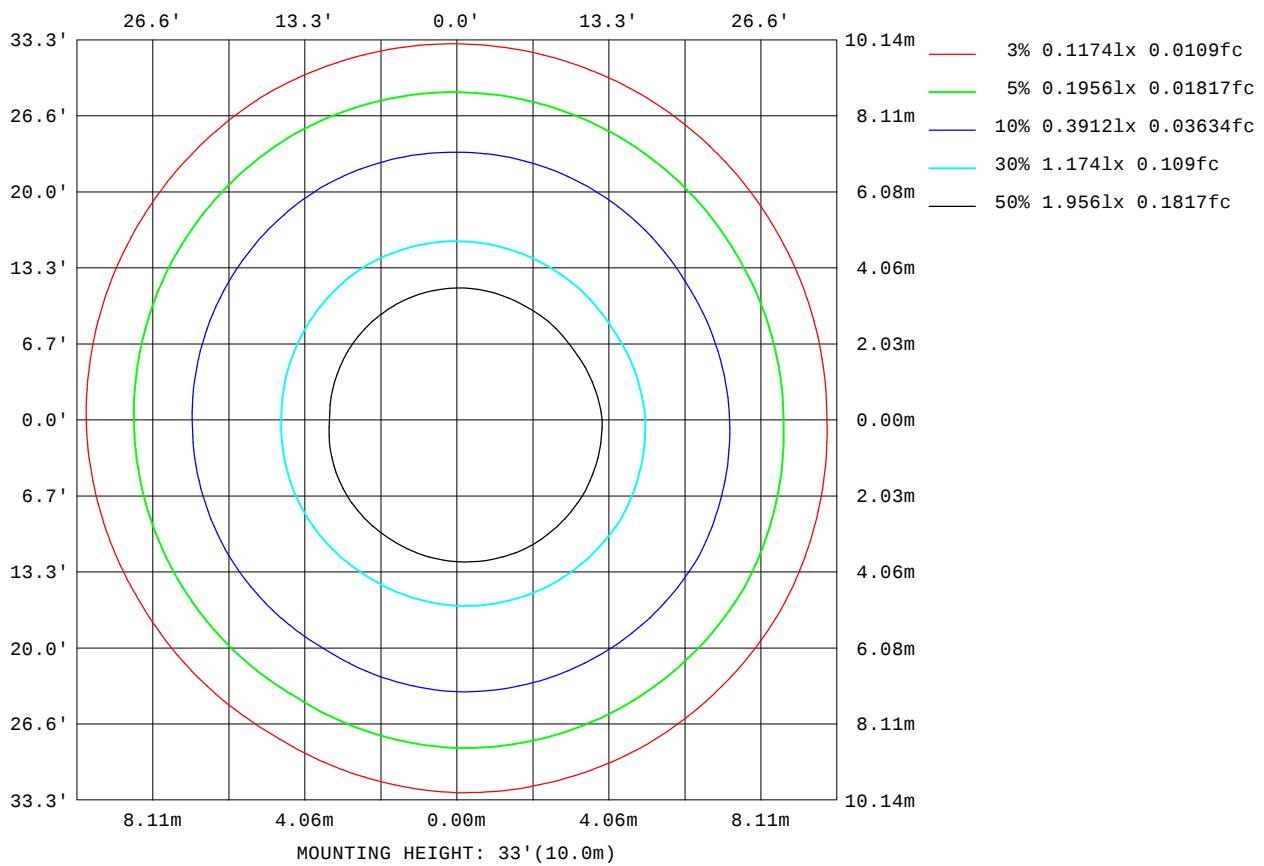

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

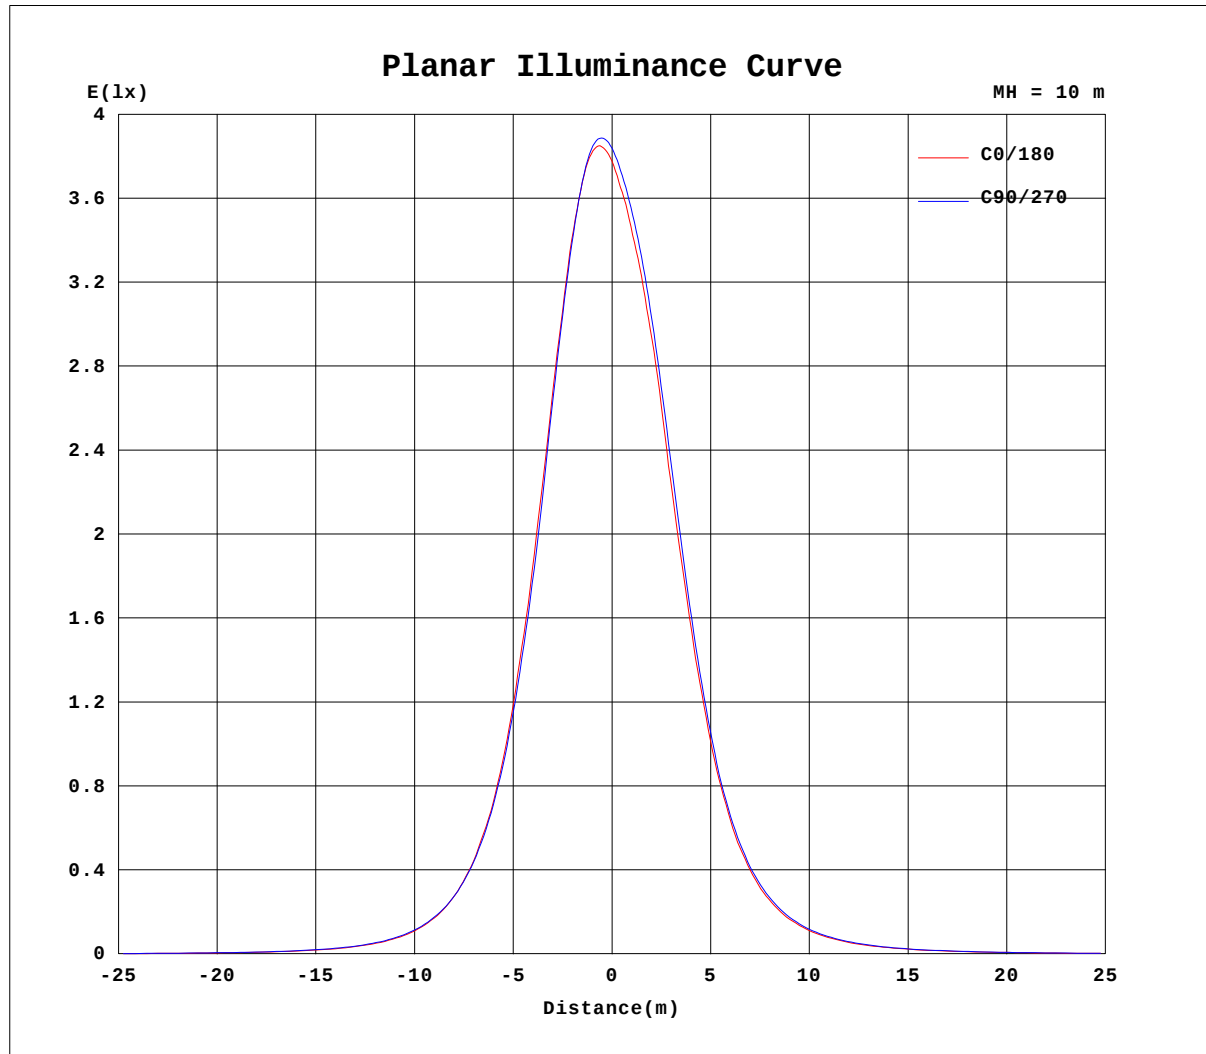


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW 3000K-45D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:45 DEG	DIM.:598MM	SERIAL No.:IES001879
MFR.:	SUR.:	Shielding Angle:

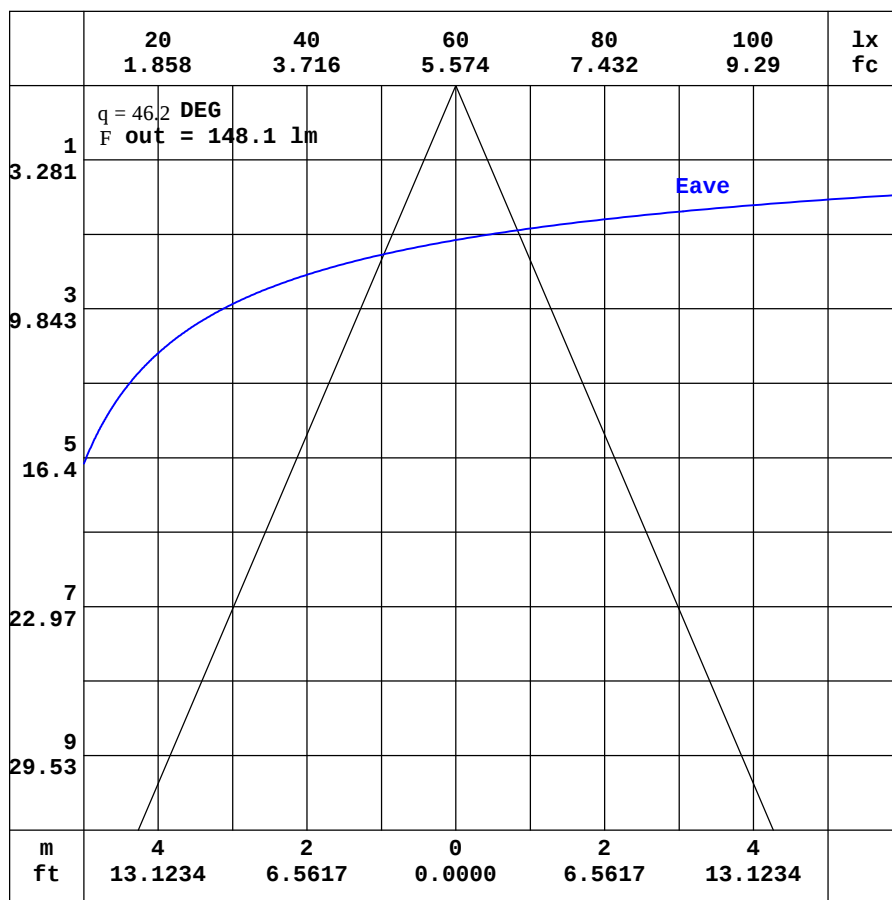

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW 3000K-45D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:45 DEG	DIM.:598MM	SERIAL No.:IES001879
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.13	1.05	1.04	1.05	1.11	1.20	1.35	1.50	1.68	1.86	2.02	2.16	2.26	2.34	2.37	2.37	2.37	2.37	2.43
-170	1.13	1.03	1.00	0.99	1.01	1.07	1.15	1.25	1.35	1.45	1.53	1.60	1.64	1.66	1.65	1.69	1.84	1.97	2.10
-160	1.13	1.01	0.96	0.93	0.92	0.93	0.96	0.99	1.01	1.03	1.03	1.02	1.01	1.16	1.30	1.44	1.56	1.67	1.73
-150	1.13	1.00	0.92	0.87	0.83	0.80	0.77	0.75	0.71	0.65	0.60	0.69	0.79	0.89	0.99	1.08	1.18	1.25	1.28
-140	1.13	0.98	0.89	0.82	0.75	0.69	0.63	0.56	0.47	0.45	0.48	0.52	0.58	0.63	0.68	0.75	0.81	0.85	0.87
-130	1.13	0.97	0.86	0.77	0.68	0.60	0.52	0.42	0.38	0.39	0.40	0.41	0.43	0.44	0.47	0.51	0.54	0.57	0.59
-120	1.13	0.97	0.84	0.73	0.64	0.54	0.44	0.37	0.37	0.37	0.36	0.36	0.35	0.36	0.38	0.39	0.41	0.42	0.44
-110	1.13	0.97	0.83	0.71	0.59	0.49	0.38	0.35	0.34	0.35	0.34	0.35	0.35	0.35	0.35	0.36	0.37	0.38	0.39
-100	1.13	0.98	0.83	0.70	0.57	0.45	0.33	0.32	0.32	0.32	0.31	0.31	0.30	0.31	0.32	0.32	0.33	0.34	0.35
-90	1.13	0.99	0.85	0.71	0.57	0.43	0.29	0.29	0.28	0.28	0.28	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27
-80	1.13	1.00	0.88	0.74	0.60	0.45	0.29	0.32	0.38	0.44	0.51	0.57	0.64	0.69	0.75	0.80	0.84	0.87	0.89
-70	1.13	1.03	0.93	0.83	0.79	0.80	0.86	1.12	1.43	1.73	2.05	2.37	2.68	2.99	3.28	3.53	3.71	3.85	3.92
-60	1.13	1.06	1.02	1.07	1.28	1.64	2.06	2.54	3.20	3.91	4.64	5.40	6.14	6.89	7.57	8.15	8.63	8.98	9.16
-50	1.13	1.10	1.16	1.45	2.01	2.78	3.55	4.34	5.37	6.71	8.19	9.80	11.5	13.3	15.3	17.2	18.8	20.1	20.7
-40	1.13	1.15	1.32	1.92	2.91	4.01	5.21	6.56	8.20	10.5	13.5	17.3	21.9	27.1	32.6	38.9	44.5	48.9	51.2
-30	1.13	1.20	1.53	2.41	3.72	5.22	6.97	9.09	12.0	16.0	21.9	30.4	41.3	54.7	69.7	85.9	103	116	123
-20	1.13	1.24	1.73	2.89	4.49	6.39	8.65	11.7	16.2	23.0	33.3	48.8	70.3	98.5	132	170	205	235	250
-10	1.13	1.29	1.89	3.26	5.10	7.30	9.98	13.9	19.7	28.9	43.5	65.9	98.5	143	197	254	308	346	371
0	1.13	1.32	1.99	3.47	5.45	7.84	10.7	15.1	21.6	31.7	48.0	73.0	110	159	217	274	322	354	378
10	1.13	1.32	1.95	3.38	5.30	7.62	10.4	14.5	20.5	29.8	44.5	66.6	98.2	141	192	243	287	317	333
20	1.13	1.31	1.86	3.12	4.88	6.99	9.50	12.9	17.8	24.8	35.4	50.7	71.6	98.7	131	166	197	217	225
30	1.13	1.29	1.72	2.71	4.24	6.03	8.12	10.6	14.1	18.6	24.8	33.5	44.5	57.8	73.4	88.2	102	110	113
40	1.13	1.26	1.56	2.28	3.52	4.92	6.51	8.33	10.4	13.2	16.6	20.6	25.5	31.0	36.9	42.0	46.6	49.5	50.3
50	1.13	1.23	1.43	1.90	2.63	3.70	4.84	6.09	7.45	9.03	10.8	12.7	14.7	16.8	18.8	20.3	21.7	22.6	22.8
60	1.13	1.20	1.33	1.54	1.95	2.48	3.24	4.03	4.88	5.77	6.69	7.66	8.58	9.44	10.2	10.8	11.2	11.5	11.6
70	1.13	1.18	1.25	1.34	1.47	1.69	1.95	2.28	2.68	3.15	3.60	4.00	4.38	4.75	5.09	5.36	5.55	5.67	5.71
80	1.13	1.16	1.19	1.23	1.27	1.31	1.36	1.40	1.46	1.54	1.62	1.72	1.81	1.90	1.98	2.04	2.08	2.11	2.12
90	1.13	1.14	1.15	1.16	1.17	1.18	1.19	1.19	1.18	1.17	1.16	1.16	1.15	1.15	1.16	1.16	1.17	1.18	1.18
100	1.13	1.13	1.12	1.11	1.10	1.10	1.10	1.08	1.06	1.05	1.03	1.02	1.01	1.01	1.02	1.02	1.02	1.02	1.02
110	1.13	1.11	1.08	1.07	1.06	1.06	1.05	1.04	1.03	1.02	1.02	1.02	1.03	1.03	1.03	1.02	1.02	1.01	1.00
120	1.13	1.09	1.07	1.05	1.05	1.04	1.03	1.03	1.03	1.05	1.08	1.11	1.15	1.18	1.20	1.22	1.22	1.22	1.22
130	1.13	1.07	1.05	1.04	1.04	1.04	1.04	1.06	1.11	1.17	1.25	1.32	1.40	1.47	1.52	1.56	1.59	1.62	1.63
140	1.13	1.07	1.05	1.04	1.04	1.06	1.09	1.16	1.25	1.35	1.46	1.58	1.69	1.79	1.89	1.95	1.99	2.01	2.01
150	1.13	1.06	1.04	1.04	1.06	1.10	1.17	1.28	1.40	1.54	1.67	1.81	1.94	2.06	2.16	2.25	2.29	2.31	2.31
160	1.13	1.06	1.04	1.04	1.08	1.14	1.25	1.39	1.54	1.70	1.85	1.99	2.09	2.19	2.29	2.37	2.41	2.44	2.47
170	1.13	1.05	1.04	1.05	1.09	1.18	1.31	1.47	1.63	1.81	1.97	2.10	2.20	2.27	2.30	2.33	2.36	2.40	2.48
180	1.13	1.05	1.04	1.05	1.11	1.20	1.35	1.50	1.68	1.86	2.02	2.16	2.26	2.34	2.37	2.37	2.37	2.37	2.44

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-10-12

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW 3000K-45D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:45 DEG	DIM.:598MM	SERIAL No.:IES001879
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	2.22	2.07	1.88	1.66	1.43	1.20	1.00	0.82	0.67	0.52	0.43	0.37	0.35	0.34	0.32	0.29	0.26	0.25
-170	2.01	1.94	1.79	1.59	1.38	1.17	0.97	0.80	0.67	0.52	0.44	0.39	0.36	0.35	0.32	0.29	0.26	0.25
-160	1.68	1.58	1.48	1.34	1.18	1.02	0.87	0.73	0.61	0.51	0.45	0.40	0.37	0.36	0.32	0.29	0.26	0.25
-150	1.26	1.21	1.12	1.02	0.92	0.81	0.71	0.63	0.56	0.49	0.44	0.40	0.37	0.35	0.32	0.29	0.26	0.25
-140	0.86	0.82	0.77	0.70	0.65	0.59	0.56	0.52	0.50	0.46	0.43	0.40	0.37	0.34	0.32	0.29	0.26	0.25
-130	0.57	0.55	0.52	0.49	0.46	0.45	0.45	0.44	0.43	0.43	0.40	0.39	0.36	0.34	0.31	0.29	0.26	0.25
-120	0.43	0.42	0.41	0.39	0.38	0.38	0.38	0.39	0.39	0.39	0.38	0.36	0.35	0.32	0.30	0.28	0.26	0.25
-110	0.38	0.37	0.37	0.36	0.36	0.35	0.36	0.36	0.36	0.35	0.35	0.34	0.32	0.31	0.29	0.27	0.26	0.25
-100	0.34	0.34	0.33	0.33	0.32	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.30	0.28	0.27	0.26	0.26	0.25
-90	0.27	0.27	0.27	0.26	0.26	0.26	0.26	0.26	0.27	0.27	0.27	0.27	0.27	0.27	0.26	0.26	0.26	0.25
-80	0.87	0.84	0.79	0.74	0.68	0.62	0.56	0.50	0.43	0.37	0.31	0.26	0.27	0.26	0.26	0.26	0.25	0.25
-70	3.83	3.68	3.47	3.21	2.91	2.61	2.32	2.01	1.70	1.39	1.07	0.78	0.58	0.42	0.30	0.27	0.26	0.25
-60	9.04	8.74	8.29	7.69	6.98	6.20	5.38	4.60	3.86	3.16	2.49	1.88	1.30	0.82	0.51	0.31	0.26	0.25
-50	20.5	19.7	18.3	16.5	14.4	12.3	10.2	8.35	6.77	5.39	4.22	3.19	2.26	1.44	0.79	0.41	0.27	0.25
-40	50.6	47.6	42.9	37.0	30.5	24.3	18.8	14.3	10.9	8.16	6.19	4.60	3.27	2.13	1.15	0.55	0.28	0.25
-30	121	112	97.3	80.3	63.1	47.3	34.1	24.0	16.7	11.7	8.36	6.02	4.22	2.75	1.52	0.68	0.30	0.25
-20	246	227	193	154	115	82.4	55.8	36.4	23.7	15.6	10.5	7.30	5.02	3.26	1.84	0.79	0.32	0.25
-10	369	342	294	229	167	114	75.0	47.2	29.6	18.7	12.1	8.19	5.56	3.61	2.05	0.86	0.33	0.25
0	388	372	325	258	188	126	81.2	50.8	31.5	19.7	12.7	8.51	5.76	3.74	2.13	0.89	0.33	0.25
10	333	310	263	207	152	105	70.6	45.5	29.2	18.9	12.5	8.57	5.85	3.80	2.17	0.93	0.36	0.25
20	218	198	168	133	99.9	72.0	50.7	34.8	23.7	16.3	11.3	8.04	5.57	3.64	2.08	0.92	0.38	0.25
30	110	101	87.1	72.3	57.1	43.6	32.6	24.1	17.7	13.0	9.64	7.04	4.98	3.27	1.85	0.88	0.39	0.25
40	49.1	45.9	41.3	35.9	30.2	24.7	20.0	16.0	12.7	10.0	7.76	5.81	4.16	2.74	1.55	0.80	0.40	0.25
50	22.4	21.5	20.1	18.3	16.3	14.3	12.2	10.4	8.79	7.26	5.85	4.45	3.20	2.10	1.26	0.70	0.41	0.25
60	11.4	11.1	10.5	9.88	9.18	8.28	7.41	6.52	5.62	4.78	3.97	3.10	2.22	1.52	1.00	0.63	0.41	0.25
70	5.64	5.50	5.29	5.00	4.65	4.27	3.92	3.54	3.13	2.70	2.31	1.93	1.50	1.12	0.83	0.60	0.41	0.25
80	2.11	2.08	2.03	1.97	1.89	1.81	1.72	1.64	1.55	1.49	1.43	1.37	1.16	0.96	0.77	0.59	0.41	0.25
90	1.17	1.17	1.16	1.16	1.15	1.14	1.15	1.16	1.17	1.18	1.19	1.20	1.04	0.89	0.73	0.57	0.41	0.25
100	1.02	1.02	1.02	1.02	1.01	1.01	1.01	1.03	1.05	1.06	1.08	1.09	0.97	0.83	0.69	0.55	0.41	0.25
110	1.01	1.01	1.02	1.02	1.02	1.01	1.01	1.01	1.01	1.02	1.03	1.00	0.89	0.78	0.66	0.53	0.40	0.25
120	1.22	1.21	1.20	1.18	1.16	1.12	1.09	1.05	1.03	1.02	1.02	0.94	0.83	0.73	0.62	0.51	0.38	0.25
130	1.61	1.58	1.55	1.49	1.44	1.36	1.28	1.21	1.14	1.07	0.98	0.88	0.78	0.68	0.58	0.48	0.37	0.25
140	2.01	1.99	1.94	1.87	1.77	1.66	1.53	1.42	1.29	1.15	0.96	0.81	0.72	0.62	0.54	0.45	0.35	0.25
150	2.32	2.31	2.27	2.18	2.07	1.93	1.78	1.62	1.36	1.11	0.91	0.75	0.64	0.57	0.49	0.41	0.33	0.25
160	2.46	2.44	2.42	2.35	2.25	2.11	1.82	1.51	1.24	0.99	0.80	0.66	0.56	0.50	0.43	0.37	0.31	0.25
170	2.41	2.44	2.42	2.26	2.02	1.75	1.48	1.22	1.00	0.78	0.63	0.53	0.46	0.42	0.38	0.33	0.29	0.25
180	2.22	2.07	1.88	1.66	1.43	1.20	1.00	0.82	0.67	0.52	0.43	0.37	0.35	0.34	0.32	0.29	0.26	0.25

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-12

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: