

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	1367.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	84.6V x 83.8H
	At 50% of Imax	44.5V x 44.4H
	At 90% of Imax	18.2V x 18.1H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	836.9 lumens per klm.
	To 50% of Imax	459.2 lumens per klm.
	To 90% of Imax	96.0 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW GREEN-45D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:45 DEG	DIM.:598MM	SERIAL No.:IES001877
MFR.:	SUR.:	Shielding Angle:

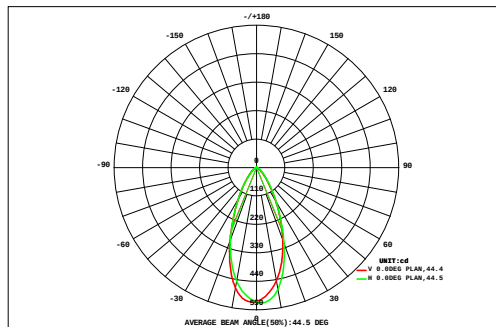

DATA OF LAMP		Eff:55.36lm/W	
MODEL		Imax(cd)	526.0
NOMINAL POWER(W)	7	AVAILABILITY(%)	83.6
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	321.8
NOMINAL FLUX(lm)	384.7	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	384.7
TEST VOLTAGE(V)	221.4	q @50%(H,V)	44,45DEG

		AREA FLUX DIAGRAM																UNIT:lm				F t	F a
		0.02	0.03	0.04	0.07	0.09	0.12	0.14	0.16	0.17	0.17	0.15	0.14	0.11	0.09	0.07	0.04	0.03	0.01	1.63	0.00		
VERTICAL (DEG)	72	0.02	0.04	0.07	0.11	0.15	0.20	0.24	0.27	0.29	0.29	0.27	0.23	0.19	0.15	0.11	0.07	0.04	0.02	2.75	0.00		
	64	0.03	0.06	0.10	0.16	0.23	0.32	0.40	0.47	0.51	0.50	0.45	0.38	0.30	0.22	0.15	0.10	0.05	0.02	4.45	0.00		
	56	0.03	0.07	0.13	0.22	0.34	0.51	0.70	0.85	0.94	0.92	0.81	0.64	0.47	0.32	0.21	0.13	0.07	0.03	7.39	1.13		
	48	0.04	0.09	0.17	0.30	0.51	0.82	1.23	1.60	1.81	1.77	1.50	1.12	0.75	0.47	0.28	0.16	0.08	0.03	12.7	9.14		
	40	0.05	0.11	0.21	0.39	0.74	1.31	2.10	2.93	3.44	3.37	2.74	1.92	1.20	0.68	0.36	0.19	0.09	0.04	21.9	19.2		
	32	0.05	0.12	0.25	0.50	1.01	1.94	3.34	4.94	5.94	5.80	4.60	3.08	1.78	0.94	0.46	0.22	0.10	0.04	35.1	33.0		
	24	0.06	0.13	0.28	0.59	1.26	2.57	4.66	7.06	8.57	8.33	6.61	4.33	2.43	1.20	0.55	0.24	0.11	0.04	49.0	47.1		
	-24	0.06	0.14	0.29	0.64	1.40	2.92	5.44	8.28	9.92	9.54	7.75	5.25	2.92	1.37	0.60	0.25	0.11	0.04	56.9	55.1		
		0.06	0.13	0.29	0.63	1.38	2.87	5.38	8.16	9.56	9.27	7.68	5.28	2.94	1.38	0.60	0.25	0.11	0.04	56.0	54.2		
		0.05	0.12	0.26	0.56	1.20	2.45	4.48	6.71	7.97	7.82	6.47	4.42	2.50	1.22	0.54	0.23	0.10	0.04	47.1	45.3		
		0.05	0.11	0.22	0.45	0.92	1.78	3.10	4.55	5.54	5.54	4.57	3.15	1.84	0.95	0.44	0.20	0.09	0.04	33.5	31.4		
		-32	0.04	0.09	0.18	0.33	0.64	1.15	1.86	2.65	3.22	3.24	2.71	1.92	1.19	0.66	0.34	0.17	0.08	0.03	20.5	17.9	
		-40	0.04	0.07	0.13	0.24	0.42	0.69	1.03	1.40	1.67	1.68	1.44	1.07	0.71	0.43	0.24	0.13	0.07	0.03	11.5	7.71	
		-48	0.03	0.06	0.10	0.17	0.27	0.40	0.56	0.72	0.83	0.83	0.73	0.58	0.41	0.27	0.17	0.10	0.05	0.02	6.30	0.45	
		-56	0.02	0.04	0.07	0.11	0.17	0.24	0.31	0.38	0.42	0.42	0.38	0.32	0.24	0.17	0.12	0.07	0.04	0.02	3.54	0.00	
	-64	0.01	0.03	0.05	0.07	0.11	0.14	0.18	0.21	0.23	0.23	0.21	0.18	0.15	0.11	0.08	0.05	0.03	0.01	2.06	0.00		
-72	0.01	0.01	0.02	0.04	0.06	0.08	0.10	0.11	0.12	0.12	0.11	0.10	0.08	0.06	0.04	0.03	0.01	0.01	1.10	0.00			
		-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72		
F t	0.67	1.45	2.85	5.56	10.9	20.5	35.3	51.4	61.1	59.8	49.2	34.1	20.2	10.7	5.34	2.62	1.26	0.53	374	---			
F a	0.00	0.00	0.00	0.52	7.02	17.2	32.2	48.5	58.2	56.9	46.2	31.0	16.9	6.78	0.33	0.00	0.00	0.00	---	322			

one-half-peak spread: U:24.4,D:20.4 , L:20.3,R:24.4


NEMA Beam Type: Type 5

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW GREEN-45D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:45 DEG	DIM.:598MM	SERIAL No.:IES001877
MFR.:	SUR.:	Shielding Angle:

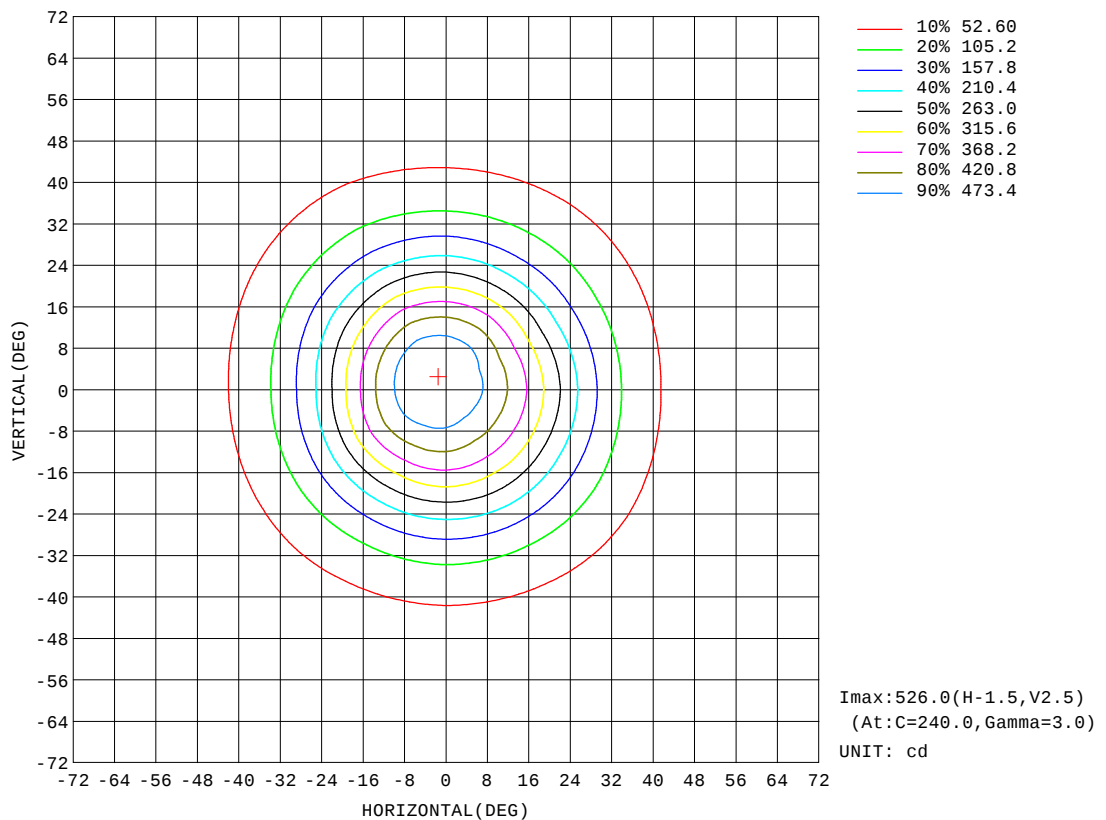


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW GREEN-45D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:45 DEG	DIM.:598MM	SERIAL No.:IES001877
MFR.:	SUR.:	Shielding Angle:

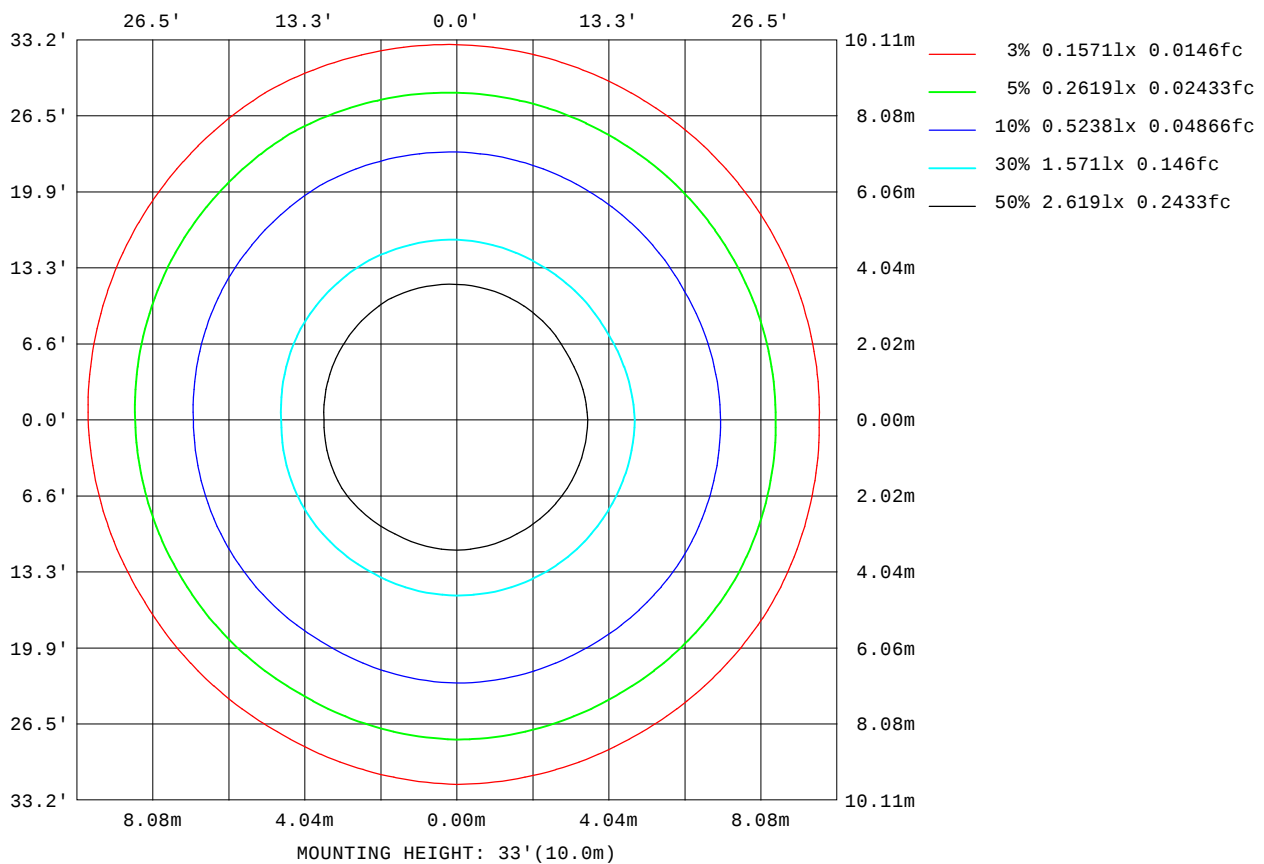

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

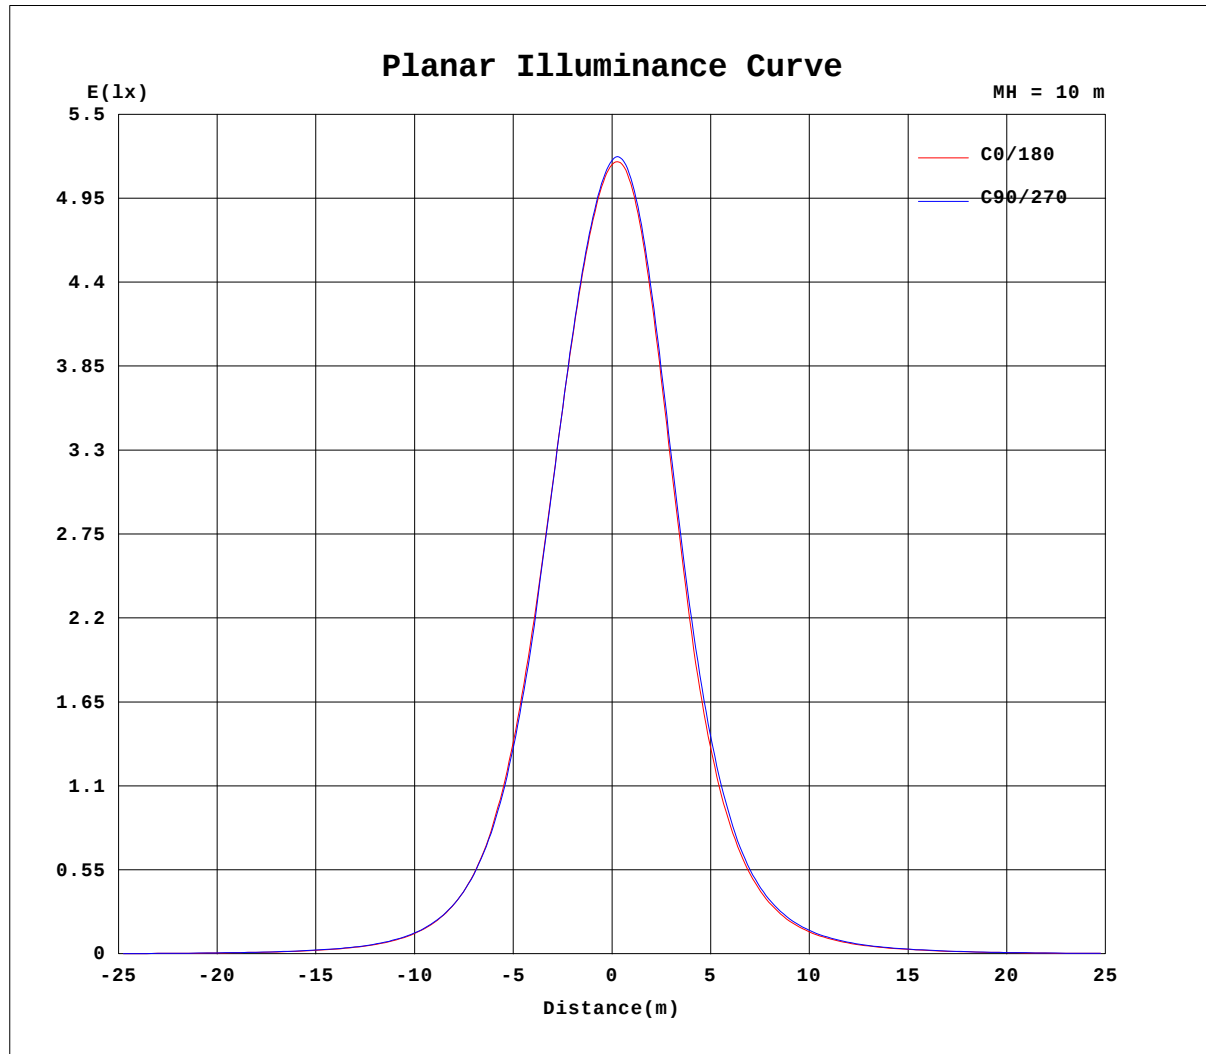


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-12

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW GREEN-45D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:45 DEG	DIM.:598MM	SERIAL No.:IES001877
MFR.:	SUR.:	Shielding Angle:

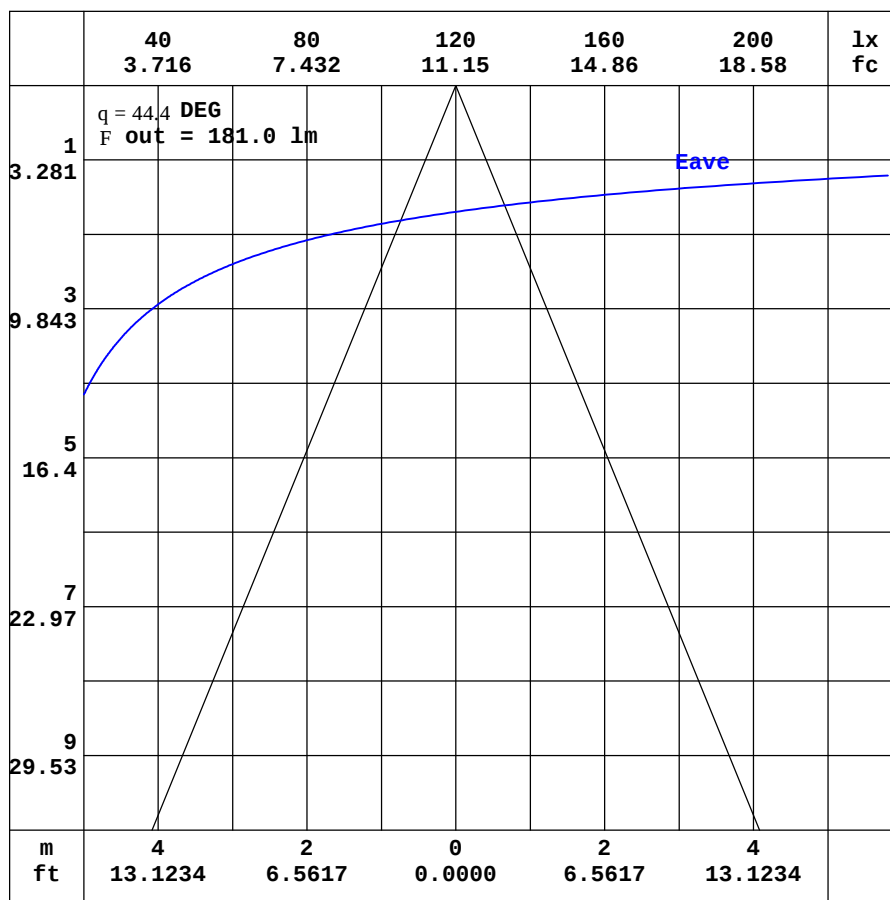

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW GREEN-45D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:45 DEG	DIM.:598MM	SERIAL No.:IES001877
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.49	1.37	1.33	1.35	1.39	1.50	1.65	1.85	2.07	2.31	2.53	2.72	2.87	2.96	2.97	2.97	2.97	2.95	3.03
-170	1.49	1.34	1.28	1.27	1.28	1.33	1.43	1.54	1.67	1.80	1.92	2.01	2.07	2.09	2.08	2.13	2.32	2.48	2.64
-160	1.49	1.32	1.23	1.19	1.16	1.17	1.19	1.22	1.26	1.28	1.29	1.28	1.27	1.47	1.66	1.84	2.01	2.13	2.21
-150	1.49	1.30	1.19	1.12	1.05	1.01	0.97	0.93	0.88	0.81	0.77	0.88	1.01	1.15	1.29	1.42	1.54	1.63	1.69
-140	1.49	1.28	1.14	1.05	0.96	0.88	0.80	0.70	0.60	0.57	0.62	0.67	0.74	0.82	0.90	0.99	1.07	1.12	1.15
-130	1.49	1.28	1.11	0.99	0.88	0.77	0.66	0.54	0.50	0.51	0.52	0.53	0.55	0.57	0.62	0.66	0.71	0.74	0.76
-120	1.49	1.27	1.09	0.94	0.81	0.69	0.57	0.47	0.47	0.47	0.46	0.46	0.47	0.48	0.50	0.51	0.52	0.54	0.55
-110	1.49	1.27	1.09	0.91	0.76	0.62	0.48	0.44	0.44	0.44	0.44	0.44	0.43	0.44	0.45	0.46	0.47	0.48	0.49
-100	1.49	1.28	1.09	0.91	0.74	0.57	0.41	0.40	0.40	0.41	0.41	0.41	0.41	0.42	0.42	0.43	0.44	0.44	0.45
-90	1.49	1.30	1.12	0.93	0.74	0.55	0.37	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.37
-80	1.49	1.32	1.15	0.97	0.78	0.58	0.37	0.41	0.49	0.57	0.65	0.74	0.83	0.91	1.00	1.07	1.14	1.19	1.22
-70	1.49	1.36	1.22	1.09	1.02	1.02	1.08	1.41	1.82	2.22	2.64	3.06	3.46	3.87	4.25	4.59	4.86	5.05	5.16
-60	1.49	1.39	1.33	1.38	1.63	2.07	2.60	3.22	4.08	5.01	5.99	6.99	7.95	8.87	9.71	10.4	11.0	11.4	11.7
-50	1.49	1.45	1.50	1.86	2.54	3.51	4.50	5.53	6.87	8.52	10.4	12.5	14.7	17.0	19.3	21.5	23.4	24.8	25.4
-40	1.49	1.50	1.72	2.43	3.67	5.08	6.63	8.34	10.4	13.3	17.1	21.9	27.6	34.0	40.8	48.0	54.3	59.0	61.2
-30	1.49	1.56	1.97	3.04	4.70	6.63	8.86	11.6	15.2	20.3	27.6	38.3	52.0	68.5	87.1	106	125	139	145
-20	1.49	1.63	2.22	3.64	5.69	8.12	11.0	14.9	20.6	29.2	42.3	61.7	89.0	125	168	214	254	284	296
-10	1.49	1.68	2.41	4.11	6.45	9.21	12.8	17.8	25.3	37.1	56.0	85.1	127	186	260	342	403	437	446
0	1.49	1.73	2.54	4.38	6.89	9.88	13.9	19.4	27.7	41.0	62.5	95.4	144	212	302	396	472	514	517
10	1.49	1.72	2.50	4.26	6.71	9.62	13.5	18.7	26.5	38.9	58.6	88.7	133	194	270	351	423	470	478
20	1.49	1.71	2.39	3.92	6.17	8.89	12.2	16.6	23.0	32.4	46.8	67.9	97.1	136	182	231	277	305	311
30	1.49	1.68	2.22	3.42	5.34	7.66	10.4	13.7	18.2	24.2	32.7	44.6	59.9	78.6	99.7	121	138	150	153
40	1.49	1.65	2.03	2.90	4.42	6.21	8.31	10.7	13.5	17.1	21.6	27.3	34.0	41.8	50.0	56.8	62.3	65.7	66.2
50	1.49	1.61	1.87	2.43	3.31	4.65	6.11	7.75	9.54	11.6	13.9	16.5	19.4	22.3	24.9	27.1	28.7	29.7	29.8
60	1.49	1.58	1.73	2.00	2.49	3.13	4.06	5.06	6.15	7.31	8.53	9.69	11.0	12.2	13.0	13.9	14.5	14.8	14.9
70	1.49	1.55	1.64	1.75	1.92	2.17	2.48	2.88	3.37	3.94	4.52	5.03	5.52	6.01	6.43	6.78	7.03	7.19	7.26
80	1.49	1.52	1.57	1.61	1.66	1.71	1.76	1.82	1.90	1.99	2.09	2.21	2.33	2.43	2.52	2.59	2.64	2.68	2.69
90	1.49	1.50	1.51	1.53	1.54	1.55	1.56	1.55	1.54	1.53	1.53	1.52	1.51	1.51	1.52	1.52	1.52	1.53	1.53
100	1.49	1.47	1.46	1.46	1.44	1.44	1.43	1.41	1.39	1.36	1.34	1.32	1.31	1.31	1.31	1.31	1.32	1.32	1.32
110	1.49	1.45	1.43	1.40	1.38	1.36	1.35	1.33	1.32	1.31	1.31	1.31	1.31	1.31	1.31	1.31	1.30	1.30	1.29
120	1.49	1.43	1.39	1.36	1.34	1.33	1.32	1.32	1.32	1.33	1.36	1.39	1.43	1.46	1.49	1.51	1.52	1.53	1.53
130	1.49	1.42	1.37	1.34	1.33	1.33	1.33	1.34	1.38	1.46	1.54	1.62	1.71	1.79	1.86	1.92	1.96	1.99	2.00
140	1.49	1.40	1.35	1.34	1.34	1.35	1.38	1.45	1.54	1.66	1.80	1.93	2.08	2.20	2.32	2.41	2.48	2.52	2.53
150	1.49	1.39	1.34	1.34	1.35	1.38	1.47	1.58	1.73	1.89	2.07	2.24	2.42	2.58	2.71	2.82	2.89	2.92	2.93
160	1.49	1.38	1.34	1.34	1.36	1.43	1.55	1.70	1.90	2.10	2.30	2.48	2.64	2.78	2.90	3.01	3.08	3.12	3.16
170	1.49	1.37	1.33	1.35	1.38	1.47	1.62	1.80	2.01	2.24	2.46	2.65	2.79	2.89	2.95	2.97	3.02	3.06	3.15
180	1.49	1.37	1.33	1.35	1.39	1.50	1.65	1.85	2.07	2.31	2.53	2.72	2.87	2.96	2.97	2.97	2.97	2.95	3.07

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-12

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW GREEN-45D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:45 DEG	DIM.:598MM	SERIAL No.:IES001877
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	2.76	2.57	2.36	2.11	1.85	1.58	1.32	1.09	0.89	0.69	0.57	0.50	0.46	0.43	0.41	0.41	0.35	0.34
-170	2.52	2.43	2.27	2.04	1.79	1.53	1.29	1.07	0.88	0.69	0.58	0.51	0.46	0.44	0.42	0.41	0.35	0.34
-160	2.16	2.05	1.92	1.76	1.55	1.36	1.15	0.97	0.81	0.67	0.57	0.52	0.47	0.45	0.42	0.40	0.35	0.34
-150	1.66	1.59	1.49	1.36	1.22	1.08	0.95	0.83	0.72	0.63	0.55	0.51	0.47	0.44	0.43	0.39	0.35	0.34
-140	1.14	1.10	1.03	0.94	0.87	0.79	0.73	0.67	0.62	0.58	0.53	0.49	0.47	0.44	0.42	0.39	0.35	0.34
-130	0.75	0.73	0.69	0.65	0.61	0.59	0.57	0.55	0.54	0.53	0.51	0.48	0.46	0.44	0.42	0.38	0.35	0.34
-120	0.54	0.53	0.51	0.50	0.48	0.49	0.48	0.48	0.49	0.48	0.48	0.46	0.45	0.43	0.40	0.37	0.35	0.34
-110	0.48	0.47	0.46	0.45	0.44	0.43	0.44	0.45	0.45	0.45	0.45	0.45	0.42	0.40	0.38	0.36	0.35	0.34
-100	0.45	0.44	0.43	0.43	0.42	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.39	0.38	0.37	0.36	0.35	0.34
-90	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.37	0.36	0.36	0.35	0.35	0.35	0.34
-80	1.20	1.16	1.10	1.03	0.95	0.87	0.79	0.70	0.62	0.53	0.45	0.39	0.37	0.36	0.36	0.35	0.34	0.34
-70	5.05	4.87	4.61	4.28	3.90	3.51	3.14	2.75	2.35	1.94	1.51	1.12	0.83	0.59	0.43	0.37	0.35	0.34
-60	11.5	11.1	10.5	9.82	8.98	8.06	7.09	6.11	5.15	4.23	3.39	2.58	1.81	1.15	0.71	0.43	0.36	0.34
-50	24.9	23.7	21.9	19.7	17.4	15.0	12.7	10.6	8.64	7.04	5.58	4.27	3.07	1.99	1.10	0.57	0.37	0.34
-40	59.5	55.3	49.3	42.1	35.1	28.4	22.5	17.6	13.5	10.3	7.98	6.05	4.36	2.87	1.58	0.76	0.39	0.34
-30	140	127	110	90.1	71.1	53.9	39.6	28.5	20.4	14.6	10.6	7.80	5.57	3.68	2.09	0.93	0.41	0.34
-20	284	255	216	171	128	92.2	63.7	42.7	28.5	19.3	13.2	9.32	6.56	4.33	2.50	1.08	0.43	0.34
-10	423	384	327	256	189	131	86.2	55.6	35.6	23.0	15.2	10.4	7.25	4.76	2.75	1.18	0.45	0.34
0	491	444	377	298	217	148	95.7	60.6	38.2	24.4	15.9	10.8	7.51	4.91	2.84	1.22	0.45	0.34
10	452	398	326	252	184	127	84.9	55.4	36.0	23.7	15.8	10.9	7.61	4.99	2.89	1.26	0.48	0.34
20	295	259	213	167	124	89.2	62.8	43.2	29.7	20.6	14.4	10.3	7.24	4.77	2.77	1.24	0.51	0.34
30	146	131	111	91.2	71.8	54.8	41.1	30.5	22.6	16.7	12.3	9.11	6.49	4.28	2.47	1.17	0.52	0.34
40	64.1	59.3	53.0	45.6	38.3	31.4	25.5	20.4	16.3	12.8	9.98	7.52	5.40	3.58	2.05	1.06	0.53	0.34
50	29.1	27.8	25.8	23.4	20.8	18.3	15.7	13.4	11.3	9.36	7.57	5.74	4.15	2.76	1.65	0.92	0.54	0.34
60	14.7	14.2	13.5	12.7	11.8	10.6	9.51	8.38	7.24	6.14	5.11	3.98	2.88	1.98	1.31	0.83	0.54	0.34
70	7.17	6.99	6.72	6.37	5.94	5.46	5.01	4.53	4.00	3.47	2.97	2.48	1.94	1.45	1.08	0.79	0.55	0.34
80	2.68	2.65	2.60	2.53	2.44	2.33	2.22	2.10	2.00	1.91	1.82	1.74	1.48	1.23	0.99	0.76	0.54	0.34
90	1.53	1.52	1.51	1.51	1.50	1.50	1.50	1.51	1.52	1.53	1.53	1.54	1.34	1.14	0.94	0.74	0.54	0.34
100	1.32	1.31	1.31	1.30	1.30	1.30	1.31	1.33	1.35	1.37	1.39	1.41	1.24	1.07	0.90	0.72	0.53	0.34
110	1.29	1.30	1.30	1.30	1.30	1.30	1.29	1.30	1.30	1.31	1.32	1.29	1.15	1.01	0.85	0.69	0.52	0.34
120	1.53	1.52	1.51	1.49	1.46	1.43	1.39	1.35	1.32	1.31	1.31	1.21	1.08	0.95	0.81	0.66	0.51	0.34
130	2.00	1.98	1.94	1.89	1.81	1.73	1.64	1.55	1.46	1.39	1.28	1.13	1.00	0.88	0.76	0.63	0.49	0.34
140	2.53	2.50	2.45	2.37	2.25	2.12	1.97	1.83	1.69	1.49	1.24	1.05	0.92	0.81	0.71	0.59	0.46	0.34
150	2.94	2.92	2.88	2.78	2.64	2.48	2.30	2.11	1.77	1.44	1.18	0.98	0.83	0.73	0.64	0.55	0.44	0.34
160	3.13	3.11	3.08	2.99	2.88	2.73	2.36	1.97	1.61	1.29	1.04	0.86	0.72	0.64	0.57	0.51	0.41	0.34
170	3.07	3.09	3.08	2.89	2.58	2.26	1.93	1.61	1.32	1.03	0.83	0.69	0.60	0.53	0.49	0.46	0.38	0.34
180	2.76	2.57	2.36	2.11	1.85	1.58	1.32	1.09	0.89	0.69	0.57	0.50	0.46	0.43	0.41	0.41	0.35	0.34

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-12

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: