

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1373.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	84.2V x 83.6H
	At 50% of Imax	44.8V x 45.0H
	At 90% of Imax	17.6V x 16.9H
Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	838.8 lumens per klm.
	To 50% of Imax	467.1 lumens per klm.
	To 90% of Imax	95.1 lumens per klm.
Upward LOR		2.2 %
Downward LOR		97.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW RED-45D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:45 DEG	DIM.:598MM	SERIAL No.:IES001876
MFR.:	SUR.:	Shielding Angle:

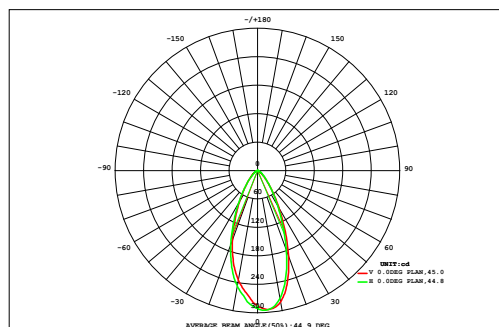

DATA OF LAMP		Eff:37.88lm/W	
MODEL		Imax(cd)	297.6
NOMINAL POWER(W)	5.76	AVAILABILITY(%)	83.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	181.7
NOMINAL FLUX(lm)	216.7	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	216.7
TEST VOLTAGE(V)	221.4	q @50%(H,V)	45,45DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.01	0.01	0.02	0.04	0.05	0.06	0.07	0.08	0.09	0.09	0.08	0.08	0.06	0.05	0.04	0.02	0.01	0.01	0.89	0.00
72	0.01	0.01	0.02	0.04	0.05	0.06	0.07	0.08	0.09	0.09	0.08	0.08	0.06	0.05	0.04	0.02	0.01	0.01	1.50	0.00
64	0.01	0.02	0.04	0.06	0.08	0.10	0.13	0.15	0.16	0.16	0.15	0.13	0.11	0.08	0.06	0.04	0.02	0.01	2.42	0.00
56	0.01	0.03	0.05	0.08	0.12	0.16	0.21	0.25	0.27	0.28	0.26	0.22	0.17	0.12	0.08	0.05	0.03	0.01	4.07	0.53
48	0.02	0.04	0.07	0.11	0.18	0.26	0.35	0.44	0.51	0.52	0.47	0.39	0.28	0.19	0.12	0.07	0.04	0.02	7.09	5.04
40	0.02	0.05	0.09	0.15	0.26	0.41	0.62	0.83	0.99	1.01	0.90	0.69	0.46	0.28	0.16	0.09	0.04	0.02	12.3	10.8
32	0.03	0.06	0.11	0.20	0.37	0.66	1.07	1.53	1.88	1.95	1.68	1.21	0.75	0.41	0.21	0.11	0.05	0.02	19.9	18.7
24	0.03	0.06	0.13	0.26	0.52	0.98	1.70	2.56	3.28	3.41	2.86	1.95	1.13	0.58	0.27	0.12	0.06	0.02	27.9	26.8
	0.03	0.07	0.15	0.31	0.66	1.32	2.38	3.66	4.69	4.92	4.10	2.76	1.53	0.74	0.32	0.14	0.06	0.02	32.4	31.4
	0.03	0.07	0.16	0.34	0.74	1.54	2.80	4.21	5.30	5.67	4.91	3.36	1.81	0.84	0.35	0.14	0.06	0.02	31.6	30.6
	0.03	0.07	0.16	0.34	0.75	1.56	2.80	4.08	5.03	5.45	4.82	3.33	1.79	0.82	0.34	0.14	0.06	0.02	26.6	25.6
	0.03	0.07	0.14	0.31	0.66	1.35	2.41	3.53	4.32	4.54	3.91	2.67	1.48	0.70	0.30	0.13	0.05	0.02	18.9	17.8
	0.03	0.06	0.12	0.25	0.52	1.01	1.73	2.53	3.10	3.16	2.63	1.81	1.05	0.53	0.24	0.11	0.05	0.02	11.5	10.1
-24	0.02	0.05	0.10	0.19	0.36	0.66	1.06	1.51	1.82	1.83	1.51	1.07	0.66	0.36	0.18	0.09	0.04	0.02	6.38	4.25
-32	0.02	0.04	0.07	0.13	0.24	0.39	0.59	0.80	0.94	0.94	0.79	0.58	0.38	0.23	0.13	0.07	0.03	0.01	3.44	0.17
-40	0.02	0.03	0.05	0.09	0.15	0.23	0.31	0.40	0.46	0.46	0.40	0.31	0.22	0.14	0.09	0.05	0.03	0.01	1.91	0.00
-48	0.01	0.02	0.04	0.06	0.10	0.13	0.17	0.21	0.23	0.23	0.20	0.17	0.13	0.09	0.06	0.04	0.02	0.01	1.09	0.00
-56	0.01	0.01	0.02	0.04	0.06	0.08	0.10	0.11	0.12	0.12	0.11	0.09	0.08	0.06	0.04	0.02	0.01	0.01	0.58	0.00
-64	0.00	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.06	0.06	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.00	---	182
-72	0.00	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.06	0.06	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.00	---	182
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
F t	0.36	0.79	1.54	2.99	5.84	10.9	18.6	26.9	33.3	34.8	29.9	20.9	12.1	6.24	3.01	1.44	0.68	0.28	211	---
F a	0.00	0.00	0.00	0.15	3.62	9.06	16.8	25.3	31.6	33.2	28.2	19.2	10.3	4.11	0.28	0.00	0.00	0.00	---	182

one-half-peak spread: U:25.1,D:20.0 , L:26.2,R:19.2


NEMA Beam Type: Type 5

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW RED-45D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:45 DEG	DIM.:598MM	SERIAL No.:IES001876
MFR.:	SUR.:	Shielding Angle:

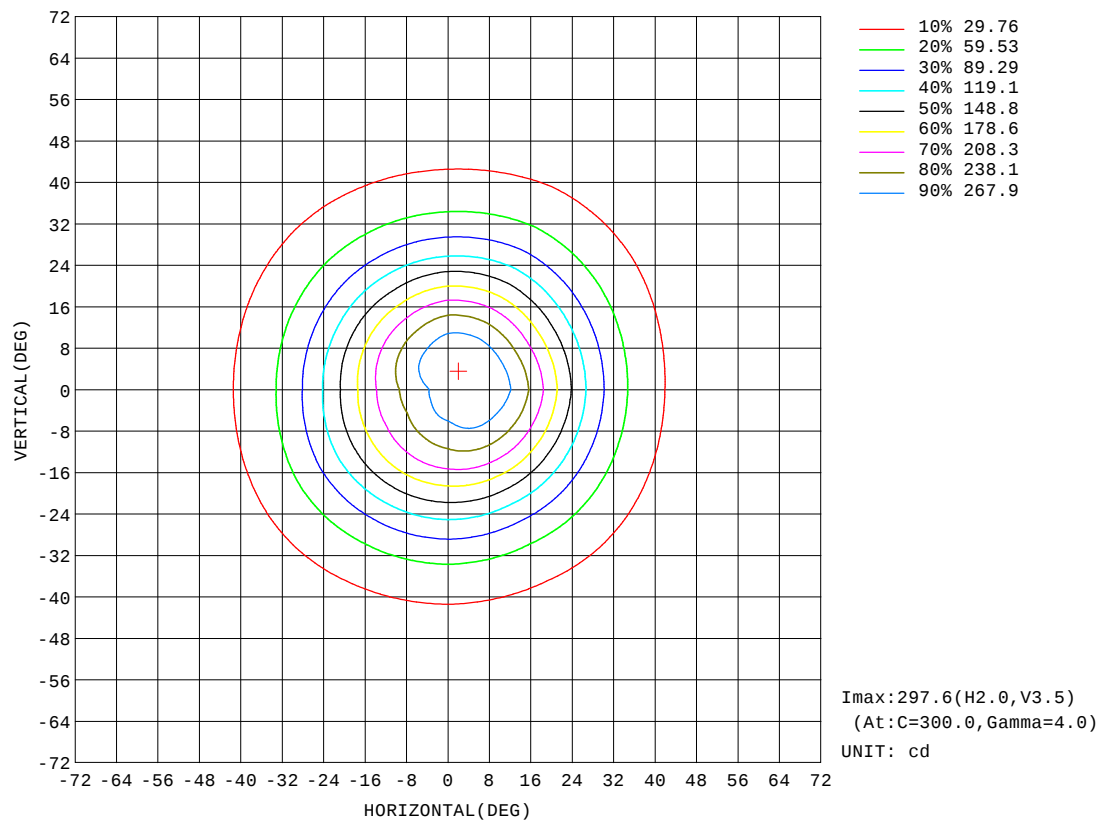


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW RED-45D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:45 DEG	DIM.:598MM	SERIAL No.:IES001876
MFR.:	SUR.:	Shielding Angle:

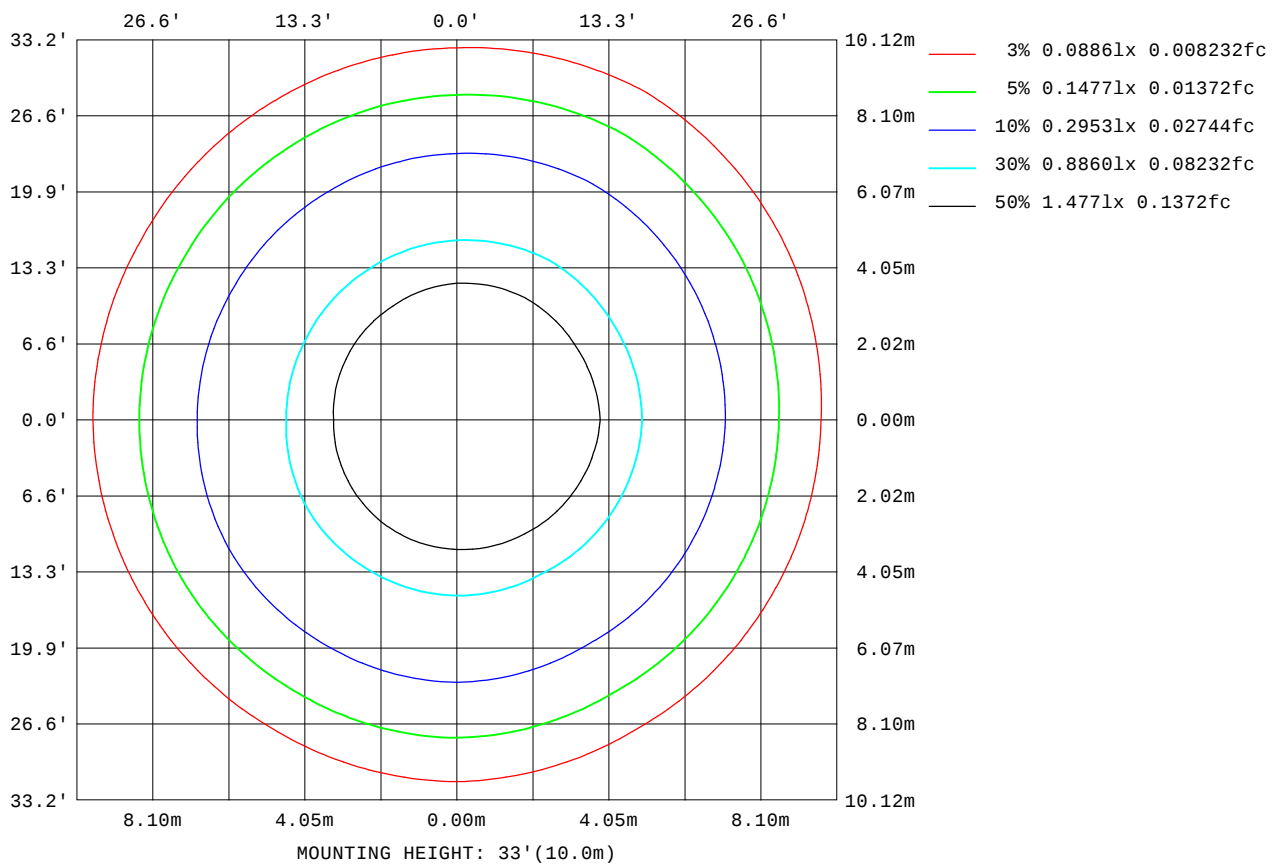

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

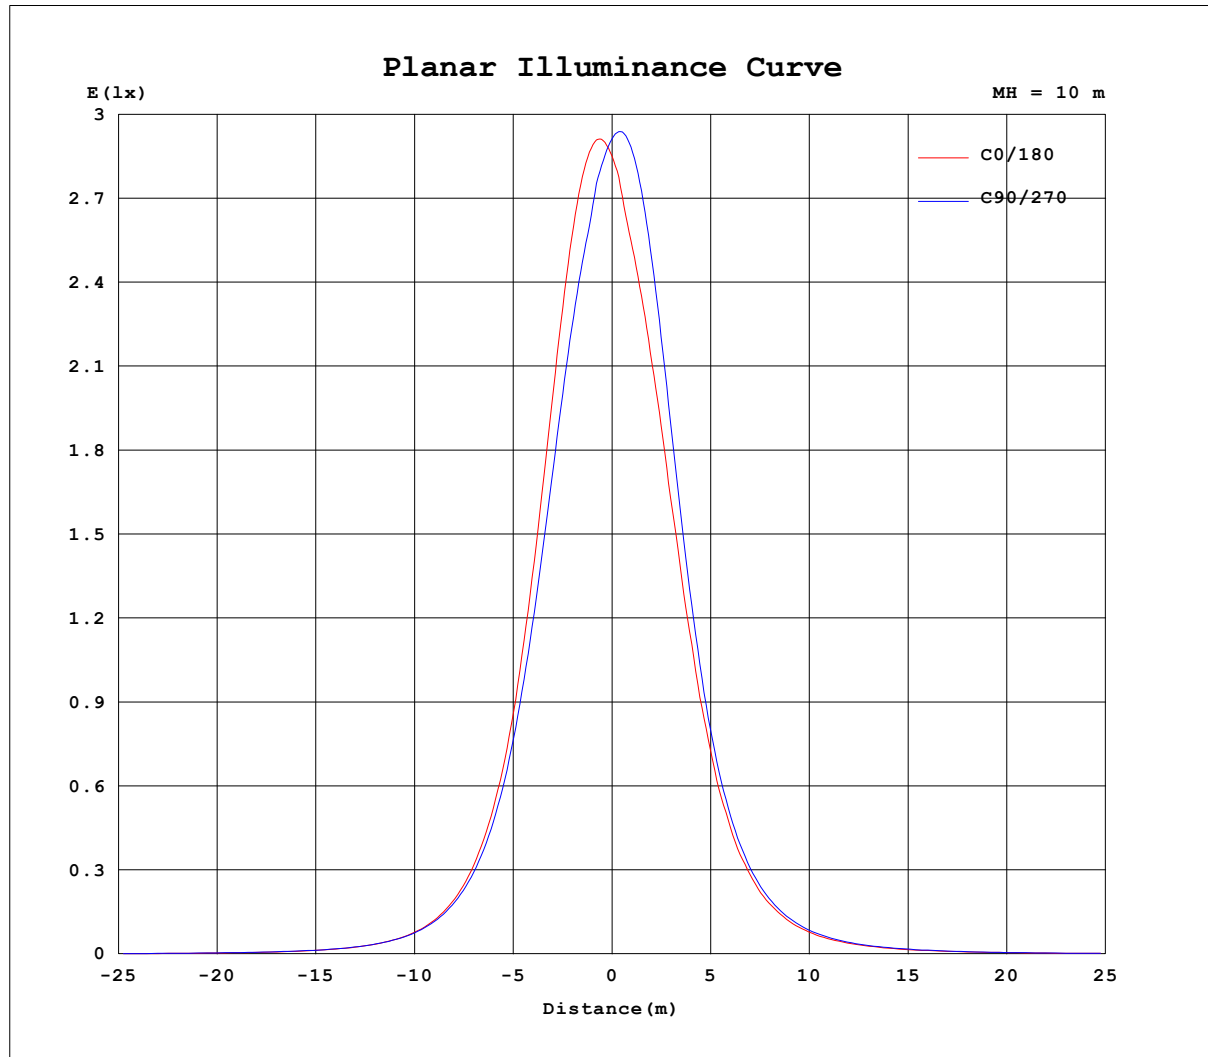


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW RED-45D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:45 DEG	DIM.:598MM	SERIAL No.:IES001876
MFR.:	SUR.:	Shielding Angle:

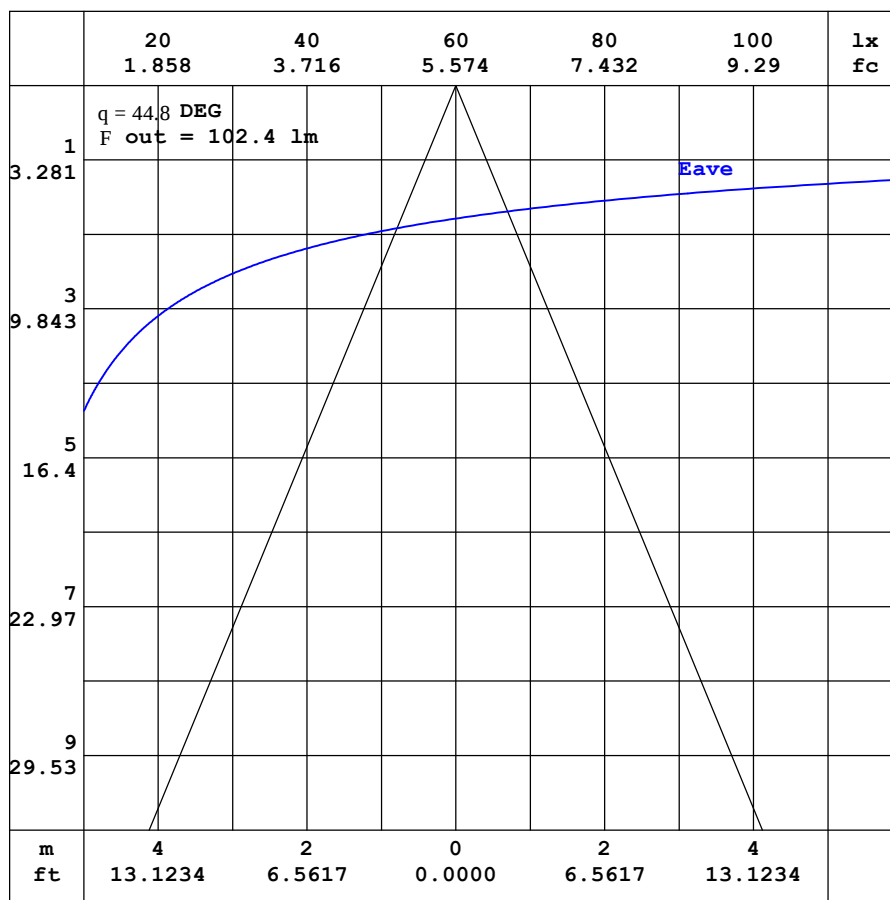

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-12

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW RED-45D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:45 DEG	DIM.:598MM	SERIAL No.:IES001876
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.78	0.73	0.73	0.74	0.79	0.87	0.96	1.08	1.21	1.35	1.47	1.56	1.64	1.70	1.74	1.76	1.77	1.77	1.81
-170	0.78	0.72	0.71	0.70	0.72	0.76	0.83	0.90	0.97	1.05	1.11	1.16	1.19	1.21	1.22	1.25	1.37	1.48	1.60
-160	0.78	0.71	0.68	0.65	0.65	0.66	0.68	0.71	0.72	0.74	0.75	0.74	0.74	0.85	0.97	1.08	1.17	1.27	1.33
-150	0.78	0.69	0.65	0.61	0.58	0.57	0.55	0.53	0.50	0.46	0.43	0.50	0.58	0.65	0.72	0.80	0.88	0.94	0.98
-140	0.78	0.68	0.62	0.57	0.52	0.48	0.44	0.39	0.33	0.31	0.33	0.37	0.40	0.45	0.50	0.55	0.60	0.63	0.65
-130	0.78	0.67	0.60	0.54	0.48	0.42	0.36	0.29	0.26	0.26	0.27	0.28	0.28	0.29	0.32	0.35	0.38	0.40	0.41
-120	0.78	0.67	0.58	0.51	0.44	0.37	0.30	0.25	0.24	0.24	0.23	0.23	0.23	0.22	0.24	0.25	0.27	0.28	0.29
-110	0.78	0.68	0.57	0.49	0.41	0.34	0.26	0.24	0.23	0.23	0.22	0.21	0.21	0.21	0.22	0.23	0.23	0.24	0.25
-100	0.78	0.68	0.58	0.48	0.39	0.31	0.22	0.21	0.21	0.21	0.21	0.20	0.20	0.20	0.21	0.22	0.22	0.22	0.23
-90	0.78	0.68	0.59	0.49	0.39	0.29	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19
-80	0.78	0.70	0.61	0.52	0.41	0.31	0.19	0.21	0.26	0.31	0.36	0.41	0.46	0.49	0.53	0.56	0.59	0.61	0.62
-70	0.78	0.72	0.65	0.58	0.54	0.55	0.59	0.77	1.00	1.23	1.46	1.69	1.93	2.15	2.34	2.50	2.62	2.69	2.73
-60	0.78	0.75	0.71	0.74	0.88	1.13	1.44	1.77	2.26	2.77	3.30	3.83	4.37	4.86	5.30	5.68	5.97	6.16	6.24
-50	0.78	0.77	0.81	1.01	1.40	1.93	2.48	3.04	3.76	4.71	5.79	6.95	8.17	9.44	10.7	11.9	12.9	13.5	13.8
-40	0.78	0.80	0.93	1.33	2.02	2.79	3.63	4.58	5.80	7.43	9.58	12.3	15.5	19.2	23.1	27.1	30.5	33.0	34.0
-30	0.78	0.85	1.07	1.67	2.59	3.64	4.84	6.39	8.41	11.4	15.6	21.7	29.6	39.1	49.7	60.9	71.1	78.5	81.5
-20	0.78	0.88	1.21	2.01	3.12	4.42	6.04	8.18	11.4	16.2	23.7	34.9	50.5	70.4	94.0	119	142	159	166
-10	0.78	0.90	1.31	2.26	3.53	5.05	6.95	9.61	13.8	20.4	30.9	46.9	70.2	102	139	177	209	233	247
0	0.78	0.92	1.38	2.41	3.78	5.42	7.45	10.4	15.0	22.2	33.8	51.6	77.9	113	155	199	234	261	285
10	0.78	0.92	1.36	2.35	3.66	5.25	7.20	9.96	14.1	20.6	30.9	46.4	68.8	99.5	138	181	220	252	273
20	0.78	0.93	1.30	2.16	3.37	4.81	6.54	8.83	12.1	16.9	24.1	34.7	49.2	68.7	92.3	119	145	166	178
30	0.78	0.91	1.21	1.88	2.94	4.16	5.56	7.25	9.56	12.6	16.8	22.7	30.3	39.5	50.5	61.6	72.9	81.1	85.1
40	0.78	0.88	1.10	1.59	2.43	3.39	4.46	5.66	7.07	8.93	11.2	13.9	17.2	21.0	25.1	29.1	32.8	35.5	36.7
50	0.78	0.86	1.01	1.33	1.83	2.56	3.33	4.15	5.07	6.11	7.26	8.61	9.94	11.4	12.8	14.0	15.2	15.9	16.3
60	0.78	0.85	0.94	1.09	1.37	1.72	2.24	2.76	3.33	3.92	4.54	5.19	5.78	6.42	6.94	7.36	7.71	7.96	8.08
70	0.78	0.83	0.88	0.95	1.05	1.20	1.37	1.58	1.85	2.15	2.44	2.70	2.97	3.23	3.47	3.66	3.80	3.89	3.94
80	0.78	0.82	0.84	0.87	0.90	0.93	0.97	1.00	1.04	1.08	1.14	1.20	1.26	1.32	1.37	1.41	1.45	1.47	1.48
90	0.78	0.79	0.80	0.81	0.82	0.83	0.84	0.84	0.83	0.82	0.82	0.81	0.81	0.81	0.82	0.83	0.83	0.84	0.85
100	0.78	0.78	0.79	0.78	0.78	0.78	0.77	0.75	0.73	0.72	0.71	0.71	0.70	0.71	0.71	0.71	0.71	0.72	0.73
110	0.78	0.78	0.76	0.76	0.75	0.75	0.74	0.73	0.72	0.72	0.71	0.71	0.70	0.71	0.71	0.71	0.71	0.70	0.70
120	0.78	0.76	0.75	0.74	0.74	0.73	0.72	0.72	0.72	0.72	0.73	0.76	0.79	0.81	0.82	0.83	0.83	0.84	0.84
130	0.78	0.75	0.74	0.74	0.73	0.73	0.73	0.73	0.76	0.80	0.85	0.91	0.96	1.01	1.05	1.08	1.10	1.11	1.11
140	0.78	0.74	0.74	0.73	0.73	0.74	0.76	0.80	0.85	0.93	1.01	1.10	1.18	1.26	1.33	1.38	1.41	1.42	1.42
150	0.78	0.74	0.74	0.74	0.74	0.77	0.83	0.89	0.98	1.07	1.17	1.28	1.38	1.47	1.56	1.63	1.66	1.67	1.67
160	0.78	0.74	0.74	0.74	0.76	0.81	0.89	0.98	1.09	1.20	1.32	1.42	1.50	1.59	1.68	1.74	1.80	1.82	1.84
170	0.78	0.74	0.73	0.74	0.78	0.84	0.93	1.05	1.17	1.30	1.42	1.52	1.59	1.65	1.68	1.72	1.77	1.81	1.86
180	0.78	0.73	0.73	0.74	0.79	0.87	0.96	1.08	1.21	1.35	1.47	1.56	1.64	1.70	1.74	1.76	1.77	1.77	1.86

H_b Range:-90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-12

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW RED-45D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:45 DEG	DIM.:598MM	SERIAL No.:IES001876
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.67	1.58	1.43	1.26	1.07	0.88	0.72	0.58	0.49	0.34	0.27	0.25	0.22	0.21	0.21	0.19	0.17	0.17	
-170	1.52	1.48	1.37	1.21	1.04	0.86	0.71	0.58	0.47	0.35	0.29	0.26	0.24	0.22	0.21	0.19	0.17	0.17	
-160	1.29	1.21	1.12	1.01	0.88	0.75	0.63	0.52	0.43	0.34	0.30	0.26	0.24	0.23	0.21	0.19	0.17	0.17	
-150	0.95	0.91	0.84	0.76	0.67	0.58	0.52	0.45	0.39	0.34	0.30	0.26	0.25	0.23	0.21	0.19	0.17	0.17	
-140	0.64	0.60	0.56	0.49	0.45	0.42	0.38	0.36	0.34	0.32	0.29	0.26	0.25	0.23	0.21	0.19	0.17	0.17	
-130	0.40	0.38	0.35	0.33	0.30	0.30	0.30	0.29	0.29	0.29	0.28	0.26	0.24	0.23	0.20	0.19	0.17	0.17	
-120	0.28	0.27	0.26	0.25	0.24	0.23	0.25	0.25	0.26	0.26	0.26	0.25	0.24	0.22	0.20	0.18	0.17	0.17	
-110	0.24	0.24	0.23	0.22	0.22	0.21	0.22	0.23	0.24	0.24	0.24	0.24	0.22	0.20	0.19	0.18	0.17	0.17	
-100	0.22	0.22	0.21	0.21	0.20	0.19	0.20	0.21	0.21	0.21	0.21	0.22	0.20	0.19	0.18	0.18	0.17	0.17	
-90	0.19	0.19	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.17	0.17	0.17	0.17	
-80	0.60	0.58	0.55	0.52	0.48	0.44	0.39	0.34	0.29	0.24	0.20	0.18	0.18	0.18	0.17	0.17	0.17	0.17	
-70	2.66	2.55	2.40	2.22	2.01	1.80	1.60	1.39	1.17	0.96	0.73	0.53	0.39	0.28	0.20	0.18	0.17	0.17	
-60	6.11	5.86	5.52	5.11	4.62	4.13	3.61	3.11	2.62	2.14	1.70	1.29	0.89	0.56	0.34	0.21	0.18	0.17	
-50	13.4	12.7	11.6	10.4	9.09	7.82	6.60	5.47	4.47	3.60	2.84	2.17	1.56	1.00	0.54	0.27	0.19	0.17	
-40	32.8	30.3	26.7	22.6	18.7	15.1	11.8	9.13	7.02	5.38	4.14	3.13	2.24	1.47	0.80	0.37	0.19	0.17	
-30	78.6	71.2	60.7	49.7	39.1	29.4	21.3	15.1	10.7	7.67	5.59	4.08	2.90	1.90	1.06	0.46	0.20	0.17	
-20	162	147	124	98.3	73.3	52.0	35.5	23.5	15.5	10.3	7.09	4.95	3.45	2.26	1.28	0.54	0.21	0.17	
-10	251	234	201	157	113	77.1	50.3	31.8	19.9	12.7	8.29	5.59	3.84	2.50	1.42	0.60	0.22	0.17	
0	294	281	244	191	136	90.5	57.9	35.9	22.0	13.7	8.82	5.88	4.01	2.60	1.48	0.62	0.23	0.17	
10	270	246	206	161	116	79.6	52.3	33.2	21.0	13.5	8.84	5.96	4.08	2.65	1.51	0.65	0.25	0.17	
20	174	160	134	106	79.0	56.4	38.8	26.0	17.4	11.7	8.08	5.64	3.91	2.55	1.46	0.64	0.26	0.17	
30	84.5	79.0	69.3	57.4	44.9	33.9	24.9	18.1	13.1	9.47	6.85	4.98	3.50	2.29	1.30	0.61	0.27	0.17	
40	36.6	34.9	31.8	28.1	23.3	18.8	15.0	11.8	9.28	7.20	5.51	4.11	2.92	1.92	1.09	0.56	0.28	0.17	
50	16.2	15.7	14.8	13.6	12.2	10.5	8.97	7.52	6.29	5.19	4.15	3.14	2.25	1.48	0.88	0.49	0.28	0.17	
60	8.02	7.82	7.51	7.11	6.57	5.93	5.30	4.62	3.99	3.38	2.81	2.18	1.56	1.07	0.71	0.45	0.28	0.17	
70	3.90	3.82	3.68	3.50	3.26	3.00	2.75	2.48	2.19	1.90	1.63	1.37	1.07	0.80	0.59	0.42	0.28	0.17	
80	1.47	1.45	1.42	1.38	1.33	1.27	1.21	1.16	1.10	1.06	1.02	0.98	0.82	0.68	0.54	0.41	0.28	0.17	
90	0.84	0.83	0.82	0.82	0.81	0.80	0.81	0.82	0.83	0.84	0.85	0.86	0.74	0.63	0.51	0.40	0.28	0.17	
100	0.72	0.72	0.71	0.71	0.71	0.70	0.71	0.72	0.73	0.74	0.76	0.77	0.68	0.59	0.48	0.38	0.28	0.17	
110	0.70	0.71	0.71	0.71	0.71	0.71	0.71	0.71	0.71	0.72	0.72	0.71	0.62	0.54	0.45	0.37	0.27	0.17	
120	0.84	0.83	0.82	0.81	0.80	0.77	0.75	0.73	0.72	0.71	0.71	0.66	0.58	0.51	0.43	0.34	0.26	0.17	
130	1.11	1.09	1.07	1.04	1.00	0.94	0.89	0.83	0.78	0.74	0.68	0.61	0.54	0.47	0.39	0.32	0.25	0.17	
140	1.42	1.41	1.37	1.32	1.24	1.16	1.07	0.98	0.90	0.78	0.66	0.56	0.49	0.43	0.36	0.30	0.23	0.17	
150	1.68	1.67	1.64	1.56	1.47	1.37	1.25	1.13	0.94	0.76	0.62	0.51	0.43	0.38	0.33	0.27	0.22	0.17	
160	1.84	1.83	1.78	1.70	1.62	1.51	1.29	1.07	0.86	0.67	0.54	0.44	0.37	0.33	0.29	0.24	0.20	0.17	
170	1.81	1.82	1.79	1.66	1.47	1.27	1.06	0.87	0.71	0.53	0.42	0.35	0.30	0.27	0.25	0.22	0.18	0.17	
180	1.67	1.58	1.43	1.26	1.07	0.88	0.72	0.58	0.49	0.34	0.27	0.25	0.22	0.21	0.21	0.19	0.17	0.17	

H_b Range:-90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-12

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: