

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2960.3 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	54.0V x 55.9H
	At 50% of Imax	30.0V x 30.6H
	At 90% of Imax	12.7V x 12.8H

Beam Flux	Total	999.9 lumens per klm.
	To 10% of Imax	817.0 lumens per klm.
	To 50% of Imax	471.1 lumens per klm.
	To 90% of Imax	105.5 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-19

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Cobra-610mm-3000K-30D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:610MM	SERIAL No.:IES001723
MFR.:	SUR.:	Shielding Angle:

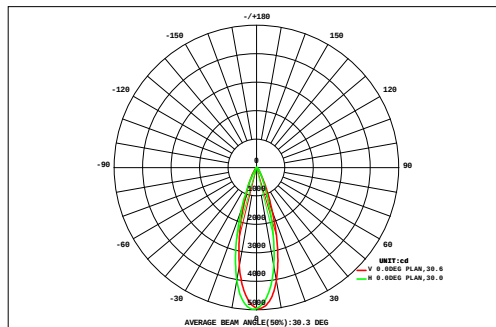

DATA OF LAMP		Eff:72.23lm/W	
MODEL		Imax(cd)	4979
NOMINAL POWER(W)	23.28	AVAILABILITY(%)	81.7
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	1374
NOMINAL FLUX(lm)	1682	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1682
TEST VOLTAGE(V)	24	q @50%(H,V)	31,30DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.24	0.34	0.46	0.59	0.73	0.85	0.96	1.04	1.09	1.09	1.04	0.96	0.85	0.73	0.60	0.46	0.34	0.24	12.6	0.00
45	0.29	0.42	0.58	0.77	0.96	1.16	1.34	1.48	1.55	1.55	1.48	1.34	1.16	0.97	0.77	0.59	0.43	0.29	17.1	0.00
40	0.35	0.52	0.74	1.00	1.29	1.61	1.92	2.16	2.29	2.29	2.16	1.92	1.61	1.30	1.01	0.75	0.53	0.35	23.8	0.00
35	0.40	0.64	0.93	1.29	1.74	2.29	2.87	3.35	3.61	3.61	3.35	2.87	2.30	1.75	1.31	0.94	0.65	0.40	34.3	5.25
30	0.44	0.73	1.14	1.65	2.35	3.32	4.57	5.74	6.41	6.41	5.74	4.57	3.35	2.38	1.68	1.16	0.73	0.42	52.8	34.7
25	0.46	0.80	1.32	2.06	3.14	4.93	7.62	10.5	12.2	12.2	10.5	7.70	5.05	3.23	2.11	1.36	0.80	0.43	86.5	72.4
20	0.46	0.84	1.50	2.49	4.16	7.25	12.2	17.8	21.2	21.2	17.9	12.5	7.58	4.43	2.66	1.58	0.87	0.42	137	125
15	0.44	0.87	1.66	2.93	5.33	9.94	17.1	25.1	30.1	30.1	25.5	18.0	11.1	6.18	3.30	1.80	0.92	0.39	191	181
10	0.39	0.85	1.73	3.21	6.20	12.0	20.7	29.6	35.3	35.4	31.2	23.7	14.8	7.84	3.86	1.94	0.92	0.33	230	221
5	0.33	0.75	1.65	3.24	6.48	12.8	22.0	31.0	36.3	37.0	33.2	25.3	15.7	8.22	3.93	1.87	0.83	0.27	241	233
0	0.27	0.59	1.36	2.93	5.99	11.9	20.4	28.2	32.9	33.3	29.3	22.0	13.5	7.07	3.41	1.55	0.64	0.21	216	208
-5	0.20	0.40	0.95	2.28	4.71	9.10	15.2	21.3	25.3	25.5	21.8	16.0	9.88	5.27	2.58	1.07	0.43	0.15	162	154
-10	0.13	0.24	0.52	1.40	3.10	5.74	9.51	13.3	15.9	15.9	13.6	9.86	6.13	3.38	1.58	0.59	0.25	0.09	101	92.6
-15	0.07	0.12	0.24	0.64	1.59	3.07	4.96	6.91	8.16	8.20	7.01	5.09	3.23	1.72	0.71	0.28	0.12	0.05	52.2	41.6
-20	0.03	0.05	0.12	0.26	0.58	1.17	2.05	2.94	3.48	3.50	2.98	2.08	1.21	0.63	0.29	0.13	0.05	0.02	21.6	5.60
-25	0.01	0.02	0.05	0.10	0.20	0.35	0.58	0.81	0.97	0.97	0.82	0.59	0.37	0.22	0.11	0.05	0.02	0.01	6.26	0.00
-30	0.01	0.01	0.02	0.03	0.06	0.10	0.17	0.22	0.26	0.26	0.23	0.17	0.10	0.06	0.03	0.02	0.01	0.01	1.75	0.00
-35	0.00	0.01	0.01	0.01	0.01	0.02	0.03	0.04	0.05	0.05	0.04	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.36	0.00
-40	0.00	0.01	0.01	0.01	0.01	0.02	0.03	0.04	0.05	0.05	0.04	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.36	0.00
-45	0.00	0.01	0.01	0.01	0.01	0.02	0.03	0.04	0.05	0.05	0.04	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.36	0.00
F t	4.55	8.21	15.0	26.9	48.6	87.6	144	202	237	239	208	155	98.0	55.4	30.0	16.2	8.54	4.10	1587	---
F a	0.00	0.00	0.00	4.85	33.9	75.5	133	192	227	229	198	144	86.3	41.1	9.97	0.00	0.00	0.00	---	1374

one-half-peak spread: U:14.7,D:15.5 , L:15.3,R:15.5


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-09-19

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Cobra-610mm-3000K-30D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:610MM	SERIAL No.:IES001723
MFR.:	SUR.:	Shielding Angle:

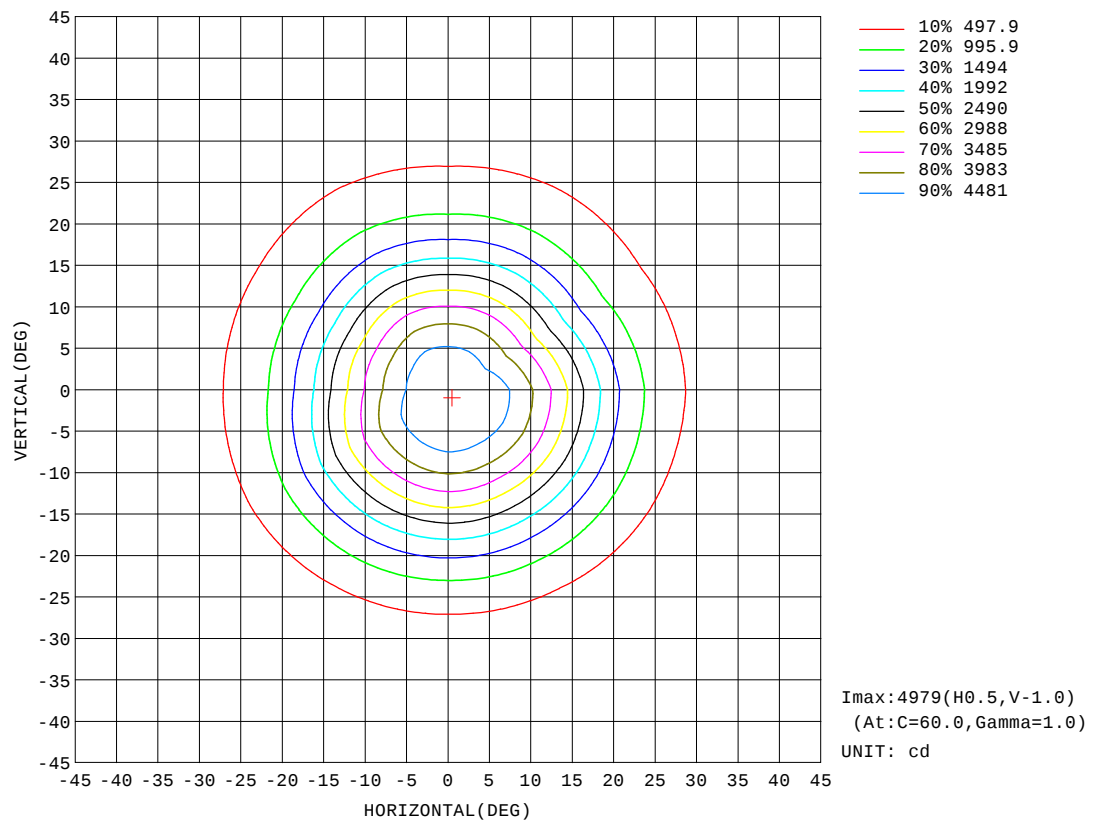


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-19

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Cobra-610mm-3000K-30D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30 DEG	DIM.: 610MM	SERIAL No.:IES001723
MFR.:	SUR.:	Shielding Angle:

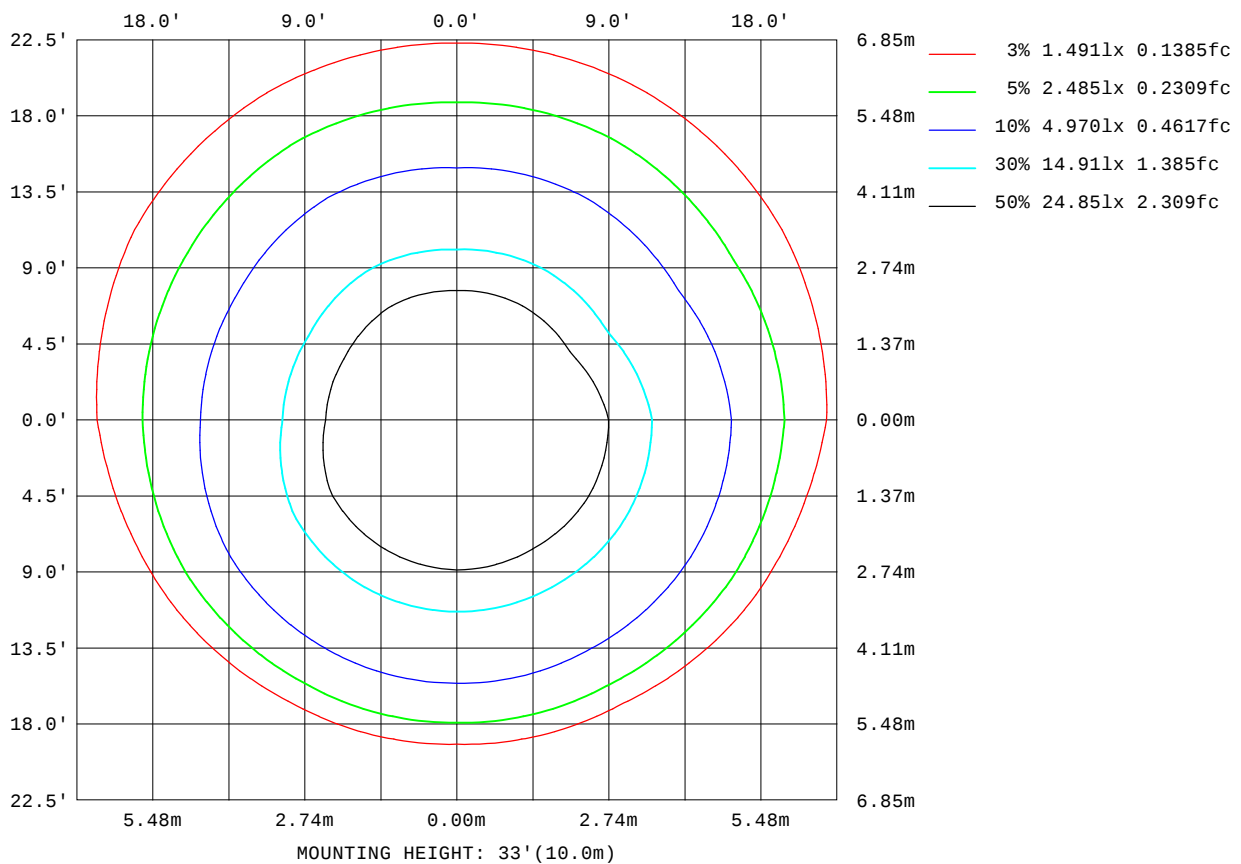

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-19

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

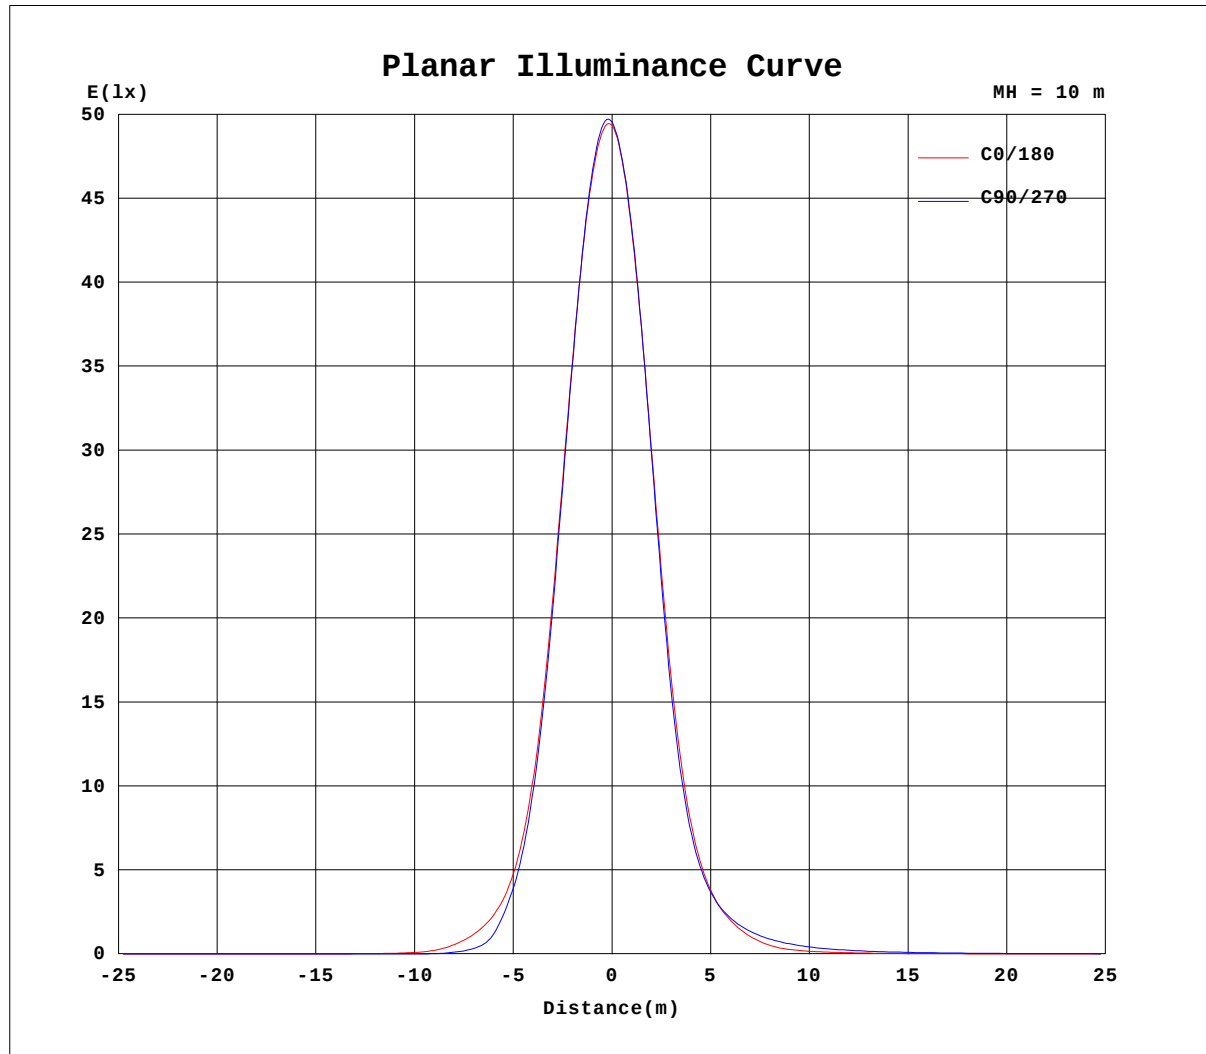


$H(b)$ Range: -90 - 90DEG
 $H(b)$ Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-19

$V(B)$ Range: -180 - 180DEG
 $V(B)$ Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Cobra-610mm-3000K-30D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:610MM	SERIAL No.:IES001723
MFR.:	SUR.:	Shielding Angle:

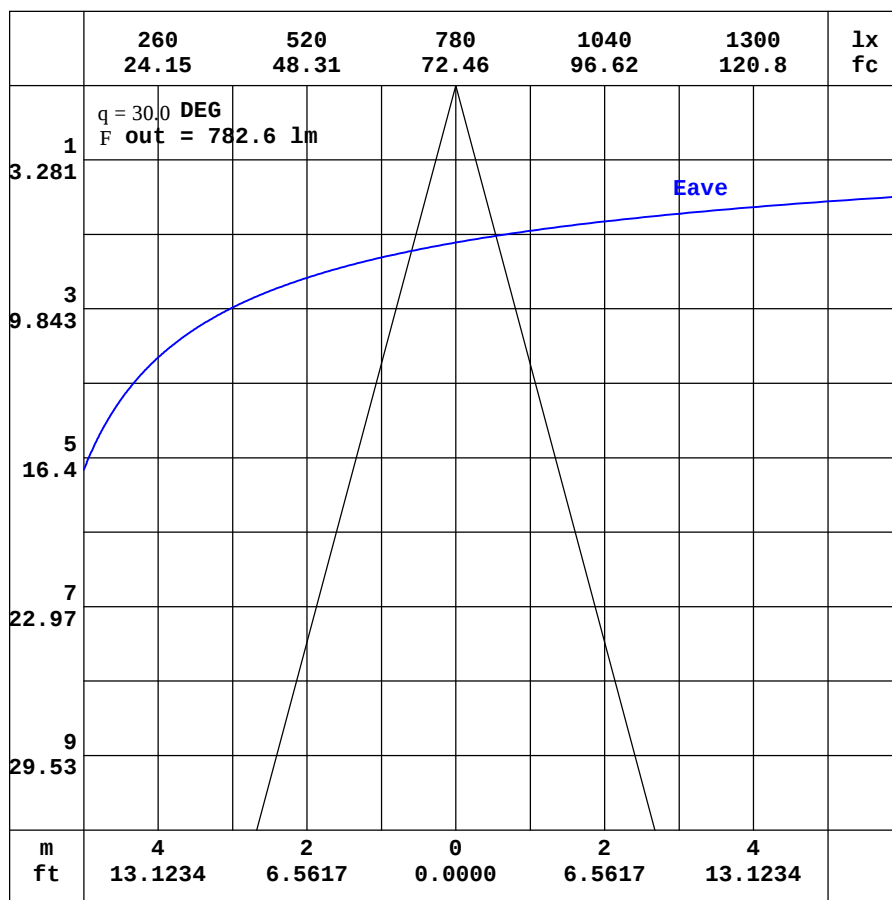

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-19

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Cobra-610mm-3000K-30D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:610MM	SERIAL No.:IES001723
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	5.90	5.34	4.93	4.75	4.86	5.36	6.36	7.78	9.45	11.1	12.5	13.4	13.9	14.0	13.9	13.6	13.3	12.9	13.0
-170	5.90	5.27	4.82	4.58	4.59	4.87	5.47	6.36	7.36	8.34	9.13	9.65	9.97	10.1	10.1	10.2	10.9	11.5	11.8
-160	5.90	5.21	4.72	4.42	4.32	4.36	4.57	4.89	5.23	5.49	5.63	5.64	5.74	6.91	8.04	9.03	9.84	10.3	10.4
-150	5.90	5.17	4.65	4.28	4.09	3.94	3.83	3.70	3.50	3.14	2.80	3.37	4.07	4.85	5.64	6.35	6.90	7.23	7.32
-140	5.90	5.15	4.59	4.19	3.91	3.66	3.37	3.00	2.47	2.25	2.29	2.45	2.70	3.02	3.37	3.71	3.97	4.13	4.15
-130	5.90	5.13	4.56	4.14	3.78	3.49	3.17	2.77	2.49	2.38	2.29	2.25	2.23	2.23	2.25	2.31	2.37	2.40	2.41
-120	5.90	5.14	4.55	4.09	3.72	3.38	3.08	2.82	2.78	2.73	2.66	2.59	2.53	2.47	2.41	2.36	2.33	2.30	2.29
-110	5.90	5.17	4.56	4.05	3.63	3.27	2.96	2.87	2.89	2.92	2.93	2.94	2.97	2.96	2.94	2.92	2.91	2.90	2.90
-100	5.90	5.22	4.60	4.03	3.52	3.06	2.64	2.65	2.70	2.74	2.78	2.81	2.84	2.87	2.90	2.93	2.95	2.97	2.99
-90	5.90	5.29	4.67	4.05	3.43	2.82	2.20	2.19	2.18	2.18	2.17	2.16	2.15	2.15	2.15	2.14	2.14	2.14	2.13
-80	5.90	5.37	4.79	4.14	3.42	2.64	1.80	1.65	1.57	1.50	1.43	1.37	1.31	1.27	1.23	1.20	1.17	1.15	1.14
-70	5.90	5.49	4.96	4.32	3.56	2.67	1.63	1.18	1.07	0.97	0.89	0.81	0.75	0.70	0.67	0.64	0.62	0.61	0.60
-60	5.90	5.62	5.20	4.65	3.92	2.99	1.87	0.87	0.75	0.67	0.62	0.59	0.56	0.55	0.54	0.53	0.53	0.52	0.51
-50	5.90	5.77	5.52	5.12	4.53	3.73	2.69	1.32	0.66	0.64	0.66	0.69	0.70	0.72	0.80	0.88	0.93	0.94	0.91
-40	5.90	5.94	5.90	5.73	5.42	4.94	4.25	3.21	1.61	0.90	1.10	1.46	1.97	2.76	3.90	7.10	10.9	14.0	14.6
-30	5.90	6.12	6.33	6.46	6.57	6.65	6.66	6.48	5.87	4.49	2.95	7.24	16.6	33.7	61.8	108	169	232	255
-20	5.90	6.29	6.77	7.27	7.91	8.76	9.87	11.3	13.0	15.3	21.5	37.8	79.3	220	445	746	1130	1433	1562
-10	5.90	6.46	7.20	8.10	9.31	11.0	13.5	17.1	22.5	31.7	54.8	117	269	540	1066	1937	2922	3691	4022
0	5.90	6.62	7.59	8.86	10.6	13.2	17.0	22.8	31.9	47.7	88.7	193	357	645	1242	2270	3511	4490	4936
10	5.90	6.62	7.72	9.14	11.2	14.2	19.1	27.0	40.3	62.6	104	188	314	510	880	1533	2446	3248	3497
20	5.90	6.59	7.76	9.25	11.3	14.6	19.6	27.9	41.8	64.6	100	156	230	322	457	658	909	1103	1162
30	5.90	6.53	7.67	9.19	11.2	14.1	18.6	25.7	36.9	54.8	81.2	111	148	189	235	289	333	363	371
40	5.90	6.46	7.41	8.97	10.7	13.1	16.6	21.7	29.2	40.2	54.5	71.3	89.8	109	128	144	158	167	171
50	5.90	6.37	7.05	8.53	10.0	11.8	14.2	17.5	22.6	29.3	37.1	46.0	55.8	66.0	73.2	79.1	83.8	86.9	88.1
60	5.90	6.27	6.71	7.61	9.16	10.6	12.1	14.3	18.2	22.6	27.4	32.2	37.3	41.7	44.1	46.2	47.8	49.0	49.5
70	5.90	6.16	6.45	6.79	7.45	8.71	10.2	11.7	13.8	16.6	19.7	23.2	26.8	28.8	29.8	30.6	31.1	31.4	31.4
80	5.90	6.04	6.20	6.37	6.54	6.73	6.93	7.21	7.60	8.06	8.63	9.34	10.3	11.0	11.5	11.8	12.0	12.0	11.8
90	5.90	5.93	5.96	5.98	6.01	6.04	6.07	6.11	6.15	6.20	6.24	6.28	6.33	6.33	6.33	6.34	6.34	6.34	6.35
100	5.90	5.82	5.74	5.64	5.56	5.47	5.39	5.33	5.28	5.24	5.19	5.15	5.12	5.08	5.04	5.02	5.00	4.99	4.99
110	5.90	5.72	5.53	5.36	5.19	5.05	4.93	4.83	4.75	4.68	4.63	4.61	4.59	4.59	4.58	4.57	4.56	4.54	4.52
120	5.90	5.62	5.36	5.12	4.93	4.79	4.70	4.66	4.65	4.72	4.85	5.00	5.18	5.36	5.55	5.70	5.82	5.89	5.90
130	5.90	5.53	5.21	4.95	4.76	4.70	4.69	4.84	5.13	5.54	6.04	6.60	7.19	7.74	8.26	8.69	9.02	9.22	9.28
140	5.90	5.47	5.10	4.83	4.72	4.73	4.96	5.44	6.14	7.03	8.01	9.01	9.97	10.8	11.5	12.1	12.5	12.7	12.8
150	5.90	5.42	5.02	4.76	4.73	4.90	5.40	6.24	7.38	8.69	10.1	11.3	12.3	13.2	13.8	14.3	14.6	14.8	14.9
160	5.90	5.38	4.97	4.74	4.77	5.11	5.87	7.03	8.48	10.1	11.5	12.7	13.5	14.0	14.4	14.6	14.8	14.9	15.1
170	5.90	5.35	4.94	4.74	4.83	5.29	6.21	7.58	9.21	10.9	12.3	13.3	13.8	14.0	13.9	13.6	13.4	13.3	13.8
180	5.90	5.34	4.93	4.75	4.86	5.36	6.36	7.78	9.45	11.1	12.5	13.4	13.9	14.0	13.9	13.6	13.3	12.9	13.1

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-19

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Cobra-610mm-3000K-30D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:610MM	SERIAL No.:IES001723
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	11.7	11.0	10.2	9.19	7.98	6.67	5.35	4.14	3.15	2.50	2.24	2.29	2.51	2.74	2.81	2.74	2.47	2.08	
-170	11.3	10.8	9.91	8.87	7.68	6.38	5.07	3.90	3.00	2.43	2.25	2.32	2.54	2.76	2.82	2.74	2.47	2.08	
-160	10.1	9.58	8.69	7.62	6.47	5.30	4.21	3.31	2.66	2.31	2.26	2.38	2.60	2.79	2.82	2.73	2.45	2.08	
-150	7.15	6.74	6.14	5.39	4.58	3.80	3.14	2.65	2.36	2.27	2.32	2.50	2.70	2.83	2.83	2.70	2.43	2.08	
-140	4.09	3.90	3.61	3.26	2.91	2.60	2.38	2.28	2.27	2.34	2.49	2.66	2.80	2.84	2.81	2.65	2.39	2.08	
-130	2.39	2.35	2.29	2.24	2.23	2.25	2.28	2.35	2.47	2.60	2.72	2.81	2.85	2.85	2.75	2.57	2.34	2.08	
-120	2.31	2.34	2.39	2.44	2.52	2.58	2.66	2.73	2.80	2.85	2.87	2.87	2.86	2.78	2.65	2.48	2.28	2.08	
-110	2.91	2.92	2.94	2.95	2.98	2.97	2.95	2.94	2.92	2.90	2.87	2.80	2.72	2.61	2.49	2.36	2.21	2.08	
-100	2.97	2.94	2.91	2.88	2.84	2.80	2.76	2.72	2.67	2.62	2.56	2.50	2.44	2.37	2.29	2.22	2.15	2.08	
-90	2.12	2.12	2.11	2.10	2.09	2.08	2.08	2.08	2.07	2.07	2.07	2.06	2.07	2.07	2.07	2.07	2.07	2.08	
-80	1.14	1.16	1.18	1.20	1.23	1.26	1.30	1.35	1.40	1.46	1.53	1.60	1.68	1.76	1.84	1.92	2.00	2.08	
-70	0.61	0.62	0.63	0.65	0.69	0.72	0.78	0.84	0.91	0.98	1.08	1.20	1.34	1.49	1.64	1.78	1.93	2.08	
-60	0.52	0.53	0.54	0.54	0.55	0.57	0.59	0.60	0.65	0.71	0.80	0.94	1.10	1.28	1.46	1.67	1.86	2.08	
-50	0.94	0.94	0.89	0.81	0.74	0.73	0.71	0.68	0.65	0.64	0.70	0.84	0.99	1.14	1.34	1.56	1.81	2.08	
-40	14.0	11.0	7.06	3.74	2.86	2.08	1.57	1.17	0.96	0.88	0.92	0.94	0.99	1.10	1.25	1.48	1.76	2.08	
-30	233	170	110	65.3	36.8	18.6	8.16	3.18	2.55	2.06	1.56	1.25	1.11	1.11	1.21	1.43	1.73	2.08	
-20	1447	1153	780	476	247	88.9	42.0	18.1	8.05	4.73	2.82	1.79	1.34	1.18	1.22	1.40	1.71	2.08	
-10	3756	3055	2091	1203	620	306	131	52.3	18.5	8.82	4.53	2.47	1.61	1.28	1.25	1.39	1.70	2.08	
0	4766	4031	2847	1639	830	418	215	88.6	28.4	12.6	6.05	3.04	1.84	1.37	1.28	1.40	1.69	2.08	
10	3250	2506	1610	964	564	337	199	102	49.7	26.9	14.5	8.04	4.79	3.10	2.28	1.90	1.85	2.08	
20	1103	908	664	465	329	235	159	97.1	58.0	33.8	19.5	11.5	7.10	4.58	3.17	2.37	2.00	2.08	
30	363	333	290	236	190	149	113	82.5	53.3	33.2	20.8	13.1	8.49	5.67	3.88	2.73	2.15	2.08	
40	167	158	145	128	109	90.4	71.9	54.8	40.4	28.5	19.3	13.2	9.04	6.32	4.40	2.96	2.28	2.08	
50	86.9	83.9	79.2	73.3	66.1	55.8	46.0	37.1	29.2	22.5	16.7	12.3	9.02	6.50	4.65	3.06	2.41	2.08	
60	49.0	47.8	46.1	44.0	41.6	37.2	32.0	27.1	22.3	17.9	14.2	11.1	8.46	6.39	4.36	3.17	2.51	2.08	
70	31.3	30.9	30.3	29.4	28.3	26.3	22.8	19.4	16.2	13.4	11.2	9.52	7.20	5.32	4.10	3.27	2.60	2.08	
80	11.9	11.7	11.4	11.0	10.4	9.58	8.77	8.20	7.75	7.36	7.04	6.72	5.77	4.89	4.08	3.34	2.67	2.08	
90	6.32	6.30	6.28	6.25	6.23	6.20	6.16	6.12	6.08	6.04	6.00	5.95	5.31	4.66	4.02	3.37	2.72	2.08	
100	4.97	4.97	4.97	4.98	5.00	5.02	5.06	5.10	5.14	5.20	5.25	5.27	4.87	4.42	3.92	3.36	2.75	2.08	
110	4.52	4.52	4.51	4.51	4.50	4.50	4.50	4.53	4.58	4.65	4.74	4.74	4.49	4.18	3.80	3.34	2.76	2.08	
120	5.86	5.75	5.60	5.42	5.21	5.01	4.83	4.68	4.56	4.52	4.53	4.37	4.18	3.96	3.68	3.29	2.76	2.08	
130	9.16	8.91	8.53	8.05	7.48	6.89	6.29	5.74	5.26	4.88	4.51	4.16	3.95	3.77	3.55	3.23	2.74	2.08	
140	12.7	12.4	11.9	11.3	10.5	9.60	8.59	7.55	6.59	5.56	4.60	4.03	3.75	3.58	3.42	3.15	2.72	2.08	
150	14.8	14.6	14.2	13.7	12.9	12.0	10.8	9.53	7.50	5.77	4.56	3.86	3.52	3.40	3.28	3.07	2.67	2.08	
160	15.0	14.9	14.7	14.5	14.0	13.3	11.3	9.06	7.00	5.32	4.17	3.52	3.25	3.19	3.12	2.97	2.62	2.08	
170	13.5	13.8	14.1	13.4	12.1	10.5	8.81	7.06	5.45	4.16	3.35	2.97	2.90	2.96	2.97	2.86	2.55	2.08	
180	11.7	11.0	10.2	9.19	7.98	6.67	5.35	4.14	3.15	2.50	2.24	2.29	2.51	2.74	2.81	2.74	2.47	2.08	

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-19

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: