


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME:LumiPixel Slim-Square Acrylic-1000mm-RGBW ALL-110 220D- Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:110X220 DEG	DIM.:1000mm	SERIAL No.:
MFR.: CD	SUR.:1*0.018	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 28.30 lm/W			
MODEL	LA181006004	Imax(cd)	54.39	S/MH(C0/180)	1.70
NOMINAL POWER(W)	10.2	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	290.52	□ UP,DN(C0-180)	13.4,37.3
NOMINAL FLUX(lm)	2.42103	CIE CLASS	SEMI-D.	□ UP,DN(C180-360)	12.4,36.9
LAMPS INSIDE	120	□ up(%)	25.9	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	24	□ down(%)	74.1	CIBSE SHR MAX	1.55

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

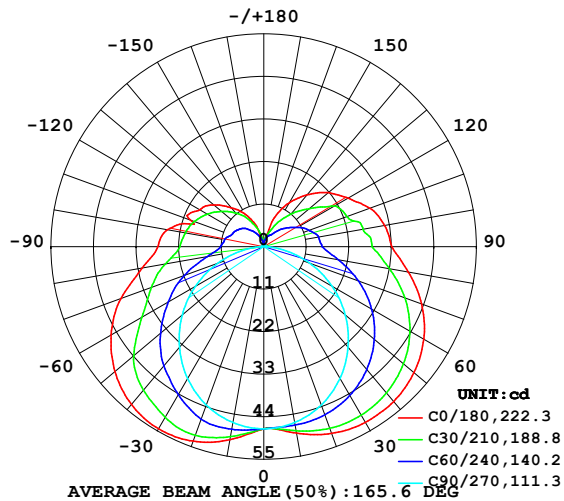

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

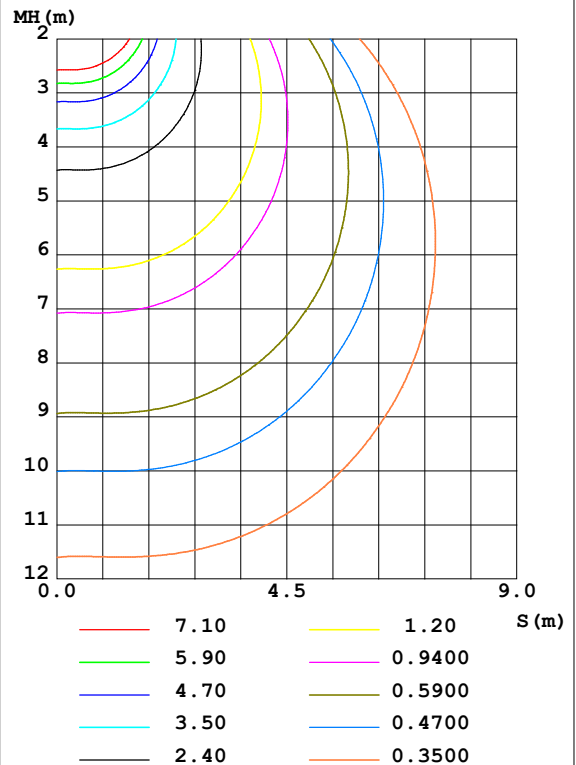

C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-09-26

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity: 65.0%
Test Distance: 7.400m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	48.94	47.59	46.19	48.91	50.66	48.91	46.19	47.59	0- 10	4.558	4.558	1.57,1.57
20	51.37	48.12	43.58	49.68	53.51	49.68	43.58	48.12	10- 20	13.76	18.32	6.31,6.31
30	52.48	47.40	39.40	47.60	54.39	47.60	39.40	47.40	20- 30	22.20	40.52	13.9,13.9
40	52.26	45.40	33.95	44.33	53.25	44.33	33.95	45.40	30- 40	28.75	69.27	23.8,23.8
50	50.68	42.23	27.53	39.39	50.23	39.39	27.53	42.23	40- 50	32.81	102.1	35.1,35.1
60	47.78	37.91	20.37	32.41	45.56	32.41	20.37	37.91	50- 60	33.56	135.6	46.7,46.7
70	43.45	32.46	12.70	26.41	39.29	26.41	12.70	32.46	60- 70	31.39	167.0	57.5,57.5
80	37.94	26.29	5.190	20.33	31.97	20.33	5.190	26.29	70- 80	26.86	193.9	66.7,66.7
90	33.13	21.56	0.7045	16.49	27.40	16.49	0.7045	21.56	80- 90	21.47	215.4	74.1,74.1
100	31.74	20.23	0.5396	15.48	25.29	15.48	0.5396	20.23	90-100	18.92	234.3	80.6,80.6
110	29.19	17.65	0.4954	14.05	20.18	14.05	0.4954	17.65	100-110	16.74	251.0	86.4,86.4
120	25.18	15.57	0.4819	12.58	19.13	12.58	0.4819	15.57	110-120	14.00	265.0	91.2,91.2
130	21.76	11.42	0.4747	10.79	16.82	10.79	0.4747	11.42	120-130	10.70	275.7	94.9,94.9
140	17.49	8.138	0.4599	8.547	13.17	8.547	0.4599	8.138	130-140	7.362	283.1	97.4,97.4
150	13.08	5.347	0.4591	6.209	9.779	6.209	0.4591	5.347	140-150	4.425	287.5	99,99
160	7.900	3.319	0.4368	3.797	5.754	3.797	0.4368	3.319	150-160	2.195	289.7	99.7,99.7
170	2.032	1.967	0.4281	1.602	1.251	1.602	0.4281	1.967	160-170	0.7146	290.4	100,100
180	0.3491	0.4011	0.4263	0.4452	0.3037	0.4452	0.4263	0.4011	170-180	0.1016	290.5	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-26

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:7.400m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME:LumiPixel Slim-Square Acrylic-1000mm-RGBW ALL-110 220D- Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:110X220 DEG	DIM.:1000mm	SERIAL No.:
MFR.: CD	SUR.:1*0.018	Shielding Angle:

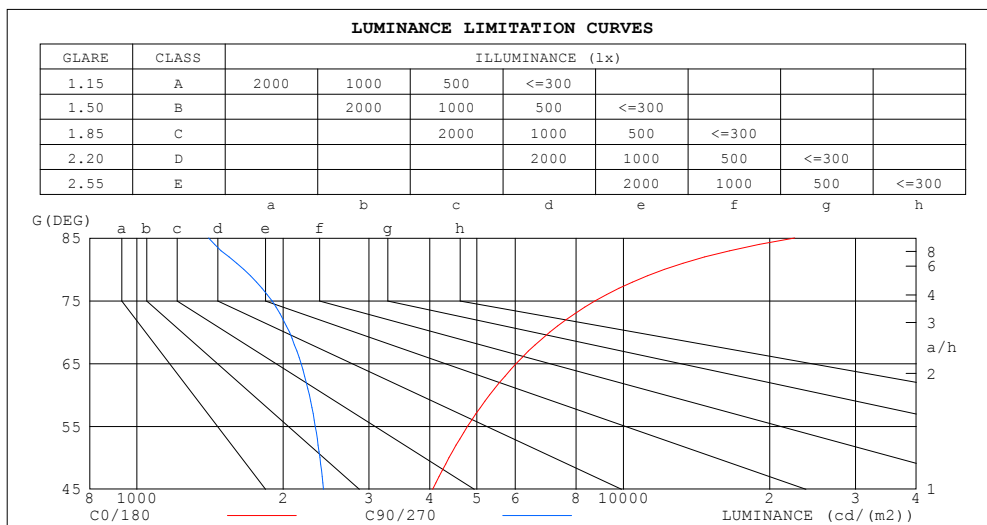

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	22510	1404
80	12144	1660
75	8755	1897
70	7062	2062
65	6023	2176
60	5312	2263
55	4788	2327
50	4383	2378
45	4059	2421


C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-26

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:7.400m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME:LumiPixel Slim-Square Acrylic-1000mm-RGBW ALL-110 220D- Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:110X220 DEG	DIM.:1000mm	SERIAL No.:
MFR.: CD	SUR.:1*0.018	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

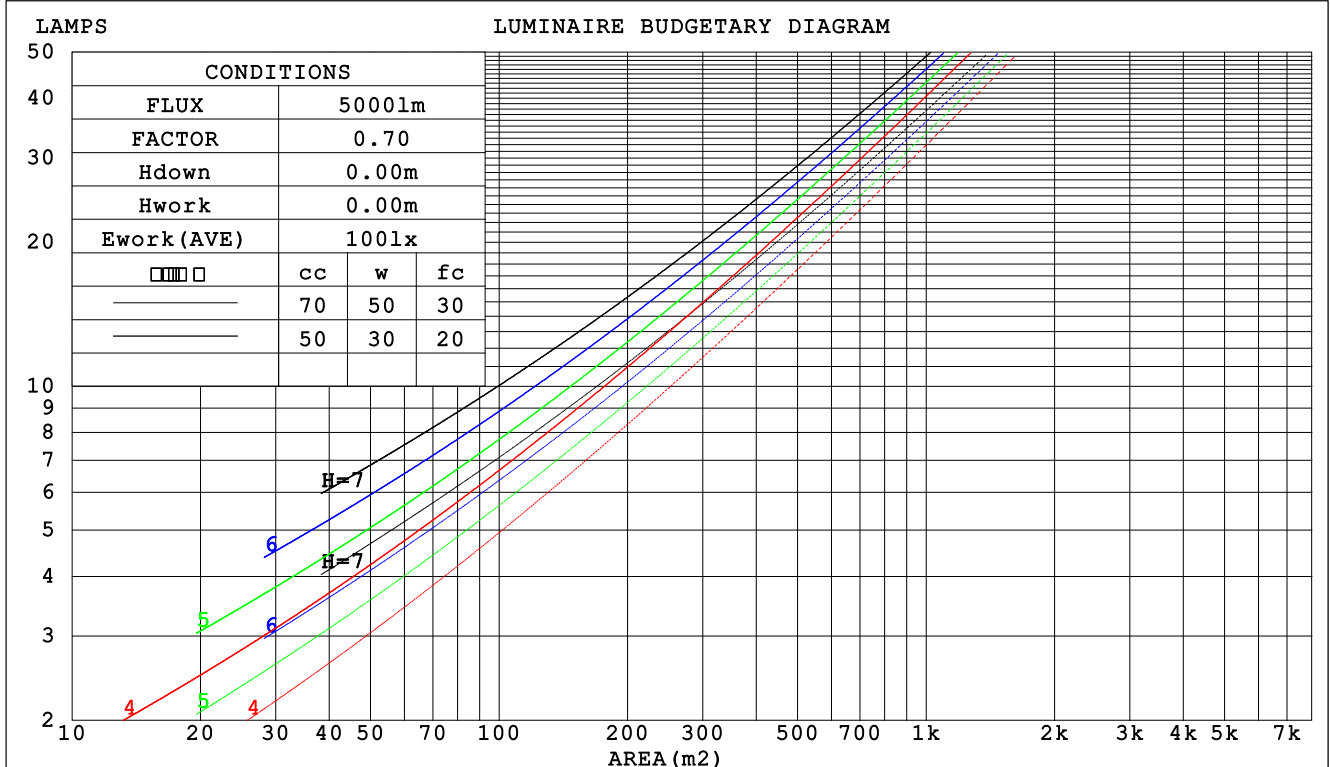

C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-26

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:7.400m [K=1.0000]
Remarks:

WEC AND CCEC

NAME:LumiPixel Slim-Square Acrylic-1000mm-RGBW ALL-110 220D- Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:110X220 DEG	DIM.:1000mm	SERIAL No.:
MFR.: CD	SUR.:1*0.018	Shielding Angle:

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.385 .219 .069	.370 .211 .067	.342 .196 .063	.316 .182 .059	.292 .169 .055	
2.0	.333 .182 .056	.319 .176 .054	.294 .163 .051	.270 .151 .047	.248 .140 .044	
3.0	.295 .157 .047	.283 .152 .046	.260 .141 .043	.238 .130 .040	.218 .121 .037	
4.0	.266 .138 .041	.254 .133 .039	.233 .124 .037	.214 .115 .035	.195 .106 .032	
5.0	.241 .123 .036	.231 .119 .035	.212 .110 .032	.194 .102 .030	.177 .095 .028	
6.0	.221 .111 .032	.212 .107 .031	.194 .099 .029	.177 .092 .027	.162 .085 .025	
7.0	.204 .101 .029	.195 .097 .028	.179 .090 .026	.164 .084 .024	.149 .078 .023	
8.0	.189 .092 .026	.181 .089 .025	.166 .083 .024	.152 .077 .022	.139 .071 .021	
9.0	.176 .085 .024	.169 .082 .023	.155 .077 .022	.142 .071 .020	.129 .066 .019	
10.0	.165 .079 .022	.158 .076 .021	.145 .071 .020	.133 .066 .019	.121 .061 .018	

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.388 .388 .388	.331 .331 .331	.226 .226 .226	.130 .130 .130	.042 .042 .042	
1.0	.384 .354 .327	.329 .304 .282	.225 .209 .195	.129 .121 .113	.041 .039 .037	
2.0	.378 .332 .293	.324 .286 .253	.222 .198 .177	.128 .115 .104	.041 .037 .034	
3.0	.371 .316 .272	.318 .272 .236	.218 .189 .165	.126 .110 .097	.040 .036 .032	
4.0	.363 .303 .258	.311 .262 .224	.214 .183 .158	.124 .107 .093	.040 .035 .031	
5.0	.355 .294 .248	.305 .254 .216	.210 .178 .153	.122 .104 .090	.039 .034 .030	
6.0	.348 .286 .241	.299 .248 .210	.206 .173 .149	.120 .102 .088	.039 .033 .029	
7.0	.341 .280 .236	.293 .242 .206	.203 .170 .146	.118 .100 .087	.038 .033 .029	
8.0	.335 .274 .233	.288 .238 .203	.199 .167 .144	.116 .098 .086	.038 .032 .028	
9.0	.328 .269 .230	.283 .234 .200	.196 .164 .142	.114 .097 .085	.037 .032 .028	
10.0	.323 .265 .227	.278 .230 .198	.193 .162 .141	.113 .096 .084	.036 .031 .028	

C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-26

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:7.400m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME:LumiPixel Slim-Square Acrylic-1000mm-RGBW ALL-110 220D- Rev1					TYPE:RGBW W=3000K					WEIGHT:				
SPEC.:110X220 DEG					DIM.:1000mm					SERIAL No.:				
MFR.: CD					SUR.:1*0.018					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions					Viewed crosswise					Viewed endwise				
x = 2H y = 2H					21.8	23.1	22.4	23.7	24.5	18.7	20.0	19.3	20.7	21.4
3H					24.7	25.9	25.3	26.5	27.3	20.3	21.5	20.9	22.1	22.9
4H					26.3	27.4	26.9	28.1	28.8	20.9	22.1	21.6	22.7	23.5
6H					28.0	29.0	28.6	29.7	30.5	21.4	22.5	22.1	23.1	23.9
8H					28.9	29.9	29.6	30.6	31.4	21.5	22.6	22.2	23.2	24.1
12H					30.0	31.0	30.7	31.7	32.5	21.6	22.6	22.3	23.3	24.1
4H 2H					22.4	23.5	23.0	24.2	25.0	20.3	21.4	20.9	22.1	22.8
3H					25.5	26.5	26.2	27.2	28.0	22.1	23.1	22.8	23.8	24.6
4H					27.3	28.2	28.0	28.9	29.7	23.0	23.9	23.7	24.6	25.5
6H					29.2	30.0	29.9	30.7	31.6	23.7	24.5	24.4	25.2	26.1
8H					30.2	31.0	31.0	31.8	32.7	23.9	24.7	24.7	25.4	26.3
12H					31.5	32.2	32.2	32.9	33.9	24.1	24.8	24.9	25.6	26.5
8H 4H					27.6	28.3	28.3	29.1	30.0	24.3	25.1	25.1	25.8	26.7
6H					29.8	30.5	30.6	31.2	32.2	25.4	26.1	26.2	26.9	27.8
8H					31.1	31.7	31.9	32.5	33.4	25.9	26.5	26.7	27.3	28.3
12H					32.6	33.1	33.4	33.9	34.9	26.3	26.8	27.2	27.7	28.6
12H 4H					27.6	28.3	28.4	29.1	30.0	24.7	25.4	25.5	26.2	27.1
6H					29.9	30.5	30.7	31.3	32.3	26.1	26.7	26.9	27.5	28.4
8H					31.3	31.8	32.1	32.6	33.6	26.8	27.3	27.6	28.1	29.1
Variations with the observer position at spacings:														
S = 1.0H					+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H					+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H					+ 0.2 / - 0.3					+ 0.3 / - 0.5				

CIE Pub.117, 290.5 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -4.3)

C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-26

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:7.400m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME:LumiPixel Slim-Square Acrylic-1000mm-RGBW ALL-110 220D- Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:110X220 DEG	DIM.:1000mm	SERIAL No.:
MFR.: CD	SUR.:1*0.018	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k(RI) x RCR = 5									
k = 0.60	45	32	25	43	32	25	41	30	24	17
0.80	54	41	32	52	40	32	49	38	31	22
1.00	61	48	40	59	47	39	55	47	37	28
1.25	68	55	47	66	54	46	61	51	43	33
1.50	74	61	52	70	59	51	65	55	48	37
2.00	81	70	61	77	67	59	71	62	56	42
2.50	86	75	67	82	72	65	74	67	60	46
3.00	90	80	72	85	77	70	77	71	65	49
4.00	94	86	79	90	82	76	81	76	70	54
5.00	98	90	84	93	86	81	84	79	74	57
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNOM = 1.25										

C Range: 0 - 180DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-09-26

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity: 65.0%
 Test Distance: 7.400m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:LumiPixel Slim-Square Acrylic-1000mm-RGBW ALL-110 220D- Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:110X220 DEG	DIM.:1000mm	SERIAL No.:
MFR.: CD	SUR.:1*0.018	Shielding Angle:

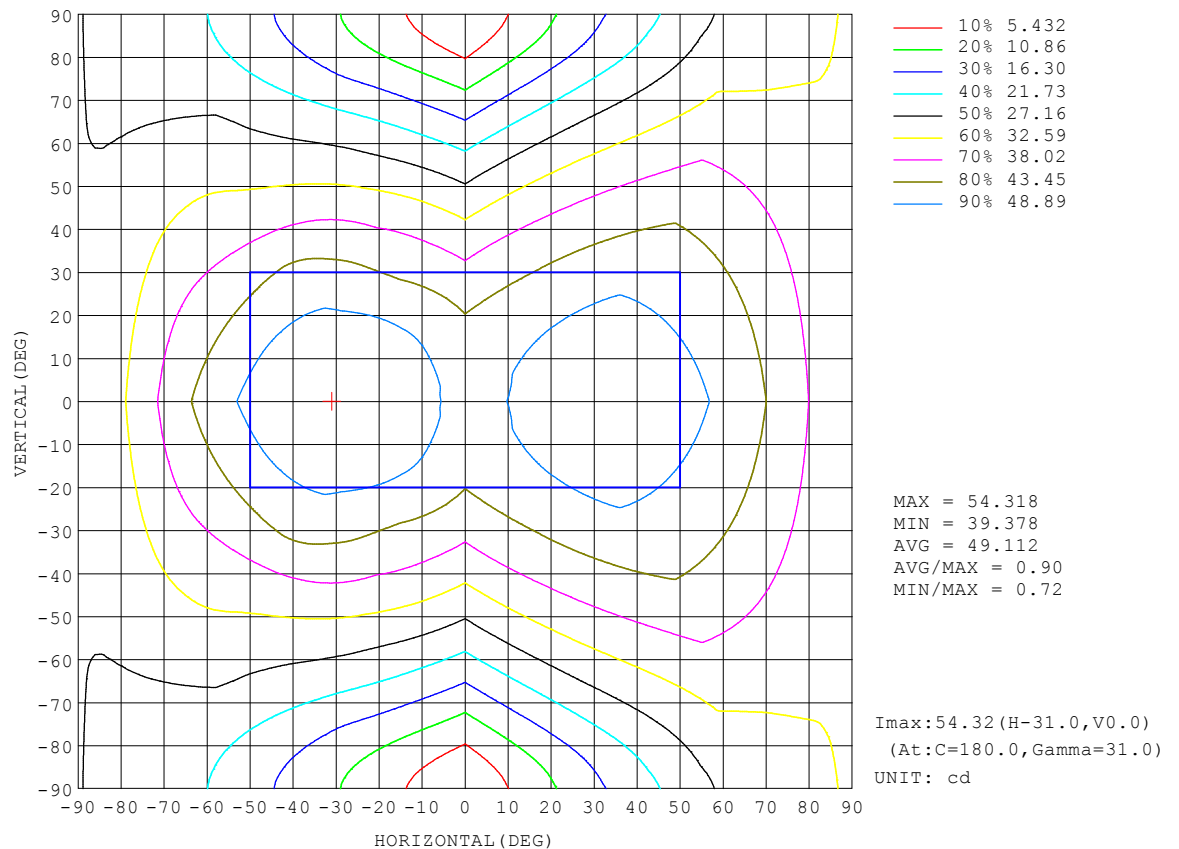


C Range: 0 - 180DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-09-26

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:7.400m [K=1.0000]
 Remarks:

AAI Figure

NAME:LumiPixel Slim-Square Acrylic-1000mm-RGBW ALL-110 220D- Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:110X220 DEG	DIM.:1000mm	SERIAL No.:
MFR.: CD	SUR.:1*0.018	Shielding Angle:

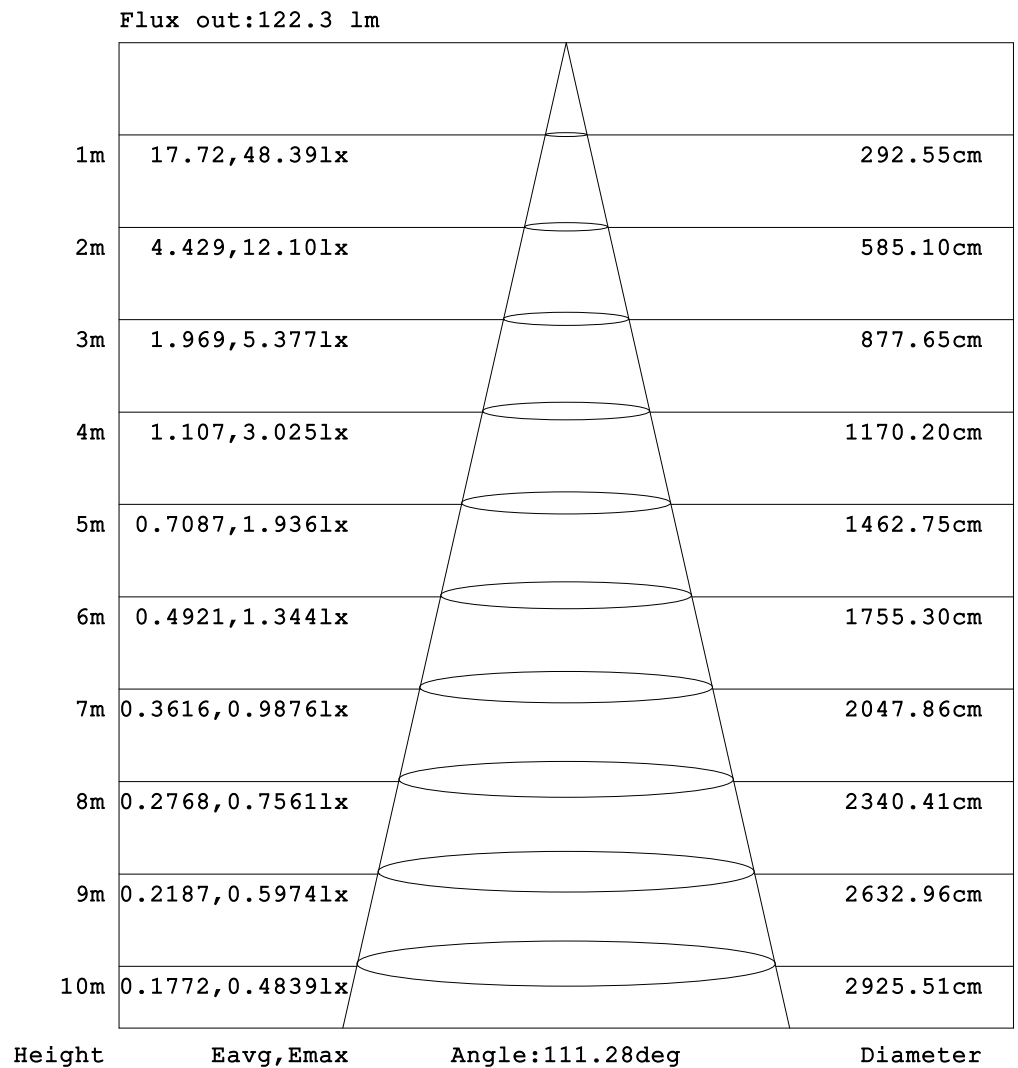


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 180DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-09-26

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:7.400m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME:LumiPixel Slim-Square Acrylic-1000mm-RGBW ALL-110 220D- Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:110X220 DEG	DIM.:1000mm	SERIAL No.:
MFR.: CD	SUR.:1*0.018	Shielding Angle:

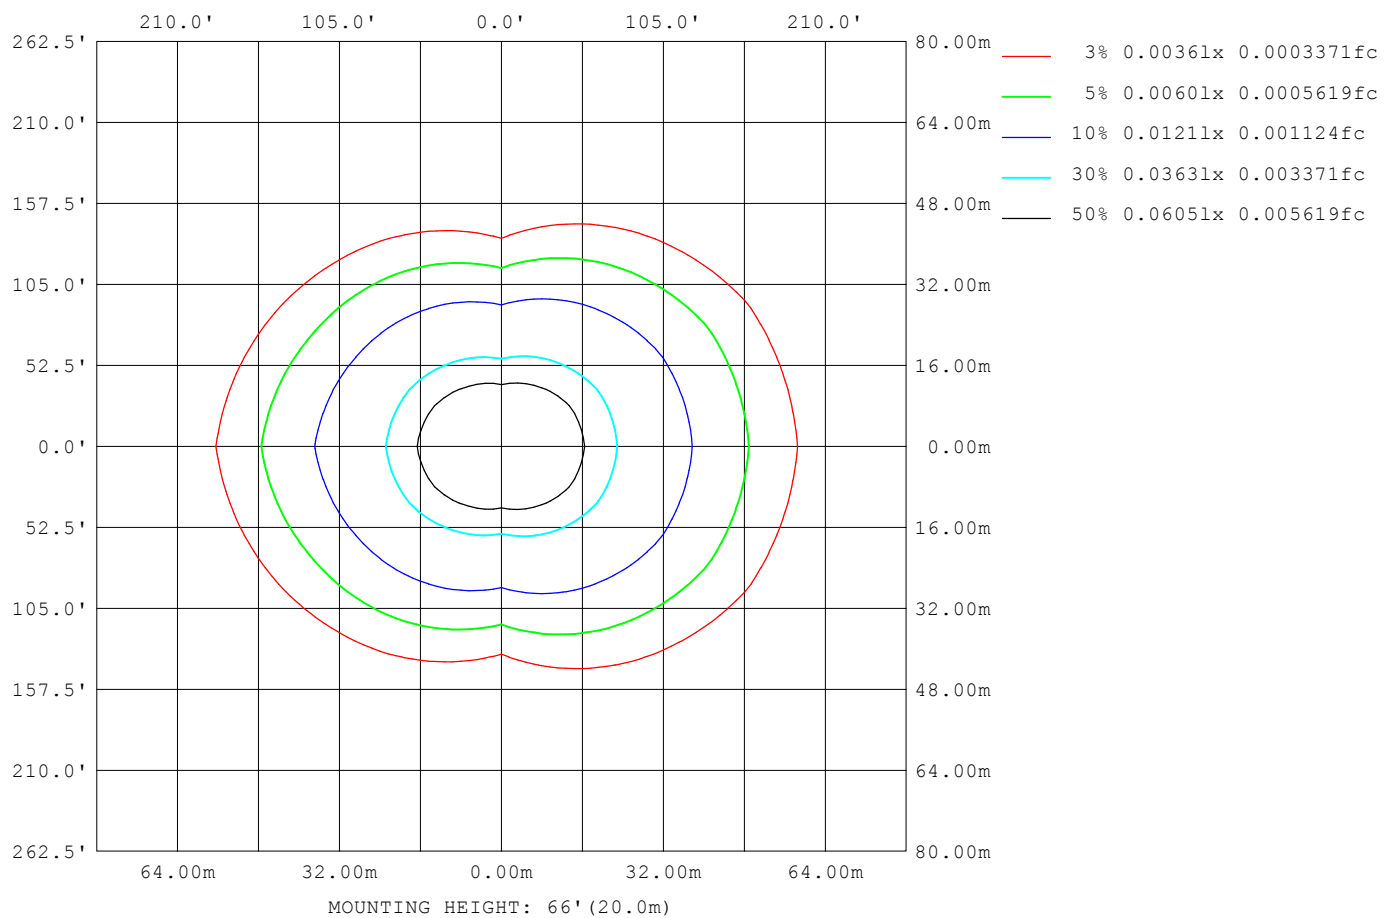

C Range: 0 - 180DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-09-26

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:7.400m [K=1.0000]
 Remarks:

LED Avg.L Report

NAME:LumiPixel Slim-Square Acrylic-1000mm-RGBW ALL-110 220D- Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:110X220 DEG	DIM.:1000mm	SERIAL No.:
MFR.: CD	SUR.:1*0.018	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	5817
L_0~180 (75) av	8165
L_0~180 (85) av	20491
L_90~270 (65) av	2177
L_90~270 (75) av	1898
L_90~270 (85) av	1405
L_45 (65) av	4283
L_45 (75) av	5748
L_45 (85) av	13460

Standard: GB/T 29293-2012

C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-26

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:7.400m [K=1.0000]
Remarks:

Planar Illuminance Curve

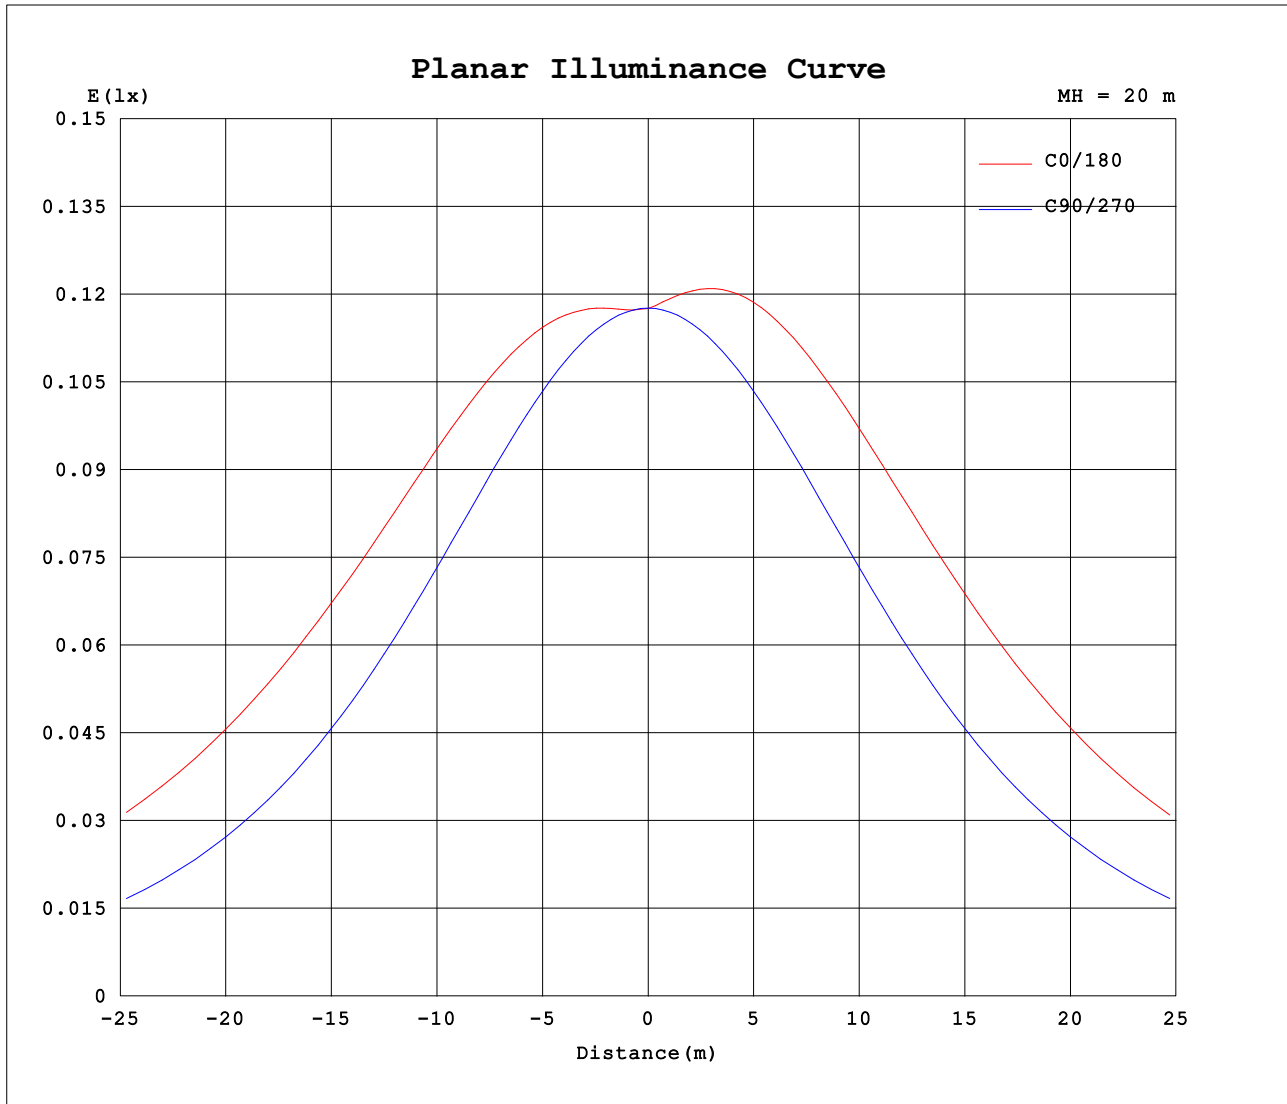

C Range: 0 - 180DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-09-26

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity: 65.0%
 Test Distance: 7.400m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:LumiPixel Slim-Square Acrylic-1000mm-RGBW ALL-110 220D- Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:110X220 DEG	DIM.:1000mm	SERIAL No.:
MFR.: CD	SUR.:1*0.018	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	47.1	47.1	47.1	47.1	47.1	47.1	47.1	47.1	47.1	47.1	47.1	47.1						
5	47.5	47.3	46.9	46.8	47.6	48.4	48.7	48.4	47.6	46.8	46.9	47.3						
10	48.9	48.3	46.8	46.2	47.9	49.9	50.7	49.9	47.9	46.2	46.8	48.3						
15	50.3	49.3	46.7	45.1	48.0	51.1	52.3	51.1	48.0	45.1	46.7	49.3						
20	51.4	50.0	46.3	43.6	47.4	51.9	53.5	51.9	47.4	43.6	46.3	50.0						
25	52.1	50.3	45.5	41.7	46.0	51.8	54.2	51.8	46.0	41.7	45.5	50.3						
30	52.5	50.3	44.5	39.4	44.2	51.0	54.4	51.0	44.2	39.4	44.5	50.3						
35	52.5	50.0	43.1	36.8	42.2	49.7	54.1	49.7	42.2	36.8	43.1	50.0						
40	52.3	49.4	41.4	33.9	40.2	48.4	53.3	48.4	40.2	33.9	41.4	49.4						
45	51.6	48.4	39.5	30.8	37.7	46.6	52.0	46.6	37.7	30.8	39.5	48.4						
50	50.7	47.1	37.3	27.5	34.8	43.9	50.2	43.9	34.8	27.5	37.3	47.1						
55	49.4	45.6	34.9	24.0	31.7	40.0	48.1	40.0	31.7	24.0	34.9	45.6						
60	47.8	43.6	32.2	20.4	28.5	36.4	45.6	36.4	28.5	20.4	32.2	43.6						
65	45.8	41.4	29.2	16.6	25.4	33.3	42.7	33.3	25.4	16.6	29.2	41.4						
70	43.4	38.8	26.1	12.7	21.9	30.9	39.3	30.9	21.9	12.7	26.1	38.8						
75	40.8	36.0	22.8	8.84	18.2	28.6	35.3	28.6	18.2	8.84	22.8	36.0						
80	37.9	33.0	19.6	5.19	14.9	25.8	32.0	25.8	14.9	5.19	19.6	33.0						
85	35.3	30.3	16.8	2.20	12.4	23.2	29.0	23.2	12.4	2.20	16.8	30.3						
90	33.1	28.0	15.1	0.70	11.2	21.8	27.4	21.8	11.2	0.70	15.1	28.0						
95	32.5	27.7	14.6	0.58	10.7	21.2	26.8	21.2	10.7	0.58	14.6	27.7						
100	31.7	26.1	14.4	0.54	10.4	20.6	25.3	20.6	10.4	0.54	14.4	26.1						
105	30.7	25.2	13.6	0.51	9.76	20.0	22.6	20.0	9.76	0.51	13.6	25.2						
110	29.2	22.9	12.4	0.50	8.96	19.1	20.2	19.1	8.96	0.50	12.4	22.9						
115	27.1	22.3	11.5	0.49	8.71	18.1	20.8	18.1	8.71	0.49	11.5	22.3						
120	25.2	21.1	10.00	0.48	8.29	16.9	19.1	16.9	8.29	0.48	10.00	21.1						
125	23.4	17.9	8.72	0.48	7.86	15.6	18.4	15.6	7.86	0.48	8.72	17.9						
130	21.8	15.3	7.53	0.47	7.36	14.2	16.8	14.2	7.36	0.47	7.53	15.3						
135	19.8	13.1	6.44	0.47	6.68	12.8	15.1	12.8	6.68	0.47	6.44	13.1						
140	17.5	11.1	5.22	0.46	5.69	11.4	13.2	11.4	5.69	0.46	5.22	11.1						
145	15.3	9.00	4.22	0.46	4.85	9.97	11.5	9.97	4.85	0.46	4.22	9.00						
150	13.1	7.17	3.52	0.46	4.06	8.36	9.78	8.36	4.06	0.46	3.52	7.17						
155	10.6	5.18	3.21	0.45	3.28	6.57	7.76	6.57	3.28	0.45	3.21	5.18						
160	7.90	3.86	2.78	0.44	2.54	5.06	5.75	5.06	2.54	0.44	2.78	3.86						
165	3.14	3.02	2.26	0.43	1.80	3.67	2.00	3.67	1.80	0.43	2.26	3.02						
170	2.03	2.23	1.70	0.43	0.98	2.22	1.25	2.22	0.98	0.43	1.70	2.23						
175	1.13	1.37	1.10	0.43	0.45	0.76	0.48	0.76	0.45	0.43	1.10	1.37						
180	0.35	0.37	0.43	0.43	0.44	0.45	0.30	0.45	0.44	0.43	0.43	0.37						

C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-26

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:7.400m [K=1.0000]
Remarks: