


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: LumiPixel Slim-Square Acrylic-1000mm-RGBW BLUE-110 220D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:110X220 DEG	DIM.:1000mm	SERIAL No.:
MFR.: CD	SUR.:1*0.018	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 5.89 lm/W
MODEL	LA181006004	Imax(cd)	2.271	S/MH(C0/180)	1.75	
NOMINAL POWER(W)	2.23	LOR(%)	100.0	S/MH(C90/270)	1.25	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	13.002	□ UP,DN(C0-180)	13.8,37.0	
NOMINAL FLUX(lm)	0.216708	CIE CLASS	SEMI-D.	□ UP,DN(C180-360)	12.8,36.5	
LAMPS INSIDE	60	□ up(%)	26.6	CIBSE SHR NOM	1.50	
TEST VOLTAGE(V)	24	□ down(%)	73.4	CIBSE SHR MAX	1.55	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

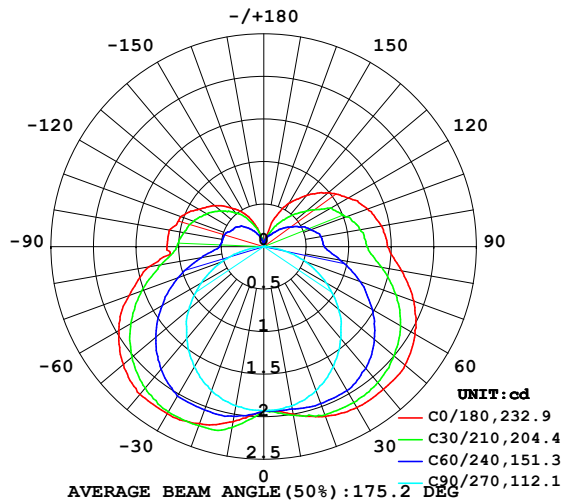

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

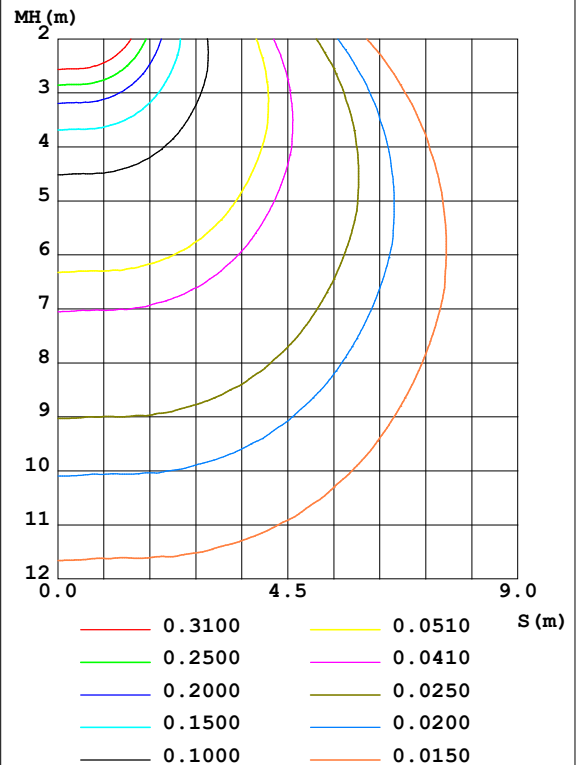

C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-26

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:7.400m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	1.999	1.977	1.898	2.090	2.091	2.090	1.898	1.977	0- 10	0.1894	0.1894	1.46,1.46
20	2.123	2.035	1.798	2.140	2.212	2.140	1.798	2.035	10- 20	0.5794	0.7689	5.91,5.91
30	2.185	2.037	1.634	2.137	2.267	2.137	1.634	2.037	20- 30	0.9481	1.717	13.2,13.2
40	2.188	1.979	1.411	2.022	2.264	2.022	1.411	1.979	30- 40	1.252	2.969	22.8,22.8
50	2.167	1.852	1.144	1.837	2.154	1.837	1.144	1.852	40- 50	1.449	4.418	34,34
60	2.054	1.670	0.8409	1.588	1.970	1.588	0.8409	1.670	50- 60	1.510	5.928	45.6,45.6
70	1.879	1.440	0.5299	1.300	1.681	1.300	0.5299	1.440	60- 70	1.430	7.358	56.6,56.6
80	1.646	1.165	0.1951	0.9844	1.373	0.9844	0.1951	1.165	70- 80	1.224	8.582	66,66
90	1.453	0.9686	0.0040	0.7706	1.138	0.7706	0.0040	0.9686	80- 90	0.9662	9.548	73.4,73.4
100	1.406	0.9251	0.0040	0.7235	1.126	0.7235	0.0040	0.9251	90-100	0.8629	10.41	80.1,80.1
110	1.300	0.8135	0.0040	0.6745	1.035	0.6745	0.0040	0.8135	100-110	0.7822	11.19	86.1,86.1
120	1.147	0.6999	0.0040	0.5961	0.8807	0.5961	0.0040	0.6999	110-120	0.6514	11.84	91.1,91.1
130	0.9870	0.5088	0.0040	0.5098	0.7523	0.5098	0.0040	0.5088	120-130	0.4936	12.34	94.9,94.9
140	0.7868	0.3557	0.0040	0.4020	0.5981	0.4020	0.0040	0.3557	130-140	0.3373	12.68	97.5,97.5
150	0.5864	0.2288	0.0040	0.2843	0.4441	0.2843	0.0040	0.2288	140-150	0.2006	12.88	99,99
160	0.3425	0.1305	0.0040	0.1627	0.2424	0.1627	0.0040	0.1305	150-160	0.0955	12.97	99.8,99.8
170	0.0838	0.0681	0.0040	0.0587	0.0478	0.0587	0.0040	0.0681	160-170	0.0281	13.00	100,100
180	0	0.0038	0.0040	0.0039	0	0.0039	0.0040	0.0038	170-180	0.0030	13.00	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-26

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:7.400m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: LumiPixel Slim-Square Acrylic-1000mm-RGBW BLUE-110 220D-Rev1	TYPE: RGBW-BLUE	WEIGHT:
SPEC.: 110X220 DEG	DIM.: 1000mm	SERIAL No.:
MFR.: CD	SUR.: 1*0.018	Shielding Angle:

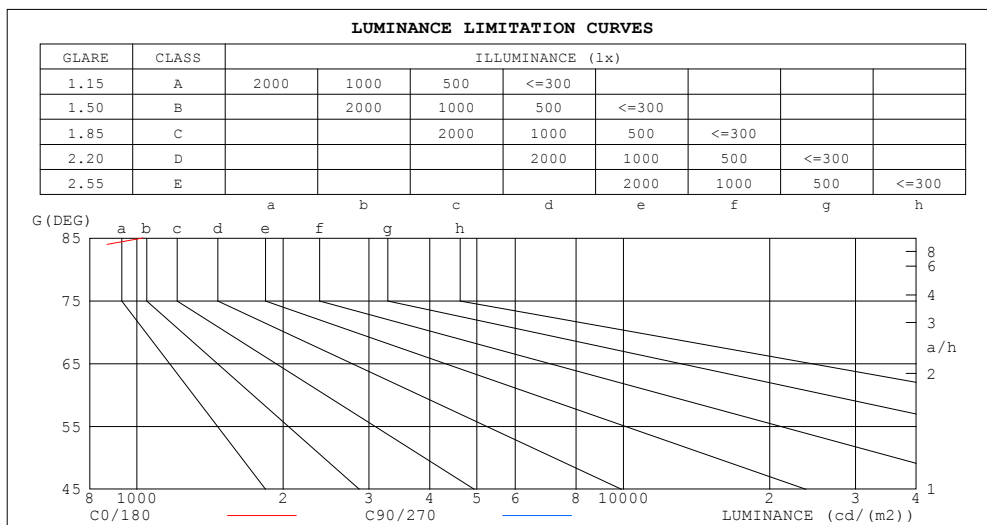

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1030	34
80	555	60
75	399	75
70	322	83
65	274	86
60	241	90
55	216	94
50	197	95
45	181	97


C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-09-26

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity: 65.0%
Test Distance: 7.400m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LumiPixel Slim-Square Acrylic-1000mm-RGBW BLUE-110 220D-Rev1	TYPE: RGBW-BLUE	WEIGHT:
SPEC.: 110X220 DEG	DIM.: 1000mm	SERIAL No.:
MFR.: CD	SUR.: 1*0.018	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.13	1.13	1.13	1.07	1.07	1.07	.96	.96	.96	.87	.87	.87	.78	.78	.78	.73
1.0	.93	.88	.83	.89	.84	.79	.79	.75	.72	.71	.68	.65	.63	.61	.58	.54
2.0	.80	.72	.65	.75	.68	.62	.67	.62	.57	.60	.55	.51	.53	.50	.46	.43
3.0	.69	.60	.52	.65	.57	.50	.58	.51	.46	.52	.46	.42	.46	.42	.38	.34
4.0	.60	.51	.43	.57	.48	.42	.51	.44	.38	.45	.40	.35	.40	.36	.32	.28
5.0	.53	.44	.37	.50	.42	.35	.45	.38	.32	.40	.34	.30	.36	.31	.27	.24
6.0	.47	.38	.31	.45	.36	.30	.40	.33	.28	.36	.30	.25	.32	.27	.23	.20
7.0	.43	.33	.27	.40	.32	.26	.36	.29	.24	.33	.27	.22	.29	.24	.20	.18
8.0	.39	.30	.24	.37	.29	.23	.33	.26	.21	.30	.24	.20	.27	.22	.18	.16
9.0	.35	.27	.21	.33	.26	.20	.30	.24	.19	.27	.22	.17	.25	.20	.16	.14
10.0	.32	.24	.19	.31	.23	.18	.28	.21	.17	.25	.20	.16	.23	.18	.14	.12

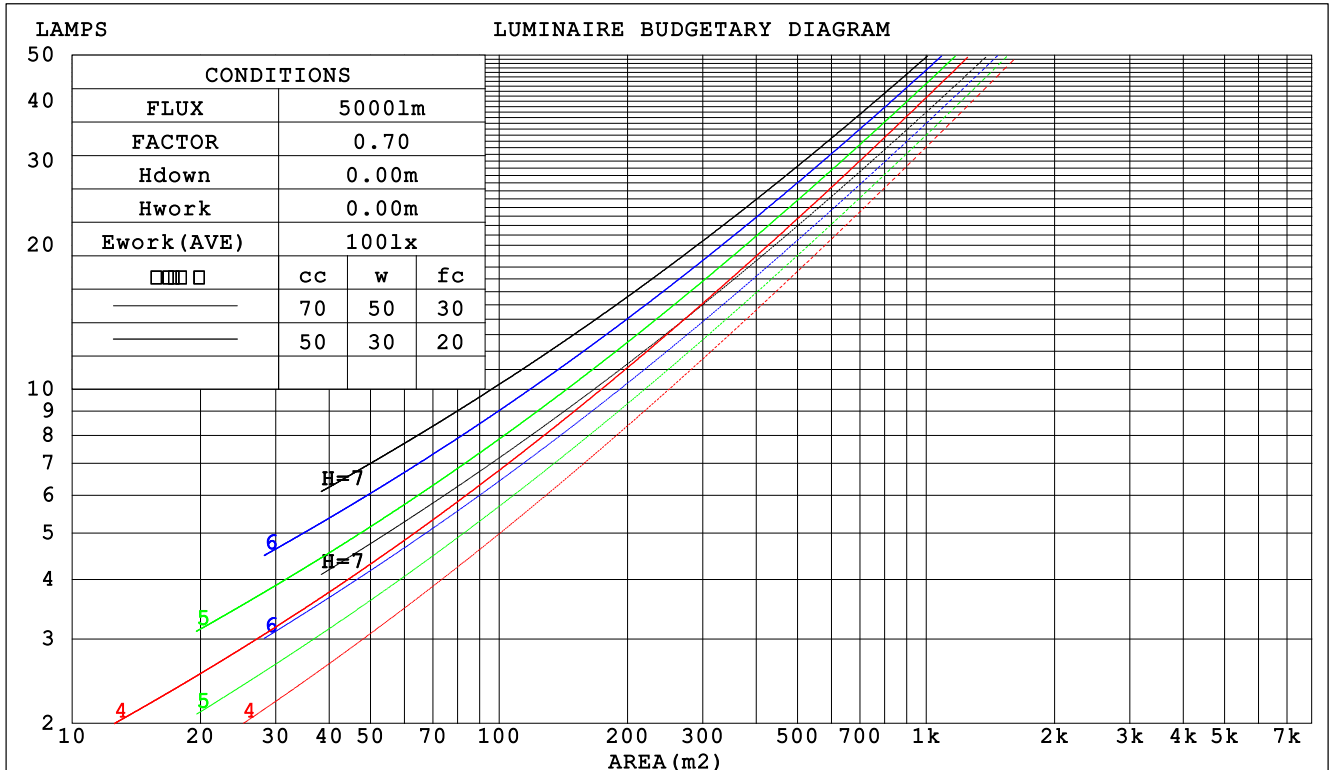

C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-09-26

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity: 65.0%
Test Distance: 7.400m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: LumiPixel Slim-Square Acrylic-1000mm-RGBW BLUE-110 220D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:110X220 DEG	DIM.:1000mm	SERIAL No.:
MFR.: CD	SUR.:1*0.018	Shielding Angle:

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.388 .221 .070	.373 .213 .068	.344 .197 .063	.318 .183 .059	.293 .170 .055	
2.0	.335 .184 .056	.321 .177 .054	.295 .164 .051	.271 .152 .048	.249 .141 .044	
3.0	.297 .158 .047	.284 .152 .046	.261 .141 .043	.239 .131 .040	.219 .121 .037	
4.0	.267 .139 .041	.256 .134 .040	.234 .124 .037	.214 .115 .035	.195 .106 .032	
5.0	.242 .124 .036	.232 .119 .035	.212 .111 .033	.194 .102 .030	.177 .095 .028	
6.0	.222 .111 .032	.212 .107 .031	.194 .100 .029	.178 .092 .027	.162 .085 .025	
7.0	.205 .101 .029	.196 .098 .028	.179 .091 .026	.164 .084 .024	.149 .077 .023	
8.0	.190 .093 .026	.182 .089 .025	.166 .083 .024	.152 .077 .022	.138 .071 .021	
9.0	.177 .085 .024	.169 .082 .023	.155 .077 .022	.142 .071 .020	.129 .066 .019	
10.0	.165 .079 .022	.158 .076 .021	.145 .071 .020	.133 .066 .019	.121 .061 .017	

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.393 .393 .393	.336 .336 .336	.229 .229 .229	.132 .132 .132	.042 .042 .042	
1.0	.390 .360 .332	.334 .309 .286	.228 .212 .198	.131 .123 .115	.042 .040 .037	
2.0	.383 .337 .298	.328 .290 .258	.225 .201 .180	.130 .117 .105	.042 .038 .034	
3.0	.376 .321 .277	.323 .277 .240	.221 .192 .168	.128 .112 .099	.041 .036 .033	
4.0	.369 .309 .263	.316 .267 .229	.218 .186 .161	.126 .109 .095	.041 .035 .031	
5.0	.361 .299 .254	.310 .259 .221	.214 .181 .156	.124 .106 .092	.040 .035 .030	
6.0	.354 .292 .247	.304 .252 .215	.210 .177 .152	.122 .104 .090	.039 .034 .030	
7.0	.347 .285 .242	.298 .247 .211	.206 .173 .149	.120 .102 .089	.039 .033 .029	
8.0	.340 .280 .238	.293 .243 .207	.203 .170 .147	.118 .100 .088	.038 .033 .029	
9.0	.334 .275 .235	.288 .239 .205	.199 .168 .146	.116 .099 .087	.038 .033 .029	
10.0	.328 .271 .233	.283 .235 .203	.196 .166 .144	.115 .098 .086	.037 .032 .029	

C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-26

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:7.400m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: LumiPixel Slim-Square Acrylic-1000mm-RGBW BLUE-110 220D-Rev1					TYPE: RGBW-BLUE					WEIGHT:				
SPEC.: 110X220 DEG					DIM.: 1000mm					SERIAL No.:				
MFR.: CD					SUR.: 1*0.018					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions					Viewed crosswise					Viewed endwise				
x = 2H y = 2H					21.8	23.1	22.4	23.7	24.5	18.5	19.8	19.1	20.4	21.2
3H					24.7	25.9	25.4	26.6	27.3	20.1	21.2	20.7	21.9	22.7
4H					26.3	27.4	27.0	28.1	28.9	20.7	21.8	21.3	22.5	23.3
6H					28.0	29.1	28.7	29.8	30.6	21.1	22.1	21.8	22.8	23.6
8H					29.0	30.0	29.7	30.7	31.5	21.2	22.2	21.9	22.9	23.7
12H					30.1	31.1	30.8	31.8	32.6	21.2	22.2	21.9	22.9	23.8
4H 2H					22.4	23.5	23.0	24.2	25.0	20.1	21.3	20.8	21.9	22.7
3H					25.5	26.5	26.2	27.2	28.0	22.0	23.0	22.7	23.7	24.6
4H					27.3	28.2	28.0	28.9	29.8	22.9	23.8	23.6	24.5	25.4
6H					29.2	30.0	30.0	30.8	31.7	23.5	24.3	24.3	25.1	26.0
8H					30.3	31.0	31.1	31.8	32.7	23.7	24.5	24.5	25.3	26.2
12H					31.5	32.2	32.3	33.0	33.9	23.9	24.6	24.6	25.3	26.3
8H 4H					27.6	28.4	28.4	29.1	30.0	24.2	25.0	25.0	25.8	26.7
6H					29.8	30.5	30.6	31.3	32.2	25.4	26.0	26.2	26.8	27.8
8H					31.1	31.7	31.9	32.5	33.5	25.9	26.4	26.7	27.2	28.2
12H					32.6	33.1	33.5	34.0	35.0	26.2	26.7	27.1	27.6	28.6
12H 4H					27.6	28.3	28.4	29.1	30.0	24.7	25.4	25.5	26.2	27.1
6H					30.0	30.5	30.8	31.3	32.3	26.1	26.6	26.9	27.4	28.4
8H					31.4	31.9	32.2	32.7	33.7	26.8	27.3	27.6	28.1	29.1
Variations with the observer position at spacings:														
S = 1.0H					+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H					+ 0.2 / - 0.2					+ 0.2 / - 0.3				
2.0H					+ 0.2 / - 0.3					+ 0.3 / - 0.5				

CIE Pub.117, 13.00 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -15.1)


C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-09-26

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity: 65.0%
Test Distance: 7.400m [K=1.0000]
Remarks:

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:7.400m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: LumiPixel Slim-Square Acrylic-1000mm-RGBW BLUE-110 220D-Rev1	TYPE: RGBW-BLUE	WEIGHT:
SPEC.: 110X220 DEG	DIM.: 1000mm	SERIAL No.:
MFR.: CD	SUR.: 1*0.018	Shielding Angle:

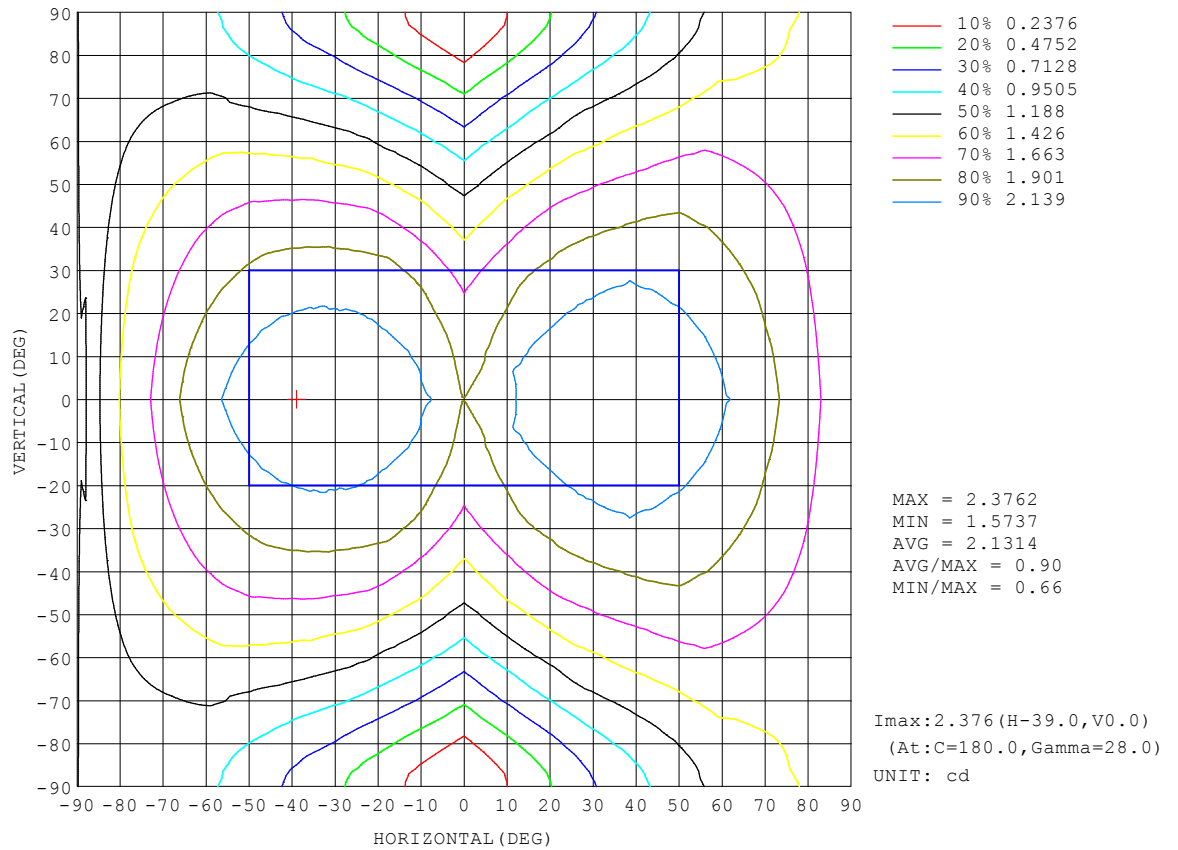


C Range: 0 - 180DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-09-26

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity: 65.0%
 Test Distance: 7.400m [K=1.0000]
 Remarks:

AAI Figure

NAME: LumiPixel Slim-Square Acrylic-1000mm-RGBW BLUE-110 220D-Rev1	TYPE: RGBW-BLUE	WEIGHT:
SPEC.: 110X220 DEG	DIM.: 1000mm	SERIAL No.:
MFR.: CD	SUR.: 1*0.018	Shielding Angle:

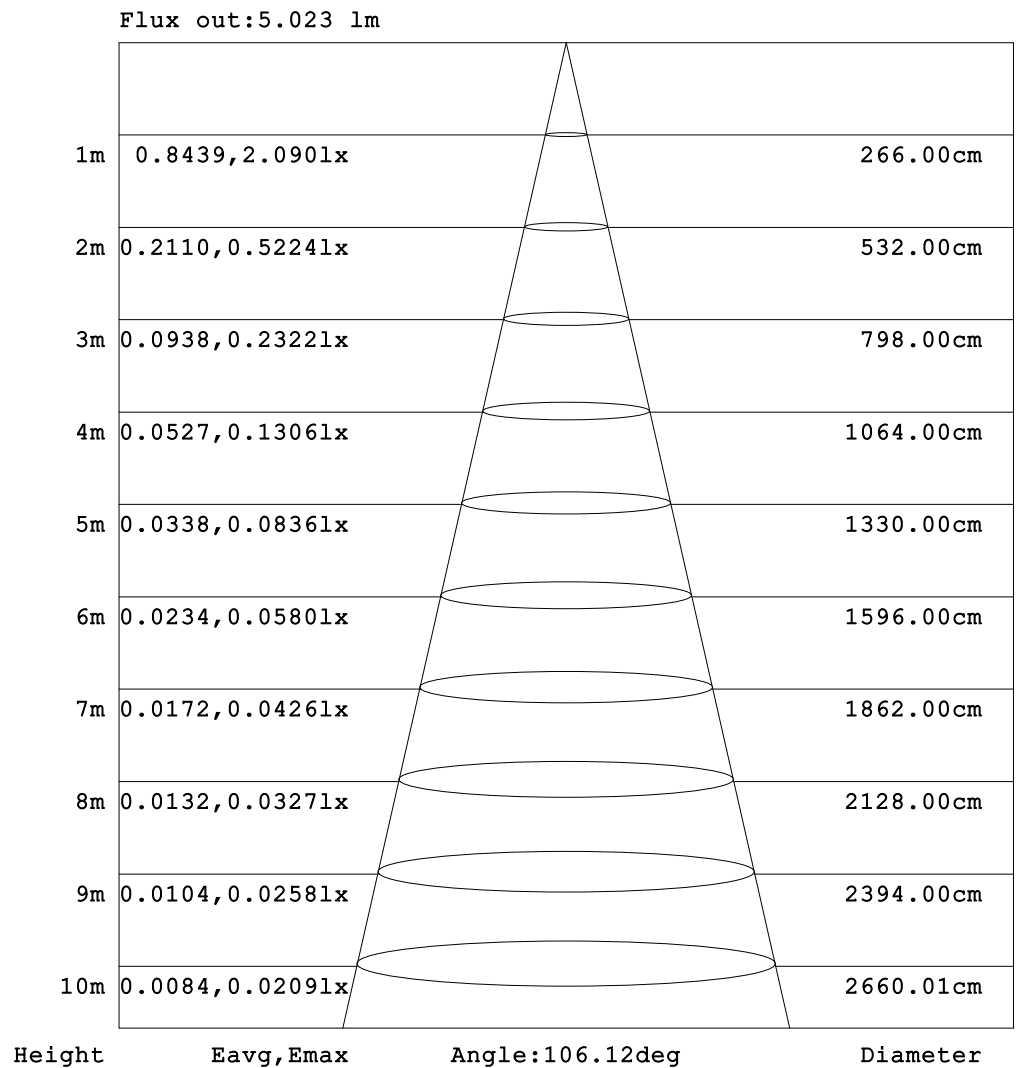


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 180DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-09-26

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity: 65.0%
 Test Distance: 7.400m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: LumiPixel Slim-Square Acrylic-1000mm-RGBW BLUE-110 220D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:110X220 DEG	DIM.:1000mm	SERIAL No.:
MFR.: CD	SUR.:1*0.018	Shielding Angle:

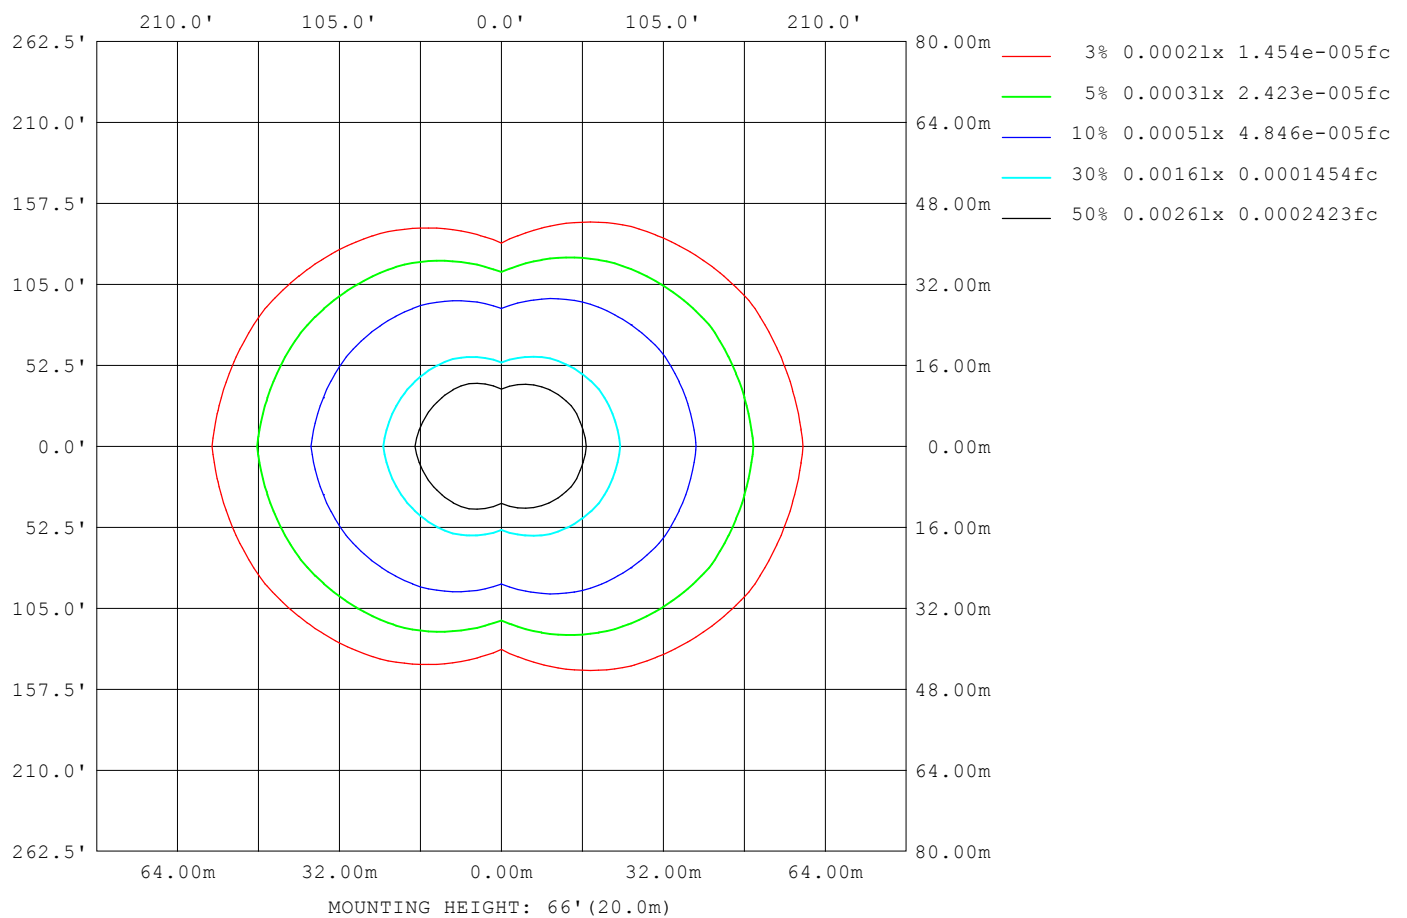

C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-26

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:7.400m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: LumiPixel Slim-Square Acrylic-1000mm-RGBW BLUE-110 220D-Rev1	TYPE: RGBW-BLUE	WEIGHT:
SPEC.: 110X220 DEG	DIM.: 1000mm	SERIAL No.:
MFR.: CD	SUR.: 1*0.018	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	252
L_0~180 (75) av	353
L_0~180 (85) av	843
L_90~270 (65) av	90
L_90~270 (75) av	78
L_90~270 (85) av	35
L_45 (65) av	201
L_45 (75) av	267
L_45 (85) av	621

Standard: GB/T 29293-2012

C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-09-26

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity: 65.0%
Test Distance: 7.400m [K=1.0000]
Remarks:

Planar Illuminance Curve

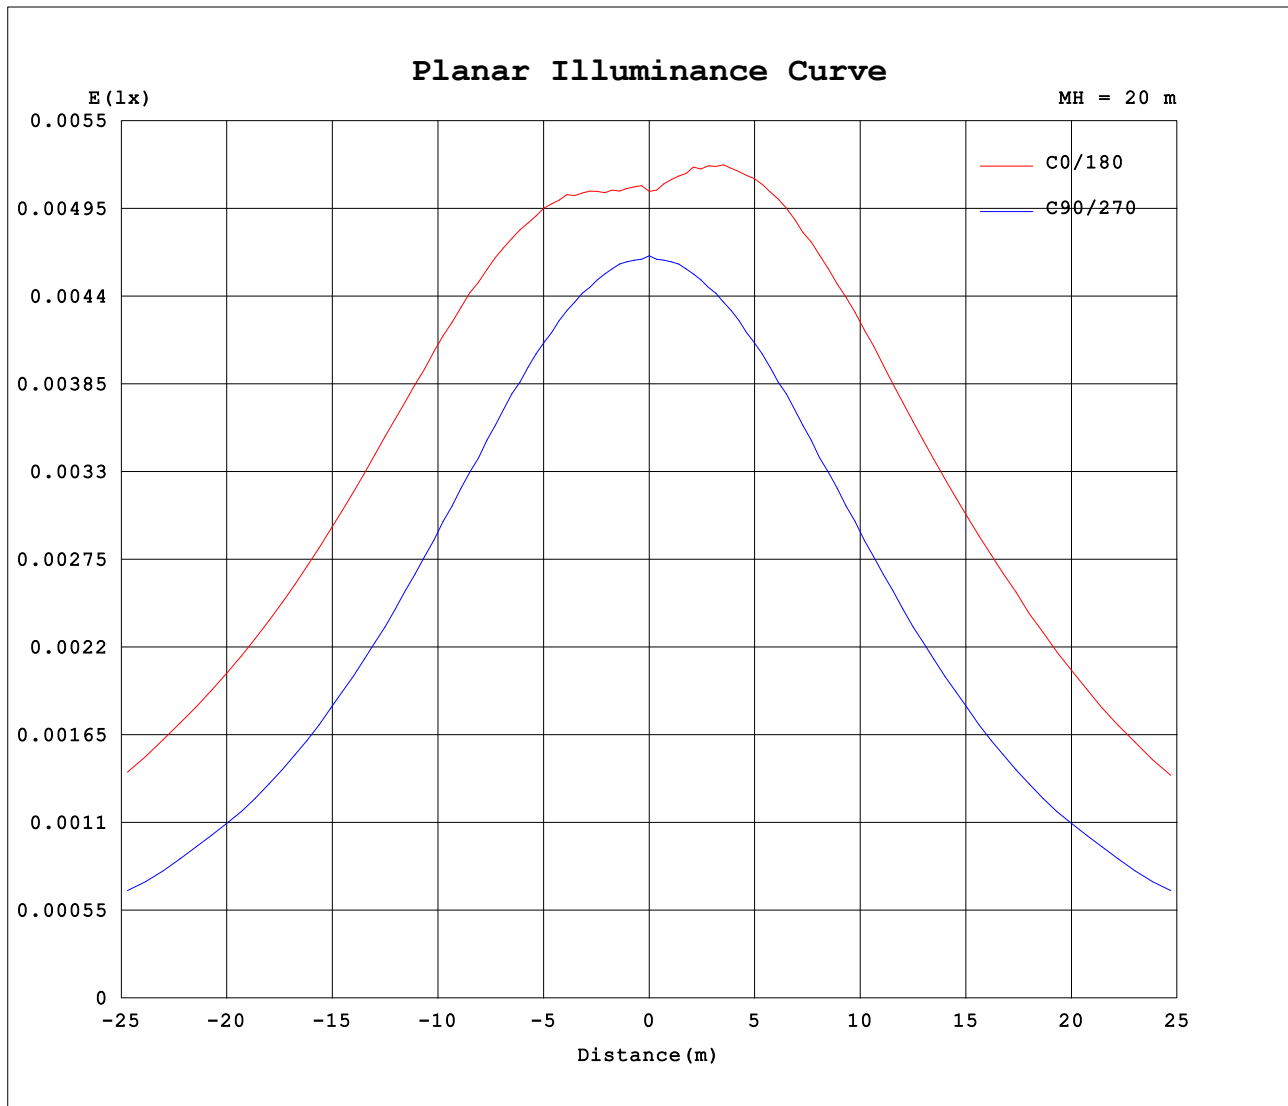

C Range: 0 - 180DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-09-26

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity: 65.0%
 Test Distance: 7.400m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LumiPixel Slim-Square Acrylic-1000mm-RGBW BLUE-110 220D-Rev1	TYPE: RGBW-BLUE	WEIGHT:
SPEC.: 110X220 DEG	DIM.: 1000mm	SERIAL No.:
MFR.: CD	SUR.: 1*0.018	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1.93	1.93	1.93	1.93	1.93	1.93	1.93	1.93	1.93	1.93	1.93	1.93						
5	1.94	1.96	1.93	1.92	1.98	2.04	2.00	2.04	1.98	1.92	1.93	1.96						
10	2.00	2.01	1.94	1.90	2.02	2.16	2.09	2.16	2.02	1.90	1.94	2.01						
15	2.06	2.05	1.96	1.86	2.05	2.23	2.16	2.23	2.05	1.86	1.96	2.05						
20	2.12	2.10	1.96	1.80	2.04	2.24	2.21	2.24	2.04	1.80	1.96	2.10						
25	2.16	2.11	1.96	1.72	2.04	2.24	2.26	2.24	2.04	1.72	1.96	2.11						
30	2.18	2.12	1.95	1.63	2.03	2.24	2.27	2.24	2.03	1.63	1.95	2.12						
35	2.19	2.11	1.91	1.53	1.96	2.21	2.27	2.21	1.96	1.53	1.91	2.11						
40	2.19	2.08	1.87	1.41	1.88	2.17	2.26	2.17	1.88	1.41	1.87	2.08						
45	2.19	2.05	1.79	1.29	1.78	2.10	2.22	2.10	1.78	1.29	1.79	2.05						
50	2.17	2.00	1.70	1.14	1.66	2.02	2.15	2.02	1.66	1.14	1.70	2.00						
55	2.12	1.93	1.59	1.00	1.53	1.93	2.07	1.93	1.53	1.00	1.59	1.93						
60	2.05	1.86	1.47	0.84	1.37	1.80	1.97	1.80	1.37	0.84	1.47	1.86						
65	1.98	1.76	1.34	0.68	1.23	1.67	1.85	1.67	1.23	0.68	1.34	1.76						
70	1.88	1.65	1.21	0.53	1.07	1.53	1.68	1.53	1.07	0.53	1.21	1.65						
75	1.76	1.53	1.06	0.36	0.90	1.37	1.53	1.37	0.90	0.36	1.06	1.53						
80	1.65	1.40	0.91	0.20	0.74	1.23	1.37	1.23	0.74	0.20	0.91	1.40						
85	1.53	1.29	0.79	0.06	0.60	1.09	1.11	1.09	0.60	0.06	0.79	1.29						
90	1.45	1.21	0.71	0.00	0.52	1.02	1.14	1.02	0.52	0.00	0.71	1.21						
95	1.43	1.19	0.70	0.00	0.50	0.99	1.13	0.99	0.50	0.00	0.70	1.19						
100	1.41	1.15	0.68	0.00	0.49	0.95	1.13	0.95	0.49	0.00	0.68	1.15						
105	1.35	1.10	0.64	0.00	0.49	0.92	1.06	0.92	0.49	0.00	0.64	1.10						
110	1.30	1.03	0.59	0.00	0.47	0.88	1.03	0.88	0.47	0.00	0.59	1.03						
115	1.23	0.96	0.54	0.00	0.43	0.83	0.97	0.83	0.43	0.00	0.54	0.96						
120	1.15	0.91	0.47	0.00	0.41	0.78	0.88	0.78	0.41	0.00	0.47	0.91						
125	1.07	0.76	0.41	0.00	0.40	0.72	0.82	0.72	0.40	0.00	0.41	0.76						
130	0.99	0.65	0.36	0.00	0.37	0.65	0.75	0.65	0.37	0.00	0.36	0.65						
135	0.89	0.55	0.30	0.00	0.33	0.59	0.68	0.59	0.33	0.00	0.30	0.55						
140	0.79	0.46	0.25	0.00	0.29	0.52	0.60	0.52	0.29	0.00	0.25	0.46						
145	0.68	0.37	0.20	0.00	0.25	0.46	0.52	0.46	0.25	0.00	0.20	0.37						
150	0.59	0.29	0.17	0.00	0.20	0.37	0.44	0.37	0.20	0.00	0.17	0.29						
155	0.46	0.20	0.14	0.00	0.16	0.28	0.35	0.28	0.16	0.00	0.14	0.20						
160	0.34	0.14	0.13	0.00	0.12	0.21	0.24	0.21	0.12	0.00	0.13	0.14						
165	0.13	0.10	0.10	0.00	0.08	0.14	0.08	0.14	0.08	0.00	0.10	0.10						
170	0.08	0.07	0.07	0.00	0.04	0.07	0.05	0.07	0.04	0.00	0.07	0.07						
175	0.04	0.02	0.05	0.00	0.02	0.00	0.01	0.00	0.02	0.00	0.05	0.02						
180	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00						

C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-09-26

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity: 65.0%
Test Distance: 7.400m [K=1.0000]
Remarks: