


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: LumiPixel Slim-Square Acrylic-1000mm-RGBW GREEN-110 220D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:110X220 DEG	DIM.:1000mm	SERIAL No.:
MFR.: CD	SUR.:1*0.018	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 32.04 lm/W
MODEL	LA181006004	I _{max} (cd)	12.74	S/MH(C0/180)	1.71	
NOMINAL POWER(W)	2.23	LOR(%)	100.0	S/MH(C90/270)	1.24	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	71.112	□ UP,DN(C0-180)	13.7,36.8	
NOMINAL FLUX(lm)	1.18521	CIE CLASS	SEMI-D.	□ UP,DN(C180-360)	13.0,36.4	
LAMPS INSIDE	60	□ up(%)	26.8	CIBSE SHR NOM	1.50	
TEST VOLTAGE(V)	24	□ down(%)	73.2	CIBSE SHR MAX	1.55	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

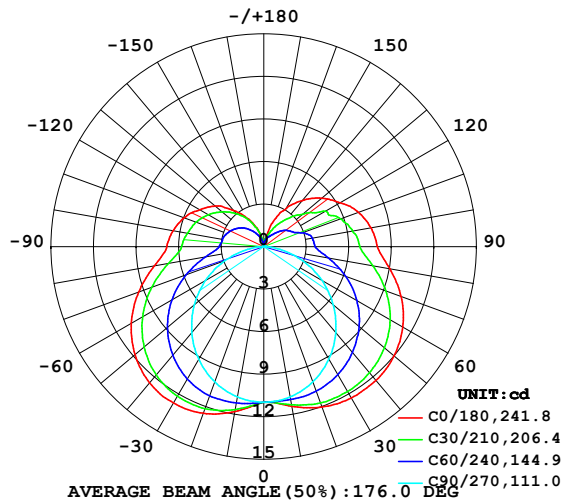

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

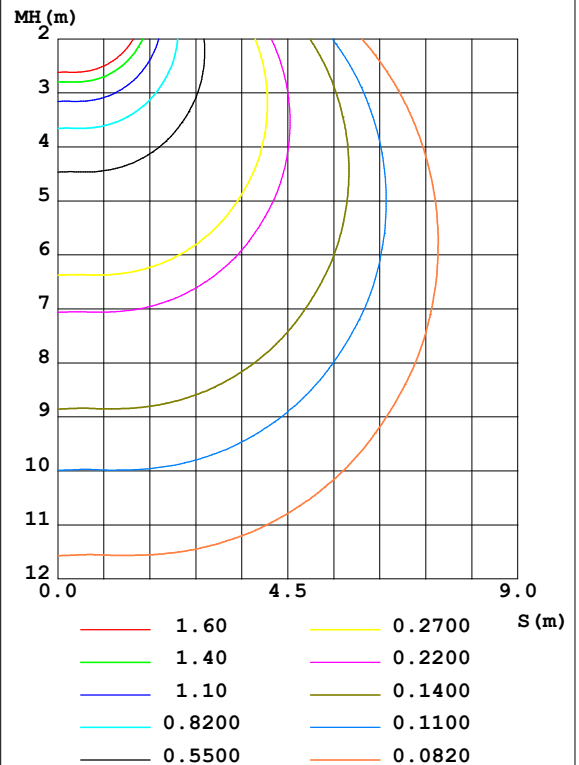

C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-09-26

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity: 65.0%
Test Distance: 7.400m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	11.43	11.13	10.76	11.43	11.81	11.43	10.76	11.13	0- 10	1.064	1.064	1.5,1.5
20	12.04	11.28	10.15	11.67	12.50	11.67	10.15	11.28	10- 20	3.218	4.282	6.02,6.02
30	12.33	11.12	9.166	11.49	12.73	11.49	9.166	11.12	20- 30	5.226	9.509	13.4,13.4
40	12.31	10.67	7.902	10.90	12.53	10.90	7.902	10.67	30- 40	6.835	16.34	23,23
50	11.99	9.943	6.399	9.945	11.86	9.945	6.399	9.943	40- 50	7.854	24.20	34,34
60	11.32	8.939	4.728	8.664	10.79	8.664	4.728	8.939	50- 60	8.166	32.36	45.5,45.5
70	10.31	7.658	2.934	7.128	9.387	7.128	2.934	7.658	60- 70	7.730	40.09	56.4,56.4
80	9.027	6.225	1.167	5.500	7.834	5.500	1.167	6.225	70- 80	6.636	46.73	65.7,65.7
90	8.008	5.194	0.0960	4.480	6.851	4.480	0.0960	5.194	80- 90	5.340	52.07	73.2,73.2
100	7.678	4.923	0.0960	4.219	6.499	4.219	0.0960	4.923	90-100	4.773	56.84	79.9,79.9
110	7.106	4.318	0.0960	3.927	5.982	3.927	0.0960	4.318	100-110	4.312	61.16	86,86
120	6.219	3.614	0.0922	3.484	5.219	3.484	0.0922	3.614	110-120	3.556	64.71	91,91
130	5.320	2.673	0.0922	2.951	4.460	2.951	0.0922	2.673	120-130	2.712	67.42	94.8,94.8
140	4.268	1.905	0.0922	2.316	3.352	2.316	0.0922	1.905	130-140	1.858	69.28	97.4,97.4
150	3.002	1.265	0.0922	1.651	2.301	1.651	0.0922	1.265	140-150	1.105	70.39	99,99
160	1.783	0.7739	0.0922	0.9492	1.347	0.9492	0.0922	0.7739	150-160	0.5347	70.92	99.7,99.7
170	0.4845	0.4321	0.0884	0.3700	0.2878	0.3700	0.0884	0.4321	160-170	0.1684	71.09	100,100
180	0.0768	0.0807	0.0884	0.0748	0.0613	0.0748	0.0884	0.0807	170-180	0.0224	71.11	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-26

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:7.400m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: LumiPixel Slim-Square Acrylic-1000mm-RGBW GREEN-110 220D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:110X220 DEG	DIM.:1000mm	SERIAL No.:
MFR.: CD	SUR.:1*0.018	Shielding Angle:

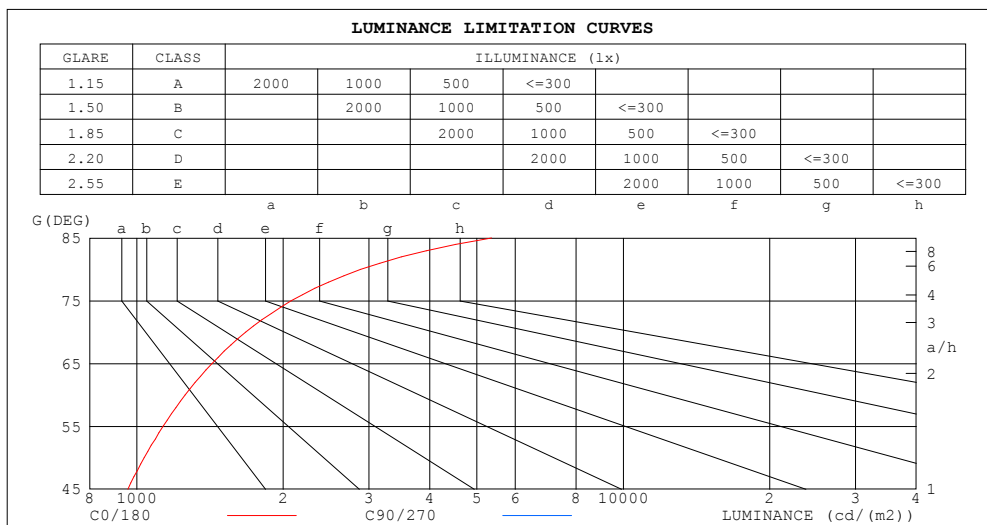

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	5357	295
80	2887	373
75	2078	431
70	1674	476
65	1428	504
60	1257	525
55	1133	540
50	1036	553
45	958	563


C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-26

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:7.400m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LumiPixel Slim-Square Acrylic-1000mm-RGBW GREEN-110 220D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:110X220 DEG	DIM.:1000mm	SERIAL No.:
MFR.: CD	SUR.:1*0.018	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

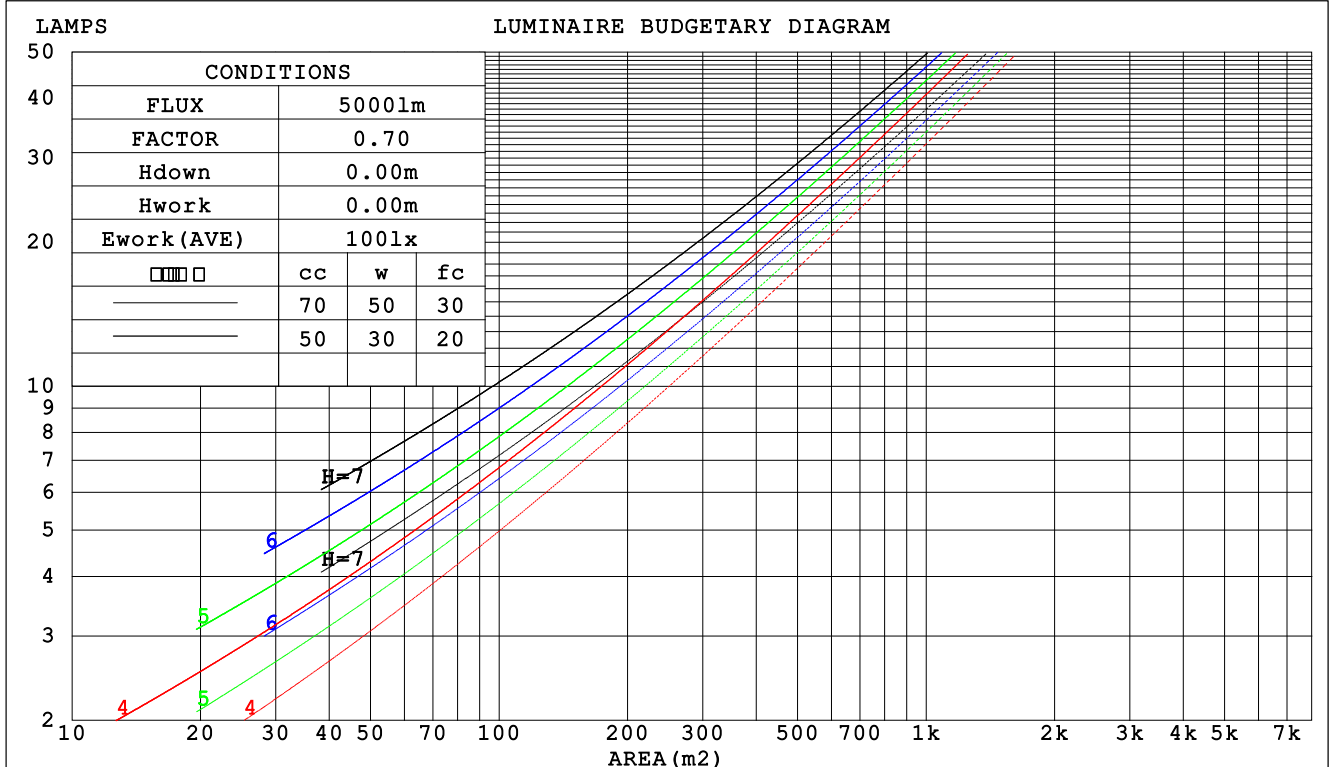

C Range: 0 - 180DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-09-26

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:7.400m [K=1.0000]
 Remarks:

WEC AND CCEC

NAME: LumiPixel Slim-Square Acrylic-1000mm-RGBW GREEN-110 220D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:110X220 DEG	DIM.:1000mm	SERIAL No.:
MFR.: CD	SUR.:1*0.018	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0	
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
□fc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.388	.221	.070	.372	.212	.067	.344	.197	.063	.317	.183	.059	.293	.170	.055		
2.0	.334	.183	.056	.321	.177	.054	.294	.164	.051	.270	.152	.047	.248	.140	.044		
3.0	.297	.158	.047	.284	.152	.046	.260	.141	.043	.238	.130	.040	.218	.121	.037		
4.0	.267	.139	.041	.255	.133	.039	.233	.124	.037	.213	.115	.035	.195	.106	.032		
5.0	.242	.123	.036	.232	.119	.035	.212	.110	.032	.193	.102	.030	.176	.094	.028		
6.0	.222	.111	.032	.212	.107	.031	.194	.099	.029	.177	.092	.027	.161	.085	.025		
7.0	.204	.101	.029	.195	.097	.028	.179	.090	.026	.163	.084	.024	.148	.077	.023		
8.0	.189	.092	.026	.181	.089	.025	.166	.083	.024	.151	.077	.022	.138	.071	.021		
9.0	.176	.085	.024	.169	.082	.023	.155	.076	.022	.141	.071	.020	.128	.065	.019		
10.0	.165	.079	.022	.158	.076	.021	.145	.071	.020	.132	.066	.019	.120	.061	.017		

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.395	.395	.395	.337	.337	.337	.230	.230	.230	.132	.132	.132	.042	.042	.042	
1.0	.391	.361	.334	.335	.310	.287	.229	.213	.199	.132	.123	.116	.042	.040	.037	
2.0	.385	.339	.300	.330	.292	.259	.226	.202	.181	.130	.117	.106	.042	.038	.035	
3.0	.378	.323	.279	.324	.278	.242	.222	.193	.170	.128	.113	.100	.041	.037	.033	
4.0	.370	.310	.265	.318	.268	.230	.218	.187	.162	.126	.110	.096	.041	.036	.032	
5.0	.363	.301	.255	.312	.260	.222	.215	.182	.157	.124	.107	.093	.040	.035	.031	
6.0	.355	.293	.248	.305	.254	.216	.211	.178	.153	.122	.105	.091	.039	.034	.030	
7.0	.348	.287	.243	.300	.249	.212	.207	.174	.150	.120	.103	.089	.039	.034	.030	
8.0	.342	.281	.240	.294	.244	.209	.204	.171	.148	.118	.101	.088	.038	.033	.029	
9.0	.336	.277	.237	.289	.240	.206	.200	.169	.147	.117	.100	.087	.038	.033	.029	
10.0	.330	.273	.234	.284	.237	.205	.197	.167	.145	.115	.098	.087	.037	.032	.029	

C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-26

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:7.400m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: LumiPixel Slim-Square Acrylic-1000mm-RGBW GREEN-110 220D-Rev1					TYPE:RGBW-GREEN					WEIGHT:				
SPEC.:110X220 DEG					DIM.:1000mm					SERIAL No.:				
MFR.: CD					SUR.:1*0.018					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions					Viewed crosswise					Viewed endwise				
x = 2H y = 2H					21.6	22.9	22.2	23.5	24.2	18.4	19.7	19.0	20.3	21.1
3H					24.4	25.6	25.1	26.3	27.0	20.0	21.2	20.6	21.8	22.6
4H					26.0	27.1	26.7	27.8	28.6	20.6	21.7	21.3	22.4	23.2
6H					27.7	28.8	28.4	29.5	30.3	21.0	22.1	21.7	22.8	23.6
8H					28.7	29.7	29.4	30.4	31.2	21.2	22.2	21.9	22.9	23.7
12H					29.8	30.8	30.5	31.5	32.3	21.2	22.2	21.9	22.9	23.8
4H 2H					22.1	23.2	22.8	23.9	24.7	20.0	21.1	20.6	21.8	22.6
3H					25.2	26.2	25.9	26.9	27.8	21.8	22.8	22.5	23.5	24.4
4H					27.0	27.9	27.7	28.6	29.5	22.7	23.6	23.4	24.3	25.2
6H					28.9	29.7	29.7	30.5	31.4	23.3	24.1	24.1	24.9	25.8
8H					30.0	30.7	30.8	31.5	32.4	23.6	24.3	24.3	25.1	26.0
12H					31.2	31.9	32.0	32.7	33.6	23.7	24.4	24.5	25.2	26.2
8H 4H					27.3	28.1	28.1	28.8	29.8	24.0	24.8	24.8	25.5	26.5
6H					29.6	30.2	30.4	31.0	31.9	25.1	25.8	25.9	26.6	27.5
8H					30.9	31.4	31.7	32.2	33.2	25.6	26.2	26.4	27.0	28.0
12H					32.3	32.8	33.2	33.7	34.7	26.0	26.5	26.8	27.3	28.3
12H 4H					27.3	28.0	28.1	28.8	29.7	24.4	25.1	25.2	25.9	26.9
6H					29.7	30.2	30.5	31.0	32.0	25.8	26.4	26.6	27.2	28.2
8H					31.1	31.6	31.9	32.4	33.4	26.5	27.0	27.3	27.8	28.8
Variations with the observer position at spacings:														
S = 1.0H					+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H					+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H					+ 0.2 / - 0.3					+ 0.3 / - 0.5				

CIE Pub.117, 71.11 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -9.2)

C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-26

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:7.400m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: LumiPixel Slim-Square Acrylic-1000mm-RGBW GREEN-110 220D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 110X220 DEG	DIM.: 1000mm	SERIAL No.:
MFR.: CD	SUR.: 1*0.018	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k(RI) x RCR = 5									
k = 0.60	44	32	24	43	31	24	40	30	23	16
0.80	53	40	32	51	39	31	48	37	30	22
1.00	61	48	39	59	46	38	54	46	37	27
1.25	68	55	46	65	53	45	60	50	43	32
1.50	73	60	51	70	58	50	64	54	47	36
2.00	81	69	60	77	66	58	70	61	55	41
2.50	85	75	66	81	72	64	74	66	60	45
3.00	89	79	72	85	76	69	77	70	64	48
4.00	94	86	79	89	82	76	81	75	70	53
5.00	97	90	84	92	86	80	83	78	74	56
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNOM = 1.25										

C Range: 0 - 180DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-09-26

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity: 65.0%
 Test Distance: 7.400m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: LumiPixel Slim-Square Acrylic-1000mm-RGBW GREEN-110 220D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 110X220 DEG	DIM.: 1000mm	SERIAL No.:
MFR.: CD	SUR.: 1*0.018	Shielding Angle:

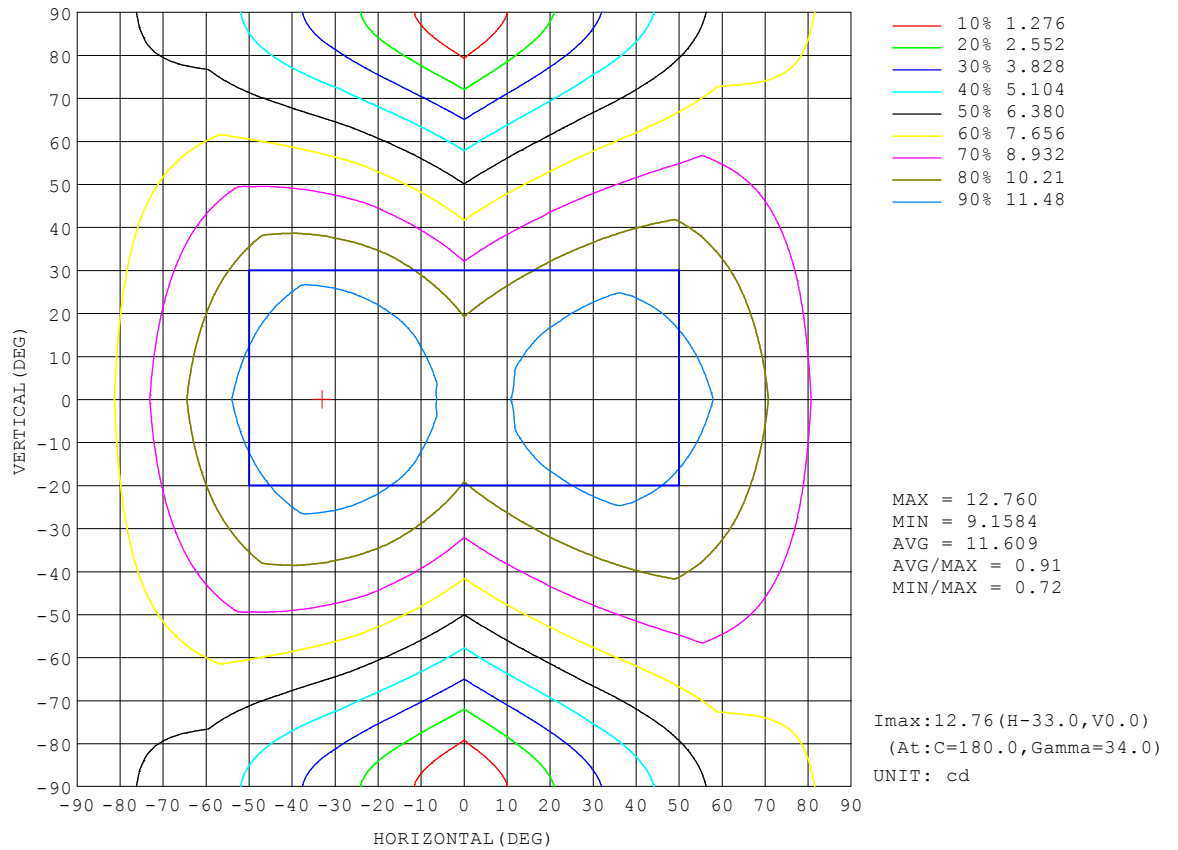


C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-09-26

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity: 65.0%
Test Distance: 7.400m [K=1.0000]
Remarks:

AAI Figure

NAME: LumiPixel Slim-Square Acrylic-1000mm-RGBW GREEN-110 220D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:110X220 DEG	DIM.:1000mm	SERIAL No.:
MFR.: CD	SUR.:1*0.018	Shielding Angle:

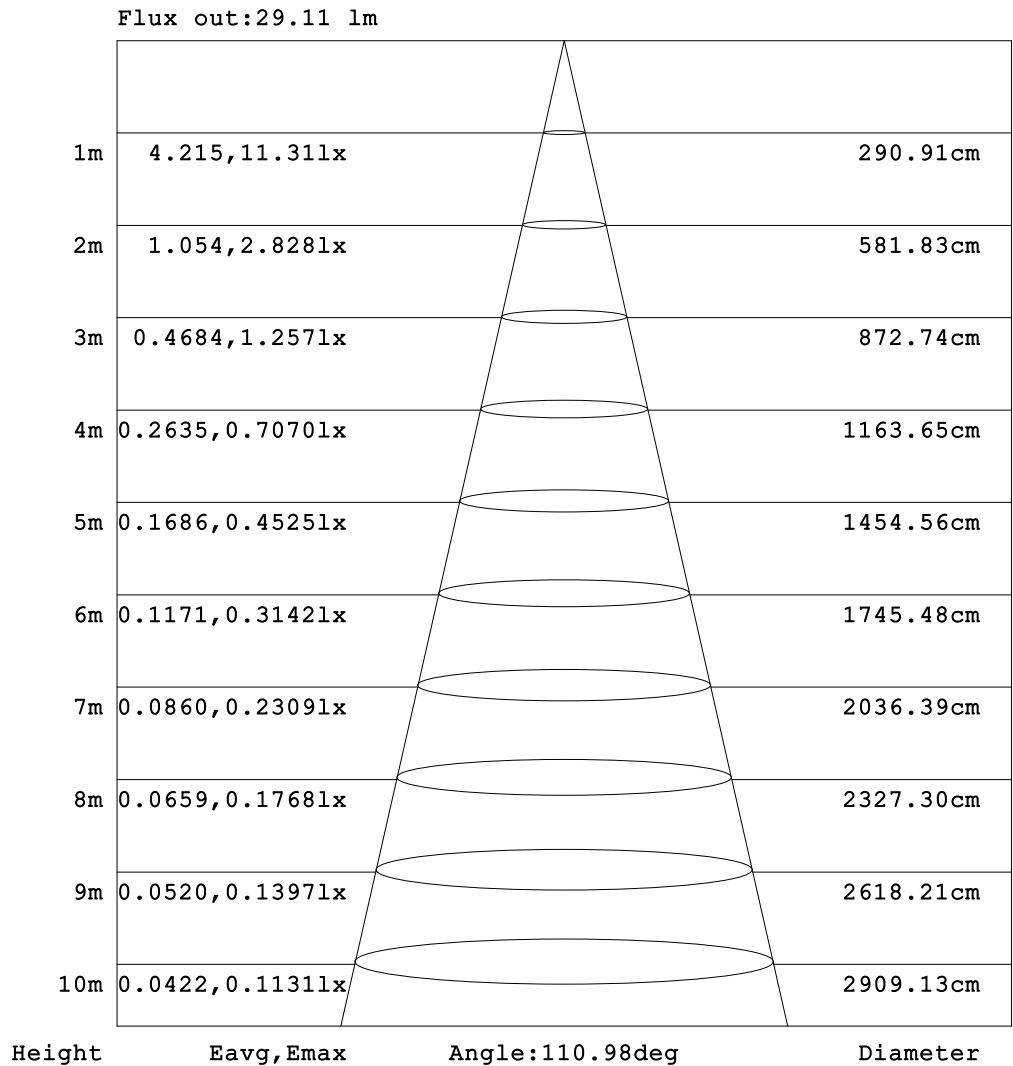


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 180DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-09-26

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:7.400m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: LumiPixel Slim-Square Acrylic-1000mm-RGBW GREEN-110 220D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 110X220 DEG	DIM.: 1000mm	SERIAL No.:
MFR.: CD	SUR.: 1*0.018	Shielding Angle:

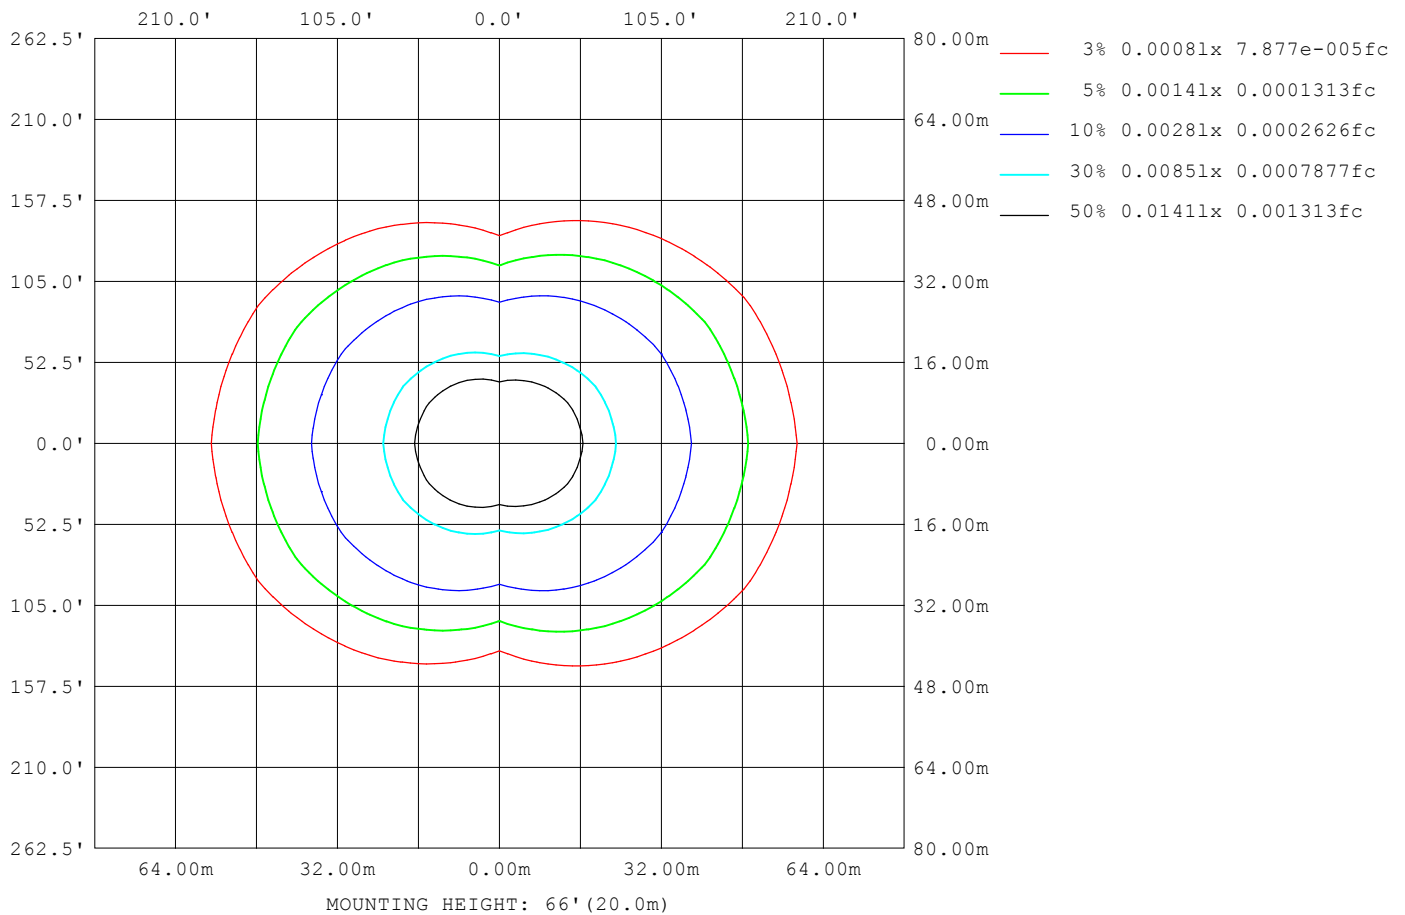

C Range: 0 - 180DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-09-26

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity: 65.0%
 Test Distance: 7.400m [K=1.0000]
 Remarks:

LED Avg.L Report

NAME: LumiPixel Slim-Square Acrylic-1000mm-RGBW GREEN-110 220D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:110X220 DEG	DIM.:1000mm	SERIAL No.:
MFR.: CD	SUR.:1*0.018	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1379
L_0~180 (75) av	1964
L_0~180 (85) av	4969
L_90~270 (65) av	504
L_90~270 (75) av	432
L_90~270 (85) av	296
L_45 (65) av	1084
L_45 (75) av	1450
L_45 (85) av	3402

Standard: GB/T 29293-2012

C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-26

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:7.400m [K=1.0000]
Remarks:

Planar Illuminance Curve

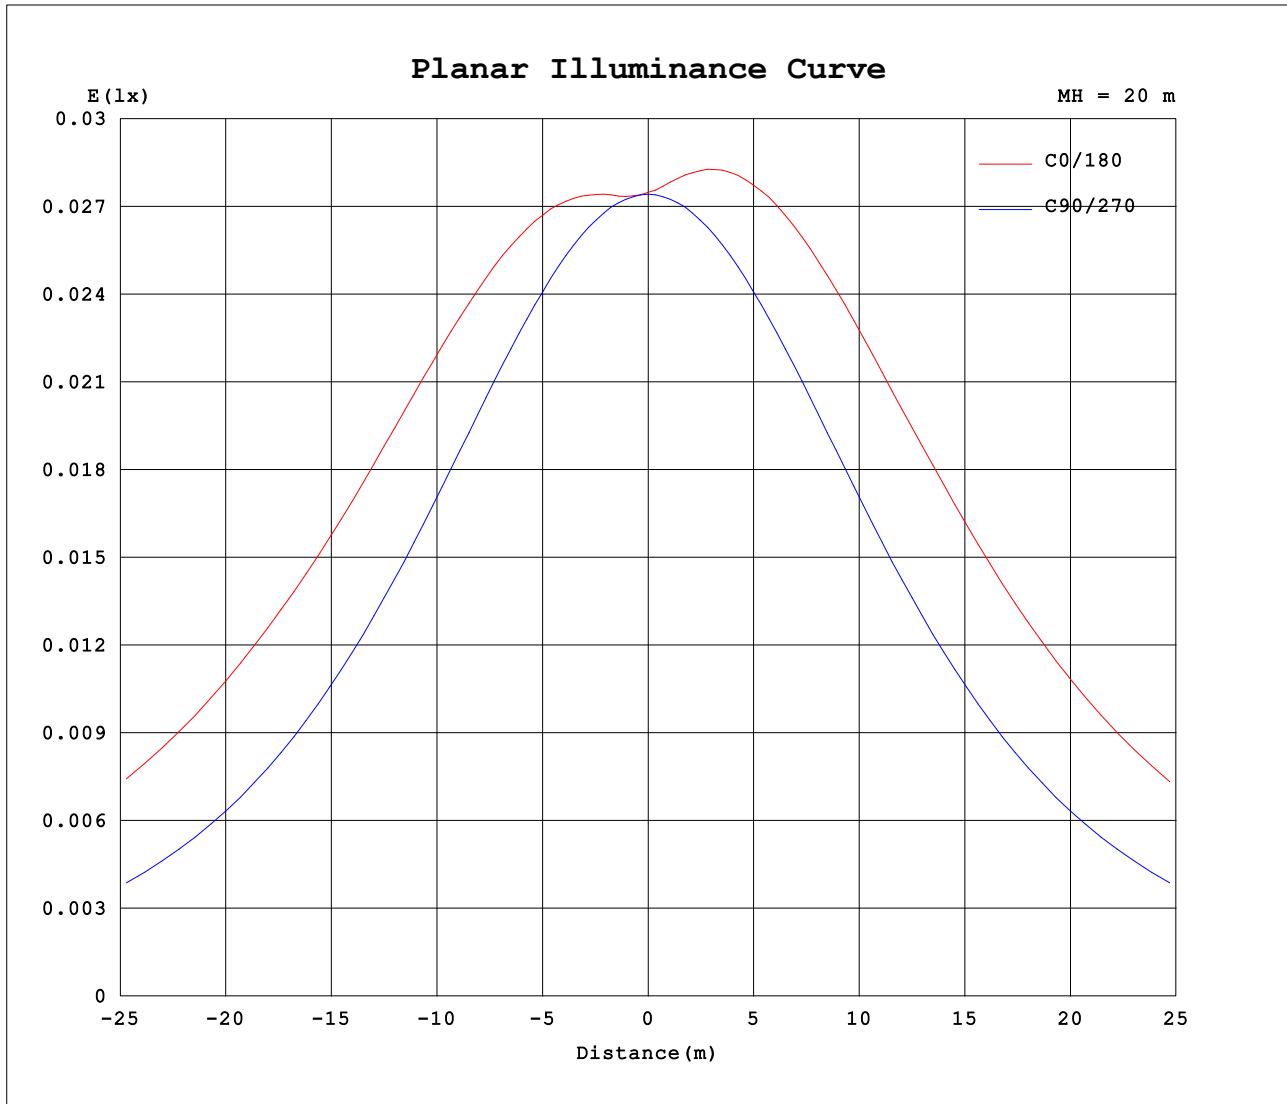

C Range: 0 - 180DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-09-26

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity: 65.0%
 Test Distance: 7.400m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LumiPixel Slim-Square Acrylic-1000mm-RGBW GREEN-110 220D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:110X220 DEG	DIM.:1000mm	SERIAL No.:
MFR.: CD	SUR.:1*0.018	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0						
5	11.1	11.1	11.0	10.9	11.1	11.3	11.3	11.3	11.1	10.9	11.0	11.1						
10	11.4	11.3	10.9	10.8	11.2	11.7	11.8	11.7	11.2	10.8	10.9	11.3						
15	11.8	11.6	10.9	10.5	11.2	12.0	12.2	12.0	11.2	10.5	10.9	11.6						
20	12.0	11.7	10.8	10.2	11.2	12.2	12.5	12.2	11.2	10.2	10.8	11.7						
25	12.2	11.8	10.7	9.70	11.0	12.2	12.7	12.2	11.0	9.70	10.7	11.8						
30	12.3	11.8	10.4	9.17	10.8	12.2	12.7	12.2	10.8	9.17	10.4	11.8						
35	12.3	11.7	10.1	8.57	10.4	12.1	12.7	12.1	10.4	8.57	10.1	11.7						
40	12.3	11.6	9.73	7.90	9.99	11.8	12.5	11.8	9.99	7.90	9.73	11.6						
45	12.2	11.4	9.28	7.17	9.46	11.5	12.2	11.5	9.46	7.17	9.28	11.4						
50	12.0	11.1	8.78	6.40	8.87	11.0	11.9	11.0	8.87	6.40	8.78	11.1						
55	11.7	10.7	8.22	5.58	8.21	10.5	11.4	10.5	8.21	5.58	8.22	10.7						
60	11.3	10.3	7.58	4.73	7.46	9.86	10.8	9.86	7.46	4.73	7.58	10.3						
65	10.9	9.76	6.90	3.84	6.68	9.16	10.1	9.16	6.68	3.84	6.90	9.76						
70	10.3	9.16	6.15	2.93	5.84	8.41	9.39	8.41	5.84	2.93	6.15	9.16						
75	9.68	8.51	5.38	2.01	4.99	7.61	8.61	7.61	4.99	2.01	5.38	8.51						
80	9.03	7.82	4.63	1.17	4.17	6.82	7.83	6.82	4.17	1.17	4.63	7.82						
85	8.41	7.18	3.99	0.46	3.49	6.15	7.18	6.15	3.49	0.46	3.99	7.18						
90	8.01	6.77	3.62	0.10	3.15	5.80	6.85	5.80	3.15	0.10	3.62	6.77						
95	7.88	6.65	3.55	0.10	3.03	5.66	6.70	5.66	3.03	0.10	3.55	6.65						
100	7.68	6.37	3.48	0.10	2.96	5.47	6.50	5.47	2.96	0.10	3.48	6.37						
105	7.42	6.13	3.28	0.10	2.89	5.28	6.27	5.28	2.89	0.10	3.28	6.13						
110	7.11	5.77	2.87	0.10	2.77	5.09	5.98	5.09	2.77	0.10	2.87	5.77						
115	6.73	5.23	2.40	0.10	2.62	4.82	5.66	4.82	2.62	0.10	2.40	5.23						
120	6.22	5.03	2.20	0.09	2.45	4.51	5.22	4.51	2.45	0.09	2.20	5.03						
125	5.78	4.20	2.01	0.09	2.27	4.19	4.85	4.19	2.27	0.09	2.01	4.20						
130	5.32	3.57	1.78	0.09	2.07	3.83	4.46	3.83	2.07	0.09	1.78	3.57						
135	4.82	3.08	1.53	0.09	1.84	3.45	3.91	3.45	1.84	0.09	1.53	3.08						
140	4.27	2.56	1.25	0.09	1.58	3.06	3.35	3.06	1.58	0.09	1.25	2.56						
145	3.71	2.10	1.02	0.09	1.33	2.66	2.85	2.66	1.33	0.09	1.02	2.10						
150	3.00	1.67	0.86	0.09	1.09	2.21	2.30	2.21	1.09	0.09	0.86	1.67						
155	2.48	1.22	0.76	0.09	0.86	1.69	1.82	1.69	0.86	0.09	0.76	1.22						
160	1.78	0.90	0.65	0.09	0.66	1.24	1.35	1.24	0.66	0.09	0.65	0.90						
165	0.75	0.69	0.51	0.09	0.44	0.87	0.48	0.87	0.44	0.09	0.51	0.69						
170	0.48	0.51	0.35	0.09	0.24	0.50	0.29	0.50	0.24	0.09	0.35	0.51						
175	0.27	0.28	0.23	0.09	0.11	0.16	0.11	0.16	0.11	0.09	0.23	0.28						
180	0.08	0.07	0.09	0.09	0.07	0.08	0.06	0.08	0.07	0.09	0.09	0.07						

C Range: 0 - 180DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-26

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:7.400m [K=1.0000]
Remarks: