


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: LumiPixel Slim-Clear Cover-1000mm-RGBW 3000K-110 110D-Rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X110 DEG	DIM.: 1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 70.99 lm/W			
MODEL		Imax (cd)	94.67	S/MH (C0/180)	1.33
NOMINAL POWER (W)	12	LOR (%)	303.3	S/MH (C90/270)	1.22
RATED VOLTAGE (V)	48	TOTAL FLUX (lm)	242.94	η UP, DN (C0-180)	1.6, 149.4
NOMINAL FLUX (lm)	1.33502	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.8, 150.5
LAMPS INSIDE	60	η up (%)	3.4	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	24	η down (%)	299.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

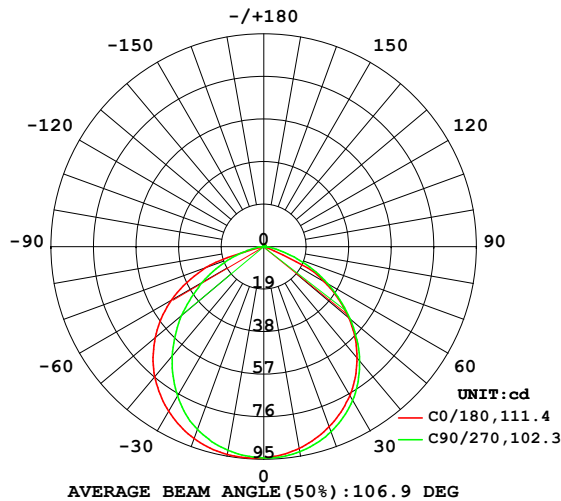

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

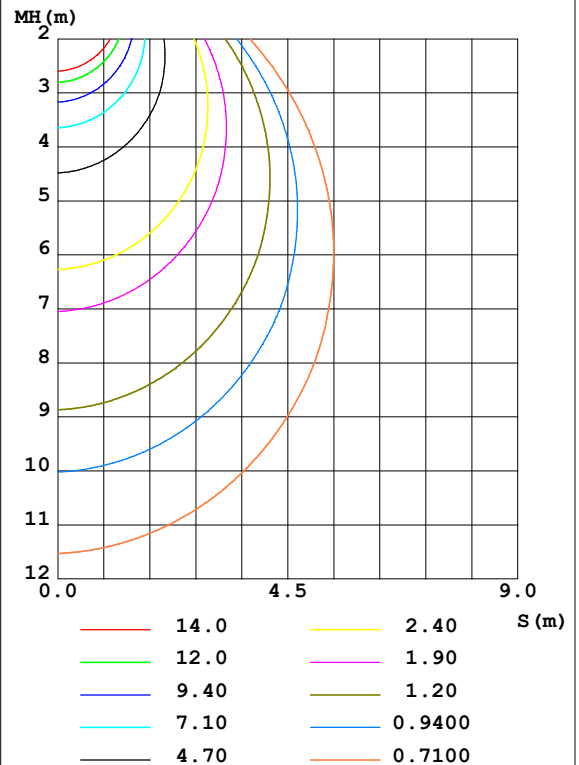

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity: 65.0%
Test Distance: 8.300m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	91.42	91.97	92.98	94.05	94.24	93.45	92.31	91.52	0- 10	8.929	8.929	3.68,11.1
20	85.54	86.31	87.98	90.32	91.12	89.30	86.82	85.36	10- 20	25.60	34.53	14.2,43.1
30	76.87	77.54	79.41	83.20	84.93	81.55	77.01	75.77	20- 30	38.75	73.28	30.2,91.5
40	64.83	65.52	66.57	72.78	75.80	70.33	63.59	63.23	30- 40	46.31	119.6	49.2,149
50	49.65	49.62	50.37	58.71	63.28	56.20	47.94	47.35	40- 50	46.78	166.4	68.5,208
60	31.17	30.95	32.82	40.98	47.43	39.22	31.53	29.61	50- 60	39.64	206.0	84.8,257
70	0.7685	13.10	15.92	21.53	27.54	20.73	16.10	12.59	60- 70	25.42	231.4	95.3,289
80	0.4879	0.4155	4.210	2.105	0.5982	1.965	4.137	0.3912	70- 80	8.117	239.5	98.6,299
90	0.0724	0.0724	0.0826	0.1985	0.2697	0.1924	0.1160	0.1162	80- 90	0.7151	240.3	98.9,300
100	0.1544	0.1447	0.1255	0.0916	0.1788	0.1739	0.2079	0.2320	90-100	0.1353	240.4	98.9,300
110	0.2751	0.2701	0.2414	0.1931	0.2995	0.2897	0.3190	0.3480	100-110	0.2292	240.6	99,300
120	0.4100	0.3715	0.3525	0.3139	0.4346	0.4152	0.4495	0.4686	110-120	0.3326	240.9	99.2,301
130	0.5164	0.4779	0.4635	0.4250	0.5697	0.5311	0.5654	0.5848	120-130	0.4051	241.4	99.3,301
140	0.6563	0.6129	0.5747	0.5555	0.6953	0.6471	0.6813	0.7006	130-140	0.4414	241.8	99.5,302
150	0.7819	0.7289	0.6859	0.6714	0.8353	0.7677	0.7827	0.8021	140-150	0.4322	242.2	99.7,302
160	0.9121	0.8206	0.7729	0.7729	0.9463	0.8787	0.8792	0.8987	150-160	0.3685	242.6	99.9,303
170	0.9846	0.9074	0.8743	0.8792	1.032	0.9559	0.9449	0.9465	160-170	0.2515	242.8	100,303
180	1.038	0.9607	0.9324	0.9469	1.052	0.9656	0.9565	0.9566	170-180	0.0904	242.9	100,303
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: LumiPixel Slim-Clear Cover-1000mm-RGBW 3000K-110 110D-Rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X110 DEG	DIM.: 1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

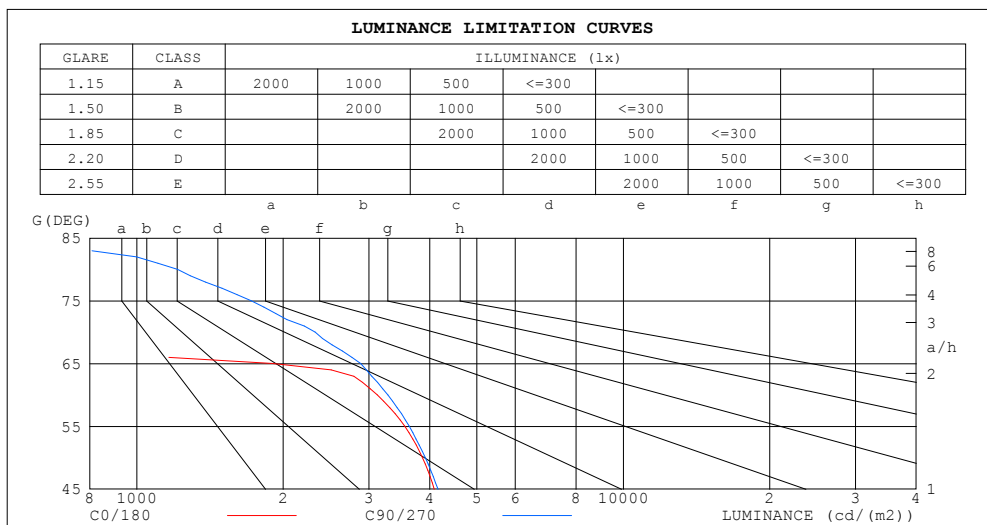


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity: 65.0%
Test Distance: 8.300m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LumiPixel Slim-Clear Cover-1000mm-RGBW 3000K-110 110D-Rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X110DEG	DIM.: 1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	3.60	3.60	3.60	3.51	3.51	3.51	3.35	3.35	3.35	3.20	3.20	3.20	3.06	3.06	3.06	3.00														
1.0	3.21	3.09	2.99	3.13	3.03	2.94	3.00	2.92	2.84	2.88	2.81	2.75	2.77	2.71	2.66	2.60														
2.0	2.83	2.64	2.48	2.77	2.59	2.45	2.66	2.51	2.39	2.55	2.43	2.33	2.46	2.36	2.27	2.21														
3.0	2.50	2.27	2.09	2.45	2.24	2.07	2.36	2.18	2.03	2.27	2.12	1.99	2.19	2.06	1.95	1.89														
4.0	2.22	1.97	1.78	2.18	1.95	1.77	2.10	1.90	1.74	2.03	1.86	1.71	1.96	1.81	1.69	1.62														
5.0	1.99	1.73	1.54	1.96	1.71	1.53	1.89	1.68	1.51	1.83	1.64	1.49	1.77	1.61	1.48	1.41														
6.0	1.80	1.54	1.35	1.77	1.52	1.34	1.71	1.49	1.33	1.66	1.46	1.32	1.61	1.44	1.30	1.24														
7.0	1.63	1.38	1.20	1.61	1.36	1.19	1.56	1.34	1.18	1.51	1.32	1.17	1.47	1.29	1.16	1.10														
8.0	1.49	1.24	1.07	1.47	1.23	1.06	1.43	1.21	1.06	1.39	1.19	1.05	1.35	1.17	1.04	.98														
9.0	1.37	1.13	.96	1.35	1.12	.96	1.31	1.10	.95	1.28	1.08	.95	1.25	1.07	.94	.89														
10.0	1.26	1.03	.87	1.25	1.02	.87	1.21	1.01	.87	1.18	.99	.86	1.16	.98	.85	.80														

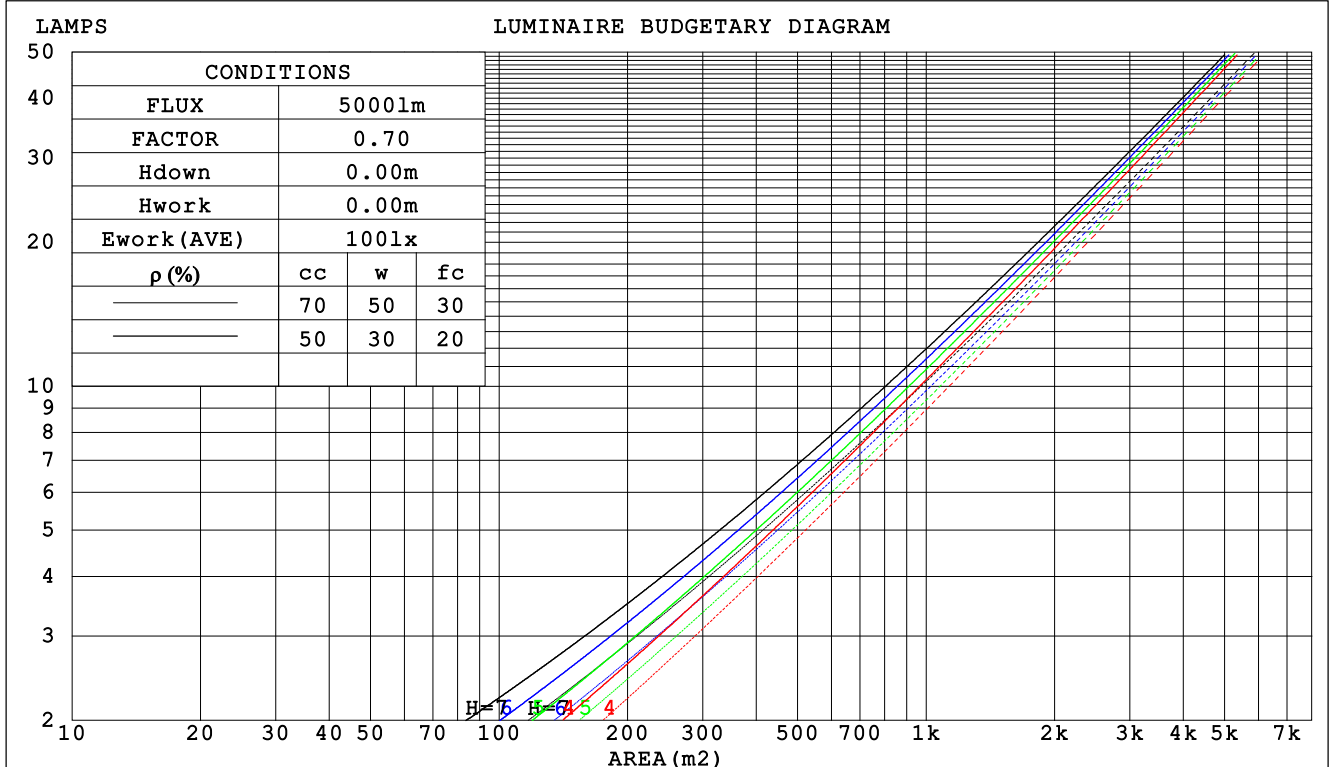

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity: 65.0%
Test Distance: 8.300m [K=1.0000]
Remarks:

WEC AND CCEC

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW 3000K-110 110D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:110X110DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.818	.465	.147	.796	.454	.144	.755	.433	.138	.717	.413	.133	.681	.395	.127	
2.0	.798	.437	.134	.778	.429	.132	.742	.412	.128	.708	.397	.124	.677	.383	.121	
3.0	.754	.401	.120	.737	.395	.119	.705	.382	.116	.675	.370	.113	.647	.358	.111	
4.0	.707	.367	.108	.692	.362	.107	.663	.352	.105	.636	.342	.103	.612	.332	.101	
5.0	.661	.337	.098	.647	.332	.097	.622	.324	.095	.598	.315	.094	.576	.308	.092	
6.0	.618	.310	.089	.606	.306	.088	.583	.299	.087	.562	.292	.086	.542	.285	.085	
7.0	.579	.286	.081	.568	.283	.081	.547	.277	.080	.528	.271	.079	.510	.265	.078	
8.0	.543	.265	.075	.534	.263	.074	.515	.257	.073	.498	.252	.073	.482	.247	.072	
9.0	.511	.247	.069	.502	.245	.069	.486	.240	.068	.470	.236	.067	.455	.231	.067	
10.0	.482	.231	.064	.474	.229	.064	.459	.225	.063	.445	.221	.063	.432	.217	.062	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.603	.603	.603	.516	.516	.516	.352	.352	.352	.202	.202	.202	.065	.065	.065	
1.0	.564	.500	.443	.483	.429	.381	.330	.295	.264	.190	.171	.153	.061	.055	.050	
2.0	.537	.426	.334	.460	.367	.289	.315	.254	.201	.182	.148	.118	.058	.048	.038	
3.0	.512	.372	.261	.439	.321	.226	.302	.223	.158	.174	.130	.093	.056	.042	.031	
4.0	.490	.331	.210	.420	.286	.183	.289	.200	.129	.167	.117	.076	.054	.038	.025	
5.0	.468	.300	.175	.402	.259	.152	.277	.181	.107	.160	.106	.064	.052	.035	.021	
6.0	.448	.274	.149	.385	.237	.130	.265	.166	.092	.154	.098	.055	.050	.032	.018	
7.0	.428	.253	.130	.368	.219	.114	.254	.154	.081	.148	.091	.048	.048	.030	.016	
8.0	.409	.235	.116	.352	.204	.101	.244	.143	.072	.142	.085	.043	.046	.028	.014	
9.0	.392	.221	.105	.338	.191	.092	.234	.135	.065	.136	.079	.039	.044	.026	.013	
10.0	.375	.208	.096	.324	.180	.084	.224	.127	.060	.131	.075	.036	.042	.025	.012	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW 3000K-110 110D-Rev1						TYPE:RGBW-3000K					WEIGHT:				
SPEC.:110X110DEG						DIM.:1000mm					SERIAL No.:				
MFR.: EVERFINE						SUR.:					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3					
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3					
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2					
Room dimensions						Viewed crosswise					Viewed endwise				
x = 2H y = 2H						25.7	27.1	26.0	27.3	27.6	25.7	27.2	26.0	27.4	27.6
3H						25.8	27.1	26.1	27.4	27.6	26.6	27.9	26.9	28.2	28.4
4H						25.7	26.9	26.0	27.2	27.5	26.8	28.1	27.1	28.3	28.6
6H						25.6	26.7	25.9	27.0	27.3	26.9	28.0	27.2	28.3	28.6
8H						25.5	26.7	25.9	26.9	27.3	26.9	28.0	27.2	28.3	28.6
12H						25.5	26.6	25.8	26.9	27.2	26.8	27.9	27.2	28.2	28.5
4H 2H						26.0	27.3	26.4	27.6	27.8	26.1	27.3	26.4	27.6	27.9
3H						26.2	27.2	26.5	27.6	27.9	27.1	28.1	27.4	28.4	28.8
4H						26.1	27.0	26.5	27.4	27.7	27.3	28.3	27.7	28.6	29.0
6H						26.0	26.8	26.4	27.2	27.6	27.4	28.3	27.8	28.6	29.0
8H						25.9	26.7	26.4	27.1	27.5	27.4	28.2	27.8	28.6	29.0
12H						25.9	26.6	26.3	27.0	27.4	27.4	28.1	27.8	28.5	28.9
8H 4H						26.0	26.8	26.5	27.2	27.6	27.2	28.0	27.6	28.4	28.8
6H						25.9	26.6	26.4	27.0	27.5	27.3	28.0	27.8	28.4	28.9
8H						25.9	26.5	26.4	26.9	27.4	27.3	27.9	27.8	28.4	28.8
12H						25.9	26.4	26.4	26.8	27.3	27.3	27.8	27.8	28.3	28.8
12H 4H						26.0	26.7	26.4	27.1	27.5	27.2	27.9	27.6	28.3	28.7
6H						25.9	26.5	26.4	26.9	27.4	27.3	27.9	27.8	28.3	28.8
8H						25.9	26.4	26.4	26.8	27.3	27.3	27.8	27.8	28.3	28.8
Variations with the observer position at spacings:															
S = 1.0H						+ 0.7 / - 0.9					+ 0.4 / - 0.5				
1.5H						+ 0.6 / - 1.2					+ 0.2 / - 0.3				
2.0H						+ 0.8 / - 1.2					+ 0.6 / - 0.6				

CIE Pub.117, 80.10 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -8.8)

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: LumiPixel Slim-Clear Cover-1000mm-RGBW 3000K-110 110D-Rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X110DEG	DIM.: 1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k(RI) x RCR = 5									
k = 0.60	181	147	127	179	147	127	175	145	126	107
0.80	213	179	158	210	178	158	204	175	156	136
1.00	239	208	187	235	206	186	229	209	184	164
1.25	261	231	211	256	229	210	248	225	207	186
1.50	275	248	229	270	245	227	261	240	224	202
2.00	295	272	255	290	268	252	279	261	247	224
2.50	306	285	269	300	281	266	288	273	260	235
3.00	316	297	282	309	292	279	297	283	272	247
4.00	327	312	299	319	306	295	306	295	286	259
5.00	333	320	310	326	314	305	312	303	295	267
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNOM = 1.25										

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity: 65.0%
Test Distance: 8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: LumiPixel Slim-Clear Cover-1000mm-RGBW 3000K-110 110D-Rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X110 DEG	DIM.: 1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

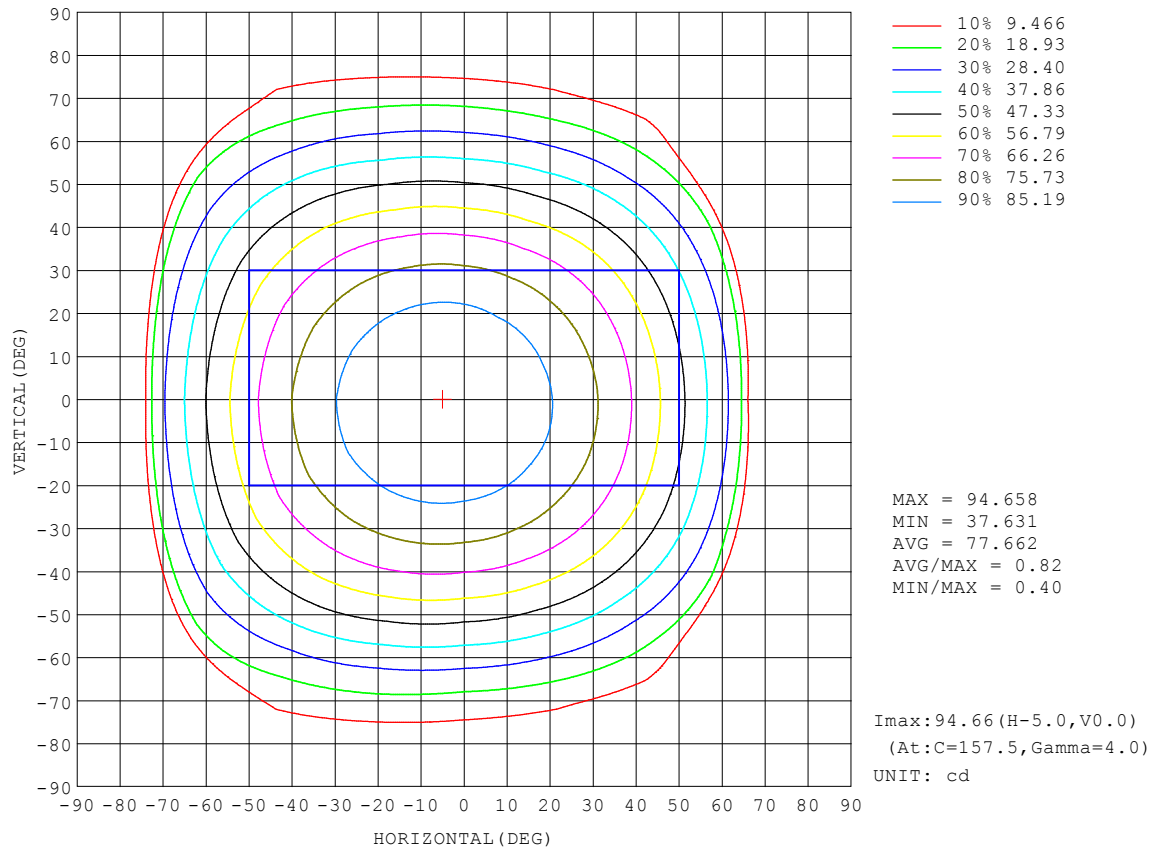


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.402
 Humidity: 65.0%
 Test Distance: 8.300m [K=1.0000]
 Remarks:

AAI Figure

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW 3000K-110 110D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:110X110 DEG	DIM.:1000mm	SERIAL No.:
MFR.:EVERFINE	SUR.:	Shielding Angle:

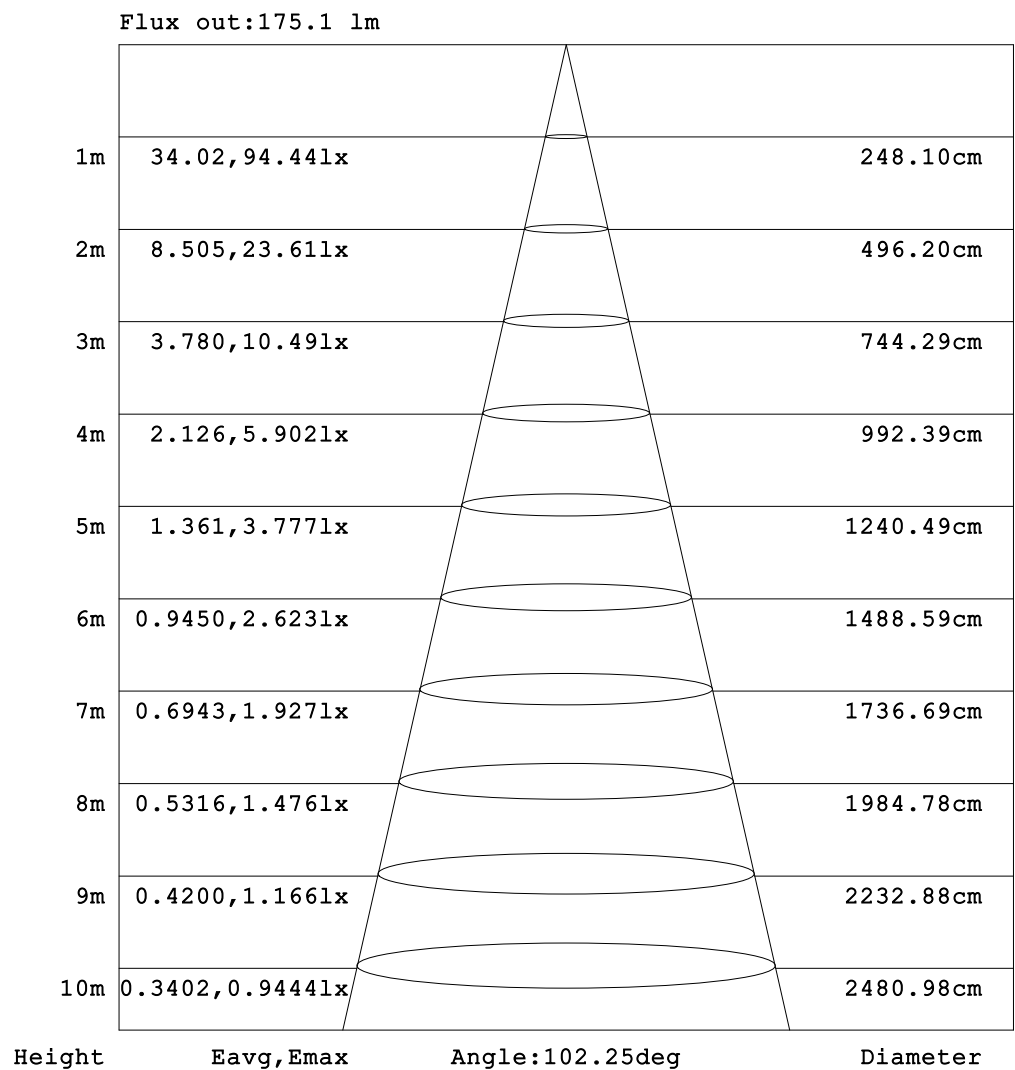


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: LumiPixel Slim-Clear Cover-1000mm-RGBW 3000K-110 110D-Rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X110 DEG	DIM.: 1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

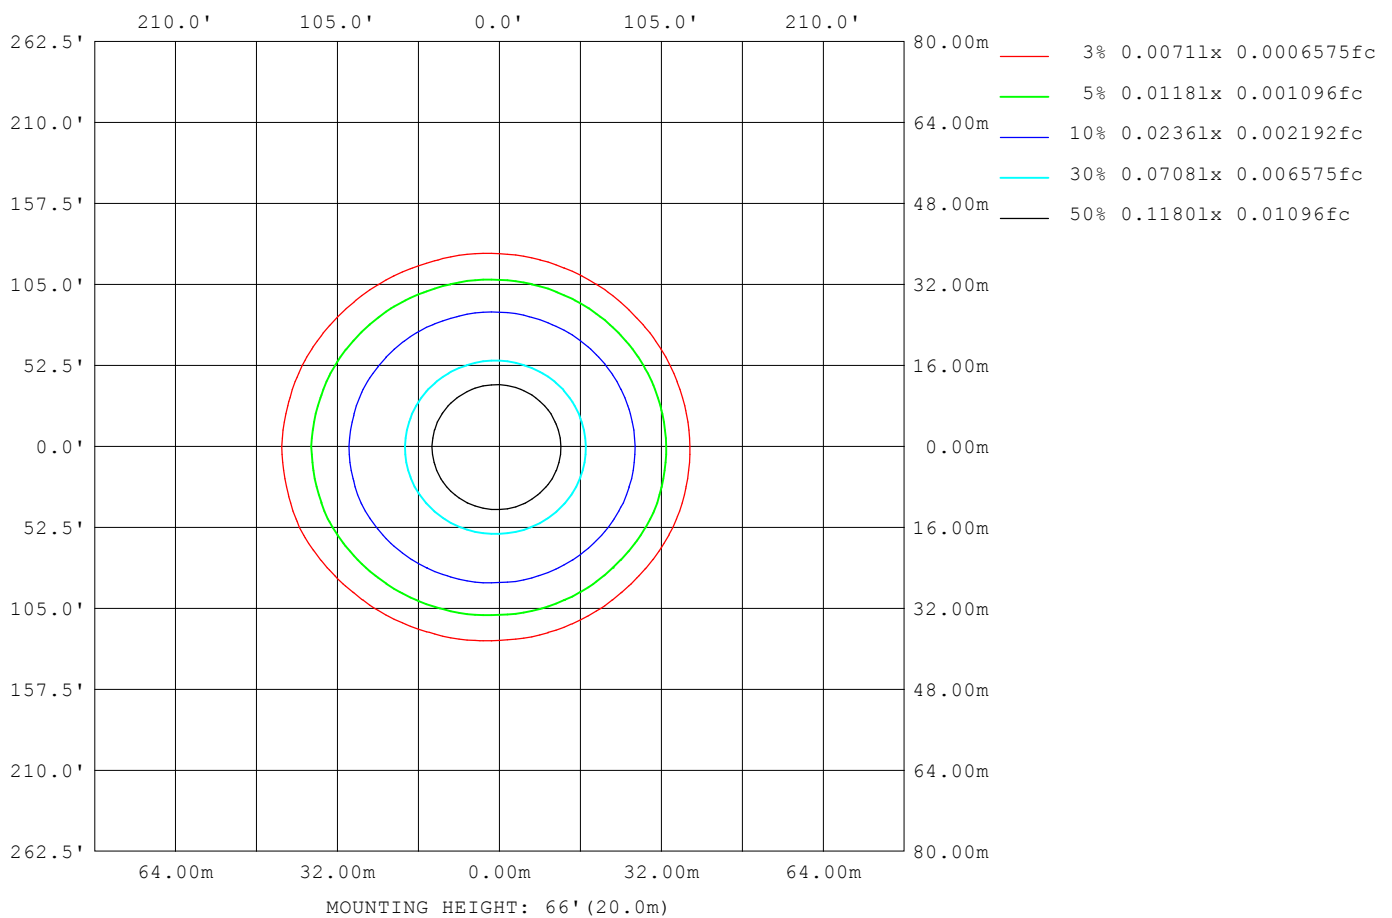

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity: 65.0%
Test Distance: 8.300m [K=1.0000]
Remarks:

LED Avg.L Report

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW 3000K-110 110D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:110X110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	3191
L_0~180 (75) av	519
L_0~180 (85) av	212
L_90~270 (65) av	2844
L_90~270 (75) av	1716
L_90~270 (85) av	606
L_45 (65) av	3066
L_45 (75) av	1345
L_45 (85) av	181

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:8.300m [K=1.0000]
 Remarks:

Planar Illuminance Curve

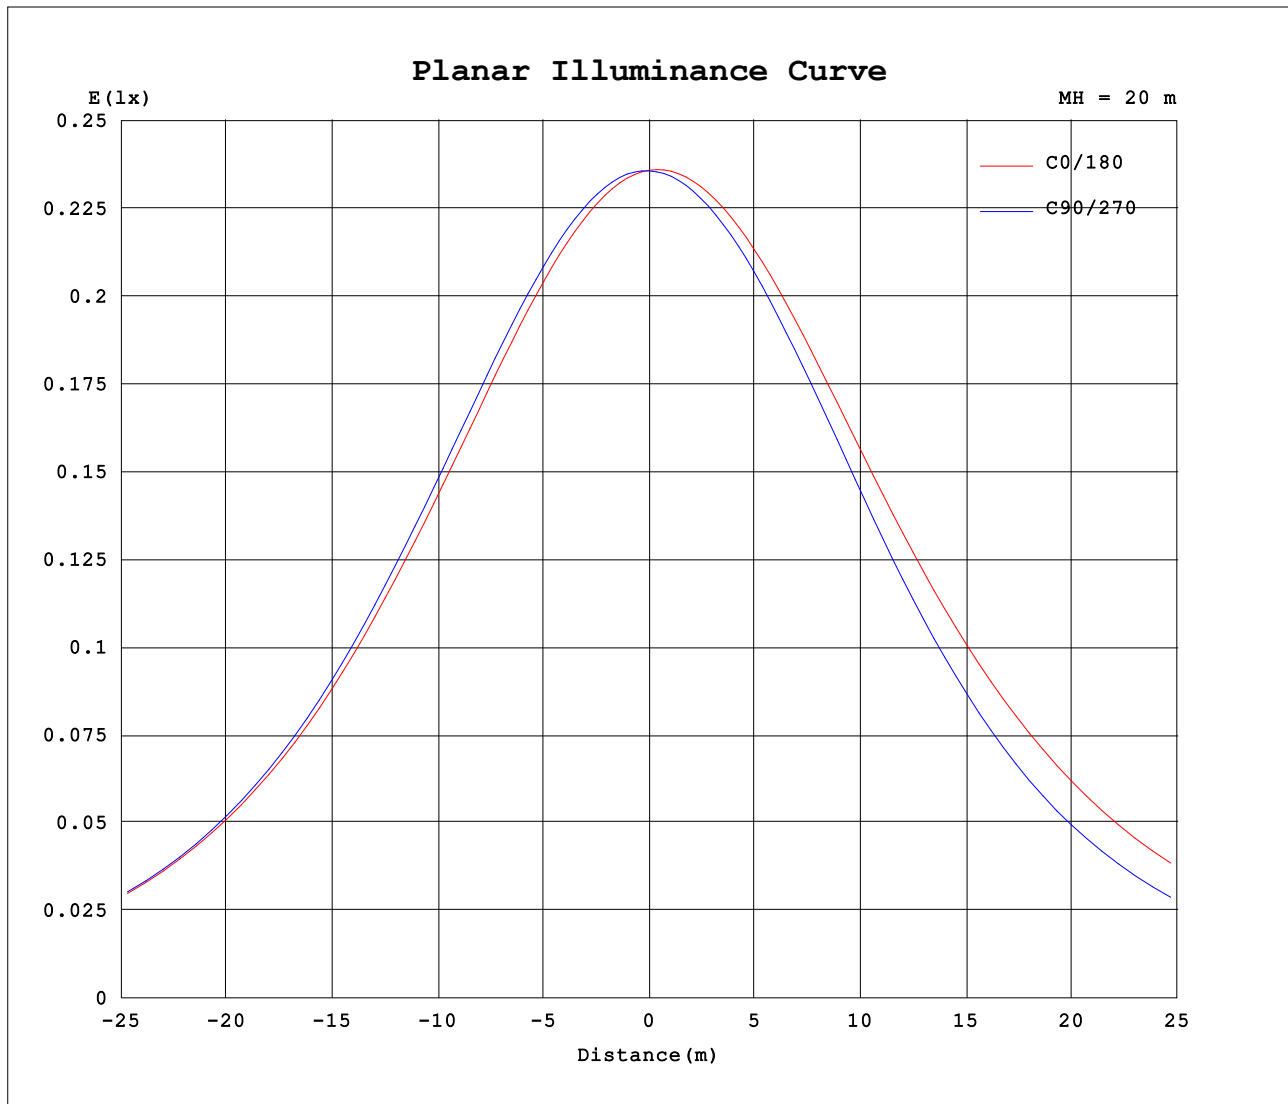

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity: 65.0%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LumiPixel Slim-Clear Cover-1000mm-RGBW 3000K-110 110D-Rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X110 DEG	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3			
5	93.3	93.4	93.6	93.8	94.1	94.3	94.6	94.7	94.6	94.5	94.2	94.0	93.7	93.5	93.3	93.2			
10	91.4	91.7	92.0	92.5	93.0	93.5	94.0	94.3	94.2	94.0	93.5	92.9	92.3	91.8	91.5	91.3			
15	88.9	89.2	89.6	90.2	90.9	91.8	92.6	93.1	93.1	92.7	91.8	91.0	90.1	89.2	88.9	88.6			
20	85.5	86.0	86.3	87.1	88.0	89.2	90.3	91.1	91.1	90.5	89.3	88.0	86.8	85.7	85.4	85.2			
25	81.5	82.0	82.2	83.1	84.1	85.6	87.2	88.4	88.4	87.5	85.8	84.2	82.5	81.2	80.9	80.9			
30	76.9	77.3	77.5	78.3	79.4	81.2	83.2	84.8	84.9	83.7	81.6	79.1	77.0	75.8	75.8	76.1			
35	71.3	71.9	72.0	72.4	73.5	76.0	78.5	80.5	80.7	79.2	76.3	73.1	70.7	69.5	69.8	70.5			
40	64.8	65.4	65.5	65.6	66.6	69.4	72.8	75.4	75.8	73.9	70.3	66.4	63.6	62.3	63.2	63.9			
45	57.8	58.4	58.1	57.8	58.9	62.1	66.1	69.6	70.0	67.9	63.6	58.8	55.9	54.7	55.7	56.6			
50	49.7	50.3	49.6	49.3	50.4	53.9	58.7	62.7	63.3	60.9	56.2	51.0	47.9	46.5	47.3	48.6			
55	40.8	41.4	40.4	40.5	41.7	45.1	50.3	55.1	55.9	53.2	47.9	42.5	39.4	38.0	38.8	39.8			
60	31.2	31.9	31.0	31.7	32.8	36.1	41.0	46.2	47.4	44.5	39.2	34.1	31.5	30.0	29.6	30.4			
65	16.1	22.2	21.8	22.9	24.4	27.2	31.1	36.7	37.9	35.0	30.0	26.1	23.7	21.8	20.7	20.8			
70	0.77	2.05	13.1	14.2	15.9	18.8	21.5	26.5	27.5	25.0	20.7	18.0	16.1	13.8	12.6	1.74			
75	0.58	0.52	1.08	7.49	8.89	11.0	12.9	11.6	4.79	9.68	12.6	10.7	8.87	7.24	1.25	0.57			
80	0.49	0.43	0.42	2.74	4.21	4.88	2.11	0.57	0.60	0.63	1.96	4.80	4.14	2.71	0.39	0.49			
85	0.24	0.19	0.25	0.22	1.00	0.66	0.42	0.44	0.50	0.53	0.41	0.52	1.11	0.30	0.20	0.25			
90	0.07	0.09	0.07	0.09	0.08	0.10	0.20	0.21	0.27	0.29	0.19	0.18	0.12	0.16	0.12	0.10			
95	0.10	0.14	0.09	0.14	0.08	0.11	0.07	0.07	0.13	0.10	0.12	0.12	0.16	0.12	0.18	0.13			
100	0.15	0.19	0.14	0.18	0.13	0.15	0.09	0.11	0.18	0.12	0.17	0.15	0.21	0.17	0.23	0.19			
105	0.21	0.25	0.19	0.23	0.18	0.20	0.14	0.17	0.23	0.16	0.23	0.20	0.27	0.24	0.29	0.26			
110	0.28	0.31	0.27	0.29	0.24	0.26	0.19	0.23	0.30	0.23	0.29	0.27	0.32	0.28	0.35	0.31			
115	0.34	0.37	0.31	0.34	0.29	0.31	0.26	0.28	0.38	0.29	0.35	0.33	0.40	0.34	0.41	0.38			
120	0.41	0.42	0.37	0.40	0.35	0.37	0.31	0.35	0.43	0.36	0.42	0.39	0.45	0.42	0.47	0.43			
125	0.46	0.48	0.42	0.46	0.40	0.43	0.37	0.40	0.51	0.42	0.47	0.44	0.51	0.47	0.52	0.50			
130	0.52	0.53	0.48	0.52	0.46	0.48	0.43	0.46	0.57	0.47	0.53	0.50	0.57	0.53	0.58	0.54			
135	0.59	0.59	0.55	0.58	0.52	0.54	0.49	0.52	0.63	0.53	0.59	0.56	0.62	0.58	0.64	0.61			
140	0.66	0.66	0.61	0.64	0.57	0.60	0.56	0.58	0.70	0.59	0.65	0.62	0.68	0.64	0.70	0.66			
145	0.72	0.71	0.67	0.70	0.63	0.66	0.61	0.65	0.76	0.64	0.70	0.68	0.72	0.69	0.75	0.72			
150	0.78	0.77	0.73	0.75	0.69	0.72	0.67	0.71	0.84	0.72	0.77	0.73	0.78	0.74	0.80	0.77			
155	0.84	0.82	0.78	0.79	0.74	0.77	0.73	0.78	0.90	0.77	0.82	0.78	0.83	0.79	0.85	0.82			
160	0.91	0.85	0.82	0.84	0.77	0.82	0.77	0.83	0.95	0.83	0.88	0.83	0.88	0.84	0.90	0.86			
165	0.95	0.89	0.86	0.89	0.83	0.87	0.83	0.87	1.00	0.87	0.92	0.89	0.91	0.88	0.94	0.90			
170	0.98	0.93	0.91	0.93	0.87	0.91	0.88	0.93	1.03	0.91	0.96	0.91	0.94	0.91	0.95	0.93			
175	1.03	0.96	0.95	0.96	0.91	0.93	0.92	0.96	1.05	0.94	0.96	0.93	0.95	0.94	0.95	0.95			
180	1.04	0.96	0.96	0.97	0.93	0.94	0.95	0.96	1.05	0.97	0.97	0.96	0.96	0.96	0.96	0.97			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity: 65.0%
Test Distance: 8.300m [K=1.0000]
Remarks: