


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW All-110 110D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:110X110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 48.10 lm/W			
MODEL		Imax(cd)	212.2	S/MH(C0/180)	1.33
NOMINAL POWER(W)	12	LOR(%)	233.2	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	48	TOTAL FLUX(lm)	566.61	η UP,DN(C0-180)	1.4,110.4
NOMINAL FLUX(lm)	4.04892	CIE CLASS	DIRECT	η UP,DN(C180-360)	1.4,120.1
LAMPS INSIDE	60	η up(%)	2.7	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	η down(%)	230.5	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

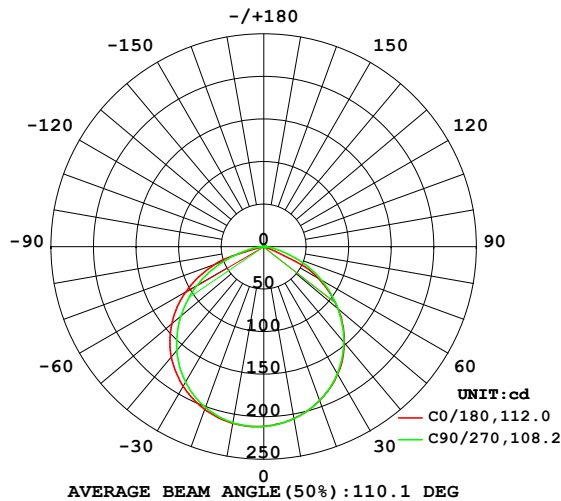

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

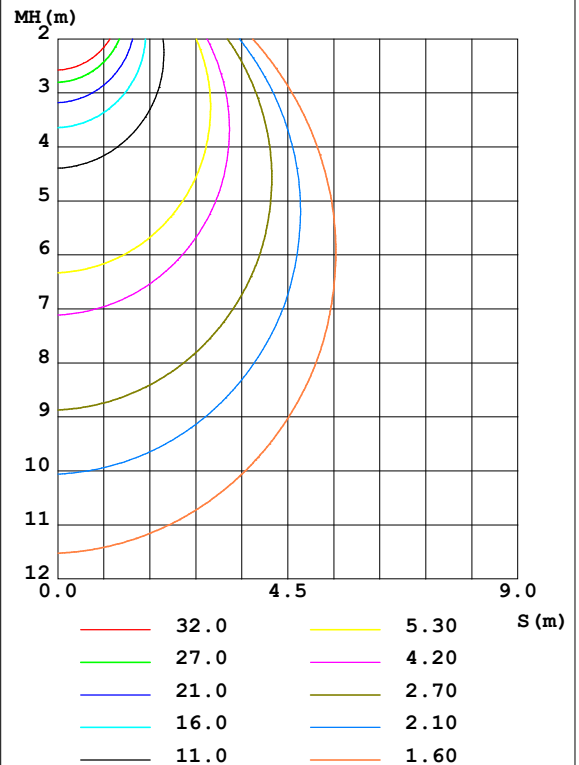

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	205.1	204.2	205.3	208.2	210.8	211.5	210.0	207.4	0- 10	20.00	20.00	3.53,8.23
20	192.5	190.6	192.3	198.4	203.5	204.2	200.9	196.4	10- 20	57.43	77.43	13.7,31.9
30	173.6	170.5	172.8	181.7	189.6	189.6	183.9	178.0	20- 30	87.35	164.8	29.1,67.8
40	147.3	144.4	146.4	158.5	169.2	167.4	159.1	152.8	30- 40	105.5	270.2	47.7,111
50	114.0	111.2	113.9	128.8	141.1	137.9	127.3	119.5	40- 50	108.4	378.7	66.8,156
60	73.45	71.87	77.87	92.20	105.3	100.6	90.16	78.92	50- 60	94.59	473.3	83.5,195
70	2.159	32.19	39.94	50.54	61.63	56.74	49.50	36.65	60- 70	63.24	536.5	94.7,221
80	1.177	1.028	10.60	5.378	1.555	5.443	13.99	1.056	70- 80	21.40	557.9	98.5,230
90	0.2453	0.2363	0.2912	0.5437	0.7332	0.5719	0.2902	0.3006	80- 90	2.028	560.0	98.8,230
100	0.4463	0.4819	0.4783	0.3534	0.3941	0.4150	0.5078	0.5380	90-100	0.3869	560.3	98.9,231
110	0.7344	0.7616	0.7587	0.6247	0.6774	0.6851	0.7593	0.7997	100-110	0.6163	561.0	99,231
120	1.013	1.013	1.025	0.9105	0.9560	0.9600	1.030	1.056	110-120	0.8490	561.8	99.2,231
130	1.253	1.263	1.271	1.167	1.230	1.230	1.296	1.323	120-130	1.004	562.8	99.3,232
140	1.532	1.538	1.527	1.429	1.518	1.529	1.576	1.623	130-140	1.073	563.9	99.5,232
150	1.796	1.794	1.764	1.700	1.816	1.780	1.808	1.861	140-150	1.037	564.9	99.7,233
160	2.041	2.011	1.987	1.943	2.089	2.031	2.031	2.069	150-160	0.8765	565.8	99.9,233
170	2.228	2.185	2.142	2.132	2.296	2.223	2.200	2.239	160-170	0.5972	566.4	100,233
180	2.334	2.286	2.238	2.277	2.348	2.296	2.253	2.292	170-180	0.2135	566.6	100,233
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW All-110 110D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:110X110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

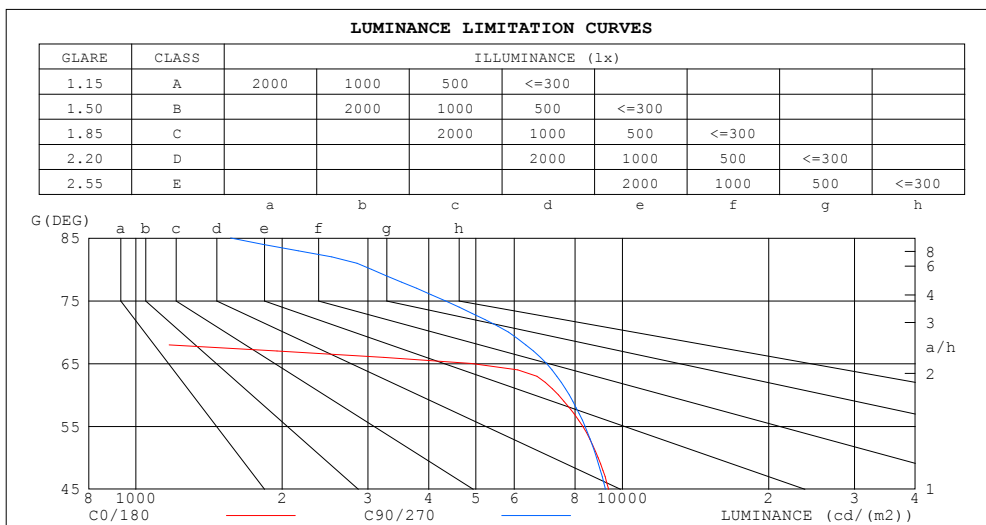

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	322	1567
80	341	3050
75	270	4324
70	317	5833
65	4898	6990
60	7386	7779
55	8294	8378
50	8918	8848
45	9373	9237


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:8.300m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW All-110 110D-Rev1	TYPE:DIM.:	WEIGHT:
SPEC.:110X110 DEG	1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	2.77	2.77	2.77	2.70	2.70	2.70	2.58	2.58	2.58	2.46	2.46	2.46	2.35	2.35	2.35	2.30
1.0	2.46	2.37	2.29	2.40	2.32	2.25	2.30	2.23	2.17	2.21	2.15	2.10	2.12	2.08	2.04	1.99
2.0	2.16	2.01	1.89	2.12	1.98	1.87	2.03	1.92	1.82	1.95	1.86	1.77	1.88	1.80	1.73	1.68
3.0	1.91	1.73	1.58	1.87	1.70	1.57	1.80	1.65	1.54	1.73	1.61	1.51	1.67	1.57	1.48	1.43
4.0	1.69	1.50	1.35	1.66	1.48	1.34	1.60	1.44	1.32	1.54	1.41	1.30	1.49	1.37	1.28	1.23
5.0	1.52	1.31	1.16	1.49	1.30	1.16	1.44	1.27	1.14	1.39	1.24	1.13	1.34	1.21	1.11	1.06
6.0	1.37	1.16	1.02	1.34	1.15	1.01	1.30	1.13	1.00	1.26	1.11	.99	1.22	1.08	.98	.93
7.0	1.24	1.04	.90	1.22	1.03	.89	1.18	1.01	.89	1.14	.99	.88	1.11	.97	.87	.82
8.0	1.13	.94	.80	1.11	.93	.80	1.08	.91	.79	1.05	.90	.79	1.02	.88	.78	.74
9.0	1.04	.85	.72	1.02	.84	.72	.99	.83	.71	.97	.82	.71	.94	.80	.70	.66
10.0	.96	.77	.65	.94	.77	.65	.92	.76	.65	.89	.75	.64	.87	.74	.64	.60

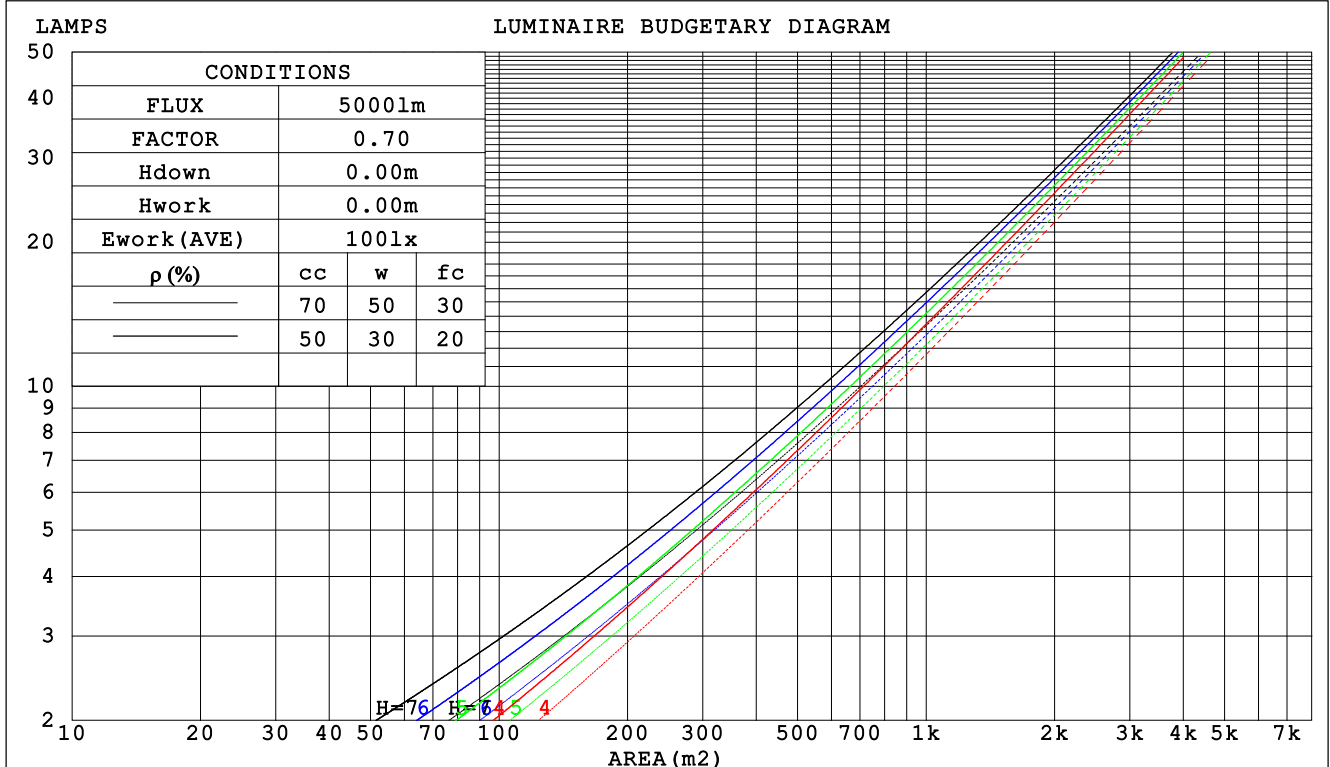

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

WEC AND CCEC

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW All-110 110D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:110X110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.642	.365	.116	.625	.357	.113	.593	.340	.109	.564	.325	.104	.536	.311	.100		
2.0	.625	.342	.105	.610	.336	.103	.581	.323	.100	.555	.312	.098	.531	.301	.095		
3.0	.590	.314	.094	.576	.309	.093	.551	.299	.091	.528	.289	.089	.507	.281	.087		
4.0	.551	.287	.084	.540	.282	.083	.517	.274	.082	.497	.267	.080	.478	.259	.079		
5.0	.515	.262	.076	.504	.259	.075	.484	.252	.074	.466	.246	.073	.449	.240	.072		
6.0	.481	.241	.069	.471	.238	.069	.454	.232	.068	.437	.227	.067	.421	.222	.066		
7.0	.450	.222	.063	.441	.220	.063	.425	.215	.062	.411	.210	.061	.397	.206	.061		
8.0	.422	.206	.058	.414	.204	.058	.400	.200	.057	.386	.196	.056	.374	.192	.056		
9.0	.396	.192	.054	.390	.190	.053	.377	.186	.053	.365	.183	.052	.353	.179	.052		
10.0	.374	.179	.050	.368	.178	.050	.356	.174	.049	.345	.171	.049	.334	.168	.048		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.465	.465	.465	.398	.398	.398	.271	.271	.271	.156	.156	.156	.050	.050	.050	
1.0	.436	.386	.341	.373	.331	.293	.255	.228	.203	.147	.132	.118	.047	.042	.038	
2.0	.415	.329	.257	.356	.283	.222	.244	.196	.155	.141	.114	.091	.045	.037	.030	
3.0	.397	.288	.200	.341	.248	.174	.234	.172	.122	.135	.101	.072	.043	.033	.024	
4.0	.380	.256	.162	.326	.221	.141	.224	.154	.099	.130	.090	.059	.042	.029	.019	
5.0	.363	.232	.135	.312	.201	.117	.215	.140	.083	.124	.082	.049	.040	.027	.016	
6.0	.347	.212	.115	.299	.184	.100	.206	.129	.071	.119	.076	.042	.039	.025	.014	
7.0	.332	.196	.101	.286	.170	.088	.197	.119	.062	.115	.070	.037	.037	.023	.012	
8.0	.318	.183	.090	.273	.158	.078	.189	.111	.056	.110	.066	.033	.036	.022	.011	
9.0	.304	.171	.082	.262	.149	.071	.181	.104	.050	.106	.062	.030	.034	.020	.010	
10.0	.291	.161	.075	.251	.140	.065	.174	.099	.046	.102	.058	.028	.033	.019	.009	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW All-110 110D-Rev1						TYPE:RGBW W=3000K					WEIGHT:				
SPEC.:110X110 DEG						DIM.:1000mm					SERIAL No.:				
MFR.: EVERFINE						SUR.:					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3					
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3					
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2					
Room dimensions						Viewed crosswise					Viewed endwise				
x = 2H y = 2H						24.6	26.1	24.9	26.3	26.5	24.7	26.2	25.0	26.4	26.6
3H						24.8	26.1	25.1	26.4	26.6	25.8	27.1	26.1	27.3	27.6
4H						24.7	26.0	25.0	26.2	26.5	26.0	27.3	26.3	27.5	27.8
6H						24.6	25.8	24.9	26.1	26.4	26.1	27.3	26.4	27.6	27.9
8H						24.5	25.7	24.9	26.0	26.3	26.1	27.2	26.4	27.5	27.8
12H						24.5	25.6	24.8	25.9	26.2	26.0	27.1	26.4	27.5	27.8
4H 2H						25.0	26.3	25.4	26.6	26.8	25.1	26.4	25.4	26.6	26.9
3H						25.2	26.3	25.6	26.6	26.9	26.2	27.3	26.6	27.6	28.0
4H						25.1	26.1	25.5	26.4	26.8	26.5	27.5	26.9	27.9	28.2
6H						25.0	25.9	25.4	26.3	26.7	26.7	27.5	27.1	27.9	28.3
8H						25.0	25.8	25.4	26.2	26.6	26.7	27.5	27.1	27.9	28.3
12H						24.9	25.7	25.4	26.1	26.5	26.6	27.4	27.1	27.8	28.2
8H 4H						25.1	25.9	25.5	26.3	26.7	26.4	27.2	26.9	27.6	28.0
6H						25.0	25.7	25.5	26.1	26.5	26.6	27.3	27.1	27.7	28.1
8H						25.0	25.5	25.4	26.0	26.5	26.6	27.2	27.1	27.6	28.1
12H						24.9	25.4	25.4	25.9	26.4	26.6	27.1	27.1	27.6	28.1
12H 4H						25.0	25.8	25.5	26.2	26.6	26.4	27.1	26.8	27.5	28.0
6H						25.0	25.6	25.4	26.0	26.5	26.6	27.1	27.0	27.6	28.1
8H						24.9	25.4	25.4	25.9	26.4	26.6	27.1	27.1	27.5	28.0
Variations with the observer position at spacings:															
S = 1.0H						+ 0.6 / - 0.8					+ 0.3 / - 0.4				
1.5H						+ 0.6 / - 1.0					+ 0.2 / - 0.3				
2.0H						+ 0.8 / - 1.2					+ 0.5 / - 0.5				

CIE Pub.117, 242.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -4.9)

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW All-110 110D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:110X110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k(RI) x RCR = 5									
k = 0.60	137	111	95	136	110	95	133	109	94	80
0.80	162	135	119	159	134	119	155	132	117	102
1.00	182	157	141	179	156	140	174	159	139	123
1.25	199	176	160	195	174	159	189	170	157	140
1.50	210	189	174	206	187	172	199	182	169	152
2.00	226	208	194	222	205	192	213	199	188	170
2.50	234	218	205	230	214	203	221	208	198	179
3.00	242	227	216	237	224	213	227	216	208	188
4.00	251	239	229	245	234	225	235	226	219	198
5.00	256	246	237	250	241	233	239	232	226	204
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNOM = 1.25										

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW All-110 110D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:110X110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

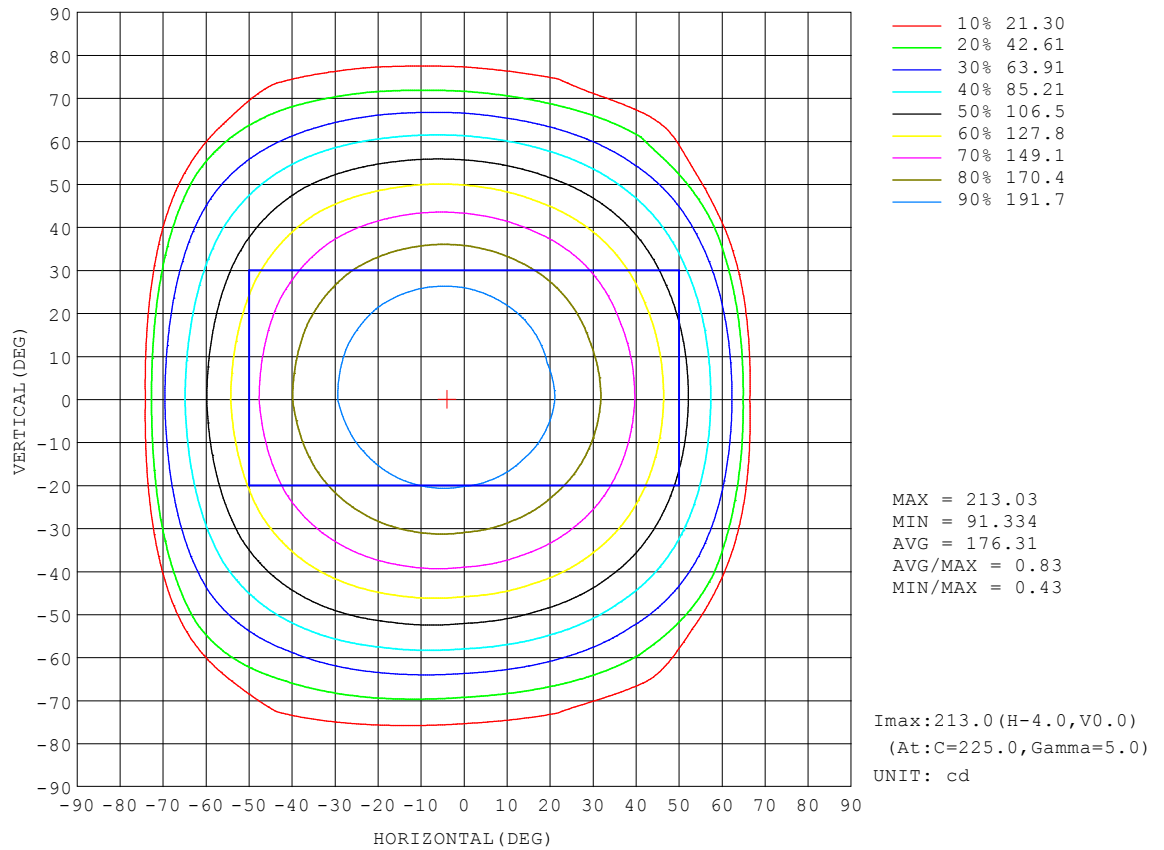


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:8.300m [K=1.0000]
 Remarks:

AAI Figure

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW All-110 110D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:110X110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

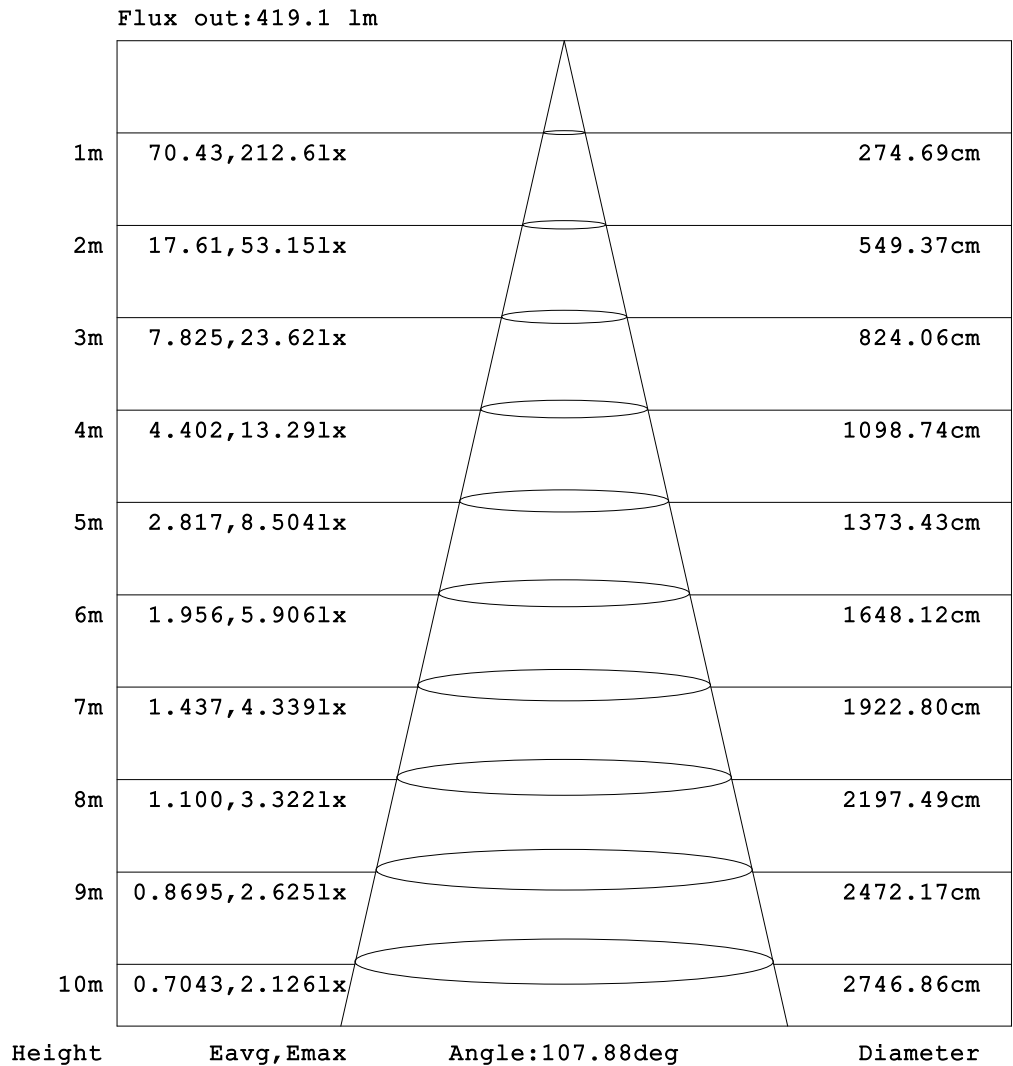


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW All-110 110D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:110X110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

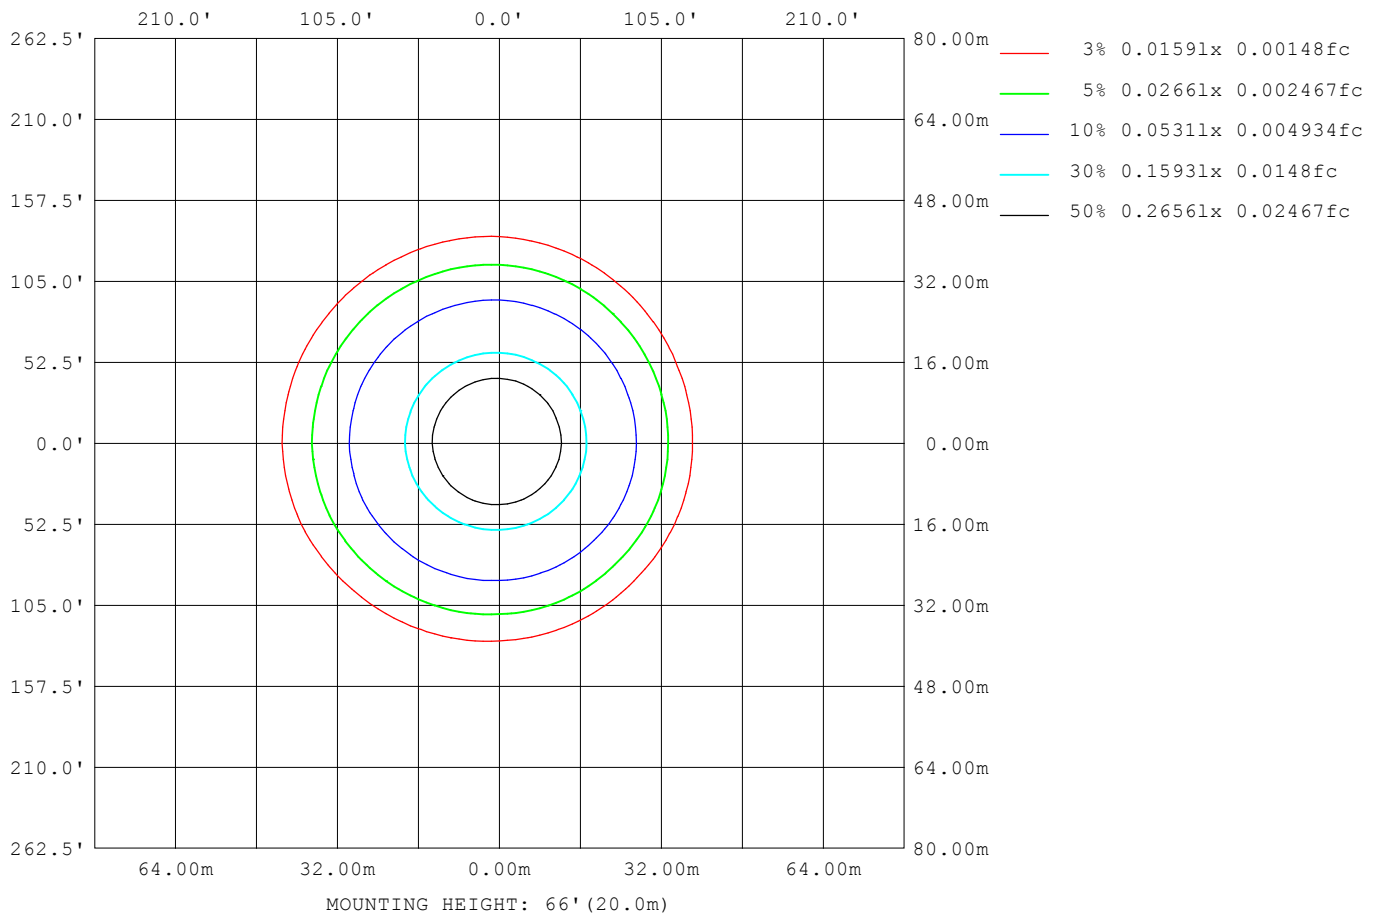

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LED Avg.L Report

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW All-110 110D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:110X110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	7418
L_0~180 (75) av	1300
L_0~180 (85) av	540
L_90~270 (65) av	7650
L_90~270 (75) av	4931
L_90~270 (85) av	1822
L_45 (65) av	7677
L_45 (75) av	3594
L_45 (85) av	483

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

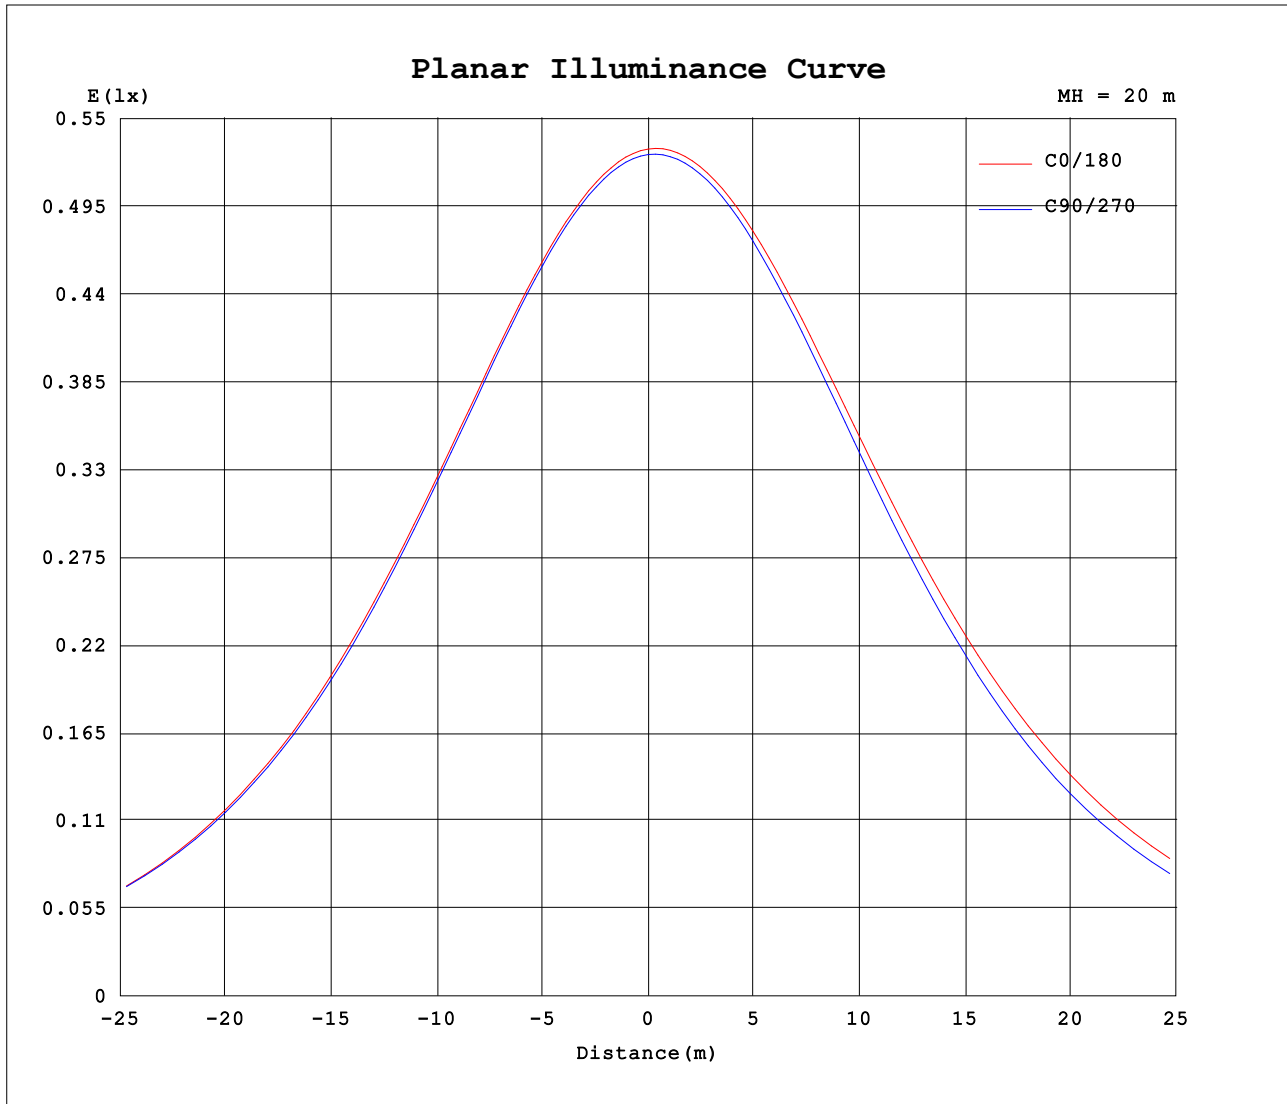

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.402
 Humidity: 65.0%
 Test Distance: 8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW All-110 110D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:110X110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	211	211	211	211	211	211	211	211	211	211	211	211	211	211	211	211			
5	209	209	209	209	209	210	211	211	212	212	212	212	212	211	210	209			
10	205	205	204	205	205	207	208	210	211	211	212	211	210	209	207	206			
15	200	199	198	199	200	202	204	207	208	209	209	208	206	205	203	201			
20	192	191	191	191	192	195	198	202	203	204	204	203	201	199	196	194			
25	184	182	181	182	183	187	191	195	197	198	198	196	194	191	188	185			
30	174	172	171	171	173	177	182	187	190	190	190	187	184	181	178	175			
35	162	160	158	158	160	165	171	177	180	181	179	176	172	169	166	164			
40	147	146	144	144	146	152	159	166	169	170	167	163	159	155	153	149			
45	132	130	129	129	131	137	144	152	156	157	154	148	144	140	137	134			
50	114	113	111	111	114	120	129	137	141	141	138	132	127	123	119	116			
55	94.6	93.5	92.1	93.4	96.2	103	111	120	124	124	120	114	109	104	100	96.4			
60	73.4	73.0	71.9	74.8	77.9	84.1	92.2	101	105	104	101	94.7	90.2	84.8	78.9	75.2			
65	41.2	51.7	51.9	55.3	59.1	64.9	71.3	80.6	84.2	83.2	78.8	74.6	70.2	64.0	57.6	52.9			
70	2.16	6.74	32.2	35.6	39.9	45.9	50.5	58.6	61.6	60.4	56.7	54.0	49.5	42.5	36.6	5.92			
75	1.39	1.31	3.41	19.0	22.4	27.2	31.1	26.6	12.1	23.5	35.8	33.1	28.6	23.3	4.09	1.40			
80	1.18	1.12	1.03	7.11	10.6	12.3	5.38	1.46	1.56	1.58	5.44	15.6	14.0	9.03	1.06	1.20			
85	0.56	0.57	0.63	0.68	2.74	1.70	1.07	1.19	1.32	1.32	1.11	1.49	3.62	0.78	0.56	0.63			
90	0.25	0.27	0.24	0.29	0.29	0.40	0.54	0.61	0.73	0.71	0.57	0.47	0.29	0.39	0.30	0.30			
95	0.32	0.39	0.35	0.41	0.35	0.35	0.24	0.21	0.29	0.24	0.31	0.30	0.39	0.36	0.41	0.37			
100	0.45	0.51	0.48	0.54	0.48	0.47	0.35	0.32	0.39	0.35	0.42	0.42	0.51	0.47	0.54	0.49			
105	0.59	0.66	0.62	0.67	0.62	0.61	0.49	0.46	0.53	0.48	0.55	0.56	0.63	0.60	0.66	0.64			
110	0.73	0.79	0.76	0.81	0.76	0.74	0.62	0.60	0.68	0.62	0.69	0.68	0.76	0.73	0.80	0.77			
115	0.88	0.94	0.89	0.93	0.89	0.88	0.76	0.74	0.82	0.76	0.83	0.81	0.89	0.85	0.93	0.91			
120	1.01	1.07	1.01	1.06	1.02	1.02	0.91	0.88	0.96	0.90	0.96	0.94	1.03	0.98	1.06	1.04			
125	1.14	1.19	1.13	1.18	1.15	1.14	1.04	1.02	1.10	1.04	1.11	1.07	1.16	1.13	1.19	1.17			
130	1.25	1.32	1.26	1.31	1.27	1.26	1.17	1.14	1.23	1.17	1.23	1.21	1.30	1.25	1.32	1.31			
135	1.39	1.45	1.40	1.45	1.40	1.39	1.28	1.27	1.37	1.31	1.37	1.36	1.43	1.38	1.48	1.46			
140	1.53	1.59	1.54	1.58	1.53	1.53	1.43	1.40	1.52	1.46	1.53	1.50	1.58	1.53	1.62	1.59			
145	1.66	1.73	1.66	1.70	1.64	1.66	1.57	1.56	1.67	1.59	1.65	1.61	1.69	1.66	1.74	1.71			
150	1.80	1.86	1.79	1.83	1.76	1.78	1.70	1.70	1.82	1.73	1.78	1.73	1.81	1.77	1.86	1.84			
155	1.93	1.98	1.91	1.94	1.87	1.91	1.83	1.84	1.95	1.86	1.90	1.83	1.91	1.87	1.96	1.94			
160	2.04	2.09	2.01	2.05	1.99	2.02	1.94	1.95	2.09	1.98	2.03	1.96	2.03	1.98	2.07	2.05			
165	2.15	2.17	2.11	2.12	2.07	2.11	2.04	2.07	2.22	2.09	2.13	2.07	2.13	2.09	2.17	2.14			
170	2.23	2.25	2.18	2.21	2.14	2.19	2.13	2.16	2.30	2.19	2.22	2.15	2.20	2.17	2.24	2.21			
175	2.30	2.30	2.25	2.27	2.20	2.26	2.22	2.24	2.34	2.26	2.28	2.21	2.24	2.22	2.29	2.25			
180	2.33	2.33	2.29	2.28	2.24	2.27	2.28	2.29	2.35	2.29	2.30	2.25	2.25	2.25	2.29	2.27			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks: