


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW Blue-110 110D-Rev1	TYPE:RGBW-Blue	WEIGHT:
SPEC.:110X110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 14.11 lm/W			
MODEL		Imax(cd)	18.18	S/MH(C0/180)	1.33
NOMINAL POWER(W)	12	LOR(%)	60.3	S/MH(C90/270)	1.13
RATED VOLTAGE(V)	48	TOTAL FLUX(lm)	48.288	η UP,DN(C0-180)	0.2,32.9
NOMINAL FLUX(lm)	1.33502	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.3,26.9
LAMPS INSIDE	60	η up(%)	0.5	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	η down(%)	59.8	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

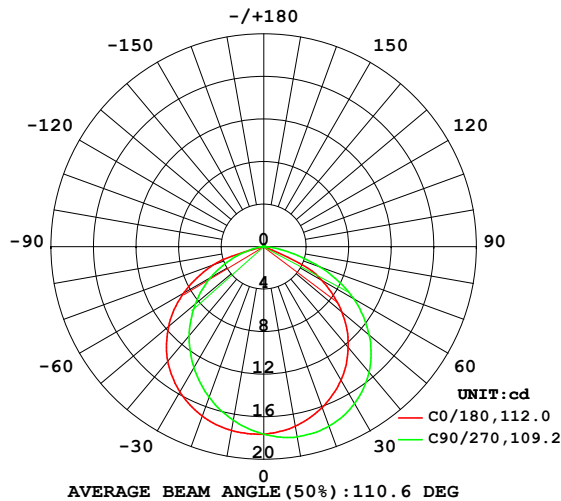

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

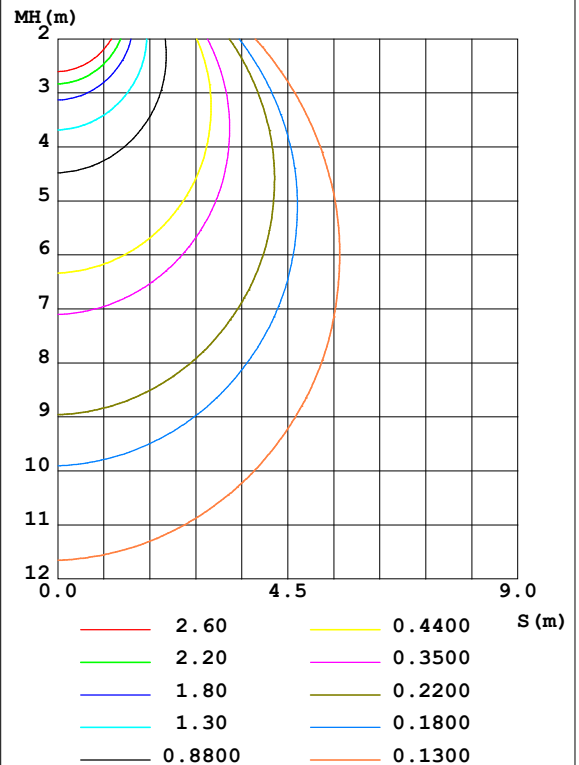

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	17.13	17.74	18.16	18.10	17.55	16.97	16.57	16.64	0- 10	1.670	1.670	3.46,2.08
20	16.09	17.25	17.95	17.89	16.95	15.82	15.06	15.18	10- 20	4.800	6.470	13.4,8.08
30	14.53	16.07	17.06	17.01	15.78	14.19	13.15	13.29	20- 30	7.321	13.79	28.6,17.2
40	12.35	14.21	15.40	15.41	14.06	12.13	10.93	11.05	30- 40	8.895	22.69	47,28.3
50	9.602	11.53	12.94	13.08	11.68	9.760	8.428	8.418	40- 50	9.246	31.93	66.1,39.9
60	6.275	7.993	9.741	9.914	8.659	6.926	5.733	5.406	50- 60	8.202	40.13	83.1,50.1
70	0.2144	3.969	5.640	5.883	5.058	3.773	2.894	2.404	60- 70	5.628	45.76	94.8,57.1
80	0.0917	0.0920	1.648	0.5457	0.0915	0.4078	0.6906	0.0532	70- 80	1.957	47.72	98.8,59.6
90	0.0048	0	0.0098	0.0388	0.0144	0.0145	0.0242	0.0194	80- 90	0.1693	47.89	99.2,59.8
100	0.0048	0	0	0	0.0241	0.0339	0.0485	0.0483	90-100	0.0150	47.90	99.2,59.8
110	0.0192	0.0049	0	0	0.0482	0.0676	0.0727	0.0725	100-110	0.0256	47.93	99.3,59.8
120	0.0337	0.0193	0.0193	0.0144	0.0723	0.0871	0.1055	0.0967	110-120	0.0441	47.97	99.3,59.9
130	0.0578	0.0435	0.0387	0.0338	0.1012	0.1210	0.1293	0.1202	120-130	0.0605	48.03	99.5,60
140	0.0820	0.0725	0.0580	0.0580	0.1205	0.1355	0.1403	0.1416	130-140	0.0712	48.10	99.6,60.1
150	0.1065	0.1063	0.0871	0.0774	0.1467	0.1499	0.1403	0.1412	140-150	0.0714	48.18	99.8,60.1
160	0.1252	0.1147	0.1083	0.1138	0.1555	0.1499	0.1403	0.1408	150-160	0.0596	48.24	99.9,60.2
170	0.1405	0.1299	0.1257	0.1245	0.1548	0.1499	0.1403	0.1404	160-170	0.0389	48.27	100,60.3
180	0.1494	0.1451	0.1354	0.1402	0.1543	0.1499	0.1403	0.1402	170-180	0.0136	48.29	100,60.3
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW Blue-110 110D-Rev1	TYPE:RGBW-Blue	WEIGHT:
SPEC.:110X110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

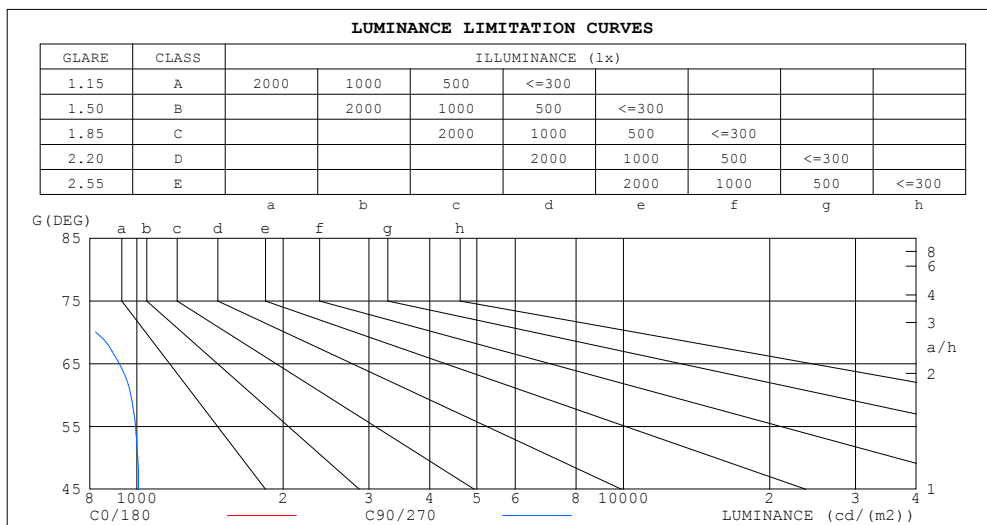


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.402
 Humidity: 65.0%
 Test Distance: 8.300m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW Blue-110 110D-Rev1	TYPE:RGBW-Blue	WEIGHT:
SPEC.:110X110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	.72	.72	.72	.70	.70	.70	.67	.67	.67	.64	.64	.64	.61	.61	.61	.60
1.0	.63	.61	.59	.62	.60	.58	.59	.58	.56	.57	.56	.54	.55	.54	.53	.51
2.0	.56	.52	.49	.55	.51	.48	.52	.49	.47	.50	.48	.46	.48	.46	.45	.43
3.0	.49	.44	.41	.48	.44	.40	.46	.43	.40	.45	.41	.39	.43	.40	.38	.37
4.0	.44	.38	.35	.43	.38	.34	.41	.37	.34	.40	.36	.33	.38	.35	.33	.31
5.0	.39	.34	.30	.38	.33	.30	.37	.33	.29	.36	.32	.29	.35	.31	.29	.27
6.0	.35	.30	.26	.34	.29	.26	.33	.29	.26	.32	.28	.25	.31	.28	.25	.24
7.0	.32	.27	.23	.31	.26	.23	.30	.26	.23	.29	.25	.22	.29	.25	.22	.21
8.0	.29	.24	.20	.29	.24	.20	.28	.23	.20	.27	.23	.20	.26	.23	.20	.19
9.0	.27	.22	.18	.26	.22	.18	.25	.21	.18	.25	.21	.18	.24	.21	.18	.17
10.0	.25	.20	.17	.24	.20	.17	.24	.19	.17	.23	.19	.16	.22	.19	.16	.15

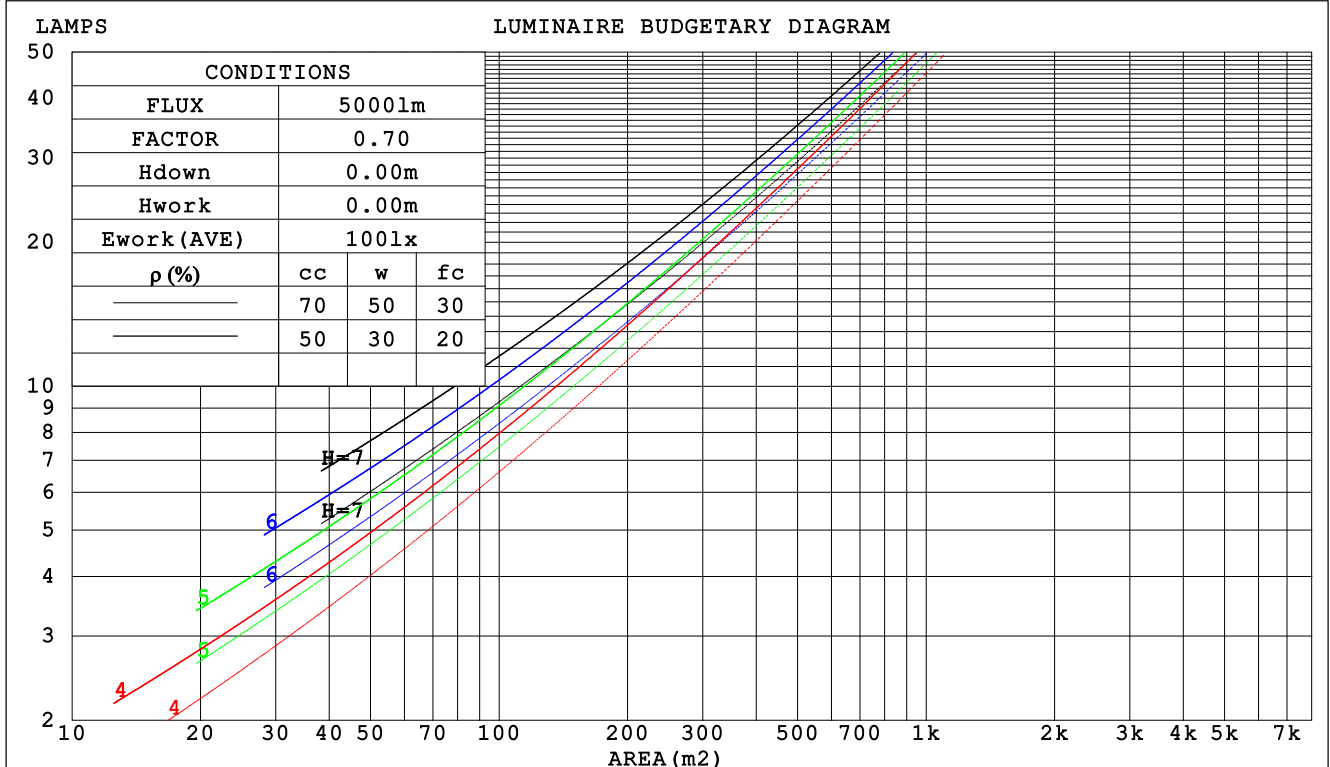

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

WEC AND CCEC

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW Blue-110 110D-Rev1	TYPE:RGBW-Blue	WEIGHT:
SPEC.:110X110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

pcc	80%	70%	50%	30%	10%	0
pw	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
pfc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.168 .095 .030	.163 .093 .030	.155 .089 .028	.148 .085 .027	.141 .082 .026	
2.0	.163 .089 .027	.159 .088 .027	.152 .085 .026	.146 .082 .026	.139 .079 .025	
3.0	.154 .082 .025	.150 .081 .024	.144 .078 .024	.138 .076 .023	.133 .073 .023	
4.0	.144 .075 .022	.141 .074 .022	.135 .072 .021	.130 .070 .021	.125 .068 .021	
5.0	.134 .068 .020	.131 .067 .020	.126 .066 .019	.122 .064 .019	.117 .063 .019	
6.0	.125 .063 .018	.123 .062 .018	.118 .061 .018	.114 .059 .017	.110 .058 .017	
7.0	.117 .058 .016	.115 .057 .016	.111 .056 .016	.107 .055 .016	.103 .054 .016	
8.0	.110 .054 .015	.108 .053 .015	.104 .052 .015	.101 .051 .015	.097 .050 .015	
9.0	.103 .050 .014	.101 .049 .014	.098 .048 .014	.095 .048 .014	.092 .047 .014	
10.0	.097 .047 .013	.096 .046 .013	.093 .045 .013	.090 .045 .013	.087 .044 .013	

pcc	80%	70%	50%	30%	10%	0
pw	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
pfc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.119 .119 .119	.101 .101 .101	.069 .069 .069	.040 .040 .040	.013 .013 .013	
1.0	.111 .098 .086	.095 .084 .074	.065 .058 .051	.037 .034 .030	.012 .011 .010	
2.0	.106 .083 .064	.091 .072 .056	.062 .050 .039	.036 .029 .023	.012 .009 .007	
3.0	.101 .073 .050	.087 .063 .043	.060 .044 .030	.034 .025 .018	.011 .008 .006	
4.0	.097 .065 .040	.083 .056 .035	.057 .039 .024	.033 .023 .014	.011 .007 .005	
5.0	.093 .058 .033	.080 .050 .029	.055 .035 .020	.032 .021 .012	.010 .007 .004	
6.0	.088 .053 .028	.076 .046 .024	.052 .032 .017	.030 .019 .010	.010 .006 .003	
7.0	.084 .049 .024	.073 .043 .021	.050 .030 .015	.029 .018 .009	.009 .006 .003	
8.0	.081 .046 .022	.070 .040 .019	.048 .028 .013	.028 .016 .008	.009 .005 .003	
9.0	.077 .043 .019	.066 .037 .017	.046 .026 .012	.027 .015 .007	.009 .005 .002	
10.0	.074 .040 .018	.064 .035 .015	.044 .025 .011	.026 .014 .007	.008 .005 .002	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW Blue-110 110D-Rev1						TYPE:RGBW-Blue					WEIGHT:				
SPEC.:110X110 DEG						DIM.:1000mm					SERIAL No.:				
MFR.: EVERFINE						SUR.:					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3					
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3					
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2					
Room dimensions						Viewed crosswise					Viewed endwise				
x = 2H y = 2H						20.6	22.0	20.9	22.3	22.5	22.1	23.6	22.4	23.8	24.0
3H						20.8	22.1	21.1	22.4	22.6	23.5	24.9	23.8	25.1	25.4
4H						20.7	21.9	21.0	22.2	22.5	23.9	25.2	24.3	25.5	25.7
6H						20.5	21.7	20.9	22.0	22.3	24.1	25.3	24.5	25.6	25.9
8H						20.5	21.6	20.8	21.9	22.2	24.1	25.3	24.5	25.6	25.9
12H						20.4	21.6	20.8	21.9	22.2	24.1	25.2	24.5	25.5	25.8
4H 2H						21.3	22.5	21.6	22.8	23.1	22.5	23.8	22.8	24.0	24.3
3H						21.5	22.6	21.8	22.9	23.2	24.0	25.1	24.4	25.4	25.7
4H						21.4	22.4	21.8	22.7	23.1	24.5	25.5	24.8	25.8	26.1
6H						21.3	22.2	21.7	22.5	22.9	24.7	25.6	25.1	26.0	26.3
8H						21.2	22.1	21.7	22.4	22.8	24.7	25.6	25.2	25.9	26.3
12H						21.2	21.9	21.6	22.3	22.8	24.7	25.5	25.2	25.9	26.3
8H 4H						21.4	22.2	21.9	22.6	23.0	24.4	25.2	24.8	25.6	26.0
6H						21.3	22.0	21.8	22.4	22.9	24.7	25.3	25.1	25.8	26.2
8H						21.3	21.9	21.8	22.3	22.8	24.7	25.3	25.2	25.7	26.2
12H						21.3	21.8	21.8	22.2	22.7	24.7	25.2	25.2	25.7	26.1
12H 4H						21.4	22.2	21.8	22.6	23.0	24.3	25.1	24.8	25.5	25.9
6H						21.3	21.9	21.8	22.4	22.8	24.6	25.2	25.1	25.7	26.1
8H						21.3	21.8	21.8	22.3	22.7	24.7	25.2	25.1	25.6	26.1
Variations with the observer position at spacings:															
S = 1.0H						+ 0.6 / - 0.9					+ 0.2 / - 0.2				
1.5H						+ 0.7 / - 1.2					+ 0.2 / - 0.3				
2.0H						+ 0.4 / - 0.9					+ 0.4 / - 0.6				

CIE Pub.117, 80.10 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -8.8)


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW Blue-110 110D-Rev1	TYPE:RGBW-Blue	WEIGHT:
SPEC.:110X110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

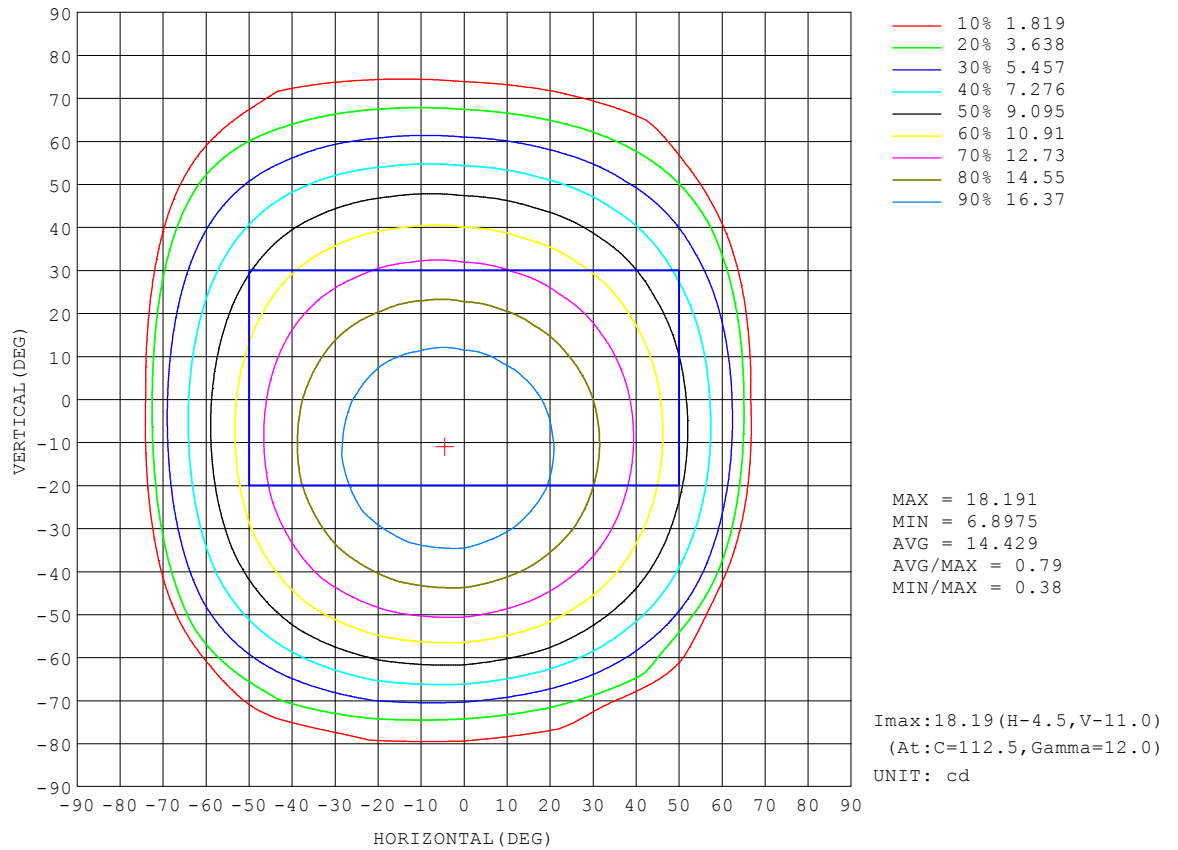


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:8.300m [K=1.0000]
 Remarks:

AAI Figure

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW Blue-110 110D-Rev1	TYPE:RGBW-Blue	WEIGHT:
SPEC.:110X110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

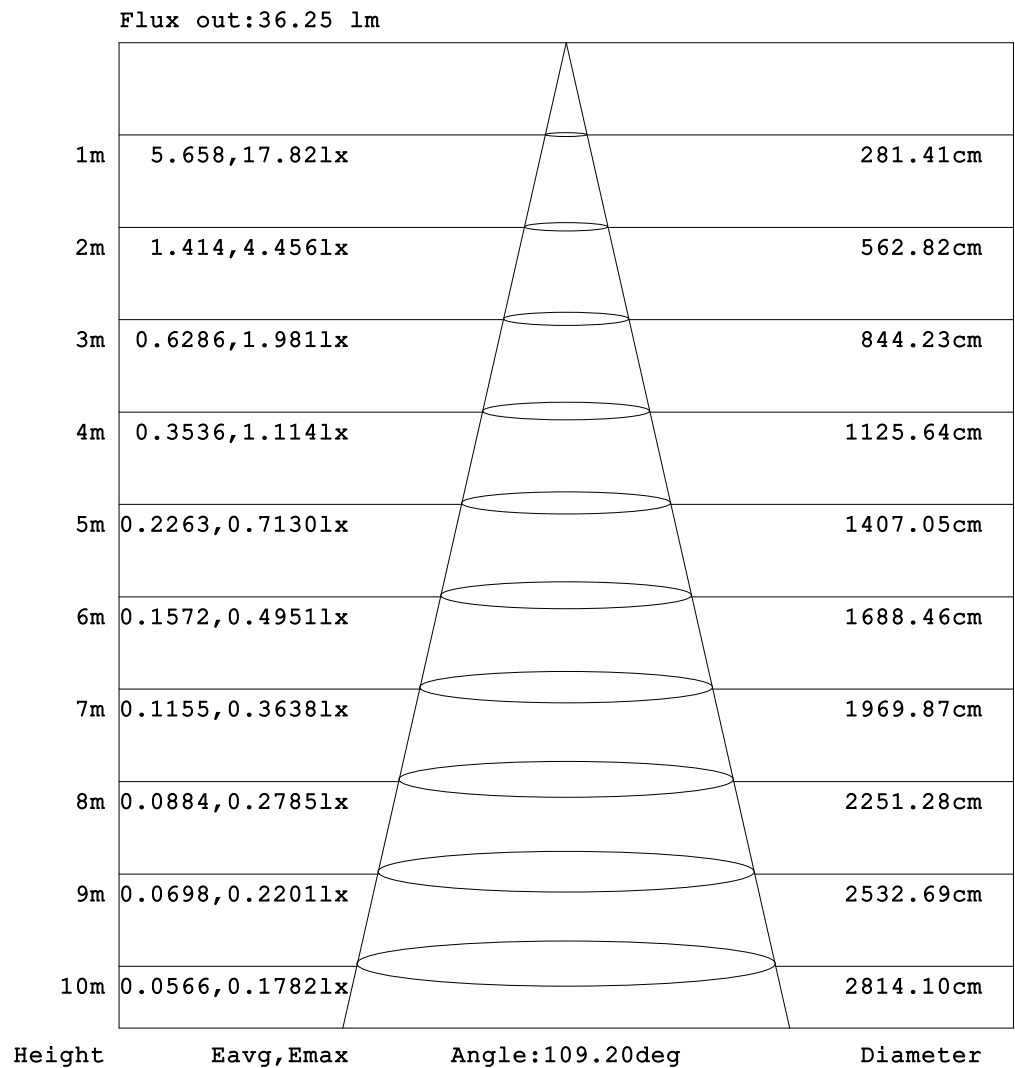


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW Blue-110 110D-Rev1	TYPE:RGBW-Blue	WEIGHT:
SPEC.:110X110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

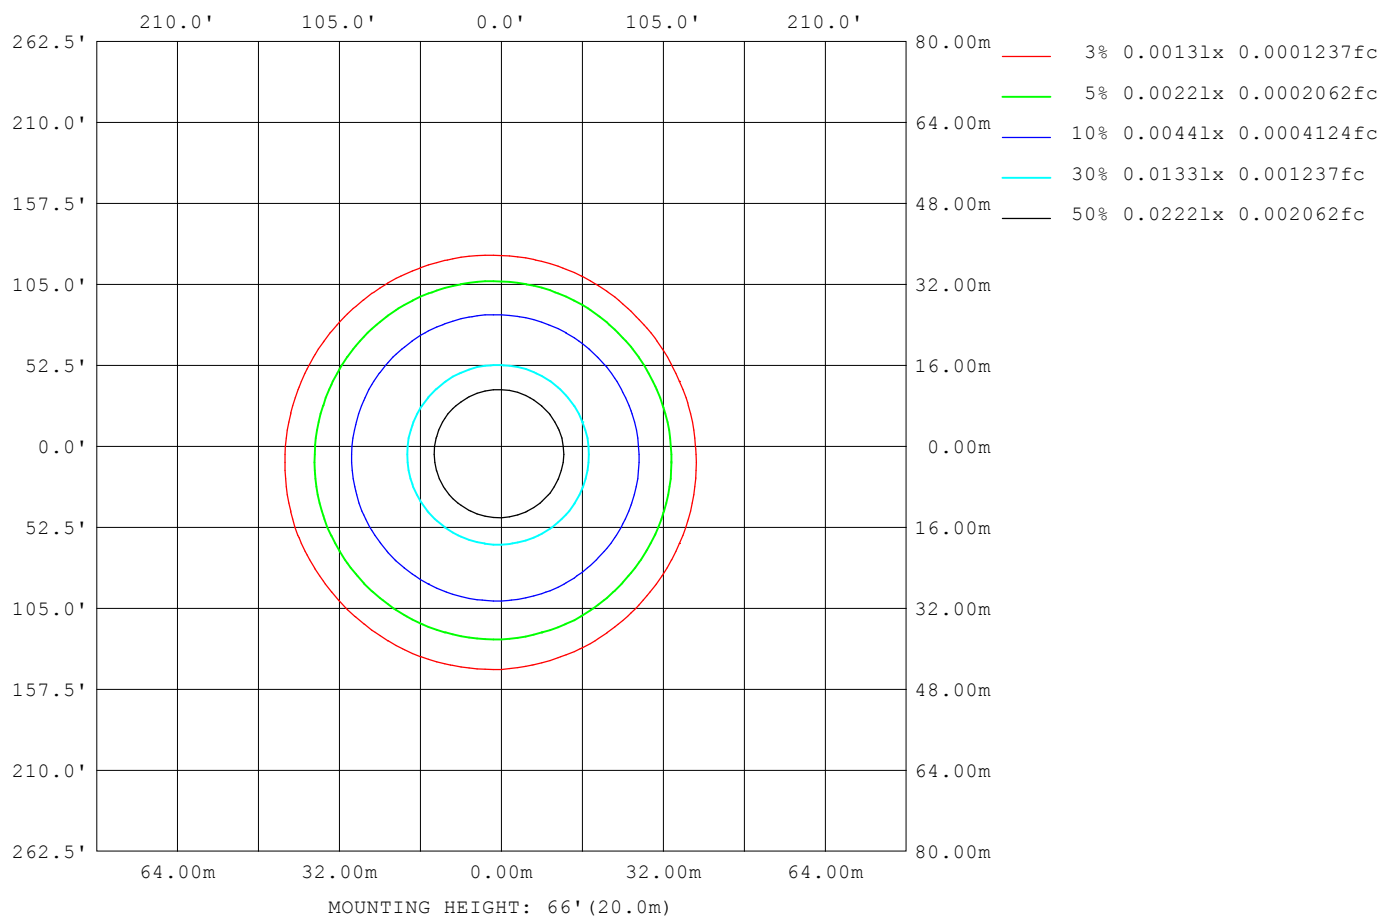

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

LED Avg.L Report

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW Blue-110 110D-Rev1	TYPE:RGBW-Blue	WEIGHT:
SPEC.:110X110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	626
L_0~180 (75) av	114
L_0~180 (85) av	32
L_90~270 (65) av	716
L_90~270 (75) av	473
L_90~270 (85) av	166
L_45 (65) av	686
L_45 (75) av	329
L_45 (85) av	32

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

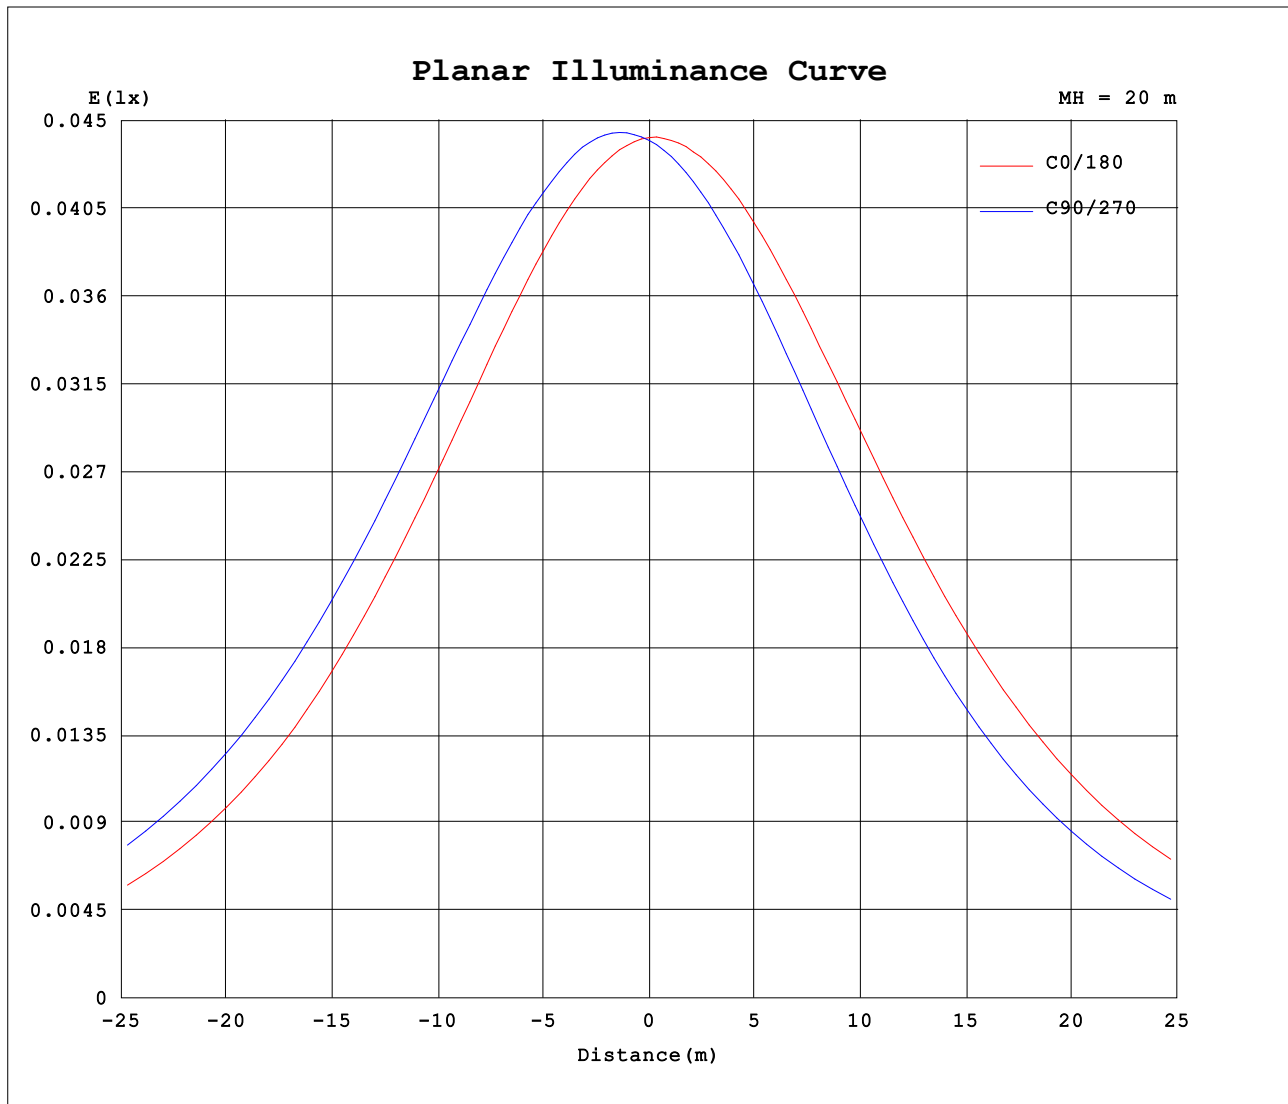

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.402
 Humidity: 65.0%
 Test Distance: 8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW Blue-110 110D-Rev1	TYPE:RGBW-Blue	WEIGHT:
SPEC.:110X110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	17.6	17.6	17.6	17.6	17.6	17.6	17.6	17.6	17.6	17.6	17.6	17.6	17.6	17.6	17.6	17.6			
5	17.4	17.6	17.8	17.9	18.0	18.0	17.9	17.8	17.6	17.5	17.3	17.2	17.2	17.2	17.2	17.3			
10	17.1	17.4	17.7	17.9	18.2	18.2	18.1	17.9	17.6	17.3	17.0	16.7	16.6	16.5	16.6	16.8			
15	16.7	17.1	17.6	17.8	18.1	18.1	18.1	17.7	17.3	16.9	16.4	16.1	15.9	15.8	16.0	16.3			
20	16.1	16.7	17.2	17.6	18.0	17.9	17.9	17.5	16.9	16.4	15.8	15.3	15.1	15.0	15.2	15.5			
25	15.4	16.1	16.7	17.2	17.6	17.6	17.5	17.1	16.4	15.8	15.1	14.5	14.1	14.1	14.3	14.7			
30	14.5	15.3	16.1	16.6	17.1	17.1	17.0	16.5	15.8	15.0	14.2	13.5	13.1	13.1	13.3	13.8			
35	13.5	14.4	15.2	15.8	16.3	16.4	16.3	15.8	15.0	14.1	13.2	12.5	12.1	11.9	12.2	12.7			
40	12.3	13.3	14.2	14.9	15.4	15.5	15.4	14.9	14.1	13.1	12.1	11.4	10.9	10.8	11.0	11.5			
45	11.1	12.0	13.0	13.7	14.3	14.4	14.3	13.8	13.0	12.0	11.0	10.2	9.70	9.55	9.78	10.2			
50	9.60	10.5	11.5	12.3	12.9	13.1	13.1	12.5	11.7	10.7	9.76	8.92	8.43	8.26	8.42	8.81			
55	8.00	8.90	9.90	10.8	11.4	11.6	11.6	11.1	10.3	9.33	8.40	7.59	7.10	6.89	6.95	7.27			
60	6.28	7.07	7.99	9.06	9.74	9.97	9.91	9.47	8.66	7.77	6.93	6.21	5.73	5.49	5.41	5.65			
65	3.67	5.16	6.02	7.04	7.80	8.10	7.95	7.64	6.90	6.14	5.35	4.76	4.31	4.05	3.89	3.94			
70	0.21	0.71	3.97	4.85	5.64	6.05	5.88	5.66	5.06	4.42	3.77	3.33	2.89	2.58	2.40	0.56			
75	0.12	0.08	0.38	2.71	3.33	3.79	3.80	2.55	1.06	1.75	2.30	1.92	1.56	1.33	0.34	0.11			
80	0.09	0.05	0.09	1.08	1.65	1.82	0.55	0.11	0.09	0.14	0.41	0.86	0.69	0.50	0.05	0.09			
85	0.03	0.00	0.05	0.01	0.41	0.16	0.10	0.07	0.08	0.10	0.05	0.12	0.17	0.06	0.02	0.05			
90	0.00	0.00	0.00	0.00	0.01	0.00	0.04	0.01	0.01	0.06	0.01	0.04	0.02	0.02	0.02	0.00			
95	0.00	0.02	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.04	0.02	0.03	0.00			
100	0.00	0.02	0.00	0.02	0.00	0.01	0.00	0.00	0.02	0.01	0.03	0.02	0.05	0.02	0.05	0.00			
105	0.00	0.03	0.00	0.03	0.00	0.02	0.00	0.01	0.03	0.01	0.05	0.02	0.06	0.02	0.05	0.01			
110	0.02	0.04	0.00	0.04	0.00	0.03	0.00	0.03	0.05	0.01	0.07	0.03	0.07	0.04	0.07	0.03			
115	0.02	0.06	0.01	0.05	0.01	0.04	0.00	0.03	0.06	0.02	0.08	0.05	0.09	0.05	0.09	0.04			
120	0.03	0.07	0.02	0.06	0.02	0.05	0.01	0.06	0.07	0.04	0.09	0.06	0.11	0.06	0.10	0.05			
125	0.04	0.08	0.03	0.07	0.03	0.06	0.02	0.06	0.08	0.05	0.10	0.07	0.12	0.07	0.11	0.06			
130	0.06	0.09	0.04	0.08	0.04	0.07	0.03	0.07	0.10	0.06	0.12	0.08	0.13	0.09	0.12	0.07			
135	0.07	0.11	0.05	0.09	0.05	0.09	0.05	0.09	0.10	0.07	0.13	0.11	0.14	0.11	0.13	0.09			
140	0.08	0.12	0.07	0.11	0.06	0.10	0.06	0.11	0.12	0.10	0.14	0.12	0.14	0.13	0.14	0.11			
145	0.10	0.13	0.08	0.12	0.07	0.11	0.07	0.11	0.13	0.11	0.15	0.12	0.14	0.13	0.14	0.11			
150	0.11	0.14	0.11	0.12	0.09	0.12	0.08	0.12	0.15	0.11	0.15	0.12	0.14	0.13	0.14	0.12			
155	0.12	0.15	0.11	0.14	0.10	0.13	0.11	0.13	0.16	0.12	0.15	0.14	0.14	0.13	0.14	0.12			
160	0.13	0.15	0.11	0.14	0.11	0.14	0.11	0.14	0.16	0.13	0.15	0.14	0.14	0.14	0.14	0.13			
165	0.13	0.15	0.12	0.14	0.11	0.14	0.12	0.14	0.16	0.14	0.15	0.14	0.14	0.14	0.14	0.14			
170	0.14	0.15	0.13	0.14	0.13	0.14	0.12	0.14	0.15	0.14	0.15	0.14	0.14	0.14	0.14	0.14			
175	0.14	0.15	0.14	0.14	0.13	0.14	0.13	0.14	0.15	0.15	0.15	0.14	0.14	0.14	0.14	0.14			
180	0.15	0.15	0.15	0.14	0.14	0.14	0.14	0.14	0.15	0.15	0.15	0.14	0.14	0.14	0.14	0.14			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks: