


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: LumiPixel Slim-Clear Cover-1000mm-RGBW GREEN-110 110D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 110X110 DEG	DIM.: 1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 33379.58 lm/W			
MODEL		Imax (cd)	30.12	S/MH (C0/180)	1.33
NOMINAL POWER (W)	12	LOR (%)	109.3	S/MH (C90/270)	0.00
RATED VOLTAGE (V)	48	TOTAL FLUX (lm)	80.101	η UP, DN (C0-180)	0.7, 45.4
NOMINAL FLUX (lm)	1.22116	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.6, 62.6
LAMPS INSIDE	60	η up (%)	1.3	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	24	η down (%)	108.0	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

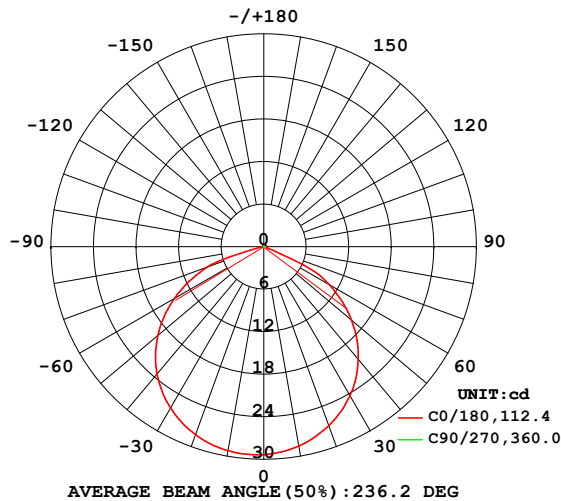

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

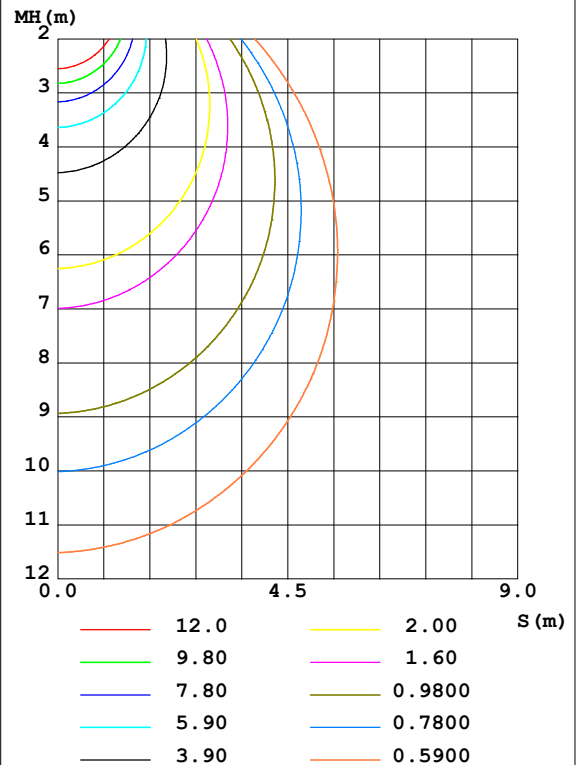

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity: 65.0%
Test Distance: 8.300m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	28.55	27.73	0	0	29.22	30.12	0	0	0- 10	2.780	2.780	3.47,3.79
20	26.86	25.32	0	0	28.22	29.68	0	0	10- 20	7.999	10.78	13.5,14.7
30	24.30	22.17	0	0	26.29	28.26	0	0	20- 30	12.22	23.00	28.7,31.4
40	20.74	18.46	0	0	23.44	25.68	0	0	30- 40	14.88	37.88	47.3,51.7
50	16.14	14.14	0	0	19.52	21.81	0	0	40- 50	15.51	53.39	66.6,72.9
60	10.59	9.162	0	0	14.49	16.60	0	0	50- 60	13.77	67.16	83.8,91.7
70	0.3465	4.141	0	0	8.503	9.853	0	0	60- 70	9.196	76.35	95.3,104
80	0.1704	0.1486	0	0	0.2245	0.8666	0	0	70- 80	2.652	79.01	98.6,108
90	0.0217	0.0344	0	0	0.0939	0.0757	0	0	80- 90	0.1471	79.15	98.8,108
100	0.0506	0.0651	0	0	0.0580	0.0580	0	0	90-100	0.0490	79.20	98.9,108
110	0.0905	0.1086	0	0	0.0996	0.0942	0	0	100-110	0.0815	79.28	99,108
120	0.1304	0.1538	0	0	0.1449	0.1359	0	0	110-120	0.1180	79.40	99.1,108
130	0.1684	0.1937	0	0	0.1830	0.1739	0	0	120-130	0.1430	79.54	99.3,109
140	0.2154	0.2389	0	0	0.2246	0.2156	0	0	130-140	0.1546	79.70	99.5,109
150	0.2589	0.2753	0	0	0.2681	0.2573	0	0	140-150	0.1532	79.85	99.7,109
160	0.2934	0.3042	0	0	0.3025	0.2898	0	0	150-160	0.1302	79.98	99.9,109
170	0.3151	0.3187	0	0	0.3278	0.3188	0	0	160-170	0.0875	80.07	100,109
180	0.3296	0.3296	0	0	0.3350	0.3314	0	0	170-180	0.0310	80.10	100,109
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: LumiPixel Slim-Clear Cover-1000mm-RGBW GREEN-110 110D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 110X110 DEG	DIM.: 1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

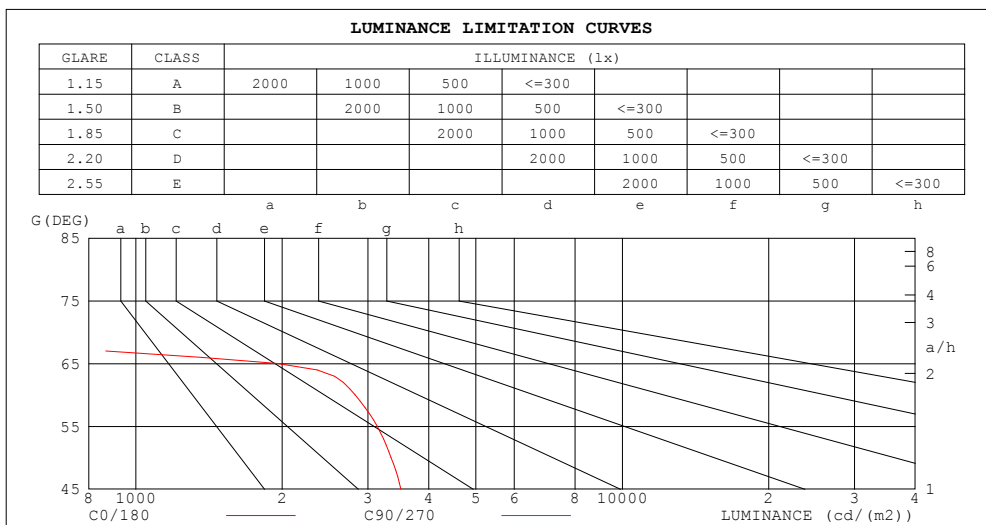

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	125	0
80	131	0
75	107	0
70	135	0
65	1953	0
60	2824	0
55	3137	0
50	3348	0
45	3506	0


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.402
 Humidity: 65.0%
 Test Distance: 8.300m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LumiPixel Slim-Clear Cover-1090mm-RGBW GREEN-110 110D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 110X110 DEG	DIM.: 1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.30	1.30	1.30	1.27	1.27	1.27	1.21	1.21	1.21	1.15	1.15	1.15	1.10	1.10	1.10	1.08
1.0	1.15	1.11	1.07	1.13	1.09	1.06	1.08	1.05	1.02	1.04	1.01	.99	.99	.97	.96	.93
2.0	1.01	.95	.89	.99	.93	.88	.95	.90	.85	.92	.87	.83	.88	.84	.81	.79
3.0	.89	.81	.74	.88	.80	.74	.84	.78	.72	.81	.75	.71	.78	.73	.69	.67
4.0	.79	.70	.63	.78	.69	.63	.75	.68	.62	.72	.66	.61	.70	.64	.60	.57
5.0	.71	.61	.54	.70	.61	.54	.67	.59	.53	.65	.58	.53	.63	.57	.52	.50
6.0	.64	.54	.48	.63	.54	.47	.61	.53	.47	.59	.52	.46	.57	.51	.46	.44
7.0	.58	.49	.42	.57	.48	.42	.55	.47	.41	.53	.46	.41	.52	.46	.41	.38
8.0	.53	.44	.37	.52	.43	.37	.50	.43	.37	.49	.42	.37	.48	.41	.36	.34
9.0	.48	.40	.34	.48	.39	.33	.46	.39	.33	.45	.38	.33	.44	.37	.33	.31
10.0	.45	.36	.30	.44	.36	.30	.43	.35	.30	.42	.35	.30	.41	.34	.30	.28

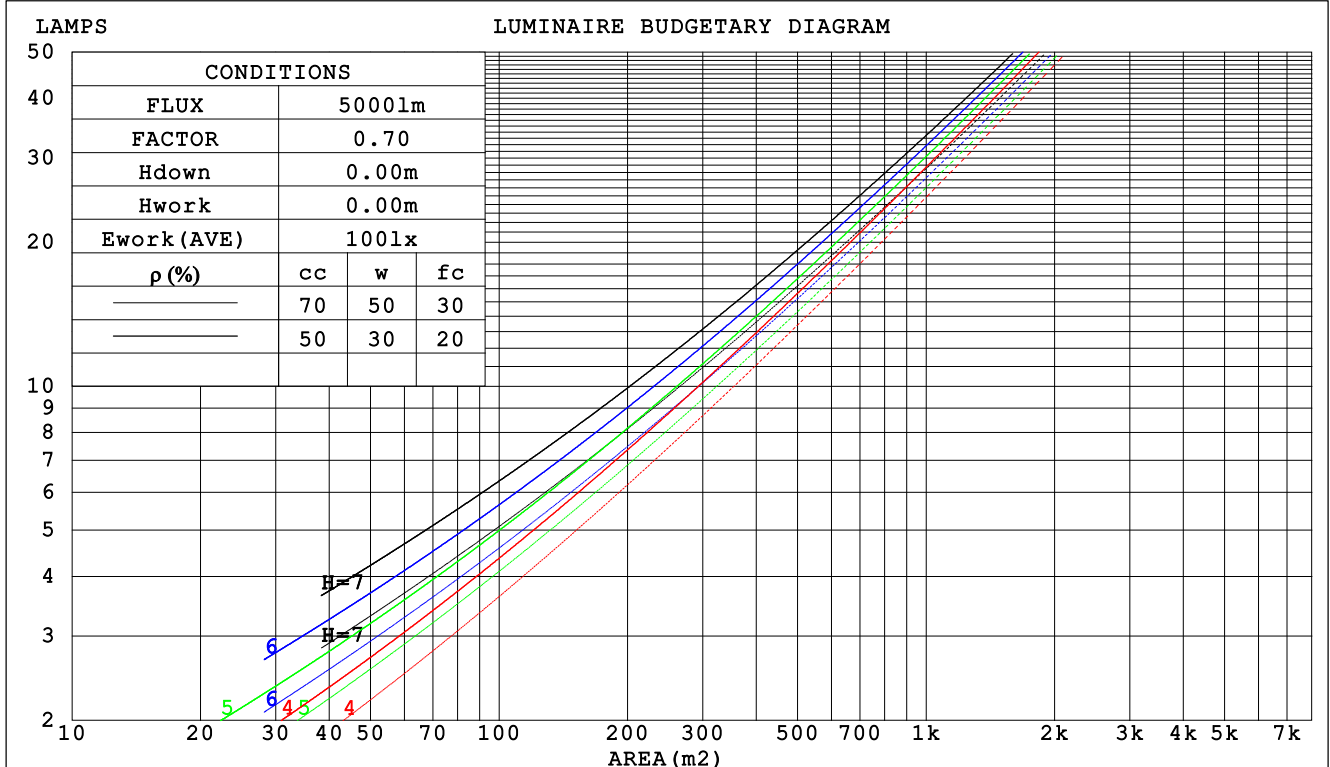

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity: 65.0%
Test Distance: 8.300m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: LumiPixel Slim-Clear Cover-1000mm-RGBW GREEN-110 110D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 110X110 DEG	DIM.: 1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.298	.170	.054	.290	.166	.053	.275	.158	.050	.261	.151	.048	.249	.144	.046	
2.0	.292	.160	.049	.285	.157	.048	.271	.151	.047	.259	.145	.045	.248	.140	.044	
3.0	.276	.147	.044	.270	.144	.043	.258	.140	.042	.247	.135	.042	.237	.131	.041	
4.0	.258	.134	.039	.253	.132	.039	.243	.129	.038	.233	.125	.038	.224	.122	.037	
5.0	.241	.123	.036	.237	.121	.035	.227	.118	.035	.219	.115	.034	.210	.112	.034	
6.0	.226	.113	.032	.221	.112	.032	.213	.109	.032	.205	.107	.031	.198	.104	.031	
7.0	.211	.104	.030	.207	.103	.029	.200	.101	.029	.193	.099	.029	.186	.097	.028	
8.0	.198	.097	.027	.195	.096	.027	.188	.094	.027	.181	.092	.027	.176	.090	.026	
9.0	.186	.090	.025	.183	.089	.025	.177	.087	.025	.171	.086	.025	.166	.084	.024	
10.0	.176	.084	.023	.173	.083	.023	.167	.082	.023	.162	.080	.023	.157	.079	.023	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.218	.218	.218	.186	.186	.186	.127	.127	.127	.073	.073	.073	.023	.023	.023	
1.0	.204	.181	.160	.175	.155	.138	.120	.107	.095	.069	.062	.055	.022	.020	.018	
2.0	.195	.154	.120	.167	.133	.104	.114	.092	.073	.066	.053	.043	.021	.017	.014	
3.0	.186	.135	.094	.160	.116	.082	.110	.081	.057	.063	.047	.034	.020	.015	.011	
4.0	.178	.120	.076	.153	.104	.066	.105	.072	.046	.061	.042	.027	.020	.014	.009	
5.0	.170	.109	.063	.146	.094	.055	.101	.066	.039	.058	.039	.023	.019	.013	.008	
6.0	.163	.100	.054	.140	.086	.047	.097	.060	.033	.056	.036	.020	.018	.012	.007	
7.0	.156	.092	.047	.134	.080	.041	.093	.056	.029	.054	.033	.017	.017	.011	.006	
8.0	.149	.086	.042	.128	.074	.037	.089	.052	.026	.052	.031	.016	.017	.010	.005	
9.0	.143	.080	.038	.123	.070	.033	.085	.049	.024	.050	.029	.014	.016	.010	.005	
10.0	.137	.076	.035	.118	.066	.031	.082	.046	.022	.048	.027	.013	.015	.009	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity: 65.0%
Test Distance: 8.300m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW GREEN-110 110D-Rev1					TYPE:RGBW-GREEN					WEIGHT:				
SPEC.:110X110 DEG					DIM.:1000mm					SERIAL No.:				
MFR.: EVERFINE					SUR.:					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions					Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	28.5	29.9	28.8	30.1	30.4	19.9	21.4	20.2	21.6	21.8			
	3H	28.7	30.0	29.0	30.3	30.5	19.7	21.0	20.0	21.3	21.5			
	4H	28.6	29.8	28.9	30.1	30.4	19.6	20.9	19.9	21.1	21.4			
	6H	28.5	29.6	28.8	29.9	30.2	19.5	20.7	19.8	21.0	21.3			
	8H	28.4	29.5	28.8	29.8	30.2	19.4	20.6	19.8	20.9	21.2			
	12H	28.4	29.4	28.7	29.8	30.1	19.4	20.5	19.8	20.8	21.1			
	4H	2H	28.6	29.9	29.0	30.2	30.5	23.2	24.5	23.5	24.7	25.0		
	3H	28.9	30.0	29.3	30.3	30.6	23.2	24.3	23.6	24.6	24.9			
	4H	28.8	29.8	29.2	30.1	30.5	23.1	24.1	23.5	24.4	24.8			
	6H	28.7	29.6	29.1	29.9	30.3	23.0	23.9	23.4	24.3	24.6			
	8H	28.7	29.5	29.1	29.9	30.3	23.0	23.8	23.4	24.2	24.6			
	12H	28.6	29.4	29.1	29.8	30.2	22.9	23.7	23.4	24.1	24.5			
8H	4H	28.7	29.5	29.1	29.9	30.3	23.2	24.0	23.6	24.4	24.8			
	6H	28.6	29.3	29.1	29.7	30.1	23.1	23.8	23.6	24.2	24.6			
	8H	28.6	29.1	29.0	29.6	30.1	23.1	23.6	23.5	24.1	24.6			
	12H	28.5	29.0	29.0	29.5	30.0	23.0	23.5	23.5	24.0	24.5			
	4H	28.6	29.4	29.1	29.8	30.2	23.2	23.9	23.6	24.3	24.7			
	6H	28.6	29.1	29.0	29.6	30.1	23.1	23.7	23.5	24.1	24.6			
	8H	28.5	29.0	29.0	29.5	30.0	23.0	23.5	23.5	24.0	24.5			
Variations with the observer position at spacings:														
S = 1.0H		+ 0.5 / - 0.7					+ 1.2 / - 1.6							
1.5H		+ 0.8 / - 0.9					+ 2.6 / - 1.7							
2.0H		+ 0.8 / - 1.5					+ 4.5 / - 3.0							

CIE Pub.117, 73.27 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -9.1)

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:


```

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

NAME: LumiPixel Slim-Clear Cover-1000mm-RGBW GREEN-110 110D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 110X110 DEG	DIM.: 1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

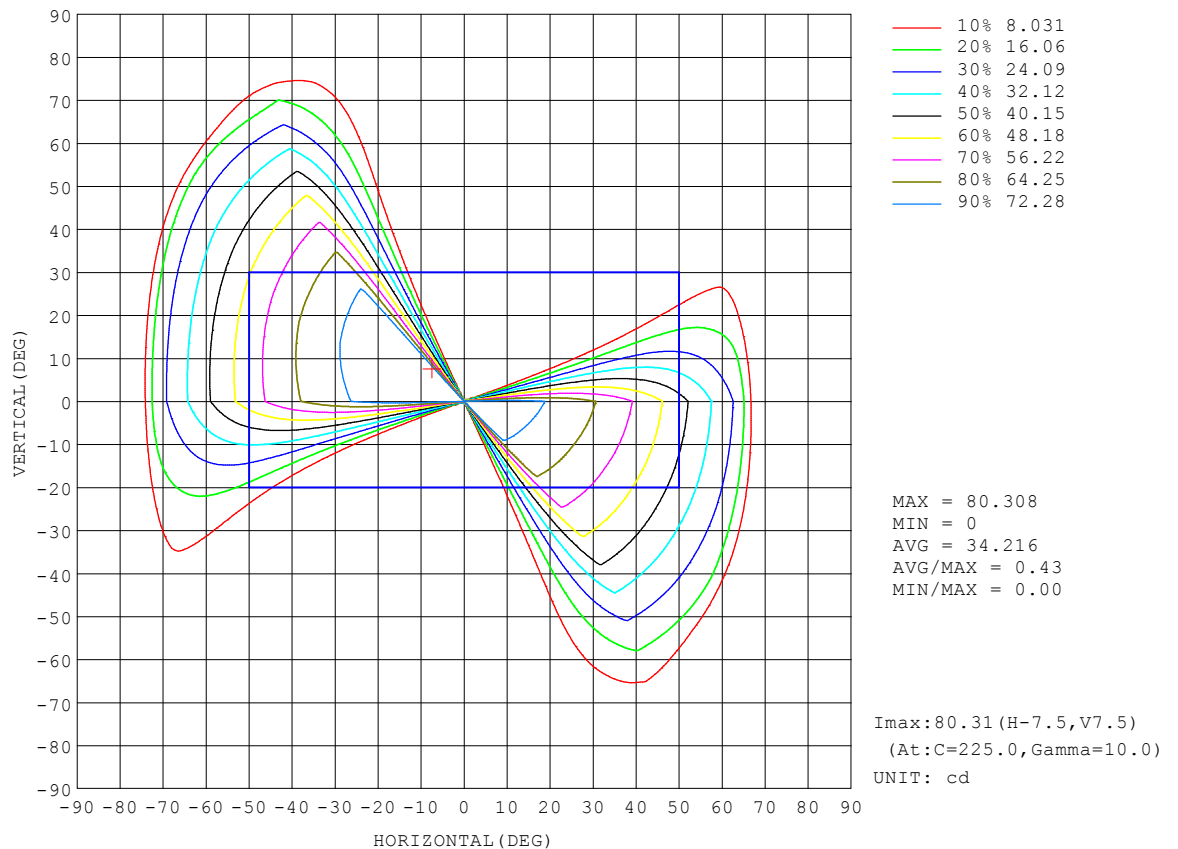


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.402
 Humidity: 65.0%
 Test Distance: 8.300m [K=1.0000]
 Remarks:

AAI Figure

NAME: LumiPixel Slim-Clear Cover-1000mm-RGBW GREEN-110 110D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 110X110 DEG	DIM.: 1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

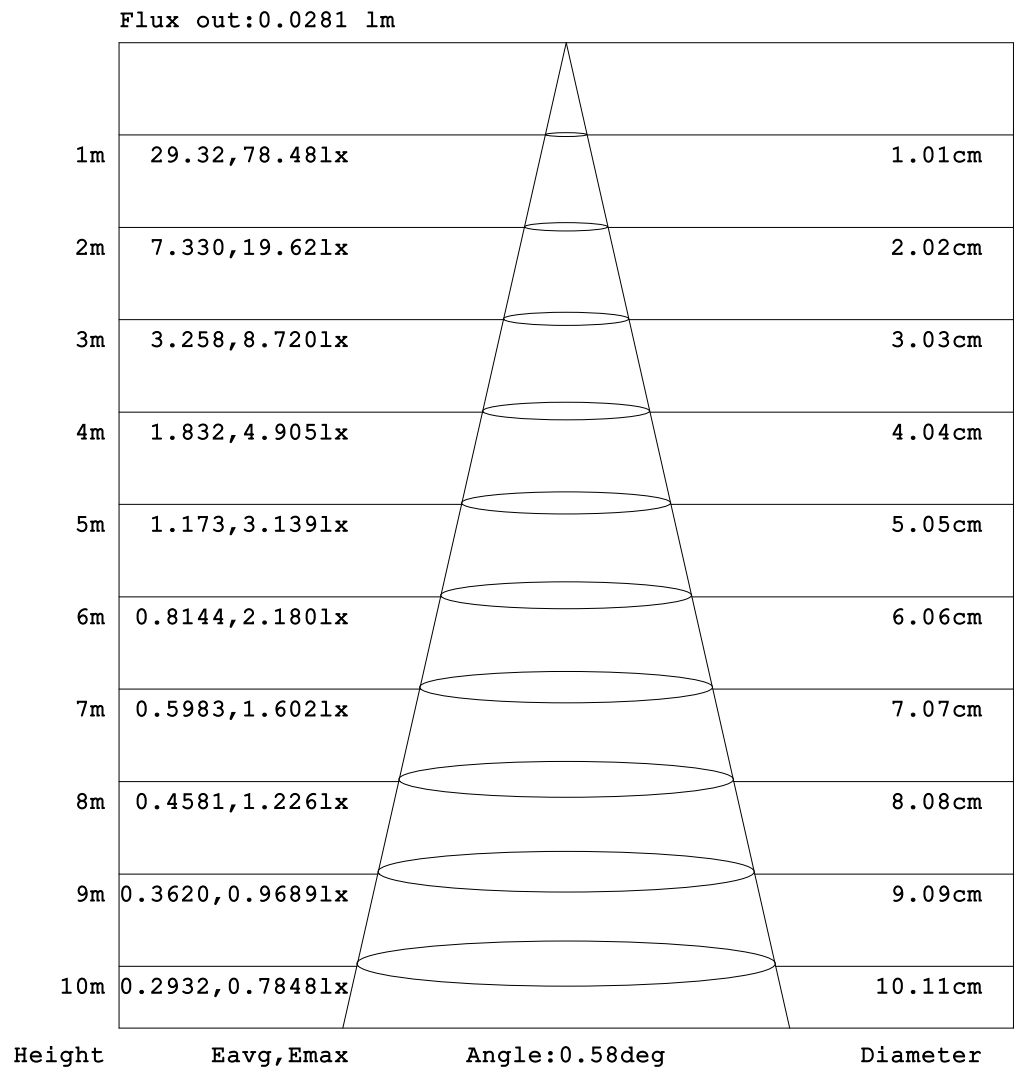


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity: 65.0%
Test Distance: 8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME: LumiPixel Slim-Clear Cover-1000mm-RGBW GREEN-110 110D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 110X110 DEG	DIM.: 1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

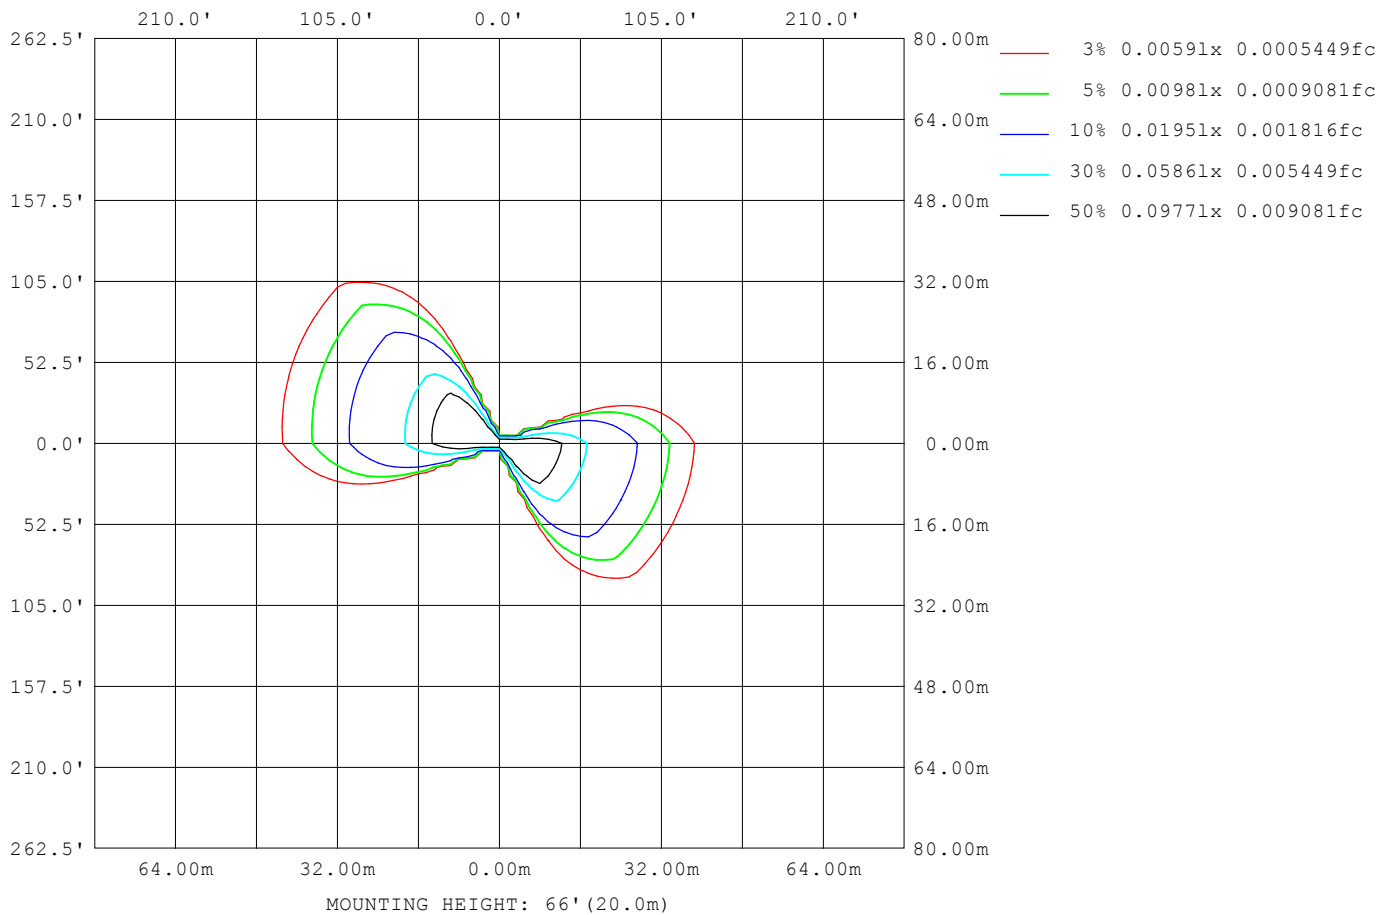

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.402
 Humidity: 65.0%
 Test Distance: 8.300m [K=1.0000]
 Remarks:

LED Avg.L Report

NAME: LumiPixel Slim-Clear Cover-1000mm-RGBW GREEN-110 110D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 110X110 DEG	DIM.: 1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1052
L_0~180 (75) av	197
L_0~180 (85) av	77
L_90~270 (65) av	0
L_90~270 (75) av	0
L_90~270 (85) av	0
L_45 (65) av	588
L_45 (75) av	337
L_45 (85) av	37

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.402
 Humidity: 65.0%
 Test Distance: 8.300m [K=1.0000]
 Remarks:

Planar Illuminance Curve

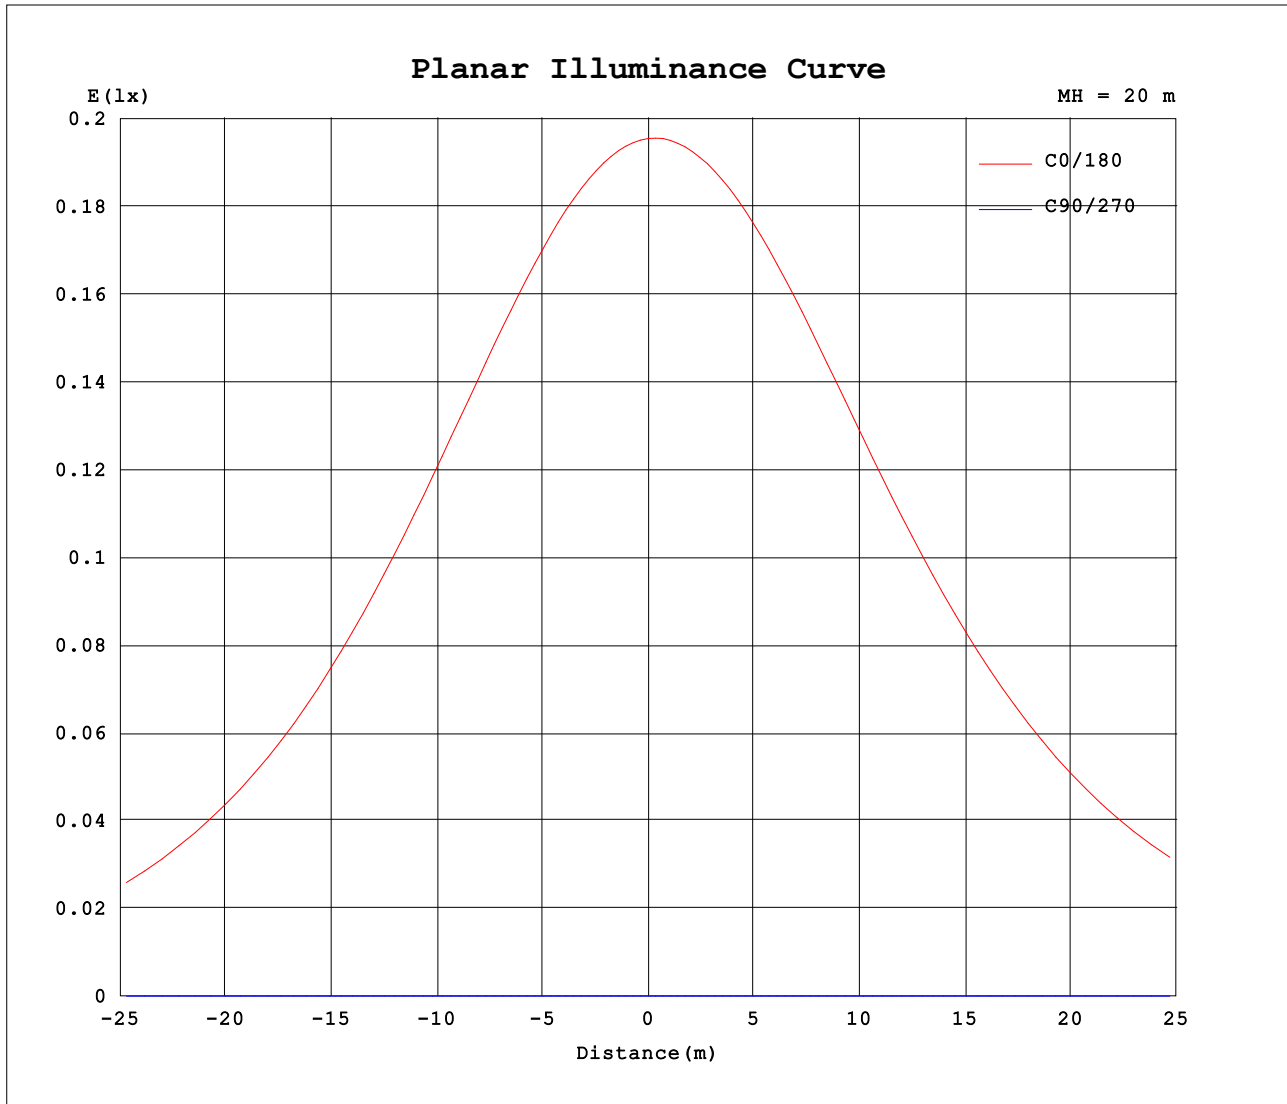

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.402
 Humidity: 65.0%
 Test Distance: 8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LumiPixel Slim-Clear Cover-1000mm-RGBW GREEN-110 110D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 110X110 DEG	DIM.: 1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	29.3	29.3	29.3	0.00	0.00	0.00	0.00	0.00	29.3	29.3	29.3	0.00	0.00	0.00	0.00	0.00			
5	29.0	28.8	28.6	0.00	0.00	0.00	0.00	0.00	29.4	29.6	29.9	0.00	0.00	0.00	0.00	0.00			
10	28.5	28.1	27.7	0.00	0.00	0.00	0.00	0.00	29.2	29.7	30.1	0.00	0.00	0.00	0.00	0.00			
15	27.8	27.2	26.6	0.00	0.00	0.00	0.00	0.00	28.8	29.5	30.0	0.00	0.00	0.00	0.00	0.00			
20	26.9	26.0	25.3	0.00	0.00	0.00	0.00	0.00	28.2	29.1	29.7	0.00	0.00	0.00	0.00	0.00			
25	25.7	24.7	23.8	0.00	0.00	0.00	0.00	0.00	27.4	28.4	29.1	0.00	0.00	0.00	0.00	0.00			
30	24.3	23.1	22.2	0.00	0.00	0.00	0.00	0.00	26.3	27.4	28.3	0.00	0.00	0.00	0.00	0.00			
35	22.7	21.4	20.4	0.00	0.00	0.00	0.00	0.00	25.0	26.2	27.1	0.00	0.00	0.00	0.00	0.00			
40	20.7	19.4	18.5	0.00	0.00	0.00	0.00	0.00	23.4	24.8	25.7	0.00	0.00	0.00	0.00	0.00			
45	18.6	17.3	16.4	0.00	0.00	0.00	0.00	0.00	21.6	23.0	23.9	0.00	0.00	0.00	0.00	0.00			
50	16.1	14.9	14.1	0.00	0.00	0.00	0.00	0.00	19.5	20.9	21.8	0.00	0.00	0.00	0.00	0.00			
55	13.5	12.4	11.7	0.00	0.00	0.00	0.00	0.00	17.2	18.5	19.4	0.00	0.00	0.00	0.00	0.00			
60	10.6	9.71	9.16	0.00	0.00	0.00	0.00	0.00	14.5	15.7	16.6	0.00	0.00	0.00	0.00	0.00			
65	6.19	6.90	6.62	0.00	0.00	0.00	0.00	0.00	11.6	12.7	13.3	0.00	0.00	0.00	0.00	0.00			
70	0.35	1.13	4.14	0.00	0.00	0.00	0.00	0.00	8.50	9.33	9.85	0.00	0.00	0.00	0.00	0.00			
75	0.21	0.18	0.55	0.00	0.00	0.00	0.00	0.00	1.83	3.54	6.43	0.00	0.00	0.00	0.00	0.00			
80	0.17	0.15	0.15	0.00	0.00	0.00	0.00	0.00	0.22	0.25	0.87	0.00	0.00	0.00	0.00	0.00			
85	0.08	0.07	0.09	0.00	0.00	0.00	0.00	0.00	0.19	0.20	0.16	0.00	0.00	0.00	0.00	0.00			
90	0.02	0.03	0.03	0.00	0.00	0.00	0.00	0.00	0.09	0.11	0.08	0.00	0.00	0.00	0.00	0.00			
95	0.03	0.05	0.05	0.00	0.00	0.00	0.00	0.00	0.04	0.03	0.04	0.00	0.00	0.00	0.00	0.00			
100	0.05	0.07	0.07	0.00	0.00	0.00	0.00	0.00	0.06	0.04	0.06	0.00	0.00	0.00	0.00	0.00			
105	0.07	0.10	0.09	0.00	0.00	0.00	0.00	0.00	0.08	0.06	0.07	0.00	0.00	0.00	0.00	0.00			
110	0.09	0.12	0.11	0.00	0.00	0.00	0.00	0.00	0.10	0.08	0.09	0.00	0.00	0.00	0.00	0.00			
115	0.11	0.14	0.13	0.00	0.00	0.00	0.00	0.00	0.12	0.10	0.11	0.00	0.00	0.00	0.00	0.00			
120	0.13	0.16	0.15	0.00	0.00	0.00	0.00	0.00	0.14	0.12	0.14	0.00	0.00	0.00	0.00	0.00			
125	0.15	0.18	0.17	0.00	0.00	0.00	0.00	0.00	0.16	0.14	0.15	0.00	0.00	0.00	0.00	0.00			
130	0.17	0.20	0.19	0.00	0.00	0.00	0.00	0.00	0.18	0.16	0.17	0.00	0.00	0.00	0.00	0.00			
135	0.19	0.22	0.21	0.00	0.00	0.00	0.00	0.00	0.20	0.18	0.19	0.00	0.00	0.00	0.00	0.00			
140	0.22	0.25	0.24	0.00	0.00	0.00	0.00	0.00	0.22	0.20	0.22	0.00	0.00	0.00	0.00	0.00			
145	0.24	0.27	0.26	0.00	0.00	0.00	0.00	0.00	0.25	0.22	0.24	0.00	0.00	0.00	0.00	0.00			
150	0.26	0.28	0.28	0.00	0.00	0.00	0.00	0.00	0.27	0.24	0.26	0.00	0.00	0.00	0.00	0.00			
155	0.28	0.30	0.29	0.00	0.00	0.00	0.00	0.00	0.29	0.27	0.27	0.00	0.00	0.00	0.00	0.00			
160	0.29	0.32	0.30	0.00	0.00	0.00	0.00	0.00	0.30	0.28	0.29	0.00	0.00	0.00	0.00	0.00			
165	0.31	0.33	0.31	0.00	0.00	0.00	0.00	0.00	0.32	0.29	0.30	0.00	0.00	0.00	0.00	0.00			
170	0.32	0.33	0.32	0.00	0.00	0.00	0.00	0.00	0.33	0.31	0.32	0.00	0.00	0.00	0.00	0.00			
175	0.32	0.33	0.33	0.00	0.00	0.00	0.00	0.00	0.34	0.32	0.33	0.00	0.00	0.00	0.00	0.00			
180	0.33	0.33	0.33	0.00	0.00	0.00	0.00	0.00	0.34	0.33	0.33	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity: 65.0%
Test Distance: 8.300m [K=1.0000]
Remarks: