


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW RED-110 110D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:110x110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 21.43 lm/W			
MODEL		Imax(cd)	26.60	S/MH(C0/180)	1.32
NOMINAL POWER(W)	12	LOR(%)	3.1	S/MH(C90/270)	1.28
RATED VOLTAGE(V)	48	TOTAL FLUX(lm)	73.271	η UP,DN(C0-180)	0.0,1.5
NOMINAL FLUX(lm)	40.0177	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,1.5
LAMPS INSIDE	60	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	η down(%)	3.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

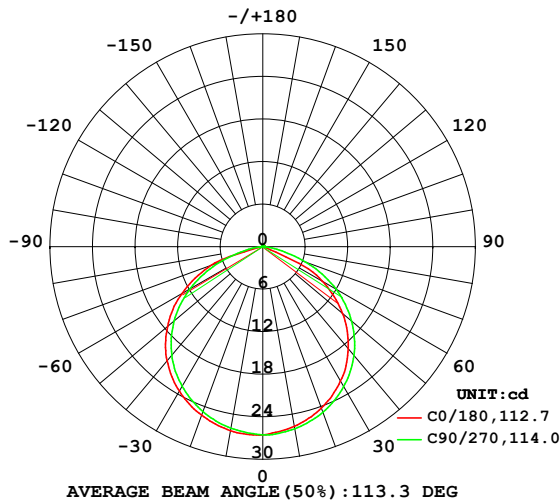

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

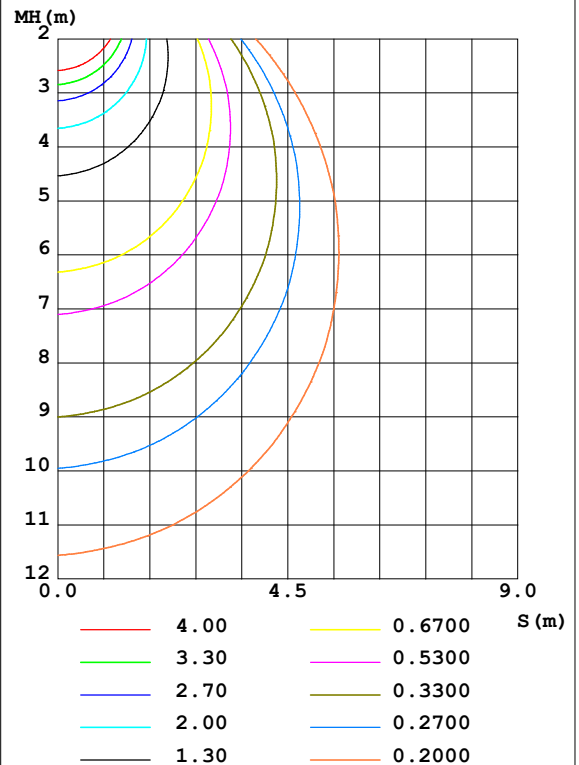

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	25.73	25.85	26.07	26.31	26.36	26.18	25.99	25.82	0- 10	2.507	2.507	3.42,0.10
20	24.22	24.43	24.85	25.28	25.26	25.17	24.74	24.36	10- 20	7.204	9.711	13.3,0.40
30	21.92	22.25	22.82	23.43	23.54	23.32	22.74	22.15	20- 30	11.01	20.72	28.3,0.86
40	18.76	19.27	20.02	20.76	21.02	20.69	19.99	19.16	30- 40	13.43	34.15	46.6,1.42
50	14.72	15.31	16.35	17.25	17.54	17.19	16.32	15.25	40- 50	14.03	48.18	65.8,2.01
60	9.669	10.40	11.88	12.86	13.11	12.75	11.80	10.28	50- 60	12.52	60.71	82.9,2.53
70	0.2957	4.976	6.508	7.433	7.743	7.356	6.485	4.891	60- 70	8.602	69.31	94.6,2.89
80	0.1440	0.1303	1.678	0.6898	0.1629	0.6602	1.676	0.1065	70- 80	2.972	72.28	98.6,3.01
90	0.0096	0.0193	0.0243	0.0632	0.0477	0.0385	0.0388	0.0388	80- 90	0.2463	72.53	99,3.02
100	0.0096	0.0193	0.0194	0.0097	0.0432	0.0532	0.0822	0.0776	90-100	0.0350	72.56	99,3.02
110	0.0478	0.0482	0.0483	0.0290	0.0863	0.0916	0.1114	0.1116	100-110	0.0559	72.62	99.1,3.02
120	0.0815	0.0819	0.0822	0.0678	0.1247	0.1390	0.1471	0.1503	110-120	0.0899	72.71	99.2,3.03
130	0.1151	0.1156	0.1161	0.1057	0.1632	0.1640	0.1886	0.1842	120-130	0.1142	72.82	99.4,3.03
140	0.1534	0.1495	0.1451	0.1309	0.2015	0.2092	0.2168	0.2173	130-140	0.1242	72.94	99.6,3.04
150	0.1902	0.1832	0.1790	0.1735	0.2427	0.2386	0.2419	0.2474	140-150	0.1231	73.07	99.7,3.04
160	0.2301	0.2160	0.2080	0.2055	0.2736	0.2636	0.2666	0.2731	150-160	0.1053	73.17	99.9,3.05
170	0.2684	0.2459	0.2402	0.2327	0.2763	0.2817	0.2787	0.2835	160-170	0.0715	73.24	100,3.05
180	0.2734	0.2796	0.2709	0.2764	0.2781	0.2844	0.2854	0.2812	170-180	0.0259	73.27	100,3.05
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW RED-110 110D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:110x110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

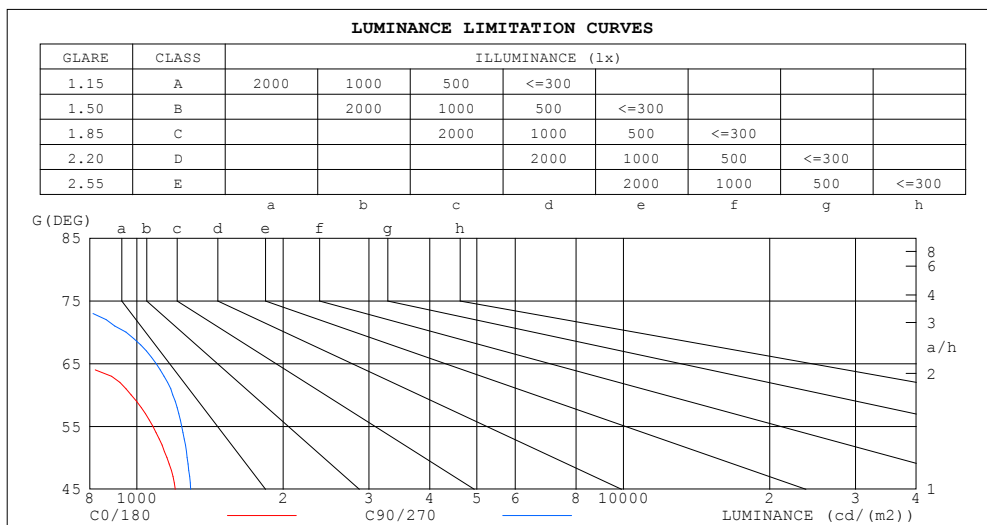

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	39	220
80	42	482
75	34	711
70	44	950
65	671	1095
60	974	1186
55	1079	1237
50	1153	1269
45	1201	1291

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW RED-110 110D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:110x110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	.04	.04	.04	.04	.04	.04	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03
1.0	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03
2.0	.03	.03	.02	.03	.03	.02	.03	.02	.02	.03	.02	.02	.02	.02	.02	.02
3.0	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02
4.0	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02
5.0	.02	.02	.02	.02	.02	.01	.02	.02	.01	.02	.02	.01	.02	.02	.01	.01
6.0	.02	.02	.01	.02	.01	.01	.02	.01	.01	.02	.01	.01	.02	.01	.01	.01
7.0	.02	.01	.01	.02	.01	.01	.02	.01	.01	.01	.01	.01	.01	.01	.01	.01
8.0	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01
9.0	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01
10.0	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01

LAMPS		LUMINAIRE BUDGETARY DIAGRAM																				
50	CONDITIONS																					
40	FLUX		5000lm																			
30	FACTOR		0.70																			
	Hdown		0.00m																			
	Hwork		0.00m																			
20	Ework (AVE)		100lx																			
	p (%)		cc	w	fc																	
	_____		70	50	30																	
	_____		50	30	20																	
10																						
9																						
8																						
7																						
6																						
5																						
4																						
3																						
2																						
	10	20	30	40	50	70	100	200	300	500	700	1k	2k	3k	4k	5k	7k					
	AREA (m2)																					

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

WEC AND CCEC

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW RED-110 110D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:110x110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

pcc	80%	70%	50%	30%	10%	0
pw	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
pfc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.009 .005 .002	.008 .005 .002	.008 .005 .001	.007 .004 .001	.007 .004 .001	
2.0	.008 .005 .001	.008 .004 .001	.008 .004 .001	.007 .004 .001	.007 .004 .001	
3.0	.008 .004 .001	.008 .004 .001	.007 .004 .001	.007 .004 .001	.007 .004 .001	
4.0	.007 .004 .001	.007 .004 .001	.007 .004 .001	.007 .004 .001	.006 .003 .001	
5.0	.007 .003 .001	.007 .003 .001	.006 .003 .001	.006 .003 .001	.006 .003 .001	
6.0	.006 .003 .001	.006 .003 .001	.006 .003 .001	.006 .003 .001	.006 .003 .001	
7.0	.006 .003 .001	.006 .003 .001	.006 .003 .001	.005 .003 .001	.005 .003 .001	
8.0	.006 .003 .001	.005 .003 .001	.005 .003 .001	.005 .003 .001	.005 .003 .001	
9.0	.005 .003 .001	.005 .003 .001	.005 .002 .001	.005 .002 .001	.005 .002 .001	
10.0	.005 .002 .001	.005 .002 .001	.005 .002 .001	.005 .002 .001	.004 .002 .001	

pcc	80%	70%	50%	30%	10%	0
pw	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
pfc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.006 .006 .006	.005 .005 .005	.004 .004 .004	.002 .002 .002	.001 .001 .001	
1.0	.006 .005 .004	.005 .004 .004	.003 .003 .003	.002 .002 .002	.001 .001 .000	
2.0	.005 .004 .003	.005 .004 .003	.003 .003 .002	.002 .001 .001	.001 .000 .000	
3.0	.005 .004 .003	.004 .003 .002	.003 .002 .002	.002 .001 .001	.001 .000 .000	
4.0	.005 .003 .002	.004 .003 .002	.003 .002 .001	.002 .001 .001	.001 .000 .000	
5.0	.005 .003 .002	.004 .003 .001	.003 .002 .001	.002 .001 .001	.001 .000 .000	
6.0	.005 .003 .001	.004 .002 .001	.003 .002 .001	.002 .001 .001	.001 .000 .000	
7.0	.004 .003 .001	.004 .002 .001	.003 .002 .001	.001 .001 .000	.000 .000 .000	
8.0	.004 .002 .001	.004 .002 .001	.002 .001 .001	.001 .001 .000	.000 .000 .000	
9.0	.004 .002 .001	.003 .002 .001	.002 .001 .001	.001 .001 .000	.000 .000 .000	
10.0	.004 .002 .001	.003 .002 .001	.002 .001 .001	.001 .001 .000	.000 .000 .000	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW RED-110 110D-Rev1						TYPE:RGBW-RED					WEIGHT:				
SPEC.:110x110 DEG						DIM.:1000mm					SERIAL No.:				
MFR.: EVERFINE						SUR.:					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3					
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3					
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2					
Room dimensions						Viewed crosswise					Viewed endwise				
x = 2H y = 2H						9.8	11.3	10.1	11.5	11.7	10.5	12.0	10.8	12.2	12.4
3H						10.0	11.4	10.3	11.6	11.9	11.7	13.1	12.0	13.3	13.6
4H						9.9	11.2	10.2	11.4	11.7	12.0	13.3	12.4	13.6	13.9
6H						9.8	11.0	10.1	11.3	11.6	12.2	13.4	12.5	13.6	13.9
8H						9.7	10.9	10.1	11.2	11.5	12.1	13.3	12.5	13.6	13.9
12H						9.7	10.8	10.1	11.1	11.4	12.1	13.2	12.5	13.5	13.8
4H 2H						10.3	11.6	10.7	11.9	12.1	10.9	12.2	11.2	12.4	12.7
3H						10.5	11.6	10.9	12.0	12.3	12.2	13.3	12.6	13.6	13.9
4H						10.4	11.4	10.8	11.8	12.1	12.6	13.6	13.0	13.9	14.3
6H						10.3	11.2	10.8	11.6	12.0	12.8	13.6	13.2	14.0	14.4
8H						10.3	11.1	10.7	11.5	11.9	12.7	13.6	13.2	14.0	14.4
12H						10.3	11.0	10.7	11.4	11.8	12.7	13.5	13.2	13.9	14.3
8H 4H						10.4	11.3	10.9	11.6	12.1	12.5	13.3	12.9	13.7	14.1
6H						10.4	11.0	10.8	11.5	11.9	12.7	13.4	13.1	13.8	14.2
8H						10.3	10.9	10.8	11.4	11.8	12.7	13.3	13.2	13.7	14.2
12H						10.3	10.8	10.8	11.3	11.8	12.7	13.2	13.2	13.6	14.1
12H 4H						10.4	11.2	10.9	11.6	12.0	12.4	13.2	12.9	13.6	14.0
6H						10.3	10.9	10.8	11.4	11.8	12.6	13.2	13.1	13.7	14.2
8H						10.3	10.8	10.8	11.3	11.8	12.7	13.2	13.1	13.6	14.1
Variations with the observer position at spacings:															
S = 1.0H						+ 0.6 / - 0.8					+ 0.2 / - 0.3				
1.5H						+ 0.6 / - 1.1					+ 0.2 / - 0.3				
2.0H						+ 0.6 / - 1.0					+ 0.4 / - 0.6				

CIE Pub.117, 2401 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 3.0)


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW RED-110 110D	TYPE:RGBW-RED	WEIGHT:
-Rev1 SPEC.:110x110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

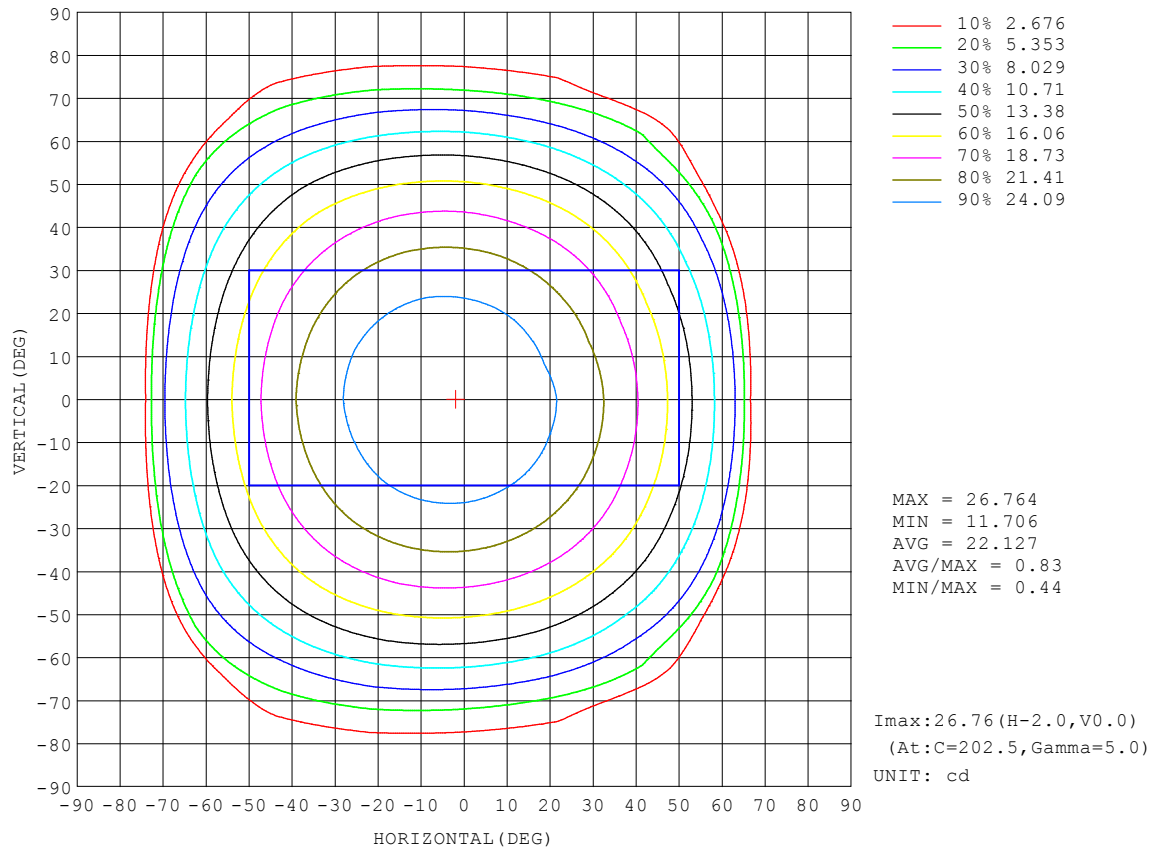


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:8.300m [K=1.0000]
 Remarks:

AAI Figure

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW RED-110 110D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:110x110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

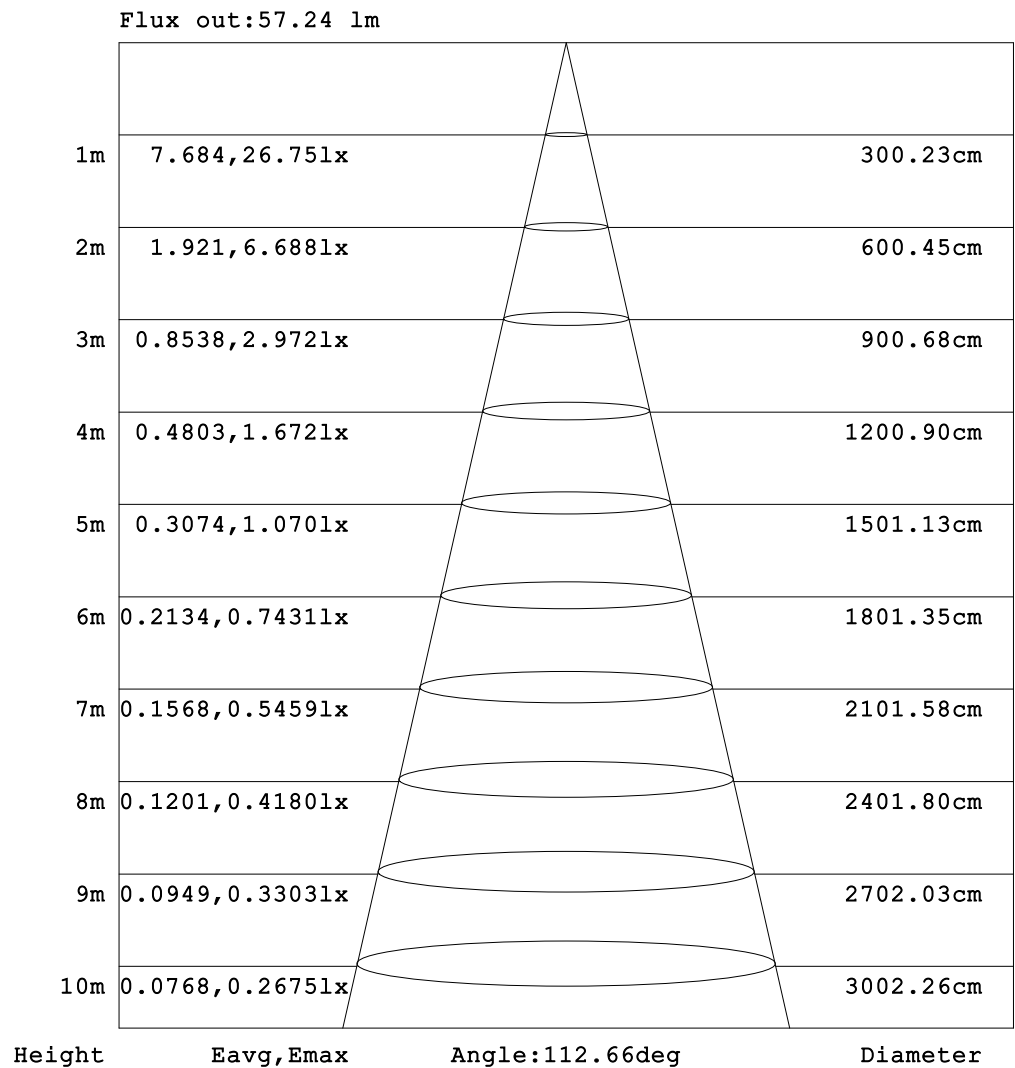


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW RED-110 110D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:110x110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

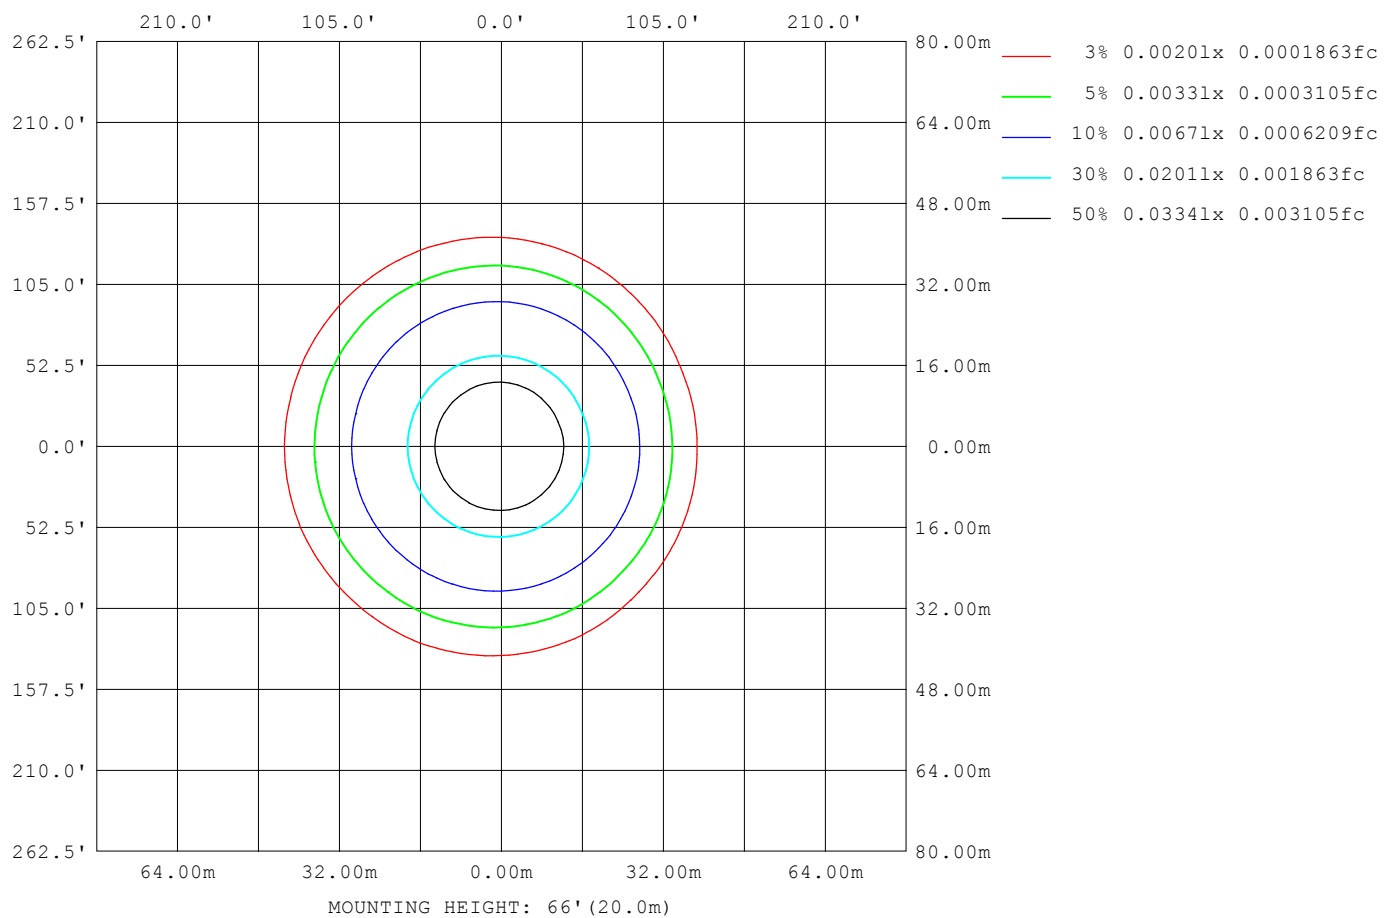

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

LED Avg.L Report

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW RED-110 110D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:110x110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	955
L_0~180 (75) av	163
L_0~180 (85) av	56
L_90~270 (65) av	1092
L_90~270 (75) av	714
L_90~270 (85) av	214
L_45 (65) av	1052
L_45 (75) av	503
L_45 (85) av	50

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

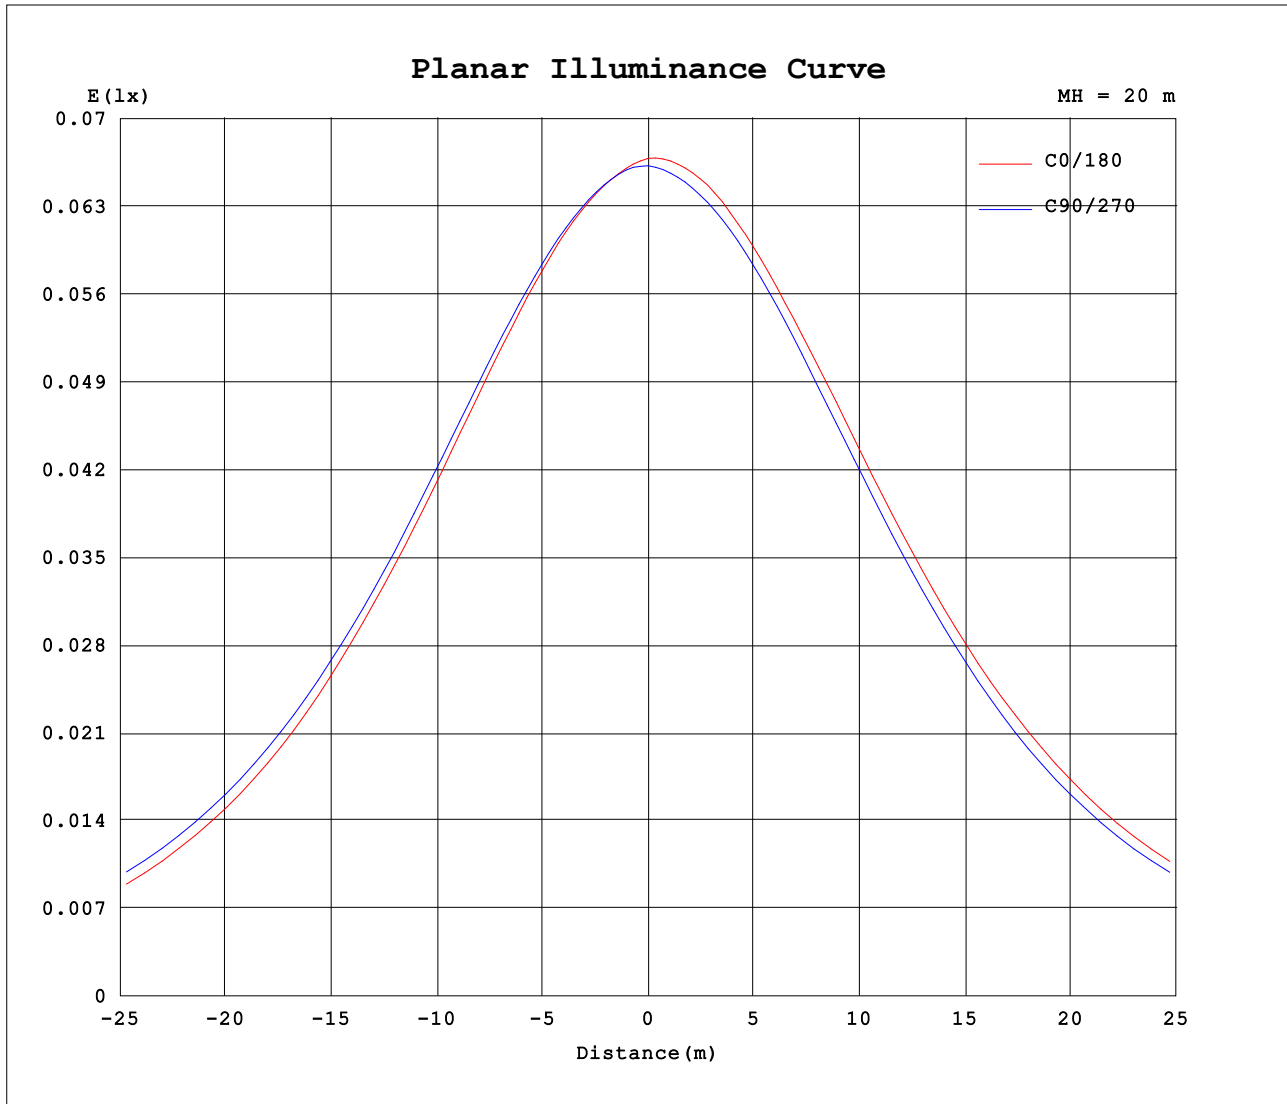

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2020-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.402
 Humidity: 65.0%
 Test Distance: 8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:LumiPixel Slim-Clear Cover-1000mm-RGBW RED-110 110D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:110x110 DEG	DIM.:1000mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5			
5	26.2	26.2	26.3	26.3	26.4	26.4	26.6	26.6	26.5	26.6	26.5	26.6	26.4	26.3	26.3	26.2			
10	25.7	25.8	25.9	25.9	26.1	26.1	26.3	26.3	26.4	26.3	26.2	26.1	26.0	25.9	25.8	25.7			
15	25.1	25.2	25.3	25.4	25.5	25.7	25.9	25.9	25.9	26.0	25.8	25.7	25.5	25.3	25.2	25.1			
20	24.2	24.3	24.4	24.6	24.8	25.0	25.3	25.3	25.3	25.3	25.2	25.0	24.7	24.6	24.4	24.2			
25	23.2	23.3	23.5	23.7	23.9	24.2	24.4	24.6	24.5	24.5	24.3	24.1	23.8	23.6	23.3	23.1			
30	21.9	22.1	22.2	22.5	22.8	23.1	23.4	23.6	23.5	23.5	23.3	23.1	22.7	22.4	22.1	21.9			
35	20.5	20.7	20.9	21.2	21.5	21.9	22.2	22.4	22.4	22.3	22.1	21.8	21.5	21.1	20.8	20.5			
40	18.8	19.0	19.3	19.6	20.0	20.4	20.8	21.0	21.0	20.9	20.7	20.4	20.0	19.5	19.2	18.8			
45	16.9	17.1	17.4	17.8	18.3	18.8	19.1	19.4	19.4	19.3	19.0	18.7	18.3	17.7	17.3	16.9			
50	14.7	15.0	15.3	15.9	16.3	16.8	17.3	17.5	17.5	17.4	17.2	16.8	16.3	15.7	15.3	14.8			
55	12.3	12.6	13.0	13.7	14.2	14.7	15.2	15.5	15.5	15.4	15.1	14.7	14.2	13.5	12.9	12.3			
60	9.67	9.98	10.4	11.3	11.9	12.4	12.9	13.1	13.1	13.0	12.8	12.3	11.8	11.1	10.3	9.71			
65	5.63	7.19	7.70	8.60	9.28	9.92	10.2	10.6	10.5	10.4	10.1	9.74	9.19	8.43	7.59	6.88			
70	0.30	0.98	4.98	5.76	6.51	7.21	7.43	7.79	7.74	7.60	7.36	7.08	6.49	5.62	4.89	0.81			
75	0.18	0.13	0.49	3.09	3.69	4.39	4.71	3.56	1.51	2.95	4.68	4.29	3.70	3.04	0.53	0.17			
80	0.14	0.10	0.13	1.13	1.68	2.00	0.69	0.15	0.16	0.19	0.66	1.98	1.68	1.11	0.11	0.15			
85	0.07	0.02	0.07	0.04	0.38	0.19	0.13	0.12	0.13	0.17	0.11	0.19	0.36	0.10	0.04	0.07			
90	0.01	0.02	0.02	0.02	0.02	0.02	0.06	0.03	0.05	0.10	0.04	0.07	0.04	0.04	0.04	0.03			
95	0.01	0.03	0.02	0.03	0.02	0.03	0.01	0.01	0.03	0.02	0.04	0.04	0.06	0.04	0.05	0.03			
100	0.01	0.05	0.02	0.05	0.02	0.04	0.01	0.02	0.04	0.02	0.05	0.04	0.08	0.04	0.08	0.03			
105	0.02	0.07	0.02	0.07	0.03	0.06	0.01	0.04	0.07	0.02	0.08	0.05	0.09	0.05	0.09	0.05			
110	0.05	0.09	0.05	0.09	0.05	0.08	0.03	0.06	0.09	0.04	0.09	0.07	0.11	0.08	0.11	0.07			
115	0.06	0.11	0.06	0.11	0.07	0.10	0.05	0.08	0.11	0.07	0.12	0.08	0.13	0.09	0.13	0.09			
120	0.08	0.12	0.08	0.12	0.08	0.12	0.07	0.10	0.12	0.09	0.14	0.12	0.15	0.11	0.15	0.11			
125	0.10	0.14	0.10	0.14	0.11	0.13	0.08	0.12	0.14	0.11	0.16	0.12	0.17	0.12	0.16	0.13			
130	0.12	0.16	0.12	0.15	0.12	0.15	0.11	0.13	0.16	0.12	0.16	0.14	0.19	0.15	0.18	0.14			
135	0.14	0.18	0.13	0.17	0.13	0.16	0.12	0.15	0.18	0.14	0.19	0.15	0.20	0.16	0.20	0.16			
140	0.15	0.20	0.15	0.19	0.15	0.19	0.13	0.17	0.20	0.16	0.21	0.17	0.22	0.17	0.22	0.18			
145	0.17	0.21	0.17	0.21	0.16	0.20	0.16	0.19	0.22	0.18	0.22	0.19	0.23	0.19	0.23	0.20			
150	0.19	0.24	0.18	0.23	0.18	0.22	0.17	0.21	0.24	0.19	0.24	0.21	0.24	0.20	0.25	0.21			
155	0.21	0.25	0.20	0.24	0.20	0.24	0.19	0.23	0.26	0.21	0.25	0.22	0.26	0.22	0.26	0.22			
160	0.23	0.27	0.22	0.25	0.21	0.25	0.21	0.25	0.27	0.22	0.26	0.23	0.27	0.23	0.27	0.23			
165	0.23	0.28	0.23	0.27	0.22	0.26	0.22	0.26	0.27	0.24	0.27	0.24	0.28	0.24	0.28	0.25			
170	0.27	0.28	0.25	0.28	0.24	0.27	0.23	0.28	0.28	0.26	0.28	0.26	0.28	0.26	0.28	0.27			
175	0.27	0.28	0.27	0.28	0.26	0.28	0.26	0.28	0.28	0.27	0.28	0.26	0.28	0.27	0.29	0.27			
180	0.27	0.28	0.28	0.29	0.27	0.28	0.28	0.29	0.28	0.27	0.28	0.28	0.29	0.28	0.28	0.28			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.402
Humidity:65.0%
Test Distance:8.300m [K=1.0000]
Remarks: