

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	10969.5 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	39.5V x 39.9H
	At 50% of Imax	14.2V x 14.8H
	At 90% of Imax	4.9V x 5.5H

Beam Flux	Total	1673.3 lumens per klm.
	To 10% of Imax	1096.0 lumens per klm.
	To 50% of Imax	382.8 lumens per klm.
	To 90% of Imax	66.2 lumens per klm.

Upward LOR	0.0 %
Downward LOR	167.3 %


Luminaire Efficiency(Light Output Ratio)	167.2 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:13 December 2024

V(β) Range:-90 - 90DEG
V(β) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.00V I:0.2700A P:6.480W PF:1.000 Freq:49.99Hz Lamp Flux:57.9261x6 lm		
Name:Medusa Mini-127mm-3000K-15D-Rev2	Type:3000K	WEIGHT:
SPEC.:15 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

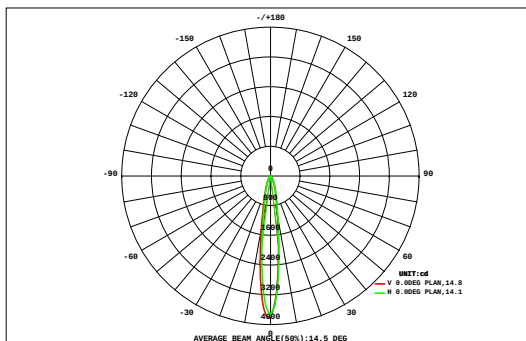

DATA OF LAMP		Eff:89.66lm/W	
MODEL		Imax(cd)	3813
NOMINAL POWER(W)	6	AVAILABILITY(%)	109.2
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	379.6
NOMINAL FLUX(lm)	57.9261	LOR(%)	167.2
LAMPS INSIDE	6	TOTAL FLUX(lm)	581.0
TEST VOLTAGE(V)	220	θ @50%(H,V)	15,14DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm			Φ t	Φ a
	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.19	0.00	
90	0.00	0.00	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.06	0.06	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.49	0.00	
80	0.00	0.00	0.01	0.02	0.05	0.08	0.12	0.14	0.15	0.15	0.15	0.13	0.10	0.07	0.03	0.02	0.01	0.00	1.23	0.00	
70	0.00	0.00	0.02	0.04	0.11	0.20	0.31	0.38	0.41	0.41	0.38	0.33	0.24	0.15	0.07	0.02	0.01	0.00	3.08	0.00	
60	0.00	0.01	0.02	0.08	0.21	0.39	0.61	0.84	0.98	0.99	0.87	0.67	0.44	0.26	0.12	0.04	0.01	0.00	6.55	0.00	
50	0.00	0.01	0.04	0.13	0.34	0.67	1.25	1.97	2.51	2.55	2.08	1.40	0.79	0.40	0.18	0.06	0.01	0.00	14.4	0.00	
40	0.00	0.01	0.05	0.19	0.48	1.13	2.39	4.38	6.38	6.56	4.70	2.64	1.32	0.58	0.24	0.08	0.01	0.00	31.1	0.00	
30	0.00	0.01	0.06	0.23	0.63	1.68	4.11	9.33	16.9	18.0	10.5	4.66	1.94	0.78	0.28	0.09	0.02	0.00	69.2	39.4	
-30	0.00	0.01	0.06	0.24	0.73	2.10	5.80	16.1	52.9	62.4	19.7	6.70	2.42	0.89	0.30	0.09	0.02	0.00	171	149	
	0.00	0.01	0.06	0.24	0.70	2.07	5.72	15.7	51.1	62.2	19.9	6.82	2.45	0.88	0.29	0.09	0.02	0.00	168	147	
	0.00	0.01	0.05	0.20	0.56	1.62	4.12	9.57	17.5	18.9	11.0	4.89	1.99	0.73	0.26	0.08	0.01	0.00	71.6	44.0	
	0.00	0.00	0.04	0.15	0.40	1.02	2.39	4.58	6.88	7.15	5.09	2.79	1.29	0.51	0.20	0.07	0.01	0.00	32.6	0.00	
-40	0.00	0.00	0.02	0.07	0.21	0.39	0.83	1.38	1.87	1.97	1.62	1.07	0.55	0.29	0.12	0.04	0.01	0.00	10.4	0.00	
-50	0.00	0.00	0.01	0.02	0.04	0.06	0.09	0.12	0.15	0.16	0.15	0.14	0.10	0.10	0.04	0.02	0.00	0.00	1.21	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.12	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																					
Φ t	0.00	0.07	0.43	1.63	4.50	11.5	27.8	64.6	158	182	76.3	32.3	13.7	5.69	2.18	0.72	0.14	0.01	581	---	
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	0.00	34.4	136	160	49.6	0.55	0.00	0.00	0.00	0.00	0.00	0.00	---	380	

one-half-peak spread: U:7.1,D:7.2 , L:7.6,R:7.4


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CAOLF
Test Date:13 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.00V I:0.2700A P:6.480W PF:1.000 Freq:49.99Hz Lamp Flux:57.926lx6 lm		
Name:Medusa Mini-127mm-3000K-15D-Rev2	Type:3000K	WEIGHT:
SPEC.:15 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

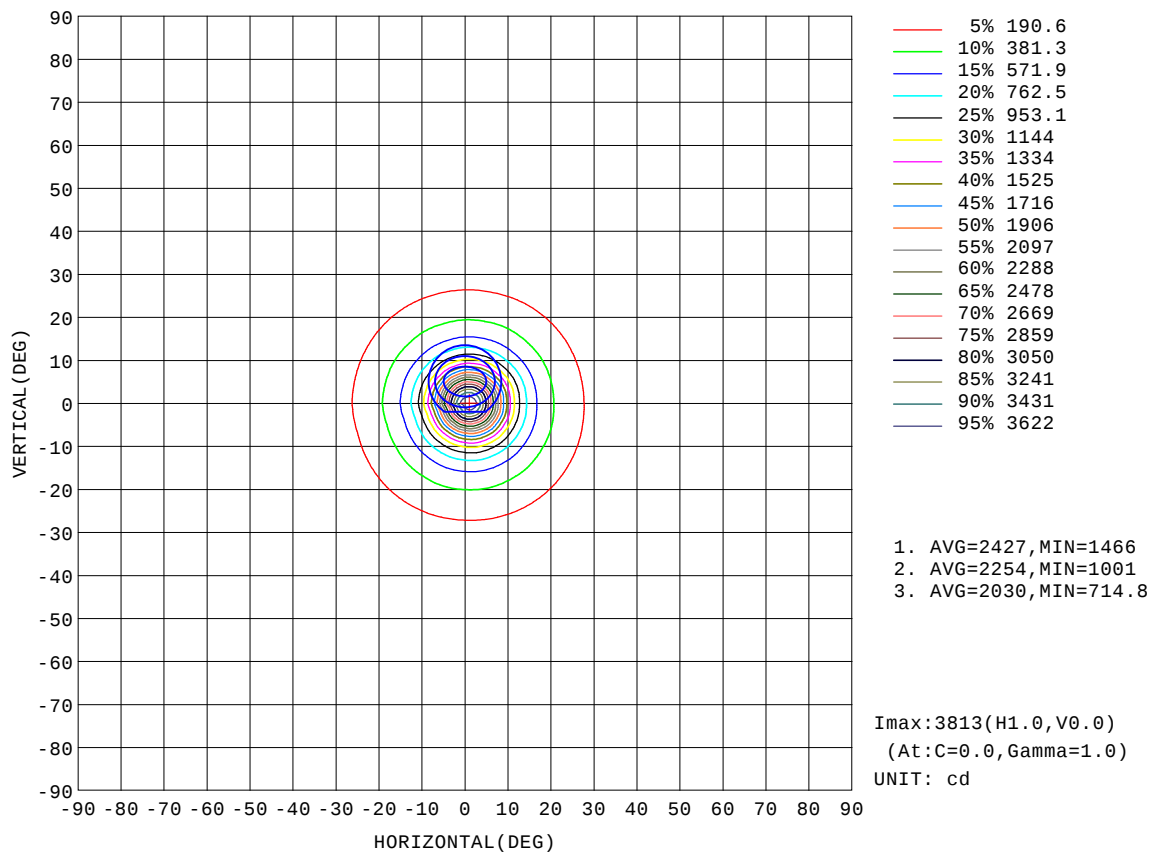


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CAOLE
Test Date:13 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.00V I:0.2700A P:6.480W PF:1.000 Freq:49.99Hz Lamp Flux:57.926lx6 lm		
Name:Medusa Mini-127mm-3000K-15D-Rev2	Type:3000K	WEIGHT:
SPEC.:15 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

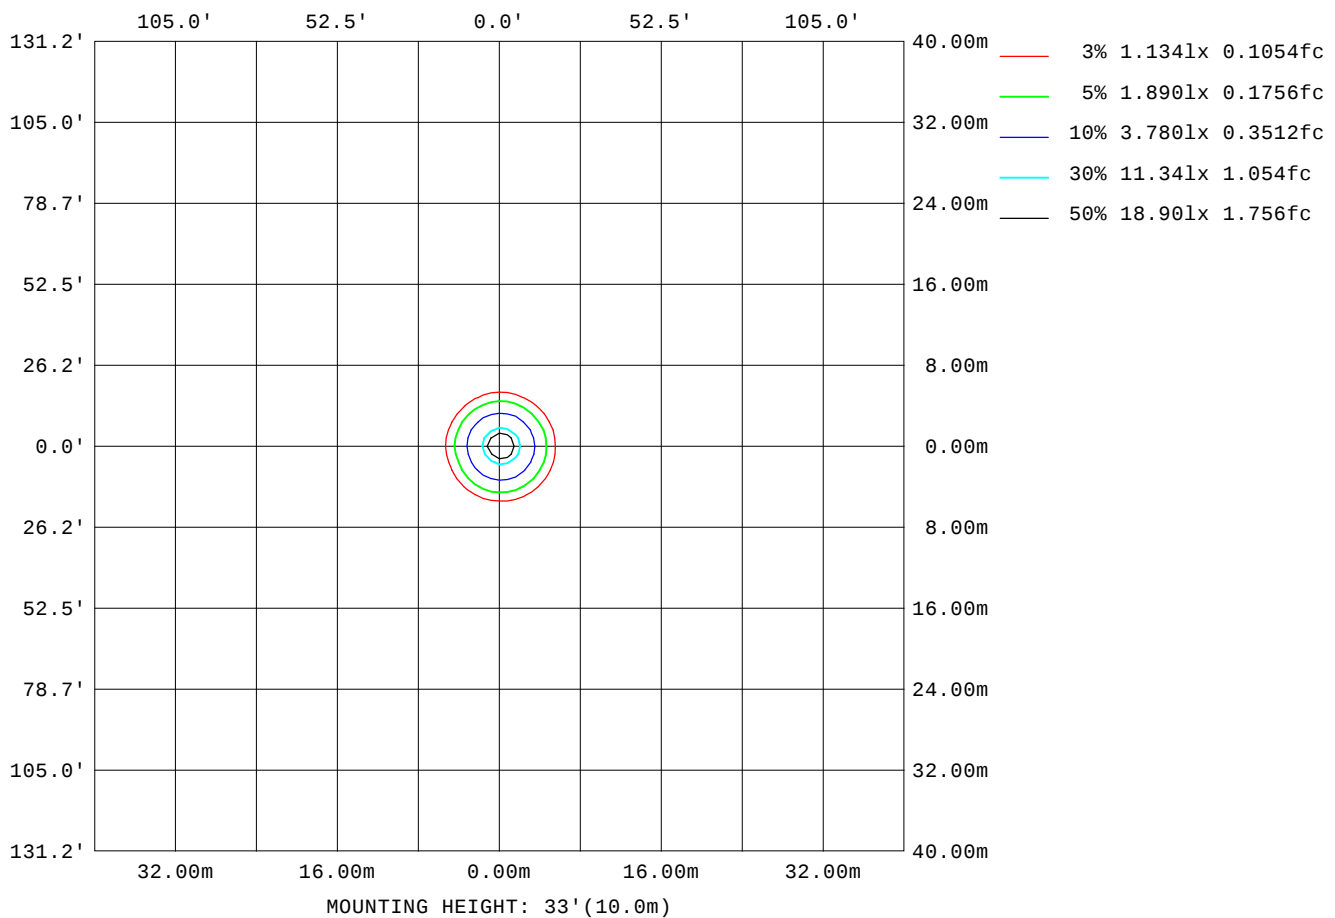

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CAOLE
Test Date:13 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

Planar Illuminance Curve

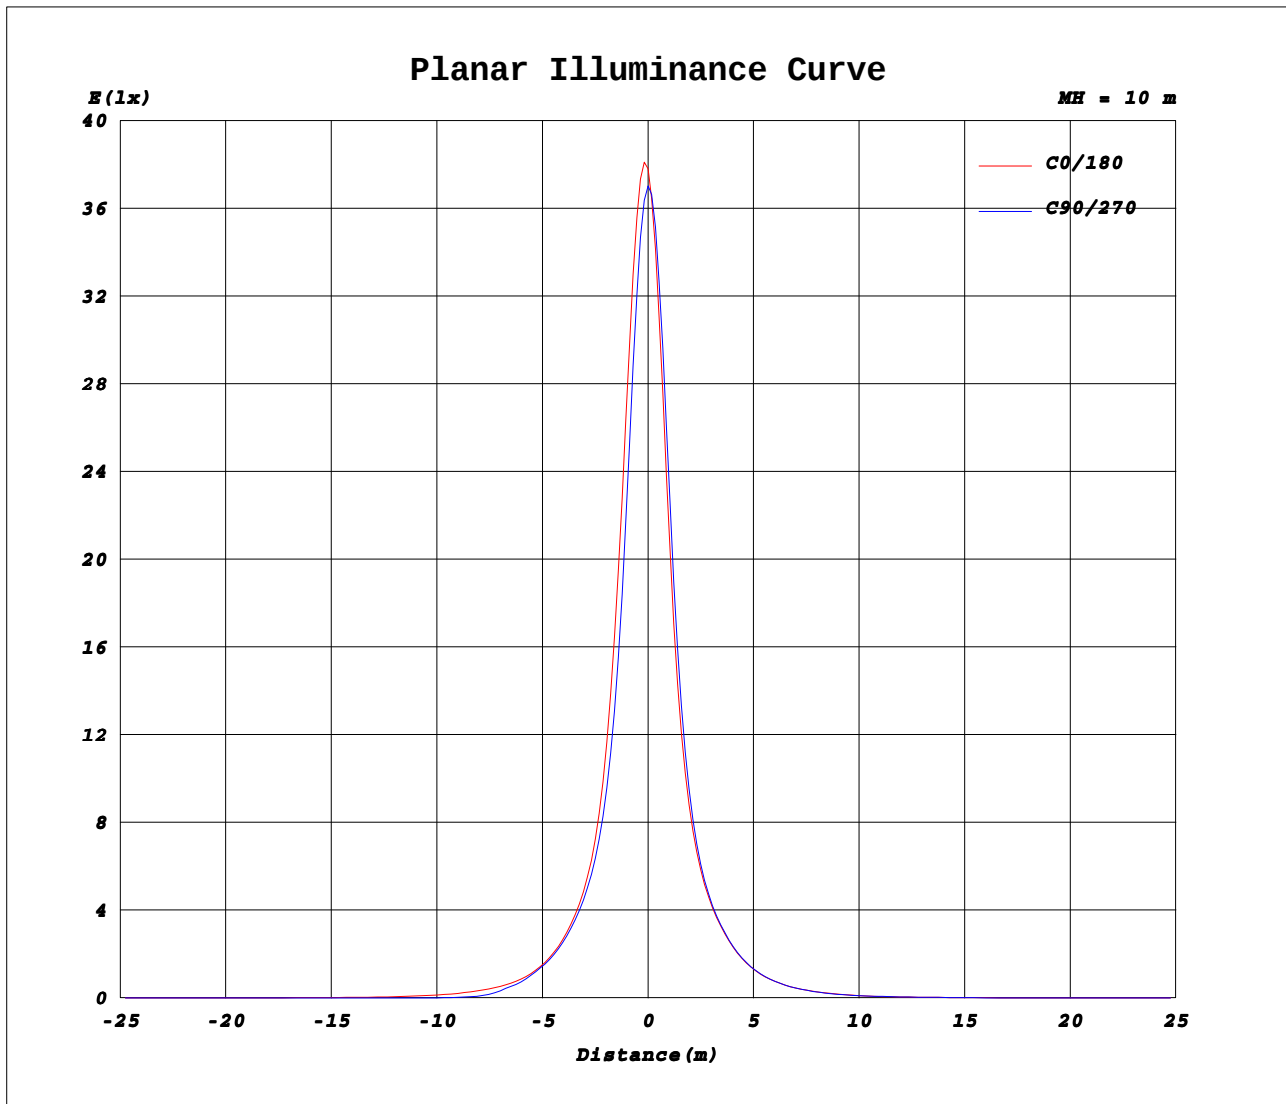


$H(\beta)$ Range: -90 - 90DEG
 $H(\beta)$ Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: CAOLF
Test Date: 13 December 2024

$V(B)$ Range: -90 - 90DEG
 $V(B)$ Interval: 0.5DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 9.060m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.00V I:0.2700A P:6.480W PF:1.000 Freq:49.99Hz Lamp Flux:57.926lx6 lm		
Name:Medusa Mini-127mm-3000K-15D-Rev2	Type:3000K	WEIGHT:
SPEC.:15 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

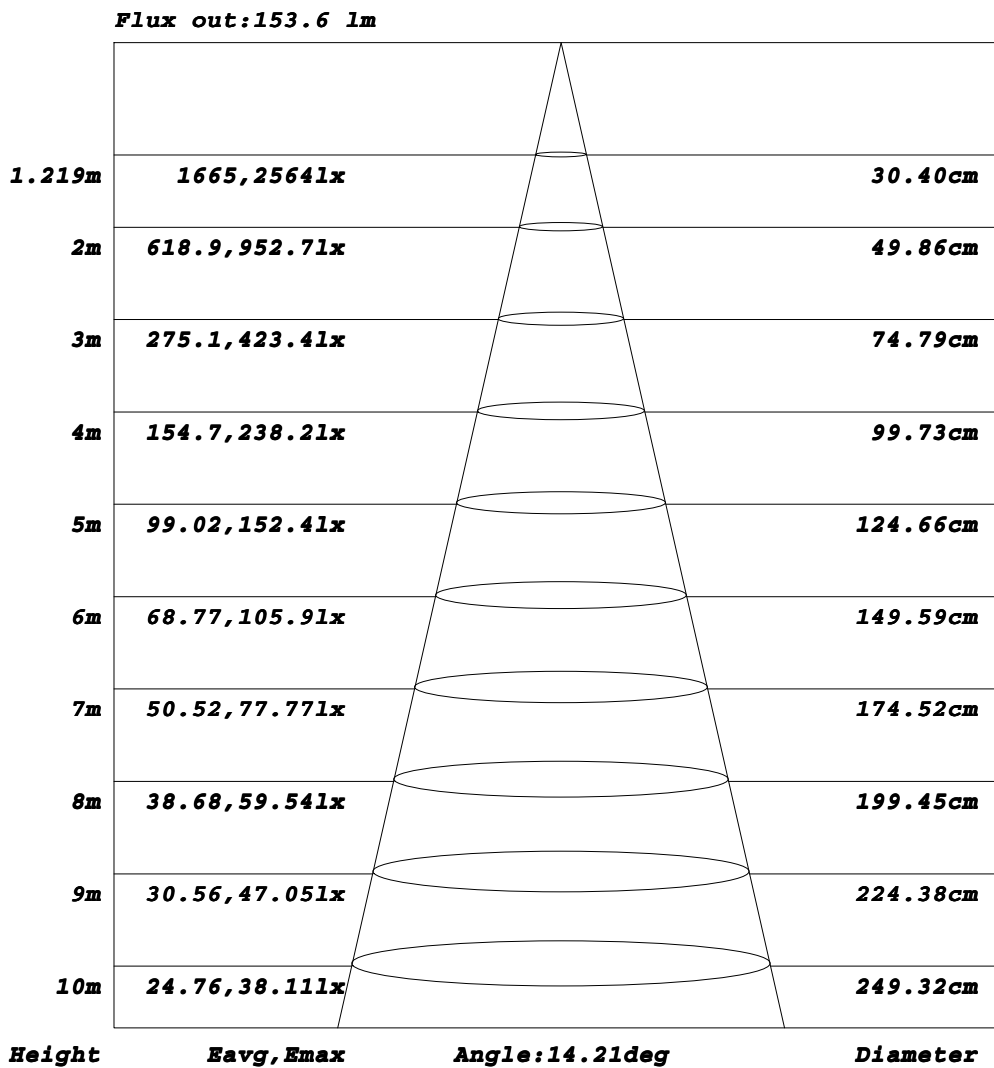

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CAOLF
Test Date:13 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.00V I:0.2700A P:6.480W PF:1.000 Freq:49.99Hz Lamp Flux:57.926lx6 lm					
Name:Medusa Mini-127mm-3000K-15D-Rev2			Type:3000K		WEIGHT:
SPEC.:15 DEG			DIM.:127mm		SERIAL No.:
MFR.:			SUR.:		Shielding Angle:

Table--1

UNIT: cd

H(DEC) V(DEC)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.01	0.01
-60	0.00	0.00	0.00	0.01	0.00	0.01	0.04	0.03	0.04	0.04	0.00	0.02	0.06	0.07	0.04	0.02	0.03	0.06	0.09
-55	0.00	0.00	0.00	0.03	0.00	0.07	0.17	0.09	0.15	0.19	0.11	0.15	0.21	0.16	0.20	0.18	0.19	0.25	0.26
-50	0.00	0.00	0.01	0.06	0.04	0.23	0.42	0.43	0.46	0.57	0.62	0.65	0.83	0.89	1.01	1.11	1.17	1.29	1.29
-45	0.00	0.00	0.04	0.10	0.14	0.49	0.87	1.10	1.01	1.53	2.49	1.72	2.23	2.68	2.86	3.31	3.58	3.97	3.94
-40	0.00	0.00	0.07	0.15	0.34	0.86	1.60	2.16	2.44	4.77	6.89	5.54	6.81	9.27	8.43	11.3	12.1	14.0	14.0
-35	0.00	0.00	0.10	0.23	0.57	1.37	2.55	3.70	5.51	10.8	12.2	13.8	22.1	27.6	34.3	45.3	51.6	59.6	59.8
-30	0.00	0.00	0.12	0.34	0.82	1.95	3.77	5.79	9.42	14.6	19.5	26.4	40.4	58.1	74.6	95.1	114	130	136
-25	0.00	0.00	0.15	0.44	1.08	2.52	4.97	8.27	12.6	17.7	25.7	39.8	60.0	85.1	116	152	191	223	237
-20	0.00	0.00	0.18	0.55	1.33	3.04	5.97	10.2	14.7	21.0	32.5	52.4	78.2	114	162	225	295	357	385
-15	0.00	0.00	0.21	0.67	1.57	3.51	6.88	11.5	16.5	24.3	39.9	63.1	96.1	144	218	320	438	558	626
-10	0.00	0.00	0.24	0.77	1.79	3.92	7.63	12.4	18.0	27.9	46.0	72.6	112	175	275	420	633	923	1169
-5	0.00	0.00	0.27	0.86	1.96	4.22	8.17	13.1	19.3	30.9	50.6	80.4	126	200	321	510	865	1667	2555
0	0.00	0.00	0.29	0.93	2.08	4.40	8.47	13.5	20.1	32.7	52.9	84.1	133	215	352	576	1075	2414	3780
5	0.00	0.01	0.31	0.95	2.10	4.40	8.43	13.6	20.4	32.3	51.8	81.5	127	204	329	524	907	1745	2639
10	0.00	0.02	0.32	0.95	2.06	4.28	8.14	13.2	20.0	30.7	48.3	74.8	114	177	278	422	627	931	1174
15	0.00	0.02	0.33	0.94	1.98	4.04	7.63	12.6	18.9	28.4	43.1	65.6	97.1	144	215	310	423	531	597
20	0.00	0.03	0.33	0.90	1.86	3.73	6.94	11.6	17.3	25.4	36.9	55.0	79.2	112	157	215	279	331	359
25	0.00	0.04	0.32	0.86	1.72	3.35	6.11	10.3	15.4	21.9	30.7	44.1	62.1	84.3	112	145	178	205	218
30	0.00	0.04	0.31	0.81	1.57	2.94	5.24	8.92	13.5	18.6	25.1	34.2	46.8	62.0	79.4	97.5	114	127	133
35	0.00	0.05	0.30	0.75	1.40	2.52	4.35	7.33	11.5	15.7	20.2	26.1	34.1	44.2	55.4	65.9	74.9	81.4	84.0
40	0.00	0.05	0.28	0.68	1.26	2.10	3.51	5.74	9.15	12.8	16.2	20.0	24.7	30.5	37.2	42.6	46.8	49.8	50.3
45	0.00	0.05	0.25	0.61	1.11	1.74	2.76	4.33	6.74	9.88	12.7	15.4	18.4	21.5	24.8	27.6	29.8	31.3	31.6
50	0.00	0.05	0.21	0.55	0.96	1.42	2.13	3.20	4.79	6.95	9.47	11.7	13.7	15.8	17.4	18.9	20.1	20.9	21.1
55	0.00	0.05	0.18	0.49	0.81	1.17	1.64	2.33	3.35	4.70	6.36	8.07	9.72	11.2	12.0	12.6	13.1	13.3	13.0
60	0.00	0.05	0.16	0.42	0.68	0.95	1.28	1.70	2.32	3.13	4.08	5.03	6.05	6.95	7.47	7.72	7.91	7.98	7.84
65	0.00	0.05	0.15	0.34	0.56	0.75	0.98	1.27	1.62	2.07	2.57	3.07	3.59	4.04	4.34	4.53	4.69	4.77	4.74
70	0.00	0.04	0.13	0.27	0.44	0.59	0.75	0.95	1.18	1.42	1.66	1.91	2.16	2.39	2.58	2.72	2.82	2.88	2.89
75	0.00	0.04	0.11	0.22	0.33	0.44	0.57	0.70	0.86	1.02	1.15	1.27	1.40	1.52	1.64	1.74	1.79	1.83	1.84
80	0.00	0.04	0.09	0.17	0.25	0.33	0.41	0.51	0.63	0.74	0.80	0.85	0.91	0.98	1.05	1.11	1.13	1.14	1.14
85	0.00	0.03	0.07	0.13	0.19	0.24	0.29	0.36	0.43	0.50	0.52	0.54	0.54	0.58	0.61	0.65	0.64	0.63	0.62
90	0.00	0.03	0.06	0.09	0.14	0.19	0.25	0.25	0.25	0.25	0.22	0.20	0.18	0.16	0.14	0.12	0.11	0.11	0.11

H(β) Range:-90 - 90DEG

H(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:CAOLE

Test Date:13 December 2024

V(B) Range:-90 - 90DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.353

Humidity:65.0%

Test Distance:9.060m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.00V I:0.2700A P:6.480W PF:1.000 Freq:49.99Hz Lamp Flux:57.926lx6 lm		
Name:Medusa Mini-127mm-3000K-15D-Rev2	Type:3000K	WEIGHT:
SPEC.:15 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.02	0.01	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.03	0.01	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.00	0.01	0.01	0.00	0.02	0.05	0.04	0.01	
-65	0.01	0.00	0.01	0.03	0.03	0.01	0.00	0.00	0.03	0.04	0.04	0.09	0.08	0.01	0.03	0.08	0.05	0.01	
-60	0.06	0.03	0.03	0.06	0.08	0.11	0.08	0.03	0.15	0.18	0.11	0.26	0.25	0.11	0.06	0.11	0.07	0.01	
-55	0.29	0.28	0.31	0.36	0.33	0.40	0.39	0.32	0.48	0.48	0.37	0.61	0.53	0.27	0.13	0.14	0.08	0.01	
-50	1.39	1.36	1.40	1.37	1.31	1.33	1.16	1.63	1.47	1.06	1.10	1.25	0.95	0.52	0.25	0.18	0.10	0.01	
-45	4.28	4.12	4.13	3.73	4.09	3.56	2.67	4.64	4.51	2.46	2.25	2.13	1.61	0.86	0.39	0.22	0.12	0.01	
-40	15.4	14.3	15.2	12.2	14.0	11.9	8.51	8.97	9.19	6.18	4.02	3.32	2.42	1.24	0.56	0.28	0.14	0.01	
-35	63.5	59.0	53.4	45.3	36.8	31.2	20.5	15.8	14.2	10.2	6.53	4.85	3.36	1.68	0.75	0.34	0.16	0.01	
-30	136	124	108	86.2	68.8	51.6	36.0	25.2	18.0	13.1	9.24	6.69	4.10	2.13	0.94	0.41	0.18	0.01	
-25	232	205	169	132	99.3	72.3	50.5	34.3	22.5	15.7	11.5	8.15	4.81	2.55	1.13	0.48	0.20	0.01	
-20	375	322	254	187	133	93.5	64.6	43.1	27.6	18.2	13.1	9.10	5.47	2.93	1.31	0.56	0.21	0.01	
-15	601	492	369	256	171	115	78.0	50.8	32.9	20.7	14.3	9.88	6.02	3.24	1.47	0.63	0.23	0.01	
-10	1079	766	501	329	211	135	88.8	57.6	36.9	22.9	15.3	10.5	6.46	3.49	1.61	0.69	0.24	0.01	
-5	2191	1186	642	390	240	148	95.3	62.2	39.3	24.6	16.1	10.9	6.74	3.67	1.72	0.74	0.26	0.01	
0	3012	1453	698	406	248	152	97.0	63.6	40.2	25.6	16.5	11.1	6.87	3.77	1.80	0.78	0.26	0.01	
5	2176	1196	635	383	236	146	94.0	62.1	39.9	25.4	16.7	11.1	6.90	3.78	1.81	0.79	0.27	0.01	
10	1063	736	487	319	204	131	86.5	58.0	38.1	24.5	16.4	10.9	6.77	3.71	1.79	0.80	0.28	0.01	
15	565	465	347	243	164	110	75.9	52.1	35.2	23.0	15.7	10.5	6.49	3.57	1.73	0.79	0.28	0.01	
20	344	299	235	173	125	89.6	64.0	44.8	30.8	21.0	14.6	9.85	6.08	3.35	1.65	0.77	0.28	0.01	
25	210	187	155	121	93.2	70.6	51.9	37.4	26.2	18.6	13.2	9.07	5.54	3.07	1.56	0.74	0.27	0.01	
30	130	118	103	85.9	69.1	53.8	40.8	30.1	21.8	16.1	11.6	8.10	4.91	2.76	1.44	0.70	0.26	0.01	
35	82.4	77.0	69.5	60.3	49.7	40.0	31.1	23.6	17.9	13.6	10.1	6.94	4.26	2.43	1.32	0.66	0.25	0.01	
40	50.3	47.5	44.7	40.4	34.5	28.8	23.2	18.4	14.6	11.4	8.50	5.72	3.59	2.12	1.20	0.62	0.24	0.01	
45	31.5	30.2	28.8	26.6	23.6	20.5	17.4	14.4	11.7	9.31	6.81	4.56	2.92	1.80	1.07	0.58	0.22	0.01	
50	21.0	20.3	19.5	18.2	16.8	15.0	13.0	11.1	9.20	7.19	5.18	3.55	2.33	1.53	0.96	0.53	0.21	0.01	
55	13.3	13.1	12.8	12.4	11.9	10.7	9.52	8.31	6.75	5.18	3.80	2.65	1.83	1.28	0.84	0.48	0.19	0.01	
60	8.04	8.04	7.99	7.94	7.62	7.08	6.43	5.67	4.61	3.57	2.67	1.96	1.45	1.06	0.74	0.43	0.17	0.01	
65	4.89	4.93	4.90	4.85	4.64	4.36	4.01	3.56	3.00	2.39	1.87	1.46	1.13	0.88	0.64	0.38	0.16	0.01	
70	2.96	2.99	2.97	2.91	2.78	2.61	2.44	2.21	1.92	1.61	1.33	1.08	0.89	0.72	0.54	0.33	0.14	0.01	
75	1.86	1.87	1.85	1.78	1.70	1.60	1.52	1.41	1.29	1.12	0.96	0.80	0.68	0.57	0.46	0.28	0.13	0.01	
80	1.16	1.17	1.17	1.12	1.07	1.01	0.98	0.94	0.90	0.79	0.68	0.58	0.51	0.45	0.38	0.24	0.11	0.01	
85	0.64	0.65	0.67	0.63	0.59	0.56	0.56	0.55	0.54	0.51	0.47	0.41	0.37	0.34	0.30	0.19	0.09	0.01	
90	0.12	0.13	0.14	0.15	0.16	0.17	0.22	0.27	0.32	0.32	0.32	0.31	0.28	0.25	0.22	0.15	0.08	0.01	

H(β) Range:-90 - 90DEG

H(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:CAOLF

Test Date:13 December 2024

V(B) Range:-90 - 90DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.353

Humidity:65.0%

Test Distance:9.060m [K=1.0000]

Remarks: