

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2105.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax At 50% of Imax At 90% of Imax	55.8V x 77.8H 20.3V x 40.0H 7.0V x 12.2H
Beam Flux	Total To 10% of Imax To 50% of Imax To 90% of Imax	813.6 lumens per klm. 657.8 lumens per klm. 276.6 lumens per klm. 42.0 lumens per klm.
	Upward LOR Downward LOR	0.0 % 81.4 %
Luminaire Efficiency(Light Output Ratio)		81.3 %

$H(\beta)$ Range:-90 - 90DEG
 $H(\beta)$ Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:13 December 2024

$V(\beta)$ Range:-90 - 90DEG
 $V(\beta)$ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.00V I:0.2700A P:6.480W PF:1.000 Freq:49.99Hz Lamp Flux:94.5479x6 lm		
Name:Medusa Mini-127mm-3000K-2040D-Rev1	Type:3000K	WEIGHT:
SPEC.:20X40 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

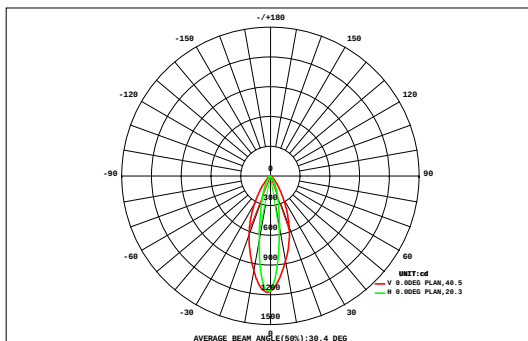

DATA OF LAMP		Eff:70.14lm/W	
MODEL		Imax(cd)	1177
NOMINAL POWER(W)	6	AVAILABILITY(%)	65.8
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	367.8
NOMINAL FLUX(lm)	93.1452	LOR(%)	81.3
LAMPS INSIDE	6	TOTAL FLUX(lm)	454.5
TEST VOLTAGE(V)	220	θ @50%(H,V)	40,20DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.22	0.00		
90	0.00	0.00	0.01	0.02	0.03	0.05	0.07	0.09	0.10	0.11	0.10	0.09	0.07	0.05	0.03	0.02	0.01	0.00	0.85	0.00		
80	0.00	0.00	0.02	0.04	0.08	0.13	0.18	0.22	0.25	0.26	0.24	0.21	0.16	0.10	0.06	0.03	0.01	0.00	2.00	0.00		
70	0.00	0.01	0.03	0.08	0.15	0.26	0.37	0.47	0.53	0.54	0.50	0.42	0.30	0.19	0.10	0.05	0.02	0.00	4.02	0.00		
60	0.00	0.01	0.05	0.12	0.25	0.47	0.72	0.94	1.08	1.10	1.00	0.80	0.55	0.32	0.16	0.07	0.02	0.00	7.65	0.00		
50	0.00	0.02	0.06	0.17	0.40	0.83	1.37	1.92	2.27	2.33	2.05	1.55	0.99	0.52	0.22	0.09	0.03	0.00	14.8	0.00		
40	0.00	0.02	0.08	0.22	0.61	1.45	2.69	4.07	5.05	5.19	4.40	3.10	1.79	0.81	0.30	0.10	0.03	0.00	29.9	18.5		
30	0.00	0.02	0.09	0.27	0.87	2.51	5.51	9.17	12.1	12.6	10.0	6.48	3.25	1.21	0.37	0.12	0.03	0.00	64.6	58.8		
-30	0.00	0.02	0.09	0.30	1.07	3.67	9.73	18.5	27.1	28.8	20.5	11.6	4.88	1.53	0.41	0.12	0.03	0.00	128	124		
	0.00	0.02	0.09	0.28	1.01	3.42	8.79	16.4	23.6	25.1	18.4	10.7	4.60	1.47	0.40	0.12	0.03	0.00	114	110		
	0.00	0.02	0.08	0.24	0.74	2.10	4.52	7.40	9.67	10.1	8.28	5.47	2.82	1.07	0.33	0.11	0.03	0.00	53.0	46.7		
	0.00	0.01	0.06	0.17	0.46	1.12	2.14	3.20	3.97	4.12	3.54	2.55	1.47	0.66	0.25	0.09	0.02	0.00	23.8	10.1		
-40	0.00	0.01	0.04	0.10	0.23	0.46	0.78	1.08	1.28	1.33	1.21	0.96	0.62	0.34	0.15	0.06	0.02	0.00	8.66	0.00		
-50	0.00	0.00	0.02	0.04	0.07	0.12	0.17	0.21	0.24	0.25	0.24	0.22	0.17	0.12	0.07	0.03	0.01	0.00	1.99	0.00		
-60	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.01	0.00	0.00	0.29	0.00		
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00		
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																						
Φ t	0.01	0.17	0.72	2.06	6.01	16.6	37.1	63.7	87.2	91.8	70.6	44.2	21.7	8.44	2.87	1.02	0.29	0.03	455	---		
Φ a	0.00	0.00	0.00	0.00	0.00	6.60	28.9	56.1	79.8	84.2	63.1	36.3	12.8	0.03	0.00	0.00	0.00	0.00	---	368		


one-half-peak spread: U:10.1,D:10.4 , L:20.9,R:19.5 IEMA Beam Type: Type 5 x 4 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:13 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.00V I:0.2700A P:6.480W PF:1.000 Freq:49.99Hz Lamp Flux:93.1452x6 lm		
Name:Medusa Mini-127mm-3000K-2040D-Rev1	Type:3000K	WEIGHT:
SPEC.:20X40 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

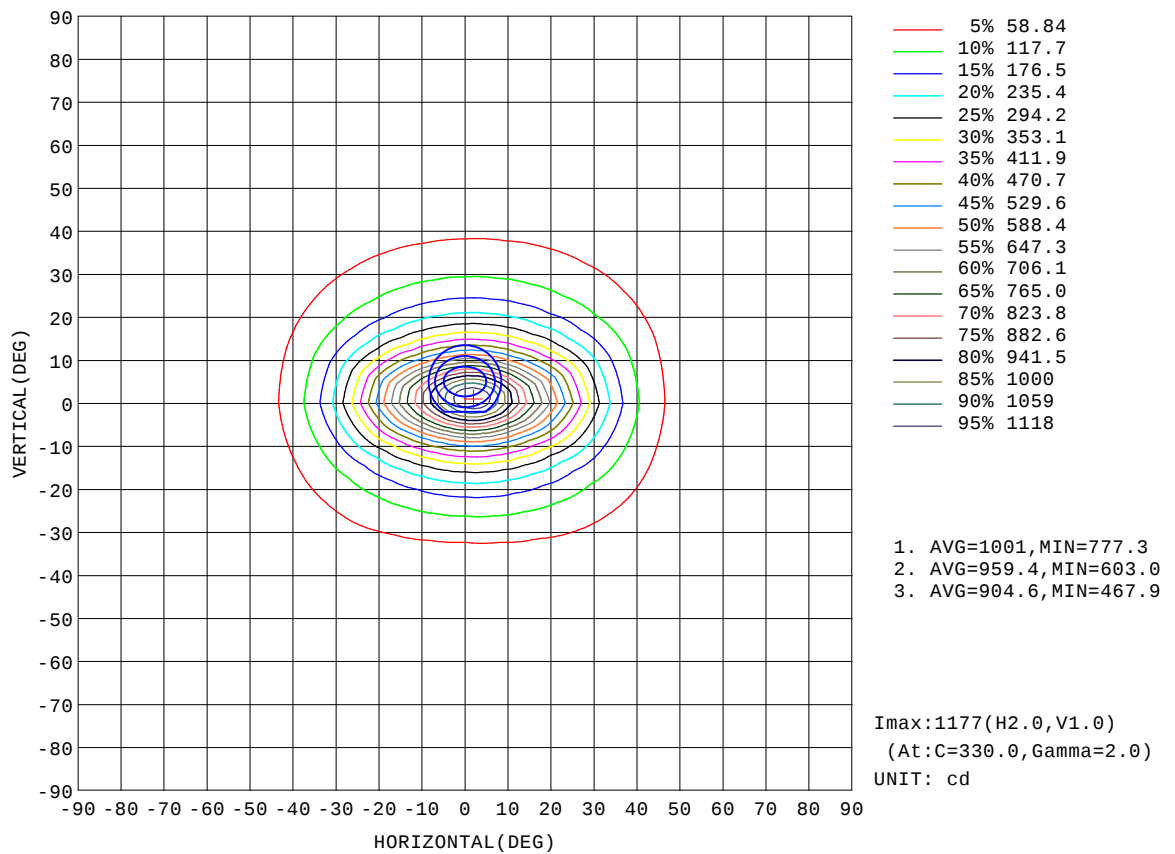


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:13 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.00V I:0.2700A P:6.480W PF:1.000 Freq:49.99Hz Lamp Flux:93.1452x6 lm		
Name:Medusa Mini-127mm-3000K-2040D-Rev1	Type:3000K	WEIGHT:
SPEC.:20X40 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

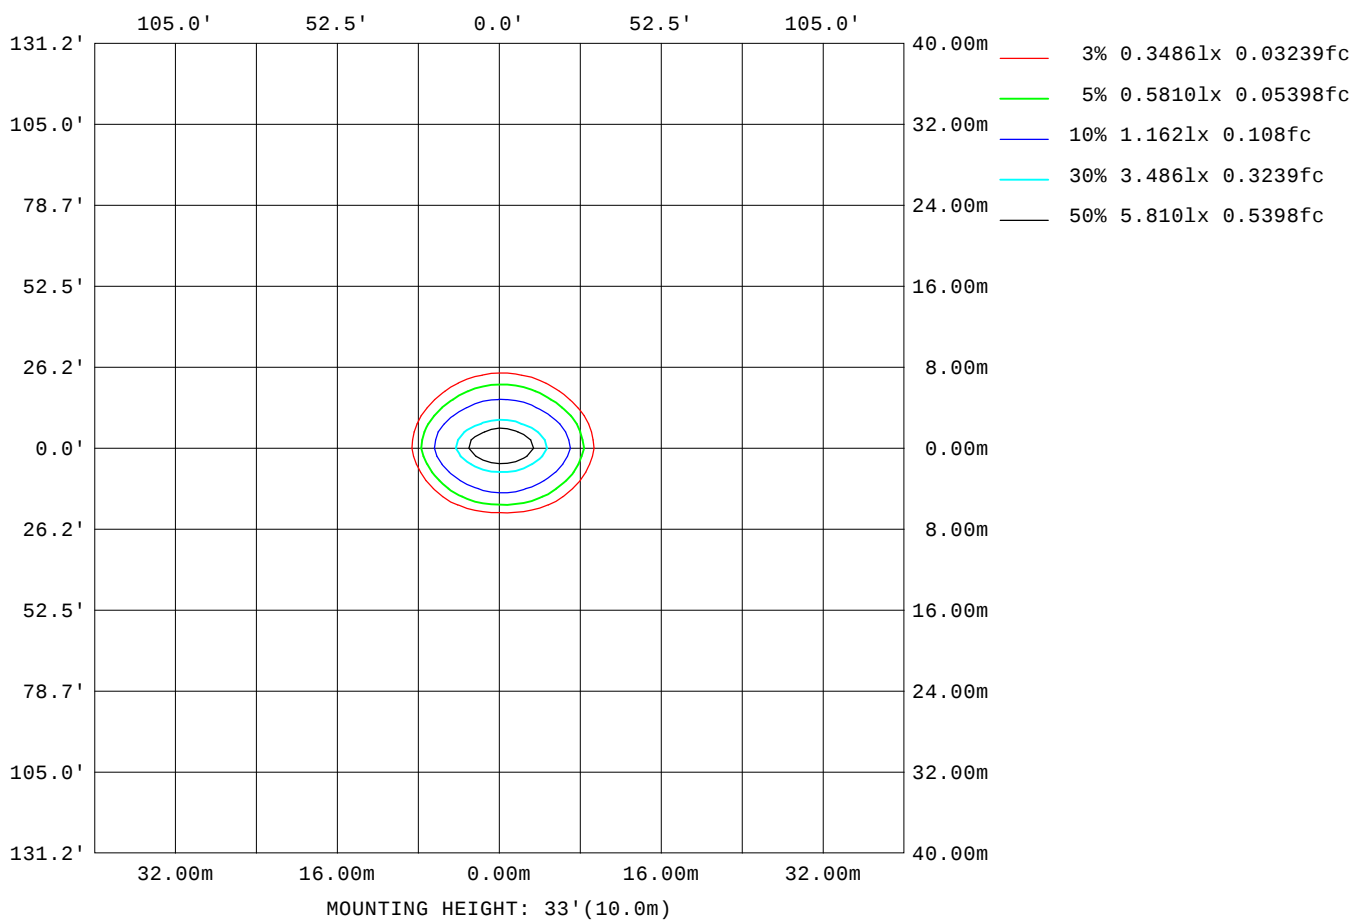

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:13 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

Planar Illuminance Curve

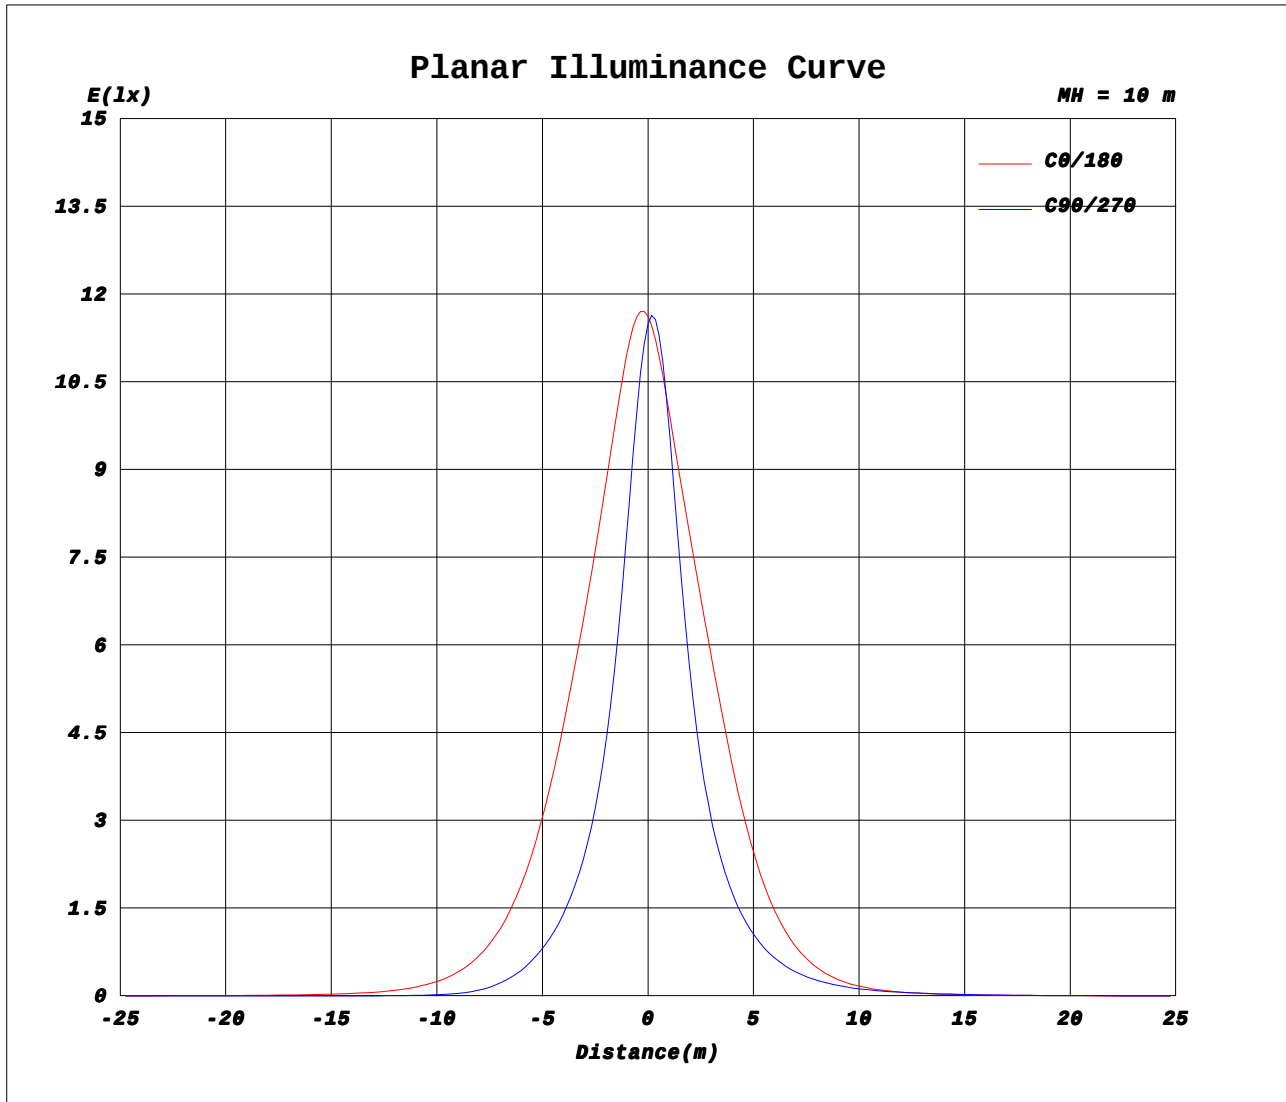


H(β) Range: -90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: CA0LE
Test Date: 13 December 2024

V(B) Range: -90 - 90DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 9.060m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.00V I:0.2700A P:6.480W PF:1.000 Freq:49.99Hz Lamp Flux:93.1452x6 lm		
Name:Medusa Mini-127mm-3000K-2040D-Rev1	Type:3000K	WEIGHT:
SPEC.:20X40 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

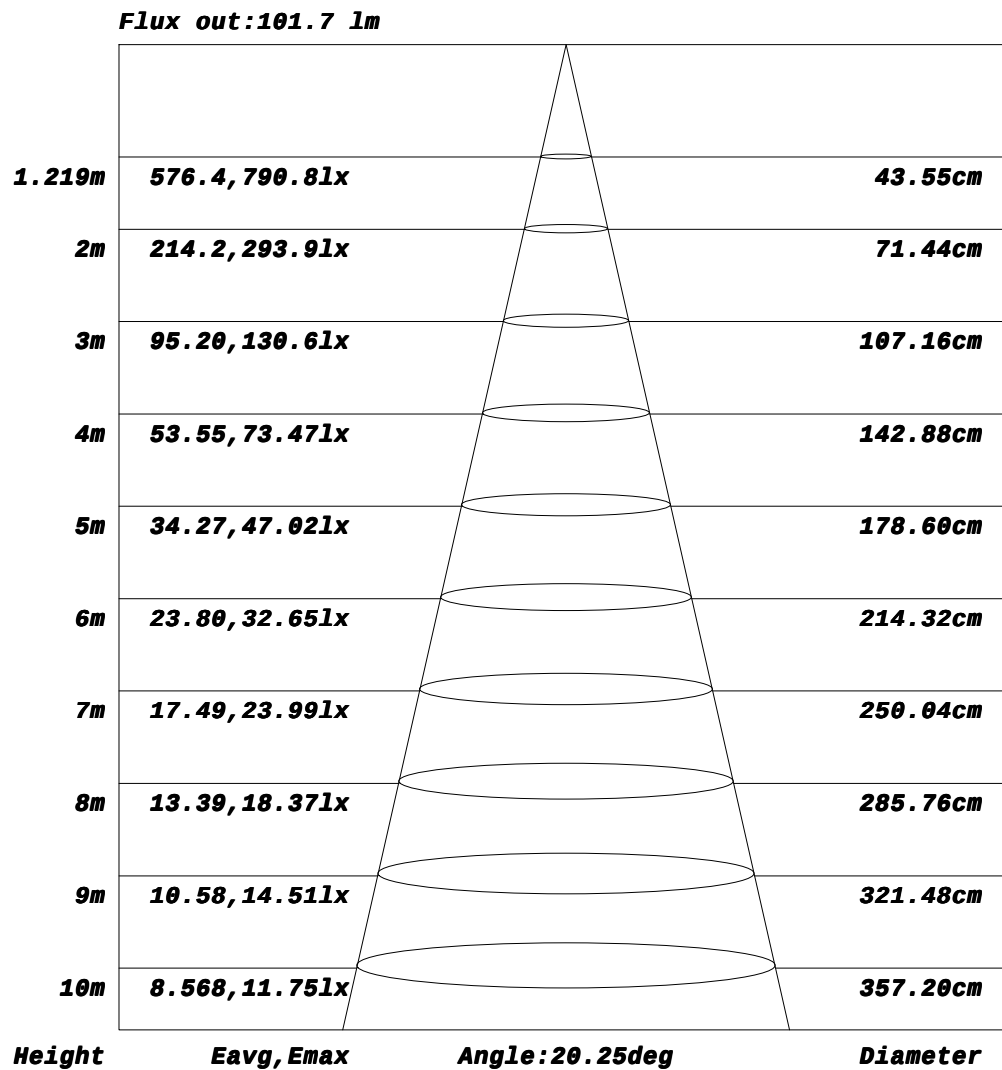

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:13 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.00V I:0.2700A P:6.480W PF:1.000 Freq:49.99Hz Lamp Flux:93.1452x6 lm		
Name:Medusa Mini-127mm-3000K-2040D-Rev1	Type:3000K	WEIGHT:
SPEC.:20X40 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(DEC) V(DEC)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.01	0.00	0.00	0.01	0.00	0.01	0.01	0.00	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.01
-60	0.00	0.00	0.00	0.04	0.00	0.05	0.13	0.03	0.05	0.09	0.00	0.01	0.05	0.06	0.04	0.01	0.02	0.05	0.07
-55	0.00	0.00	0.02	0.10	0.02	0.28	0.42	0.13	0.39	0.48	0.22	0.40	0.48	0.39	0.52	0.57	0.62	0.71	0.70
-50	0.00	0.00	0.06	0.21	0.17	0.67	0.89	0.90	1.17	1.43	1.58	1.83	2.16	2.26	2.53	2.73	2.82	3.00	2.94
-45	0.00	0.00	0.11	0.37	0.52	1.20	1.68	2.10	2.45	3.26	4.08	4.29	5.22	5.72	5.97	6.55	6.67	7.04	6.91
-40	0.00	0.00	0.19	0.58	1.01	1.89	2.77	3.60	4.50	6.25	7.97	9.09	11.0	12.9	13.3	15.3	15.7	17.0	16.7
-35	0.00	0.00	0.28	0.83	1.53	2.72	4.07	5.40	7.25	10.5	13.8	17.5	22.5	27.1	31.2	35.5	38.3	41.1	41.0
-30	0.00	0.00	0.41	1.12	2.06	3.53	5.48	7.46	10.4	15.1	22.1	29.6	38.7	49.1	57.9	65.9	72.8	77.7	78.4
-25	0.00	0.00	0.54	1.41	2.57	4.32	6.74	9.67	13.6	20.4	31.0	43.9	59.3	76.4	92.5	107	120	129	132
-20	0.00	0.00	0.67	1.69	3.05	5.05	7.76	11.5	16.9	26.3	41.1	60.9	83.8	111	137	162	183	199	206
-15	0.00	0.00	0.80	1.96	3.50	5.69	8.68	13.0	20.0	32.5	52.7	81.9	119	157	203	243	281	309	321
-10	0.00	0.00	0.91	2.20	3.89	6.23	9.45	14.3	22.8	38.7	65.4	106	162	232	305	376	440	494	522
-5	0.00	0.00	1.01	2.42	4.21	6.65	10.0	15.4	25.1	44.2	78.2	133	211	316	440	566	679	791	859
0	0.00	0.00	1.09	2.60	4.47	6.96	10.4	16.1	26.6	48.0	87.6	154	254	390	552	715	873	1037	1162
5	0.00	0.01	1.10	2.62	4.48	6.95	10.4	16.0	26.4	46.7	82.9	142	231	354	506	654	795	933	1035
10	0.00	0.02	1.09	2.60	4.41	6.84	10.2	15.6	25.2	43.2	74.1	123	193	278	372	468	546	625	668
15	0.00	0.03	1.04	2.55	4.28	6.61	9.78	14.7	23.2	38.5	62.8	97.7	143	193	251	300	350	385	403
20	0.00	0.04	0.98	2.47	4.09	6.28	9.21	13.6	20.7	32.7	50.7	74.6	103	136	167	200	227	245	256
25	0.00	0.05	0.88	2.37	3.84	5.87	8.50	12.3	18.2	27.4	40.5	56.6	75.5	95.3	116	135	152	163	168
30	0.00	0.05	0.78	2.25	3.56	5.40	7.70	10.9	15.6	22.5	32.0	43.0	55.2	67.8	81.1	92.6	102	109	112
35	0.00	0.06	0.66	2.07	3.24	4.89	6.82	9.40	13.1	18.3	24.9	32.5	40.4	48.9	56.9	64.0	69.3	73.6	75.0
40	0.00	0.06	0.55	1.86	2.93	4.28	5.91	7.99	10.8	14.6	19.3	24.5	30.0	35.3	40.1	44.6	47.5	50.3	51.2
45	0.00	0.06	0.44	1.59	2.66	3.67	5.01	6.65	8.73	11.5	14.8	18.5	22.1	25.6	28.8	31.4	33.3	35.0	35.5
50	0.00	0.06	0.36	1.29	2.35	3.08	4.14	5.40	6.98	8.93	11.3	13.8	16.3	18.6	20.6	22.3	23.5	24.5	24.9
55	0.00	0.05	0.29	0.99	1.93	2.57	3.32	4.26	5.43	6.79	8.39	10.1	11.8	13.4	14.7	15.7	16.5	17.2	17.4
60	0.00	0.05	0.23	0.72	1.46	2.07	2.59	3.26	4.09	5.02	6.05	7.23	8.40	9.45	10.3	10.9	11.4	11.9	12.1
65	0.00	0.04	0.19	0.53	1.01	1.54	1.95	2.39	2.96	3.57	4.25	5.01	5.78	6.47	7.01	7.44	7.82	8.10	8.25
70	0.00	0.04	0.15	0.38	0.66	1.01	1.37	1.69	2.04	2.41	2.84	3.32	3.79	4.24	4.63	4.95	5.20	5.38	5.49
75	0.00	0.04	0.11	0.26	0.42	0.61	0.83	1.07	1.31	1.52	1.77	2.03	2.30	2.58	2.83	3.06	3.22	3.33	3.40
80	0.00	0.03	0.08	0.17	0.25	0.35	0.46	0.58	0.70	0.83	0.93	1.03	1.14	1.27	1.39	1.50	1.58	1.64	1.68
85	0.00	0.03	0.06	0.11	0.17	0.23	0.27	0.33	0.41	0.49	0.50	0.51	0.52	0.57	0.62	0.66	0.65	0.64	0.63
90	0.00	0.03	0.05	0.08	0.11	0.15	0.18	0.22	0.26	0.31	0.31	0.31	0.31	0.33	0.35	0.38	0.38	0.38	0.38

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:13 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.00V I:0.2700A P:6.480W PF:1.000 Freq:49.99Hz Lamp Flux:93.1452x6 lm																	
Name:Medusa Mini-127mm-3000K-2040D-Rev1									Type:3000K						WEIGHT:		
SPEC.:20X40 DEG									DIM.:127mm						SERIAL No.:		
MFR.:									SUR.:						Shielding Angle:		

Table--2

UNIT: cd

H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.01
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.03	0.01
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.07	0.05	0.01	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.03	0.03	0.00	0.04	0.11	0.07	0.01	
-65	0.00	0.00	0.00	0.01	0.01	0.01	0.00	0.00	0.06	0.05	0.03	0.17	0.21	0.05	0.10	0.18	0.09	0.01	
-60	0.05	0.02	0.03	0.05	0.06	0.18	0.14	0.02	0.34	0.38	0.17	0.45	0.54	0.28	0.20	0.27	0.13	0.01	
-55	0.81	0.80	0.87	0.92	0.82	1.04	1.02	0.82	1.06	1.09	0.80	0.99	1.02	0.65	0.40	0.40	0.16	0.01	
-50	3.17	3.16	3.26	3.22	3.13	3.23	2.96	2.91	2.74	2.33	2.04	1.93	1.65	1.14	0.70	0.54	0.20	0.01	
-45	7.34	7.21	7.53	7.17	7.37	7.16	6.12	6.34	5.62	4.28	3.67	3.18	2.48	1.72	1.04	0.70	0.25	0.01	
-40	17.8	17.2	17.8	16.2	16.6	15.0	12.9	11.6	9.84	7.38	5.69	4.64	3.52	2.34	1.41	0.89	0.30	0.01	
-35	42.6	41.4	39.9	37.0	33.5	29.3	24.1	19.7	15.5	11.1	8.13	6.29	4.71	2.95	1.79	1.09	0.35	0.01	
-30	80.4	78.0	73.0	66.6	58.8	48.8	39.1	30.4	21.9	15.1	10.9	8.11	5.65	3.55	2.16	1.28	0.41	0.01	
-25	133	128	118	106	90.9	74.2	57.4	42.6	29.5	19.6	13.6	9.64	6.50	4.13	2.52	1.47	0.46	0.01	
-20	207	197	181	157	133	105	80.8	57.4	38.2	24.5	16.0	10.8	7.26	4.67	2.84	1.65	0.52	0.01	
-15	323	304	272	236	190	151	111	75.0	47.6	29.0	18.0	11.9	7.91	5.15	3.14	1.82	0.56	0.01	
-10	520	478	421	356	285	210	145	93.5	56.7	33.1	19.7	12.7	8.44	5.55	3.40	1.97	0.60	0.01	
-5	847	748	635	514	388	273	180	111	64.8	36.4	21.1	13.4	8.83	5.87	3.62	2.11	0.63	0.01	
0	1132	973	801	638	476	327	209	125	70.4	38.4	21.8	13.8	9.08	6.09	3.80	2.23	0.65	0.01	
5	1002	871	722	577	426	294	190	116	67.4	37.9	21.8	13.8	9.08	6.09	3.81	2.24	0.67	0.01	
10	657	587	510	422	332	242	163	103	61.7	35.8	21.1	13.5	8.94	6.00	3.77	2.23	0.67	0.01	
15	400	373	328	284	227	177	127	85.6	54.3	32.7	19.9	12.9	8.66	5.83	3.69	2.20	0.66	0.01	
20	253	241	219	188	158	124	94.6	67.3	45.1	28.8	18.3	12.1	8.25	5.59	3.57	2.15	0.64	0.01	
25	167	160	146	129	110	90.1	69.7	52.0	36.6	24.4	16.4	11.2	7.74	5.29	3.41	2.09	0.61	0.01	
30	112	107	99.3	89.6	77.1	64.9	52.3	40.2	29.3	20.5	14.3	10.1	7.15	4.94	3.22	1.99	0.58	0.01	
35	75.3	72.5	68.5	62.5	55.1	46.8	39.0	30.9	23.5	17.1	12.3	8.93	6.51	4.55	3.02	1.88	0.53	0.01	
40	51.4	49.6	47.6	43.8	39.6	34.4	29.0	23.7	18.5	14.0	10.4	7.77	5.77	4.14	2.80	1.73	0.49	0.01	
45	35.7	34.7	33.4	31.3	28.6	25.3	21.8	18.1	14.5	11.3	8.68	6.65	5.04	3.71	2.58	1.55	0.44	0.01	
50	25.0	24.5	23.7	22.4	20.7	18.6	16.3	13.8	11.3	9.02	7.11	5.57	4.30	3.26	2.37	1.36	0.39	0.01	
55	17.6	17.3	16.8	16.0	15.0	13.6	12.0	10.4	8.64	7.07	5.69	4.56	3.60	2.82	2.14	1.15	0.34	0.01	
60	12.2	12.0	11.7	11.3	10.7	9.81	8.76	7.63	6.48	5.41	4.45	3.64	2.95	2.43	1.84	0.94	0.30	0.01	
65	8.34	8.29	8.13	7.87	7.47	6.91	6.19	5.44	4.72	4.03	3.38	2.82	2.38	2.05	1.51	0.76	0.26	0.01	
70	5.55	5.54	5.44	5.26	5.00	4.65	4.21	3.75	3.30	2.88	2.46	2.11	1.88	1.59	1.16	0.60	0.22	0.01	
75	3.44	3.44	3.39	3.26	3.09	2.87	2.65	2.41	2.16	1.92	1.70	1.51	1.35	1.12	0.85	0.47	0.18	0.01	
80	1.72	1.73	1.72	1.67	1.60	1.51	1.43	1.34	1.26	1.16	1.06	0.94	0.84	0.73	0.62	0.35	0.15	0.01	
85	0.65	0.67	0.69	0.67	0.64	0.60	0.62	0.62	0.62	0.59	0.54	0.47	0.46	0.45	0.42	0.25	0.11	0.01	
90	0.39	0.39	0.40	0.40	0.40	0.39	0.40	0.41	0.41	0.39	0.36	0.34	0.30	0.26	0.22	0.15	0.08	0.01	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:13 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks: