

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)		2487.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	61.5V x 62.2H
	At 50% of Imax	31.8V x 31.8H
	At 90% of Imax	14.0V x 14.4H
Beam Flux	Total	976.8 lumens per klm.
	To 10% of Imax	814.2 lumens per klm.
	To 50% of Imax	442.2 lumens per klm.
	To 90% of Imax	112.9 lumens per klm.
Upward LOR		0.0 %
Downward LOR		97.7 %
Luminaire Efficiency(Light Output Ratio)		97.6 %


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:13 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.00V I:0.2700A P:6.480W PF:1.000 Freq:49.99Hz Lamp Flux:96.83x6 lm

Name:Medusa Mini-127mm-3000K-30D-Rev2	Type:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

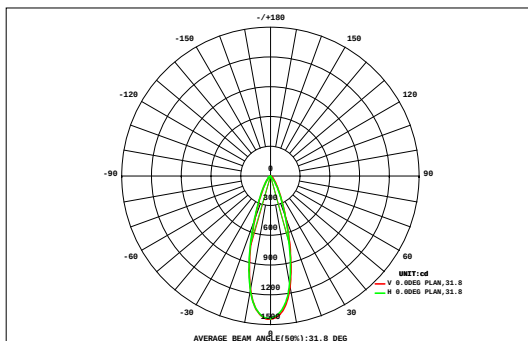

DATA OF LAMP				Eff:87.54lm/W	
MODEL				Imax(cd)	1445
NOMINAL POWER(W)	6	AVAILABILITY(%)		81.3	
RATED VOLTAGE(V)	220	Avai. FLUX(lm)		472.4	
NOMINAL FLUX(lm)	96.83	LOR(%)		97.6	
LAMPS INSIDE	6	TOTAL FLUX(lm)		567.3	
TEST VOLTAGE(V)	220	θ @50%(H,V)		32,32DEG	

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.22	0.00
80	0.00	0.00	0.01	0.01	0.03	0.04	0.05	0.06	0.06	0.06	0.06	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.53	0.00
70	0.00	0.00	0.01	0.03	0.05	0.09	0.13	0.16	0.17	0.18	0.17	0.14	0.10	0.06	0.03	0.01	0.00	0.00	1.35	0.00
60	0.00	0.01	0.02	0.05	0.12	0.23	0.35	0.44	0.50	0.51	0.46	0.36	0.24	0.13	0.06	0.02	0.01	0.00	3.50	0.00
50	0.00	0.01	0.03	0.10	0.24	0.47	0.76	1.06	1.28	1.29	1.08	0.78	0.48	0.25	0.10	0.03	0.01	0.00	7.97	0.00
40	0.00	0.01	0.04	0.16	0.41	0.84	1.53	2.42	3.14	3.17	2.47	1.57	0.86	0.41	0.16	0.05	0.01	0.00	17.3	1.02
30	0.00	0.01	0.06	0.22	0.60	1.38	2.93	5.58	8.41	8.57	5.78	3.04	1.43	0.61	0.22	0.06	0.01	0.00	38.9	27.8
20	0.00	0.01	0.07	0.27	0.78	2.02	5.14	12.6	22.6	23.2	13.4	5.39	2.11	0.80	0.27	0.07	0.01	0.00	88.7	80.7
10	0.00	0.01	0.08	0.29	0.90	2.51	7.26	21.1	38.0	38.6	22.3	7.59	2.57	0.91	0.29	0.08	0.01	0.00	143	135
0	0.00	0.01	0.07	0.28	0.87	2.46	7.00	20.1	36.7	37.7	21.4	7.35	2.52	0.88	0.28	0.08	0.01	0.00	138	131
-10	0.00	0.01	0.06	0.23	0.70	1.91	4.82	11.6	20.7	21.2	12.2	5.05	1.99	0.72	0.24	0.07	0.01	0.00	81.5	73.5
-20	0.00	0.01	0.05	0.17	0.47	1.23	2.73	5.11	7.55	7.60	5.20	2.78	1.26	0.49	0.18	0.05	0.01	0.00	34.9	23.4
-30	0.00	0.00	0.03	0.09	0.25	0.49	0.99	1.58	2.02	2.01	1.56	0.99	0.50	0.26	0.09	0.03	0.00	0.00	10.9	0.00
-40	0.00	0.00	0.01	0.03	0.06	0.08	0.12	0.15	0.18	0.17	0.15	0.12	0.08	0.07	0.03	0.01	0.00	0.00	1.28	0.00
-50	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.11	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
HORIZONTAL (DEG)																				
Φ t	0.01	0.09	0.54	1.94	5.51	13.8	33.8	82.0	141	144	86.2	35.2	14.2	5.64	1.99	0.59	0.11	0.01	567	---
Φ a	0.00	0.00	0.00	0.00	0.00	0.39	22.9	74.0	134	137	78.3	24.8	0.56	0.00	0.00	0.00	0.00	0.00	---	472

one-half-peak spread: U:15.5,D:15.0 , L:16.8,R:15.2


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:13 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.00V I:0.2700A P:6.480W PF:1.000 Freq:49.99Hz Lamp Flux:96.83x6 lm		
Name:Medusa Mini-127mm-3000K-30D-Rev2	Type:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

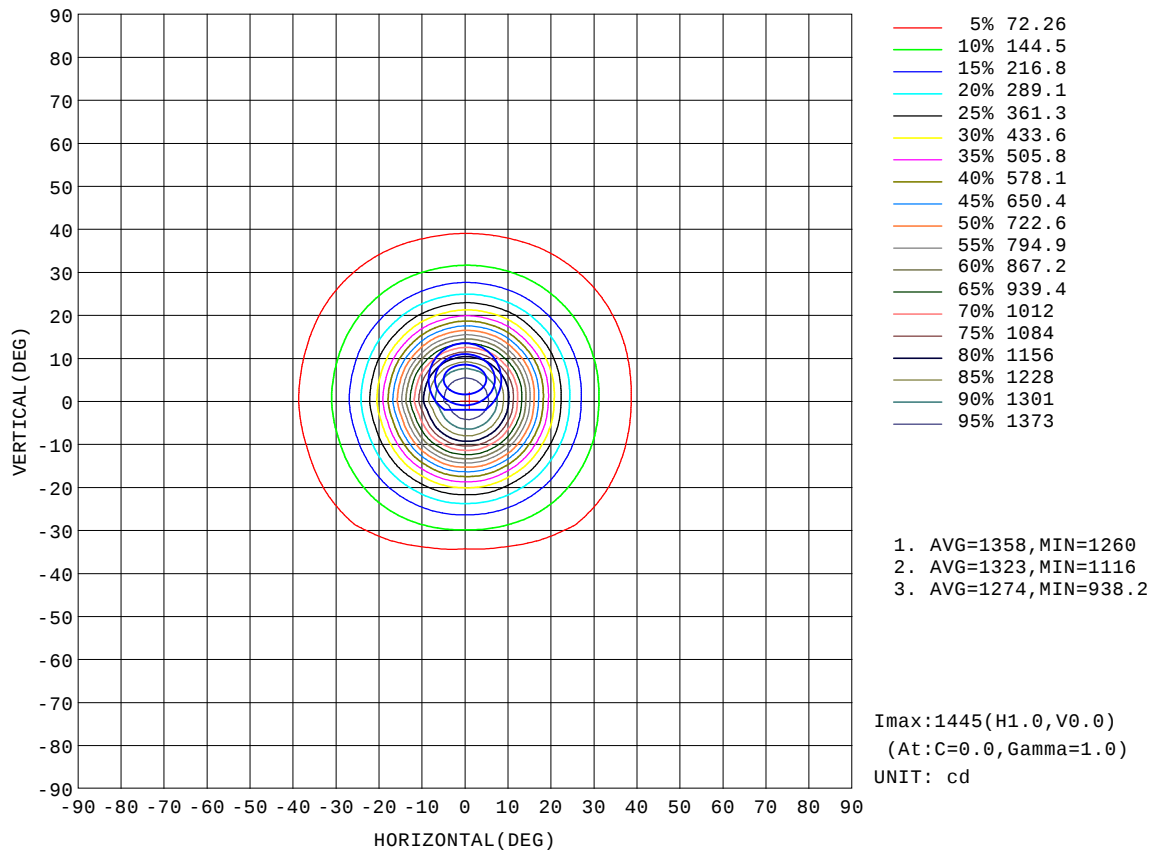


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:13 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.00V I:0.2700A P:6.480W PF:1.000 Freq:49.99Hz Lamp Flux:96.83x6 lm		
Name:Medusa Mini-127mm-3000K-30D-Rev2	Type:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

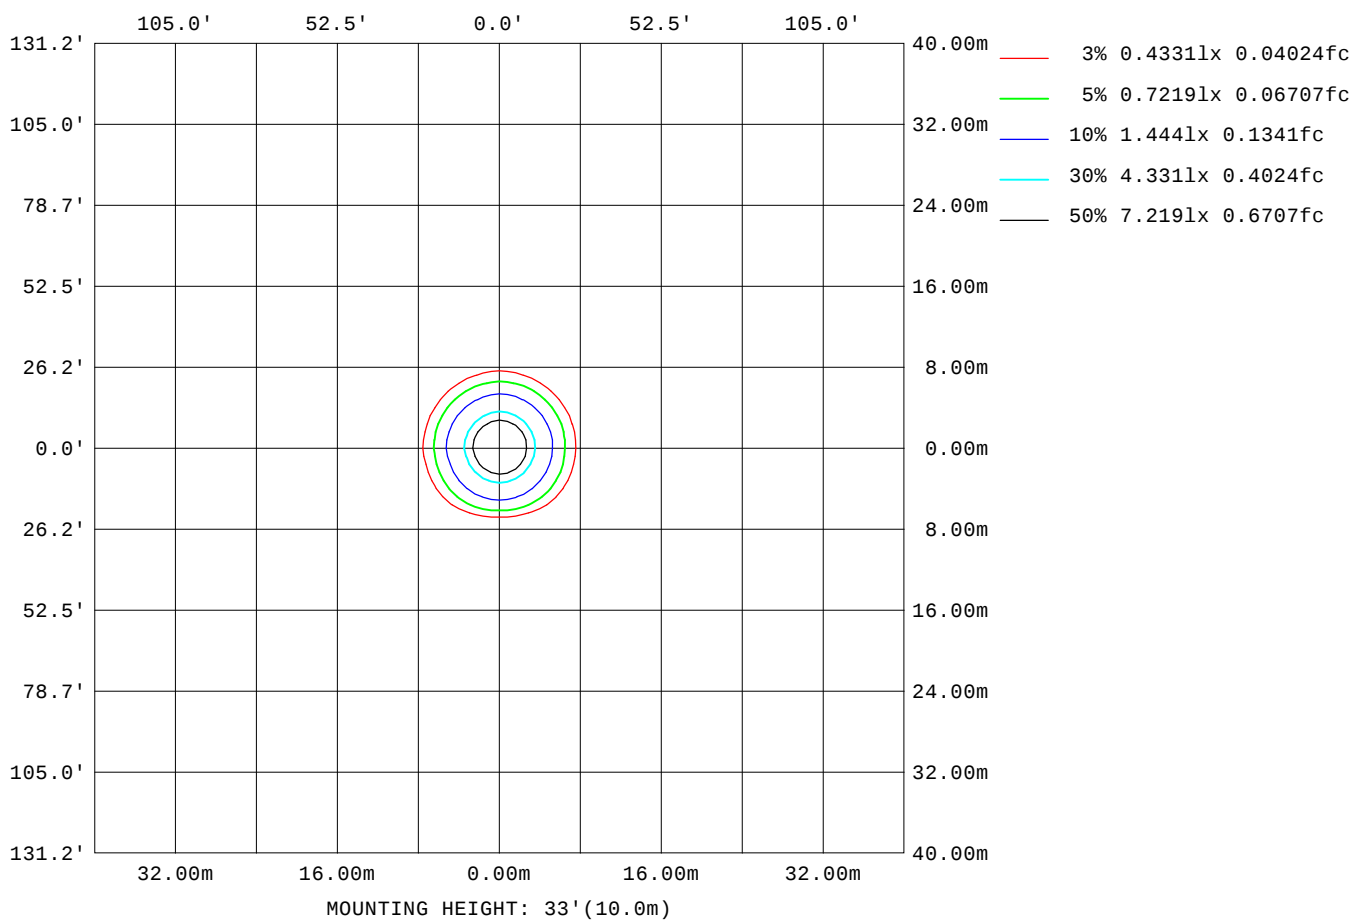

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CAOLE
Test Date:13 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

Planar Illuminance Curve

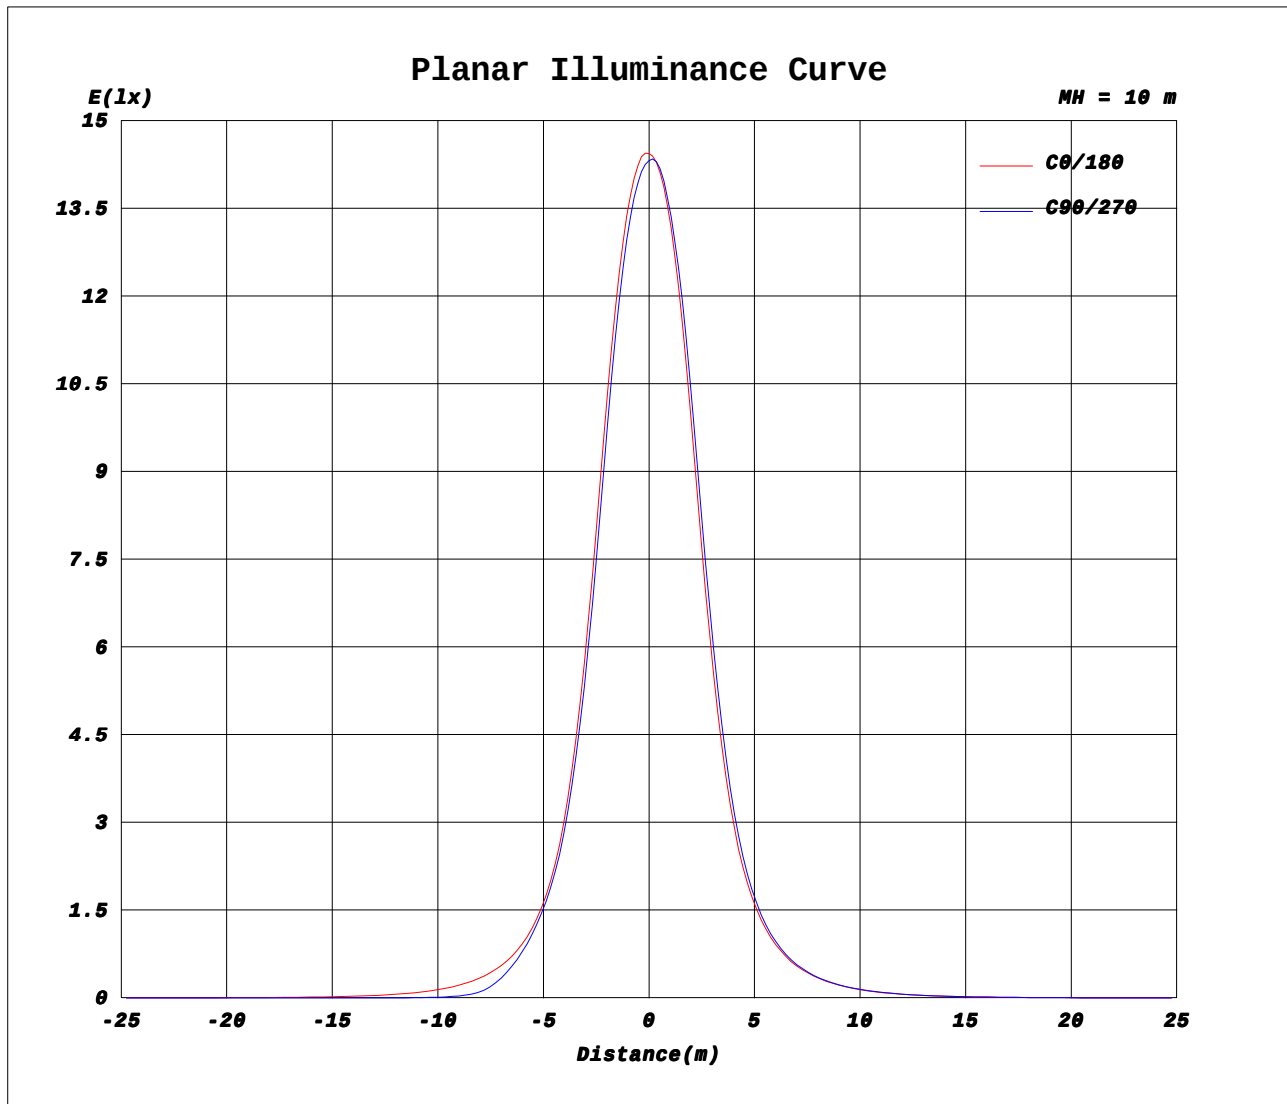


H(β) Range: -90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: CA0LE
Test Date: 13 December 2024

V(B) Range: -90 - 90DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 9.060m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.00V I:0.2700A P:6.480W PF:1.000 Freq:49.99Hz Lamp Flux:96.83x6 lm		
Name:Medusa Mini-127mm-3000K-30D-Rev2	Type:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

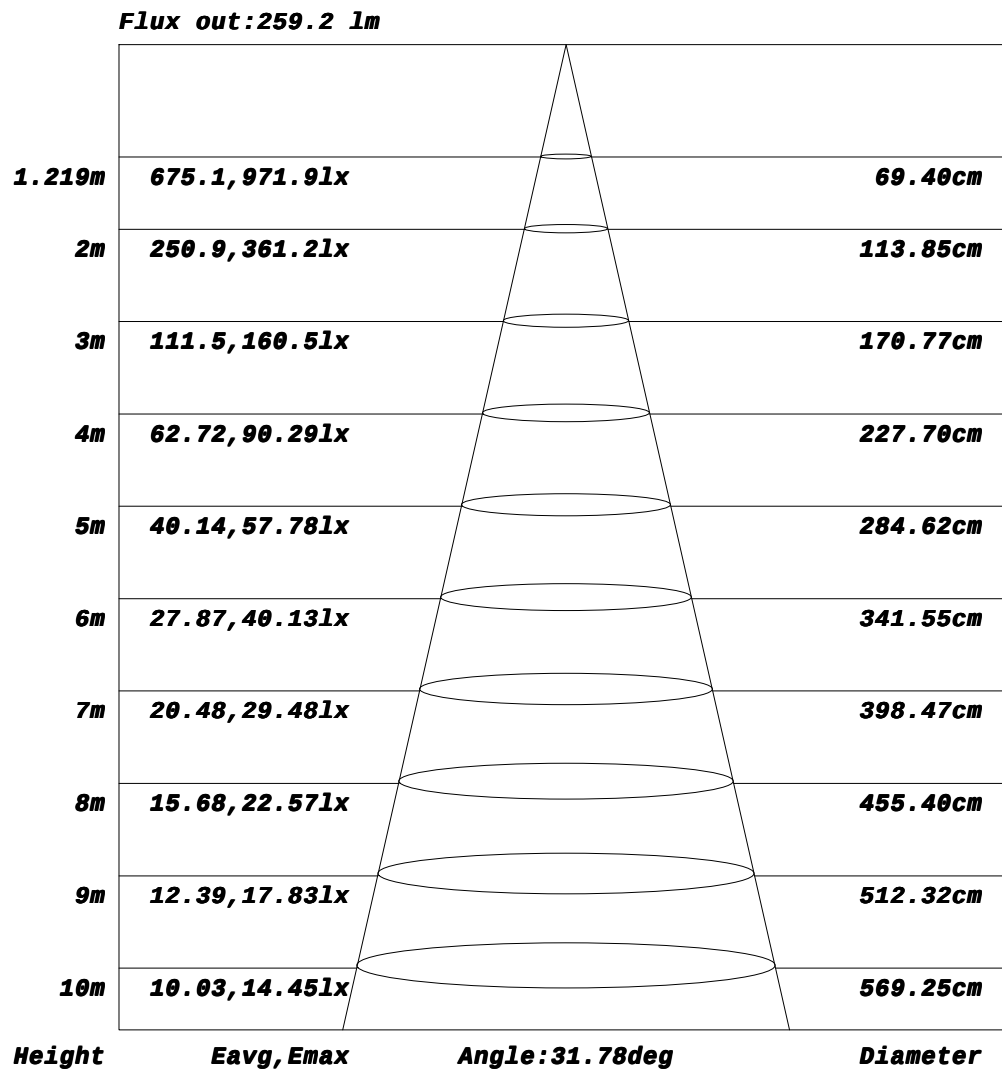

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:13 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.00V I:0.2700A P:6.480W PF:1.000 Freq:49.99Hz Lamp Flux:96.83x6 lm		
Name:Medusa Mini-127mm-3000K-30D-Rev2	Type:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.01	0.01	0.00	0.00	0.02	0.00	0.01	0.01	0.00	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.03	0.03	0.00	0.06	0.10	0.03	0.05	0.07	0.00	0.01	0.05	0.05	0.03	0.01	0.01	0.03	0.05
-55	0.00	0.00	0.04	0.06	0.03	0.21	0.28	0.12	0.26	0.28	0.12	0.20	0.25	0.16	0.21	0.17	0.15	0.19	0.19
-50	0.00	0.00	0.07	0.10	0.15	0.45	0.62	0.64	0.69	0.85	1.00	0.87	1.05	1.05	1.16	1.22	1.23	1.32	1.27
-45	0.00	0.00	0.11	0.16	0.38	0.79	1.26	1.52	1.48	2.73	3.42	2.30	3.08	3.61	3.63	4.15	4.38	4.74	4.57
-40	0.00	0.00	0.14	0.26	0.62	1.28	2.17	2.82	3.87	6.62	7.74	7.34	9.94	12.2	11.3	14.8	14.8	16.3	15.5
-35	0.00	0.00	0.18	0.39	0.91	1.98	3.36	4.70	7.47	12.0	14.2	18.0	26.7	33.7	42.1	51.3	58.1	63.7	62.6
-30	0.00	0.02	0.22	0.53	1.21	2.65	4.79	7.11	11.0	16.4	23.3	32.7	48.2	66.0	84.2	105	125	139	142
-25	0.00	0.03	0.27	0.69	1.51	3.31	6.12	9.60	14.2	20.9	32.0	48.5	69.3	96.9	130	169	210	242	253
-20	0.00	0.04	0.32	0.83	1.83	3.94	7.17	11.5	16.9	25.8	40.8	62.0	90.4	130	186	257	338	413	440
-15	0.00	0.05	0.36	0.96	2.12	4.49	8.10	13.0	19.6	30.9	49.0	74.4	112	169	255	386	542	689	747
-10	0.00	0.05	0.41	1.08	2.37	4.95	8.88	14.2	22.1	35.6	55.8	85.5	132	208	334	537	799	1017	1113
-5	0.00	0.06	0.45	1.18	2.55	5.29	9.44	15.2	24.2	39.1	61.3	95.0	150	243	408	676	1006	1262	1352
0	0.00	0.06	0.48	1.26	2.68	5.49	9.77	15.7	25.5	41.0	64.2	99.9	160	264	457	773	1134	1371	1444
5	0.00	0.07	0.50	1.28	2.69	5.47	9.74	15.9	25.5	40.4	62.7	97.1	154	252	429	720	1067	1309	1385
10	0.00	0.08	0.51	1.27	2.64	5.30	9.44	15.5	24.6	38.3	58.6	89.3	139	220	361	584	858	1089	1180
15	0.00	0.08	0.51	1.25	2.53	5.01	8.88	14.7	23.2	35.2	52.6	78.6	118	179	275	415	597	753	827
20	0.00	0.08	0.50	1.20	2.38	4.61	8.13	13.5	21.1	31.3	45.6	66.4	96.1	139	199	279	375	455	497
25	0.00	0.08	0.48	1.15	2.19	4.14	7.25	11.9	18.5	27.0	38.4	54.0	75.2	103	139	183	229	267	285
30	0.00	0.08	0.46	1.07	2.00	3.62	6.31	10.2	15.8	22.7	31.4	42.6	57.3	75.5	97.2	121	144	161	169
35	0.00	0.07	0.43	1.00	1.79	3.11	5.30	8.53	13.0	18.6	25.0	32.9	42.6	54.3	67.4	80.2	91.8	101	104
40	0.00	0.07	0.40	0.91	1.58	2.60	4.31	6.92	10.4	14.6	19.5	25.1	31.4	38.5	46.2	53.5	59.5	64.1	66.0
45	0.00	0.07	0.37	0.82	1.40	2.17	3.39	5.32	7.99	11.1	14.6	18.6	22.7	27.1	31.5	35.3	38.6	41.1	42.0
50	0.00	0.07	0.33	0.73	1.22	1.78	2.62	3.94	5.82	8.06	10.5	13.2	15.9	18.7	21.1	23.1	24.7	26.0	26.5
55	0.00	0.07	0.29	0.63	1.03	1.45	2.03	2.84	4.05	5.58	7.30	8.94	10.6	12.3	13.5	14.5	15.4	16.1	16.3
60	0.00	0.07	0.26	0.55	0.86	1.18	1.57	2.09	2.78	3.70	4.74	5.76	6.77	7.66	8.26	8.66	9.13	9.51	9.62
65	0.00	0.07	0.21	0.46	0.69	0.94	1.21	1.54	1.95	2.45	2.98	3.53	4.06	4.52	4.86	5.05	5.28	5.47	5.53
70	0.00	0.06	0.18	0.39	0.56	0.73	0.93	1.14	1.40	1.67	1.94	2.21	2.47	2.71	2.91	3.05	3.17	3.26	3.30
75	0.00	0.06	0.16	0.31	0.44	0.55	0.68	0.84	1.01	1.18	1.31	1.45	1.59	1.72	1.84	1.95	2.01	2.04	2.05
80	0.00	0.05	0.13	0.24	0.33	0.41	0.49	0.59	0.71	0.83	0.89	0.95	1.01	1.08	1.16	1.23	1.25	1.25	1.25
85	0.00	0.05	0.10	0.17	0.23	0.28	0.33	0.41	0.49	0.56	0.58	0.59	0.60	0.65	0.69	0.73	0.72	0.71	0.69
90	0.00	0.04	0.09	0.13	0.18	0.23	0.28	0.32	0.35	0.38	0.38	0.38	0.38	0.39	0.40	0.41	0.41	0.41	0.41

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:13 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.00V I:0.2700A P:6.480W PF:1.000 Freq:49.99Hz Lamp Flux:96.83x6 lm		
Name:Medusa Mini-127mm-3000K-30D-Rev2	Type:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.01	0.00	
-65	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.01	0.02	0.01	0.03	0.01	0.00	0.02	0.04	0.01	0.00	
-60	0.03	0.01	0.01	0.03	0.05	0.05	0.01	0.00	0.09	0.07	0.04	0.14	0.09	0.00	0.05	0.06	0.02	0.00	
-55	0.20	0.16	0.18	0.22	0.17	0.26	0.22	0.13	0.31	0.30	0.17	0.34	0.28	0.08	0.08	0.09	0.02	0.00	
-50	1.34	1.27	1.26	1.20	1.09	1.08	0.92	1.05	0.91	0.74	0.75	0.77	0.56	0.23	0.13	0.13	0.03	0.00	
-45	4.73	4.36	4.12	3.61	3.60	3.08	2.33	3.53	2.84	1.58	1.68	1.50	0.97	0.47	0.22	0.17	0.04	0.00	
-40	16.1	14.4	14.5	11.1	12.4	10.1	7.46	8.05	6.85	4.06	3.08	2.48	1.58	0.77	0.35	0.21	0.05	0.00	
-35	63.1	57.0	50.5	41.4	33.9	27.2	18.6	14.9	12.5	7.79	5.06	3.72	2.37	1.09	0.50	0.26	0.07	0.00	
-30	139	125	106	84.4	66.1	48.8	33.7	24.5	17.3	11.4	7.56	5.29	3.08	1.43	0.66	0.31	0.08	0.00	
-25	243	212	172	133	98.9	70.6	49.4	33.3	22.0	14.7	10.1	6.67	3.71	1.77	0.83	0.37	0.10	0.00	
-20	418	346	264	192	135	93.3	63.8	42.1	27.1	17.7	11.9	7.64	4.28	2.11	0.98	0.42	0.11	0.00	
-15	703	564	402	267	176	117	77.3	50.5	32.2	20.4	13.2	8.48	4.78	2.41	1.13	0.48	0.12	0.00	
-10	1048	844	575	357	220	139	89.6	57.4	36.3	22.6	14.2	9.14	5.21	2.65	1.25	0.53	0.13	0.00	
-5	1298	1073	736	439	255	155	97.8	62.2	39.2	24.2	15.0	9.57	5.49	2.83	1.36	0.58	0.14	0.00	
0	1389	1166	801	471	269	161	101	64.1	40.5	25.1	15.4	9.78	5.64	2.95	1.44	0.62	0.15	0.00	
5	1321	1113	770	458	263	158	99.6	63.6	40.5	25.3	15.6	9.84	5.65	2.96	1.46	0.64	0.16	0.00	
10	1113	901	626	385	232	145	93.0	60.4	38.9	24.7	15.4	9.65	5.53	2.92	1.46	0.65	0.16	0.00	
15	775	628	441	290	188	123	81.8	54.7	36.0	23.3	14.7	9.19	5.27	2.82	1.43	0.64	0.16	0.00	
20	468	391	291	206	144	99.8	68.9	47.2	31.9	21.1	13.7	8.51	4.93	2.66	1.38	0.63	0.16	0.00	
25	272	236	190	144	107	77.7	55.9	39.5	27.4	18.6	12.2	7.64	4.50	2.46	1.31	0.61	0.16	0.00	
30	163	147	124	99.9	77.5	59.0	43.9	32.1	23.0	15.9	10.7	6.70	4.02	2.24	1.23	0.59	0.15	0.00	
35	101	93.2	81.8	68.8	55.6	43.6	33.6	25.4	18.7	13.3	9.02	5.69	3.47	2.01	1.14	0.55	0.15	0.00	
40	64.5	60.3	54.3	47.1	39.3	31.8	25.3	19.6	14.9	10.9	7.32	4.74	2.93	1.79	1.04	0.52	0.14	0.00	
45	41.4	39.1	35.9	31.9	27.5	23.0	18.8	14.9	11.5	8.42	5.75	3.79	2.43	1.57	0.94	0.48	0.13	0.00	
50	26.3	25.3	23.6	21.5	19.1	16.3	13.6	10.9	8.43	6.23	4.39	2.95	1.99	1.35	0.84	0.43	0.12	0.00	
55	16.4	16.0	15.2	14.1	12.8	11.0	9.30	7.61	5.95	4.48	3.19	2.27	1.62	1.15	0.74	0.38	0.11	0.00	
60	9.77	9.64	9.27	8.74	8.03	7.10	6.10	5.11	4.05	3.09	2.32	1.74	1.30	0.97	0.65	0.34	0.10	0.00	
65	5.65	5.64	5.49	5.23	4.85	4.36	3.81	3.26	2.68	2.15	1.70	1.33	1.05	0.79	0.55	0.29	0.10	0.00	
70	3.34	3.32	3.24	3.09	2.89	2.64	2.38	2.11	1.81	1.52	1.25	1.02	0.82	0.64	0.46	0.25	0.09	0.00	
75	2.07	2.06	2.02	1.92	1.81	1.68	1.55	1.41	1.27	1.09	0.92	0.75	0.63	0.51	0.39	0.21	0.08	0.00	
80	1.26	1.27	1.27	1.21	1.15	1.09	1.02	0.96	0.89	0.78	0.68	0.56	0.47	0.40	0.31	0.18	0.07	0.00	
85	0.72	0.74	0.75	0.72	0.68	0.65	0.64	0.63	0.61	0.54	0.47	0.40	0.34	0.29	0.24	0.14	0.06	0.00	
90	0.41	0.42	0.42	0.42	0.42	0.42	0.43	0.43	0.43	0.40	0.36	0.33	0.28	0.23	0.17	0.11	0.06	0.00	

H(β) Range:-90 - 90DEG

H(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:CA0LE

Test Date:13 December 2024

V(B) Range:-90 - 90DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.353

Humidity:65.0%

Test Distance:9.060m [K=1.0000]

Remarks: