

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1376.9 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	79.6V x 83.1H
	At 50% of Imax	46.8V x 47.8H
	At 90% of Imax	22.7V x 24.0H
Beam Flux	Total	985.4 lumens per klm.
	To 10% of Imax	898.7 lumens per klm.
	To 50% of Imax	555.9 lumens per klm.
	To 90% of Imax	174.9 lumens per klm.
Upward LOR		0.0 %
Downward LOR		98.5 %
Luminaire Efficiency(Light Output Ratio)		98.5 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CAOLE
Test Date:13 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.00V I:0.2700A P:6.480W PF:1.000 Freq:49.99Hz Lamp Flux:94.5479x6 lm		
Name:Medusa Mini-127mm-3000K-45D-Rev2	Type:3000K	WEIGHT:
SPEC.:45 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

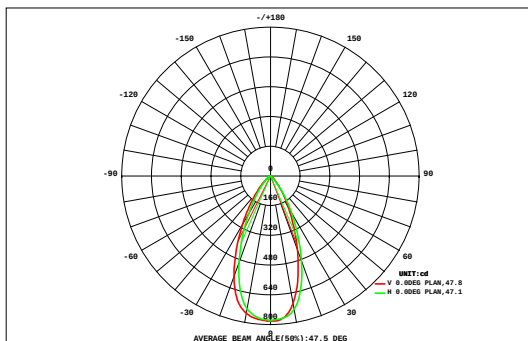

DATA OF LAMP		Eff:86.25lm/W	
MODEL		Imax(cd)	781.1
NOMINAL POWER(W)	6	AVAILABILITY(%)	89.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	509.9
NOMINAL FLUX(lm)	94.5479	LOR(%)	98.5
LAMPS INSIDE	6	TOTAL FLUX(lm)	558.9
TEST VOLTAGE(V)	220	θ @50%(H,V)	48,47DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.19	0.00
90	0.00	0.00	0.00	0.01	0.02	0.03	0.05	0.06	0.07	0.07	0.07	0.06	0.05	0.04	0.02	0.01	0.01	0.00	0.57	0.00
80	0.00	0.00	0.01	0.02	0.05	0.07	0.11	0.14	0.16	0.17	0.16	0.14	0.11	0.07	0.04	0.02	0.01	0.00	1.28	0.00
70	0.00	0.00	0.02	0.04	0.08	0.15	0.25	0.37	0.48	0.53	0.48	0.36	0.23	0.13	0.07	0.03	0.01	0.00	3.25	0.00
60	0.00	0.01	0.03	0.07	0.15	0.34	0.68	1.12	1.54	1.70	1.48	1.04	0.59	0.27	0.11	0.04	0.01	0.00	9.18	0.73
50	0.00	0.01	0.03	0.10	0.28	0.76	1.67	3.00	4.30	4.76	3.97	2.56	1.33	0.55	0.18	0.06	0.02	0.00	23.6	18.0
40	0.00	0.01	0.04	0.14	0.48	1.46	3.52	6.81	10.0	10.9	8.80	5.34	2.55	0.95	0.28	0.07	0.02	0.00	51.4	47.8
30	0.00	0.01	0.05	0.18	0.70	2.28	6.00	12.1	17.6	18.7	15.1	8.98	3.99	1.38	0.37	0.09	0.02	0.00	87.6	84.7
20	0.00	0.01	0.05	0.21	0.84	2.89	7.84	16.0	22.2	22.6	19.2	11.6	4.98	1.63	0.43	0.09	0.02	0.00	111	108
10	0.00	0.01	0.05	0.20	0.82	2.84	7.65	15.6	22.0	23.0	19.5	11.6	4.94	1.61	0.42	0.09	0.02	0.00	110	108
0	0.00	0.01	0.04	0.16	0.64	2.19	5.78	11.7	17.4	18.8	15.2	8.87	3.87	1.31	0.35	0.08	0.02	0.00	86.4	83.5
-10	0.00	0.00	0.03	0.11	0.41	1.35	3.40	6.55	9.68	10.6	8.53	5.14	2.39	0.86	0.24	0.06	0.01	0.00	49.4	45.9
-20	0.00	0.00	0.02	0.06	0.19	0.57	1.39	2.59	3.75	4.11	3.40	2.18	1.09	0.43	0.14	0.04	0.01	0.00	20.0	13.6
-30	0.00	0.00	0.01	0.02	0.05	0.12	0.30	0.57	0.83	0.92	0.80	0.56	0.30	0.14	0.05	0.02	0.01	0.00	4.71	0.00
-40	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.03	0.04	0.06	0.06	0.05	0.03	0.02	0.01	0.01	0.00	0.00	0.34	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	0.00	0.08	0.38	1.33	4.73	15.1	38.7	76.6	110	117	96.7	58.5	26.5	9.41	2.73	0.75	0.19	0.02	559	---
Φ a	0.00	0.00	0.00	0.00	0.00	8.93	34.6	73.1	107	114	93.3	54.8	22.1	2.69	0.00	0.00	0.00	0.00	---	510

one-half-peak spread: U:21.8,D:23.8 , L:20.3,R:27.8


NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:13 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.00V I:0.2700A P:6.480W PF:1.000 Freq:49.99Hz Lamp Flux:94.5479x6 lm		
Name:Medusa Mini-127mm-3000K-45D-Rev2	Type:3000K	WEIGHT:
SPEC.:45 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

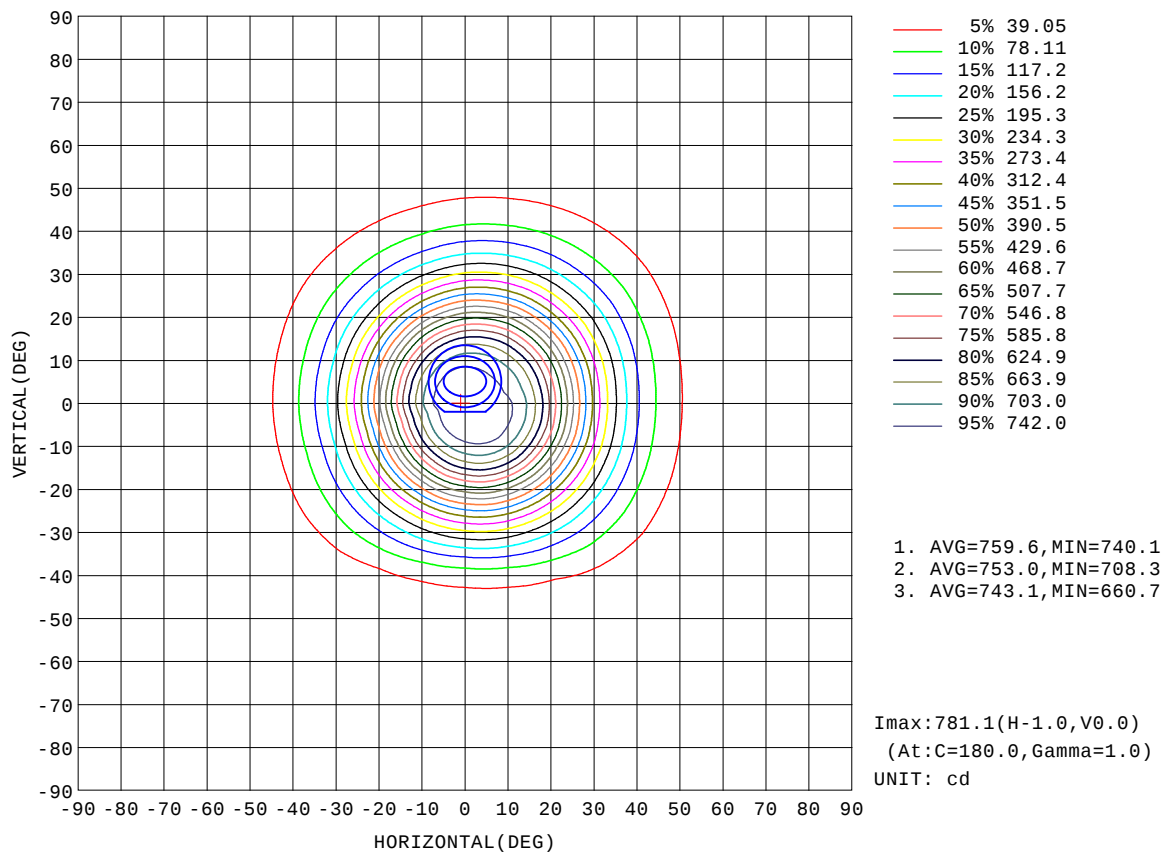


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:13 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.00V I:0.2700A P:6.480W PF:1.000 Freq:49.99Hz Lamp Flux:94.5479x6 lm		
Name:Medusa Mini-127mm-3000K-45D-Rev2	Type:3000K	WEIGHT:
SPEC.:45 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

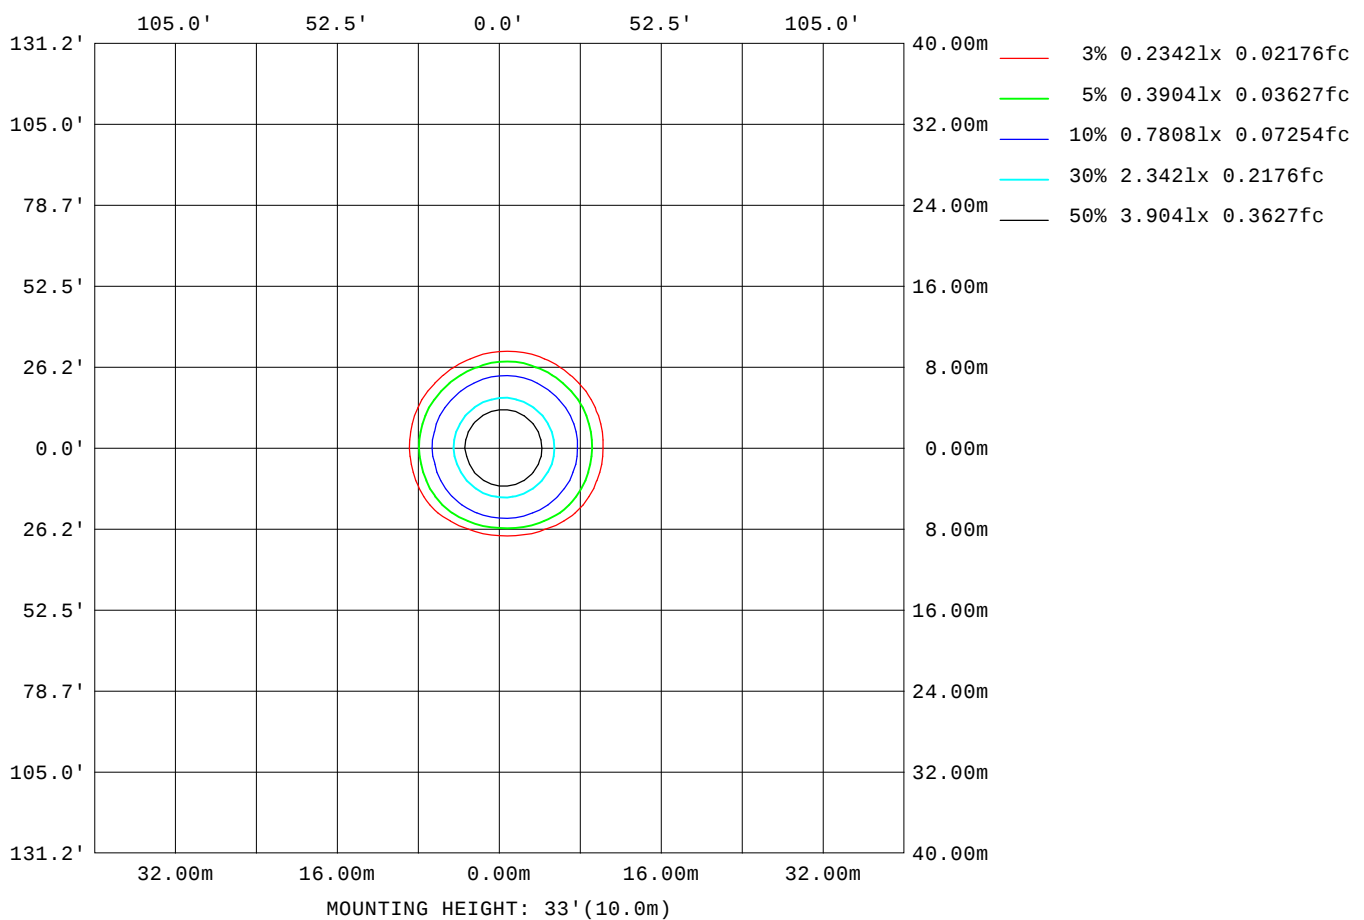

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CAOLE
Test Date:13 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

Planar Illuminance Curve

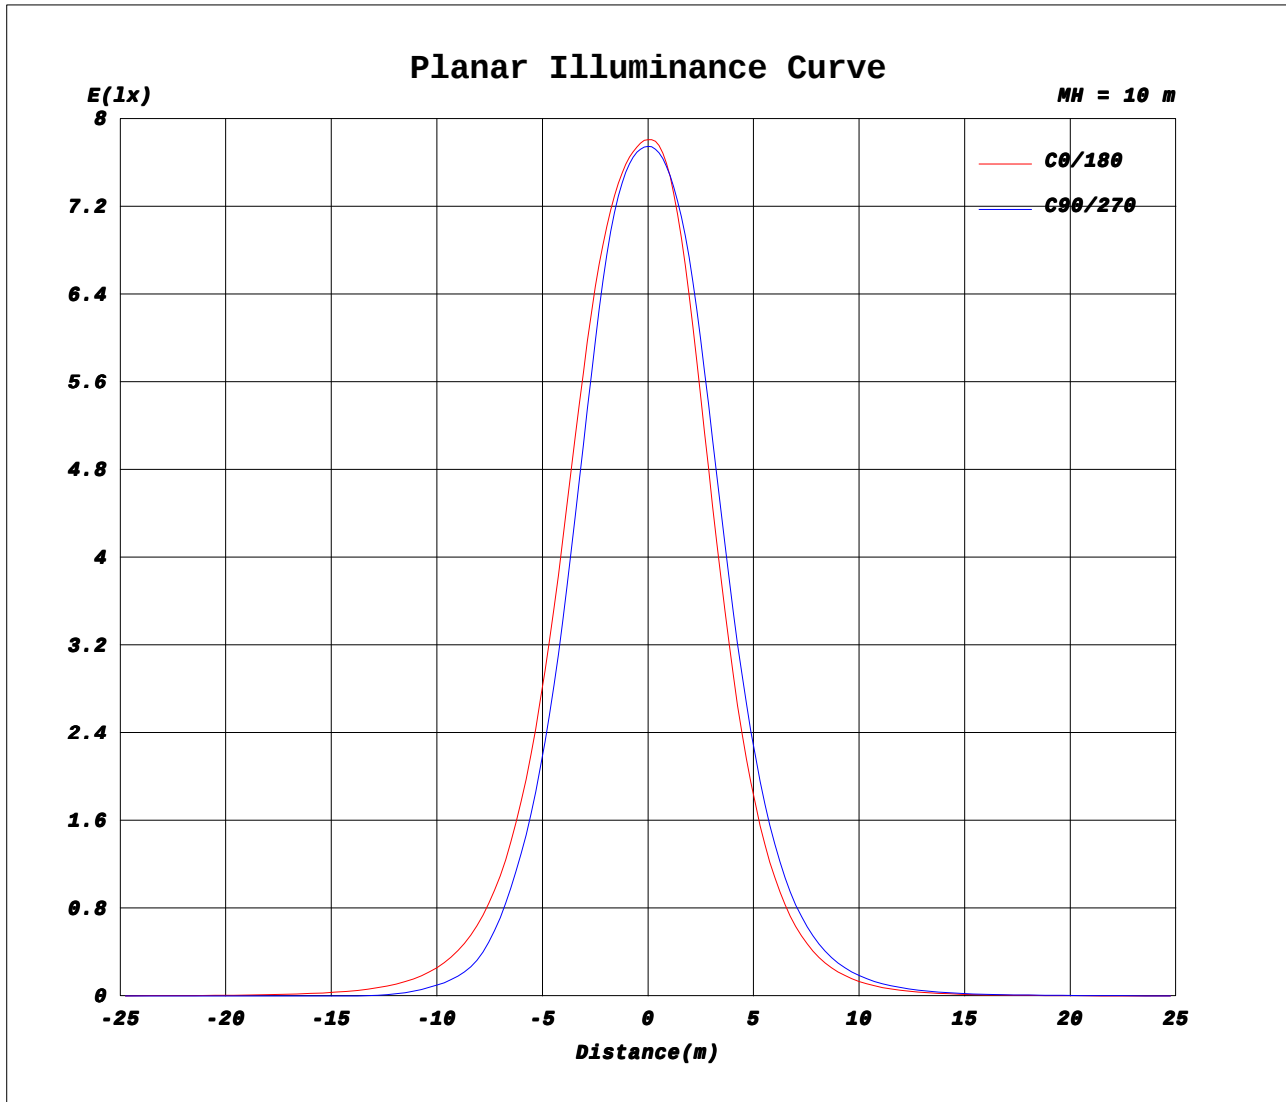


H(β) Range: -90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: CA0LE
Test Date: 13 December 2024

V(β) Range: -90 - 90DEG
V(β) Interval: 0.5DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 9.060m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.00V I:0.2700A P:6.480W PF:1.000 Freq:49.99Hz Lamp Flux:94.5479x6 lm		
Name:Medusa Mini-127mm-3000K-45D-Rev2	Type:3000K	WEIGHT:
SPEC.:45 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

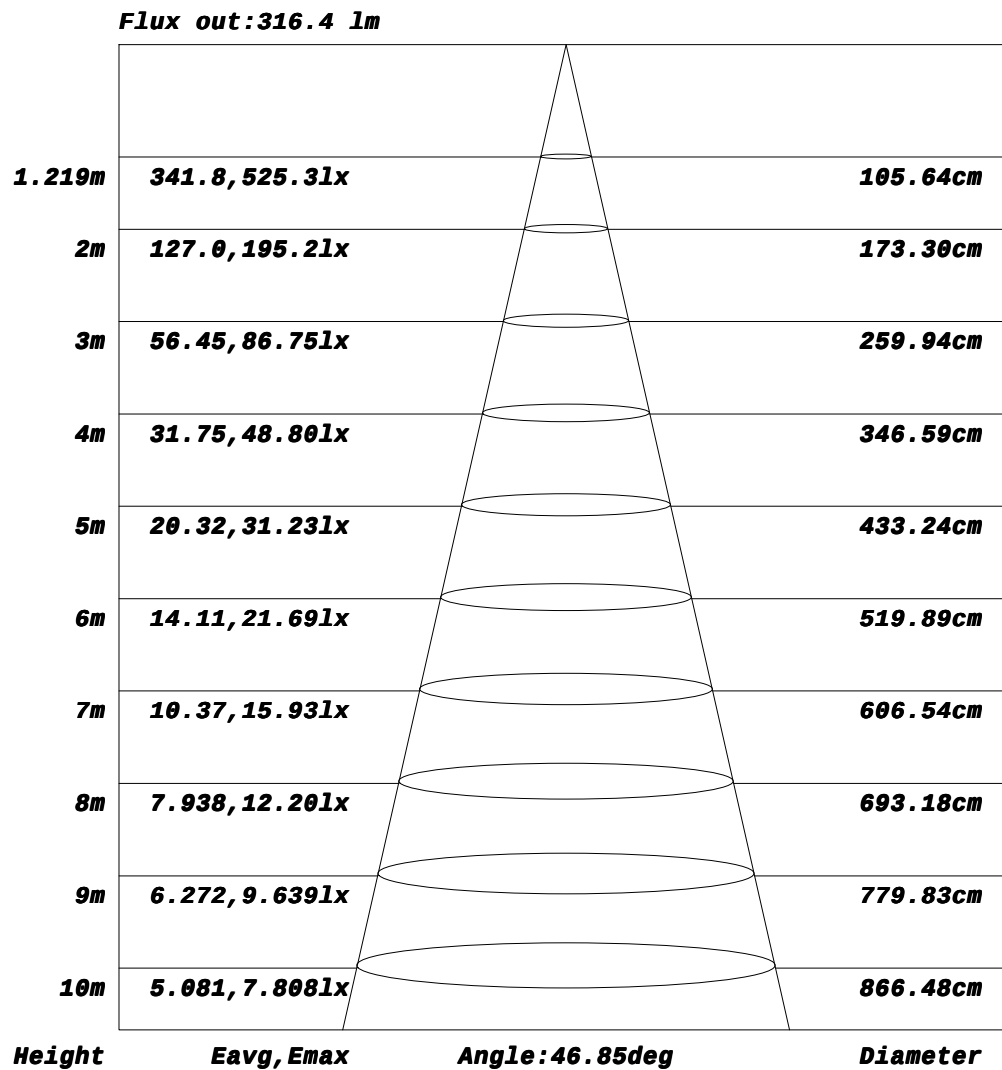

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:13 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.00V I:0.2700A P:6.480W PF:1.000 Freq:49.99Hz Lamp Flux:94.5479x6 lm					
Name:Medusa Mini-127mm-3000K-45D-Rev2			Type:3000K		WEIGHT:
SPEC.:45 DEG			DIM.:127mm		SERIAL No.:
MFR.:			SUR.:		Shielding Angle:

Table--1

UNIT: cd

H(DEC) V(DEC)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00	0.00	0.03	0.00	0.00	0.01	0.01	0.01	0.00	0.01	0.02	0.02
-55	0.00	0.00	0.00	0.02	0.00	0.04	0.15	0.02	0.14	0.22	0.05	0.15	0.23	0.17	0.26	0.30	0.35	0.44	0.46
-50	0.00	0.00	0.00	0.06	0.00	0.22	0.40	0.38	0.55	0.73	0.84	1.12	1.64	2.17	3.30	4.60	5.97	7.45	8.12
-45	0.00	0.00	0.00	0.11	0.09	0.50	0.80	1.02	1.32	1.95	2.85	4.18	6.51	9.82	13.8	18.4	22.7	26.2	28.1
-40	0.00	0.00	0.03	0.19	0.34	0.89	1.38	1.91	2.69	4.34	6.96	10.6	16.6	23.8	30.5	40.6	48.2	55.8	59.3
-35	0.00	0.00	0.06	0.28	0.62	1.33	2.09	3.03	4.75	8.25	13.4	21.2	33.7	47.8	65.8	85.7	105	122	130
-30	0.00	0.00	0.09	0.38	0.92	1.78	2.91	4.46	7.35	12.8	21.9	35.5	56.3	82.6	113	147	181	210	226
-25	0.00	0.00	0.13	0.52	1.20	2.20	3.68	6.10	10.2	17.6	31.0	52.3	81.8	121	168	220	273	318	345
-20	0.00	0.00	0.18	0.66	1.46	2.59	4.35	7.56	12.8	22.7	40.7	68.9	109	163	230	307	385	451	487
-15	0.00	0.00	0.22	0.81	1.70	2.94	4.97	8.76	15.4	27.6	50.0	84.6	136	206	295	400	502	585	629
-10	0.00	0.00	0.26	0.95	1.90	3.25	5.48	9.80	17.7	32.5	58.0	98.3	159	244	353	478	601	688	730
-5	0.00	0.00	0.29	1.06	2.07	3.48	5.85	10.5	19.5	36.0	64.4	110	178	274	396	533	660	743	768
0	0.00	0.00	0.31	1.16	2.20	3.64	6.06	10.9	20.5	37.7	67.3	115	188	291	424	571	698	768	781
5	0.00	0.01	0.33	1.18	2.22	3.66	6.05	10.9	20.1	37.0	65.7	112	182	281	408	550	677	749	765
10	0.00	0.01	0.33	1.17	2.20	3.61	5.89	10.4	18.9	34.4	60.4	102	164	254	369	496	615	696	726
15	0.00	0.02	0.33	1.15	2.15	3.48	5.58	9.62	17.1	30.5	53.1	88.3	141	214	308	413	516	593	632
20	0.00	0.02	0.31	1.10	2.06	3.31	5.18	8.59	14.9	25.9	44.4	72.5	113	168	238	319	399	460	497
25	0.00	0.02	0.29	1.03	1.95	3.09	4.72	7.46	12.4	21.1	35.3	56.4	85.5	124	173	229	284	330	359
30	0.00	0.03	0.26	0.94	1.82	2.84	4.23	6.33	10.0	16.4	26.7	41.6	61.4	87.1	119	154	189	220	240
35	0.00	0.03	0.23	0.85	1.66	2.57	3.70	5.31	7.91	12.2	19.3	29.2	42.0	58.6	77.9	99.3	120	139	151
40	0.00	0.03	0.20	0.75	1.48	2.27	3.20	4.45	6.20	9.01	13.4	19.7	27.9	37.9	49.2	61.4	72.8	83.9	91.4
45	0.00	0.03	0.17	0.64	1.29	1.95	2.71	3.67	4.91	6.65	9.22	12.8	17.7	23.5	30.0	36.6	43.0	48.9	52.9
50	0.00	0.03	0.15	0.53	1.07	1.63	2.25	2.99	3.90	5.04	6.47	8.41	11.0	14.1	17.6	21.1	24.5	27.6	29.7
55	0.00	0.03	0.13	0.43	0.85	1.31	1.81	2.38	3.07	3.84	4.73	5.79	7.06	8.57	10.2	11.9	13.6	15.1	16.1
60	0.00	0.03	0.11	0.34	0.66	1.00	1.40	1.83	2.35	2.91	3.49	4.13	4.82	5.52	6.27	6.99	7.71	8.35	8.79
65	0.00	0.03	0.09	0.26	0.48	0.73	1.01	1.35	1.72	2.12	2.52	2.95	3.36	3.76	4.15	4.50	4.82	5.09	5.27
70	0.00	0.02	0.08	0.18	0.33	0.50	0.68	0.93	1.18	1.45	1.73	2.01	2.28	2.55	2.79	3.02	3.20	3.34	3.44
75	0.00	0.02	0.06	0.14	0.21	0.33	0.44	0.59	0.76	0.93	1.10	1.26	1.43	1.61	1.77	1.93	2.04	2.13	2.20
80	0.00	0.02	0.05	0.10	0.15	0.22	0.26	0.37	0.48	0.58	0.66	0.73	0.81	0.92	1.02	1.12	1.18	1.22	1.26
85	0.00	0.02	0.04	0.07	0.11	0.14	0.18	0.25	0.31	0.38	0.39	0.40	0.42	0.46	0.50	0.54	0.54	0.53	0.53
90	0.00	0.02	0.03	0.05	0.06	0.08	0.09	0.14	0.19	0.23	0.23	0.23	0.23	0.24	0.26	0.27	0.28	0.28	0.29

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:13 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.00V I:0.2700A P:6.480W PF:1.000 Freq:49.99Hz Lamp Flux:94.5479x6 lm																		
Name:Medusa Mini-127mm-3000K-45D-Rev2									Type:3000K					WEIGHT:				
SPEC.:45 DEG									DIM.:127mm					SERIAL No.:				
MFR.:									SUR.:					Shielding Angle:				

Table--2

UNIT: cd

H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.03	0.02	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.05	0.02	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.08	0.07	0.02	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.05	0.00	0.03	0.11	0.10	0.02	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.07	0.02	0.14	0.21	0.10	0.06	0.16	0.12	0.02	
-60	0.02	0.01	0.03	0.04	0.03	0.14	0.13	0.03	0.28	0.34	0.22	0.35	0.46	0.30	0.15	0.22	0.15	0.02	
-55	0.65	0.67	0.90	1.00	0.74	1.10	0.96	0.72	0.91	0.90	0.69	0.79	0.79	0.59	0.32	0.28	0.18	0.02	
-50	9.19	9.07	8.57	7.63	6.22	5.13	4.01	3.14	2.57	1.99	1.60	1.44	1.25	0.93	0.54	0.35	0.21	0.02	
-45	29.1	28.1	25.8	22.3	18.9	15.0	10.9	8.28	5.98	4.07	2.91	2.30	1.82	1.32	0.77	0.44	0.25	0.02	
-40	61.7	58.6	55.3	46.5	40.1	32.0	23.2	16.6	11.6	7.45	4.78	3.40	2.50	1.70	1.02	0.56	0.28	0.02	
-35	134	127	113	95.3	76.7	59.8	41.8	28.6	19.4	11.7	7.23	4.76	3.28	2.08	1.25	0.68	0.32	0.02	
-30	230	218	192	159	125	94.2	66.0	44.6	27.9	16.7	10.0	6.37	3.94	2.44	1.48	0.80	0.35	0.02	
-25	351	330	289	237	183	134	93.6	61.4	37.8	22.2	13.0	7.84	4.59	2.80	1.70	0.92	0.39	0.02	
-20	494	463	405	329	250	180	122	78.7	48.4	28.0	15.8	9.12	5.20	3.13	1.89	1.03	0.42	0.02	
-15	635	598	524	424	320	226	151	96.2	58.3	33.3	18.3	10.3	5.73	3.41	2.06	1.13	0.45	0.02	
-10	733	701	620	506	382	268	177	110	66.0	37.5	20.5	11.3	6.17	3.66	2.21	1.22	0.48	0.02	
-5	767	743	678	561	423	295	193	120	71.2	40.4	21.9	12.0	6.47	3.84	2.33	1.30	0.50	0.02	
0	774	750	691	576	436	305	199	124	73.2	41.6	22.6	12.4	6.62	3.96	2.42	1.37	0.52	0.02	
5	752	727	666	556	422	296	195	121	72.3	41.2	22.5	12.2	6.63	3.97	2.43	1.38	0.52	0.02	
10	718	683	611	503	383	271	181	113	68.2	39.1	21.6	11.8	6.49	3.92	2.41	1.37	0.52	0.02	
15	629	593	519	426	325	232	156	100	61.3	35.5	19.9	11.0	6.21	3.81	2.37	1.35	0.52	0.02	
20	497	468	409	334	257	187	128	83.4	52.1	30.9	17.6	9.96	5.84	3.65	2.30	1.32	0.51	0.02	
25	360	339	298	245	191	141	99.9	66.7	42.3	25.7	15.0	8.84	5.38	3.46	2.20	1.27	0.49	0.02	
30	243	230	204	170	134	102	73.3	50.7	33.0	20.5	12.3	7.66	4.88	3.23	2.09	1.21	0.47	0.02	
35	154	147	132	112	90.4	69.7	51.6	36.6	24.7	15.7	9.94	6.47	4.37	2.98	1.96	1.14	0.45	0.02	
40	93.1	89.6	81.7	70.8	58.4	46.1	35.0	25.3	17.5	11.7	7.85	5.42	3.84	2.72	1.81	1.07	0.42	0.02	
45	54.1	52.6	48.6	43.0	36.2	29.3	22.7	16.9	12.1	8.62	6.16	4.52	3.36	2.44	1.66	0.97	0.39	0.02	
50	30.4	29.7	27.8	25.0	21.6	17.9	14.3	11.1	8.38	6.37	4.88	3.77	2.88	2.17	1.50	0.88	0.36	0.02	
55	16.5	16.2	15.4	14.2	12.6	10.8	8.93	7.33	5.96	4.83	3.90	3.11	2.44	1.87	1.33	0.78	0.33	0.02	
60	8.99	8.92	8.60	8.13	7.49	6.71	5.89	5.13	4.41	3.73	3.09	2.52	2.02	1.60	1.16	0.69	0.29	0.02	
65	5.37	5.38	5.29	5.11	4.85	4.52	4.13	3.73	3.30	2.84	2.40	1.99	1.64	1.32	0.98	0.59	0.26	0.02	
70	3.51	3.54	3.52	3.43	3.29	3.12	2.91	2.67	2.41	2.10	1.80	1.52	1.29	1.05	0.81	0.49	0.23	0.02	
75	2.26	2.29	2.30	2.25	2.18	2.07	1.95	1.82	1.67	1.48	1.29	1.11	0.96	0.80	0.64	0.41	0.20	0.02	
80	1.31	1.35	1.38	1.35	1.31	1.26	1.21	1.15	1.08	0.98	0.86	0.74	0.68	0.59	0.51	0.33	0.17	0.02	
85	0.56	0.59	0.61	0.61	0.60	0.57	0.59	0.62	0.65	0.59	0.54	0.49	0.46	0.43	0.39	0.26	0.14	0.02	
90	0.30	0.30	0.31	0.30	0.30	0.30	0.30	0.31	0.32	0.31	0.30	0.30	0.29	0.29	0.28	0.20	0.11	0.02	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:13 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks: