

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		8262.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	31.3V x 31.7H
	At 50% of Imax	15.0V x 15.2H
	At 90% of Imax	5.7V x 5.7H
Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	663.4 lumens per klm.
	To 50% of Imax	327.4 lumens per klm.
	To 90% of Imax	67.3 lumens per klm.
Upward LOR		2.3 %
Downward LOR		97.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-05-04

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: Medusa-510mm-3000K-15D-Rev1	TYPE: 3000K	WEIGHT:
SPEC.: 15 DEG	DIM.: 510mm	SERIAL No.: IES000996
MFR.:	SUR.:	Shielding Angle:

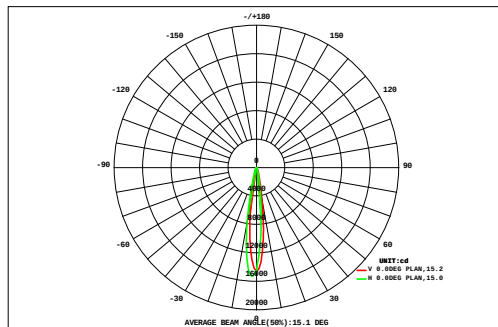

DATA OF LAMP		Eff: 98.68lm/W	
MODEL		Imax(cd)	15459
NOMINAL POWER(W)	18.96	AVAILABILITY(%)	66.3
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	1240
NOMINAL FLUX(lm)	1871	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1871
TEST VOLTAGE(V)	24	q @50%(H,V)	15,15DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT: lm		F t	F a
	0.37	0.44	0.52	0.61	0.70	0.79	0.87	0.92	0.93	0.93	0.90	0.85	0.77	0.68	0.59	0.50	0.42	0.35	12.2	0.00
27	0.44	0.54	0.65	0.78	0.92	1.05	1.17	1.25	1.28	1.27	1.22	1.13	1.01	0.88	0.75	0.62	0.51	0.42	15.9	0.00
24	0.52	0.65	0.81	1.00	1.20	1.41	1.60	1.73	1.79	1.77	1.69	1.53	1.34	1.14	0.95	0.77	0.62	0.49	21.0	0.00
21	0.61	0.79	1.00	1.27	1.58	1.92	2.24	2.49	2.60	2.56	2.40	2.12	1.79	1.47	1.19	0.94	0.74	0.58	28.3	0.00
18	0.71	0.94	1.23	1.60	2.08	2.65	3.28	3.83	4.06	3.97	3.60	3.01	2.42	1.90	1.48	1.14	0.87	0.66	39.4	5.10
15	0.82	1.10	1.48	2.00	2.74	3.77	5.12	6.52	7.17	6.91	5.91	4.52	3.34	2.44	1.81	1.36	1.01	0.75	58.8	35.4
12	0.92	1.26	1.75	2.47	3.59	5.46	8.42	11.7	13.4	12.8	10.4	7.12	4.60	3.17	2.26	1.63	1.17	0.83	93.0	73.1
9	1.01	1.41	2.01	2.97	4.67	7.88	13.1	19.3	23.2	22.2	17.0	11.0	6.85	4.32	2.81	1.91	1.31	0.90	144	127
	1.07	1.51	2.19	3.36	5.68	10.4	18.2	27.3	33.7	32.5	25.7	17.3	10.0	5.58	3.32	2.14	1.42	0.95	202	186
	1.10	1.58	2.34	3.72	6.70	12.8	22.9	34.7	41.3	39.3	31.8	21.0	11.8	6.29	3.59	2.25	1.47	0.97	246	231
	1.09	1.60	2.41	3.91	7.19	13.9	24.0	33.7	38.8	36.8	29.2	19.5	11.1	6.06	3.50	2.22	1.45	0.96	237	223
	1.04	1.53	2.31	3.67	6.42	11.4	18.3	25.4	29.5	28.2	22.0	14.8	8.92	5.13	3.16	2.06	1.37	0.91	186	171
-9	0.95	1.39	2.06	3.12	4.81	7.68	11.8	16.0	18.7	17.9	14.1	9.77	6.27	4.01	2.67	1.81	1.23	0.84	125	108
-12	0.83	1.20	1.72	2.44	3.47	4.96	6.95	8.99	10.3	9.99	8.17	6.02	4.28	3.04	2.15	1.52	1.06	0.74	77.9	58.1
-15	0.70	0.98	1.37	1.87	2.52	3.32	4.20	5.06	5.60	5.48	4.74	3.84	2.99	2.26	1.68	1.23	0.89	0.63	49.4	21.8
-18	0.57	0.78	1.06	1.41	1.83	2.29	2.75	3.13	3.36	3.31	3.01	2.58	2.11	1.67	1.29	0.97	0.72	0.52	33.3	0.00
-21	0.46	0.61	0.81	1.05	1.31	1.60	1.86	2.07	2.18	2.16	2.00	1.77	1.50	1.22	0.97	0.75	0.57	0.43	23.3	0.00
-24	0.37	0.48	0.61	0.77	0.94	1.11	1.27	1.39	1.46	1.45	1.36	1.22	1.06	0.89	0.72	0.57	0.45	0.36	16.5	0.00
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)	6	9	12	15	18	21	24	27			
F t	13.6	18.8	26.4	38.0	58.4	94.4	148	206	239	229	185	129	82.2	52.2	34.9	24.4	17.3	12.3	1609	---
F a	0.00	0.00	0.00	4.44	34.7	75.1	130	189	223	214	168	111	60.9	27.3	2.32	0.00	0.00	0.00	---	1240

one-half-peak spread: U:7.5,D:7.6 , L:7.6,R:7.7


NEMA Beam Type: Type 3

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-05-04

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: Medusa-510mm-3000K-15D-Rev1	TYPE: 3000K	WEIGHT:
SPEC.: 15 DEG	DIM.: 510mm	SERIAL No.: IES000996
MFR.:	SUR.:	Shielding Angle:

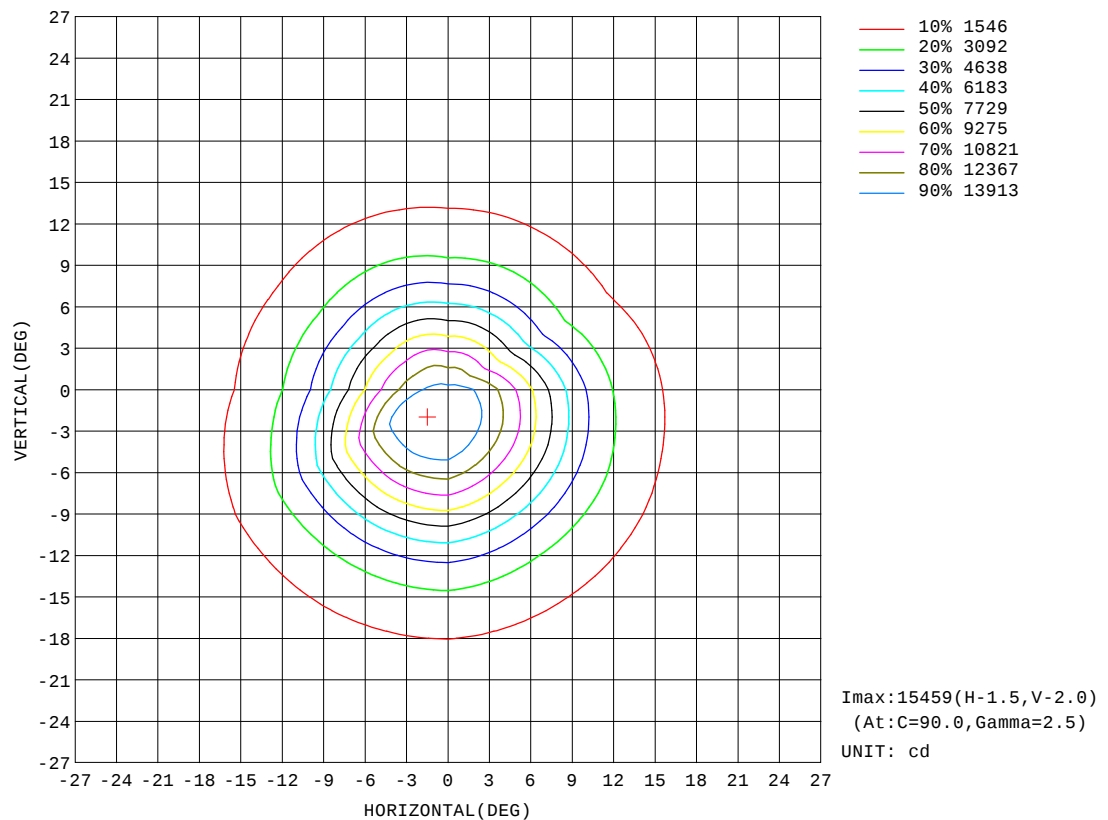


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-04

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME: Medusa-510mm-3000K-15D-Rev1	TYPE: 3000K	WEIGHT:
SPEC.: 15 DEG	DIM.: 510mm	SERIAL No.: IES000996
MFR.:	SUR.:	Shielding Angle:

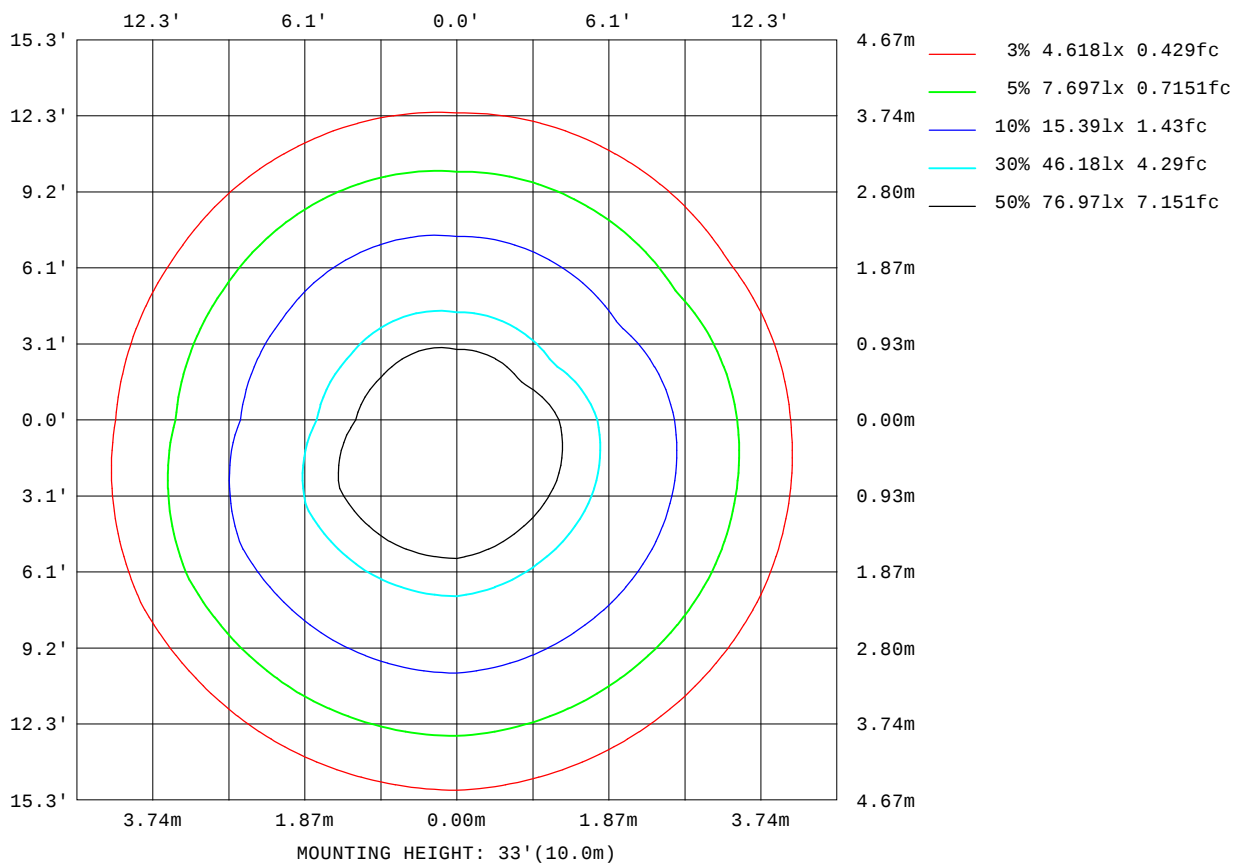

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-04

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

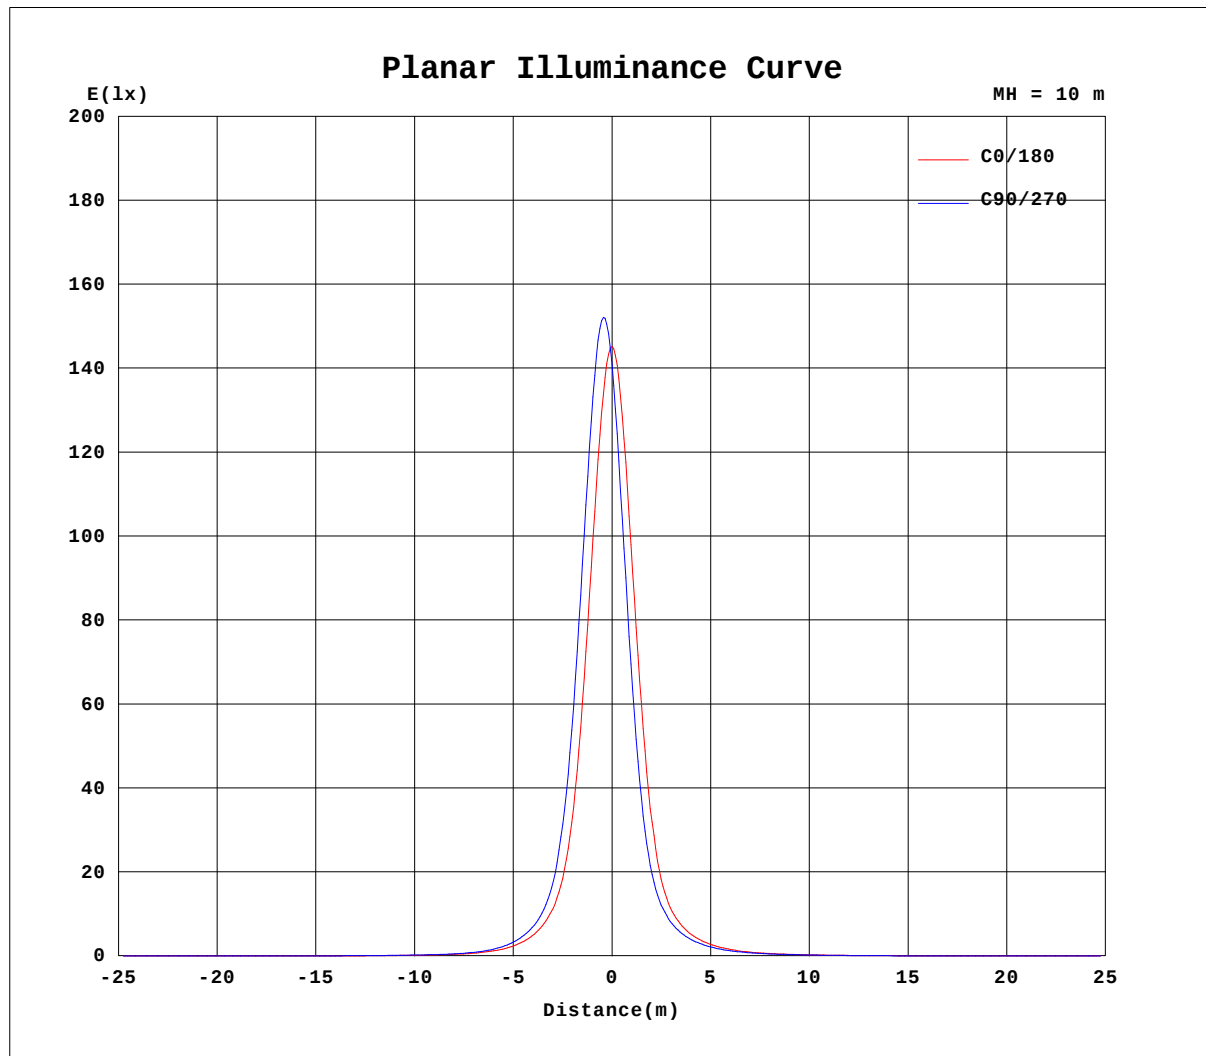


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-05-04

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME: Medusa-510mm-3000K-15D-Rev1	TYPE: 3000K	WEIGHT:
SPEC.: 15 DEG	DIM.: 510mm	SERIAL No.: IES000996
MFR.:	SUR.:	Shielding Angle:

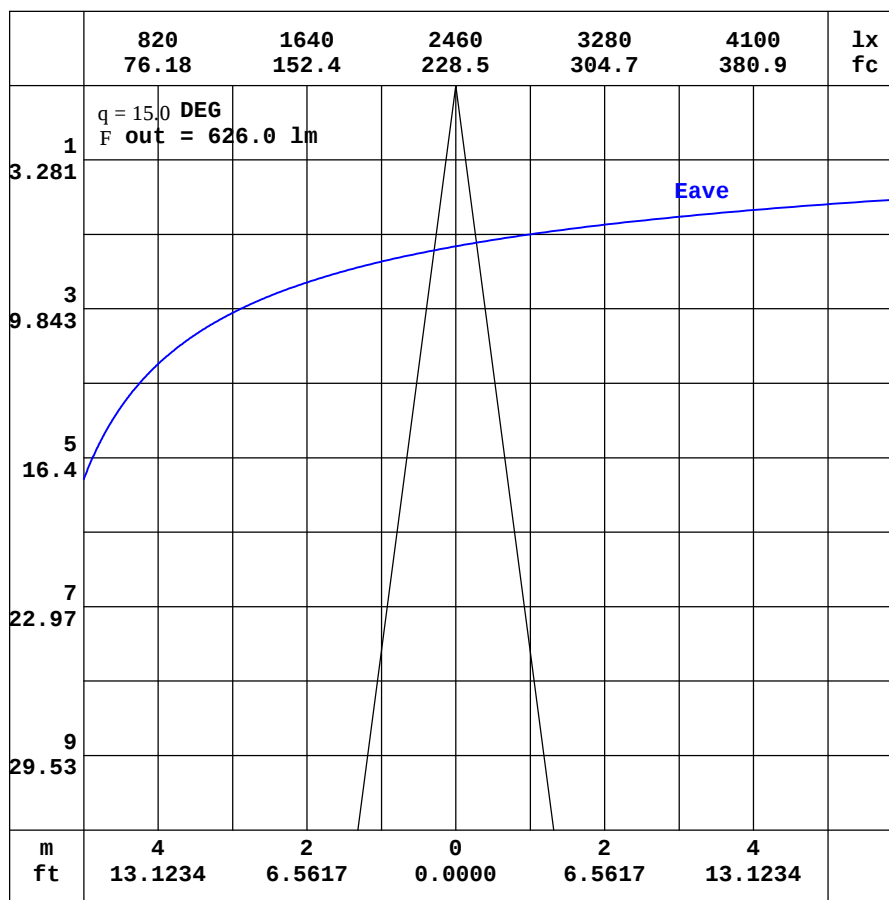

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

$H(b)$ Range: -90 - 90DEG
 $H(b)$ Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-05-04

$V(B)$ Range: -180 - 180DEG
 $V(B)$ Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Medusa-510mm-3000K-15D-Rev1	TYPE: 3000K	WEIGHT:
SPEC.: 15 DEG	DIM.: 510mm	SERIAL No.: IES000996
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.69	0.62	0.54	0.50	0.50	0.52	0.59	0.72	0.94	1.20	1.40	1.50	1.52	1.50	1.50	1.51	1.50	1.47	1.40
-170	0.69	0.61	0.54	0.49	0.49	0.49	0.52	0.59	0.72	0.87	0.98	1.05	1.07	1.09	1.12	1.20	1.31	1.40	1.46
-160	0.69	0.61	0.53	0.48	0.47	0.46	0.45	0.46	0.49	0.53	0.55	0.55	0.56	0.71	0.85	0.98	1.09	1.16	1.19
-150	0.69	0.60	0.53	0.48	0.46	0.44	0.41	0.38	0.33	0.29	0.24	0.29	0.37	0.46	0.56	0.65	0.72	0.76	0.78
-140	0.69	0.60	0.53	0.48	0.45	0.43	0.40	0.35	0.28	0.23	0.21	0.21	0.23	0.26	0.30	0.34	0.37	0.40	0.40
-130	0.69	0.61	0.53	0.48	0.45	0.42	0.40	0.36	0.33	0.30	0.26	0.24	0.22	0.20	0.20	0.20	0.20	0.20	0.20
-120	0.69	0.61	0.54	0.48	0.44	0.42	0.39	0.38	0.37	0.36	0.35	0.33	0.31	0.30	0.28	0.26	0.25	0.25	0.24
-110	0.69	0.61	0.54	0.48	0.44	0.40	0.38	0.38	0.38	0.38	0.38	0.37	0.37	0.37	0.37	0.37	0.36	0.36	0.36
-100	0.69	0.61	0.54	0.48	0.42	0.38	0.33	0.34	0.34	0.35	0.35	0.35	0.35	0.36	0.36	0.36	0.36	0.36	0.36
-90	0.69	0.62	0.55	0.48	0.41	0.34	0.27	0.27	0.27	0.27	0.26	0.26	0.26	0.26	0.26	0.26	0.26	0.26	0.26
-80	0.69	0.63	0.56	0.49	0.42	0.34	0.25	0.25	0.25	0.26	0.26	0.27	0.28	0.29	0.30	0.31	0.32	0.32	0.33
-70	0.69	0.64	0.59	0.53	0.46	0.39	0.33	0.34	0.39	0.45	0.51	0.58	0.65	0.72	0.79	0.84	0.89	0.92	0.94
-60	0.69	0.66	0.62	0.57	0.53	0.50	0.51	0.57	0.70	0.86	1.05	1.27	1.49	1.71	1.90	2.07	2.19	2.28	2.33
-50	0.69	0.68	0.66	0.63	0.63	0.67	0.77	0.93	1.17	1.53	1.96	2.43	2.94	3.45	3.91	4.31	4.63	4.85	4.94
-40	0.69	0.70	0.70	0.70	0.74	0.89	1.15	1.49	1.89	2.48	3.26	4.16	5.17	6.22	7.31	8.34	9.24	9.90	10.2
-30	0.69	0.72	0.74	0.77	0.86	1.17	1.64	2.20	2.90	3.81	4.90	6.46	8.51	11.3	15.3	20.0	24.6	28.5	30.0
-20	0.69	0.74	0.78	0.84	1.02	1.49	2.11	2.93	4.05	5.55	7.30	9.92	14.5	23.1	37.4	57.5	81.9	104	114
-10	0.69	0.76	0.82	0.90	1.15	1.75	2.55	3.57	5.23	7.17	9.85	14.5	23.4	41.3	76.3	150	329	613	758
0	0.69	0.78	0.85	0.94	1.23	1.95	2.80	4.04	5.95	8.23	11.5	17.1	27.7	46.0	81.3	167	459	1060	1452
10	0.69	0.77	0.85	0.96	1.25	1.88	2.74	3.83	5.58	7.65	10.4	14.9	22.5	35.3	56.1	91.3	155	250	281
20	0.69	0.77	0.85	0.96	1.19	1.74	2.46	3.41	4.70	6.40	8.41	11.0	15.0	21.0	29.3	39.6	50.7	59.1	60.8
30	0.69	0.76	0.84	0.94	1.11	1.52	2.11	2.83	3.74	4.89	6.24	7.85	9.63	11.8	14.4	17.2	19.8	21.6	22.0
40	0.69	0.75	0.82	0.91	1.04	1.30	1.70	2.21	2.81	3.53	4.36	5.26	6.24	7.26	8.20	8.99	9.59	9.97	10.0
50	0.69	0.74	0.80	0.87	0.97	1.12	1.36	1.67	2.01	2.39	2.84	3.32	3.82	4.31	4.72	5.06	5.33	5.47	5.50
60	0.69	0.73	0.78	0.83	0.89	0.98	1.11	1.26	1.42	1.59	1.78	1.98	2.19	2.40	2.57	2.72	2.82	2.88	2.90
70	0.69	0.71	0.74	0.78	0.81	0.86	0.92	0.97	1.03	1.09	1.16	1.22	1.28	1.34	1.39	1.43	1.46	1.48	1.48
80	0.69	0.70	0.71	0.73	0.74	0.76	0.78	0.79	0.81	0.82	0.84	0.85	0.86	0.87	0.88	0.89	0.89	0.89	0.89
90	0.69	0.69	0.69	0.68	0.68	0.68	0.67	0.67	0.66	0.66	0.65	0.65	0.64	0.64	0.64	0.64	0.63	0.63	0.63
100	0.69	0.68	0.66	0.64	0.63	0.61	0.59	0.58	0.56	0.55	0.54	0.53	0.53	0.52	0.52	0.52	0.51	0.51	0.51
110	0.69	0.67	0.64	0.61	0.58	0.55	0.54	0.53	0.52	0.51	0.51	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50
120	0.69	0.66	0.61	0.57	0.54	0.52	0.51	0.51	0.51	0.51	0.51	0.52	0.54	0.55	0.57	0.59	0.60	0.61	0.62
130	0.69	0.64	0.59	0.55	0.52	0.51	0.51	0.51	0.53	0.55	0.60	0.65	0.73	0.81	0.89	0.97	1.03	1.07	1.09
140	0.69	0.64	0.57	0.53	0.51	0.50	0.51	0.54	0.59	0.68	0.81	0.96	1.12	1.25	1.36	1.43	1.48	1.51	1.52
150	0.69	0.63	0.56	0.52	0.50	0.51	0.53	0.59	0.71	0.89	1.09	1.28	1.43	1.52	1.58	1.62	1.65	1.67	1.67
160	0.69	0.62	0.55	0.51	0.50	0.52	0.56	0.66	0.84	1.07	1.29	1.46	1.55	1.61	1.65	1.69	1.74	1.76	1.78
170	0.69	0.62	0.55	0.50	0.50	0.52	0.58	0.71	0.92	1.18	1.39	1.51	1.56	1.59	1.61	1.63	1.64	1.64	1.68
180	0.69	0.62	0.54	0.50	0.50	0.52	0.59	0.72	0.94	1.20	1.40	1.50	1.52	1.50	1.50	1.51	1.50	1.47	1.40

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-05-04

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Medusa-510mm-3000K-15D-Rev1	TYPE: 3000K	WEIGHT:
SPEC.: 15 DEG	DIM.: 510mm	SERIAL No.: IES000996
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: ×10cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	1.32	1.26	1.18	1.07	0.94	0.81	0.66	0.50	0.35	0.25	0.21	0.23	0.28	0.34	0.36	0.37	0.34	0.27
-170	1.43	1.35	1.25	1.11	0.94	0.78	0.61	0.46	0.32	0.24	0.21	0.24	0.29	0.34	0.37	0.37	0.34	0.27
-160	1.18	1.12	1.03	0.91	0.78	0.63	0.49	0.36	0.27	0.22	0.22	0.25	0.30	0.35	0.37	0.37	0.33	0.27
-150	0.78	0.75	0.69	0.61	0.51	0.42	0.33	0.26	0.22	0.21	0.24	0.28	0.33	0.36	0.37	0.36	0.33	0.27
-140	0.41	0.39	0.36	0.33	0.28	0.25	0.22	0.21	0.21	0.24	0.28	0.32	0.35	0.37	0.37	0.36	0.33	0.27
-130	0.20	0.20	0.20	0.20	0.20	0.21	0.22	0.24	0.27	0.30	0.33	0.35	0.37	0.37	0.37	0.35	0.32	0.27
-120	0.24	0.25	0.26	0.27	0.28	0.30	0.31	0.33	0.35	0.36	0.37	0.37	0.37	0.37	0.37	0.35	0.34	0.31
-110	0.36	0.36	0.36	0.36	0.37	0.37	0.37	0.37	0.37	0.37	0.37	0.37	0.36	0.35	0.34	0.32	0.30	0.27
-100	0.36	0.36	0.36	0.36	0.36	0.36	0.35	0.35	0.35	0.35	0.34	0.34	0.33	0.32	0.31	0.30	0.29	0.27
-90	0.26	0.26	0.26	0.27	0.27	0.27	0.27	0.27	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.27	0.27	0.27
-80	0.32	0.31	0.30	0.29	0.28	0.27	0.26	0.26	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.26	0.26	0.27
-70	0.91	0.87	0.82	0.76	0.69	0.62	0.55	0.48	0.42	0.36	0.32	0.28	0.25	0.23	0.23	0.24	0.25	0.27
-60	2.27	2.17	2.02	1.85	1.65	1.43	1.21	1.01	0.82	0.65	0.52	0.38	0.28	0.23	0.22	0.23	0.25	0.27
-50	4.83	4.60	4.26	3.85	3.38	2.87	2.36	1.90	1.48	1.13	0.82	0.55	0.34	0.24	0.20	0.21	0.24	0.27
-40	9.84	9.14	8.21	7.21	6.14	5.09	4.09	3.18	2.41	1.75	1.20	0.77	0.45	0.25	0.19	0.20	0.23	0.27
-30	28.0	23.8	19.2	14.7	11.0	8.29	6.35	4.83	3.51	2.44	1.61	1.03	0.57	0.27	0.18	0.19	0.23	0.27
-20	99.7	76.1	52.7	34.2	21.3	13.7	9.17	6.49	4.68	3.12	1.98	1.21	0.70	0.31	0.16	0.17	0.22	0.27
-10	529	264	126	67.2	36.3	20.0	11.9	7.80	5.45	3.57	2.18	1.27	0.74	0.31	0.13	0.16	0.22	0.27
0	1071	463	170	79.6	41.0	22.0	12.7	8.09	5.60	3.82	2.13	1.26	0.73	0.29	0.10	0.15	0.22	0.27
10	224	136	81.8	51.7	32.1	19.6	12.3	8.32	5.88	3.81	2.42	1.43	0.86	0.40	0.19	0.20	0.24	0.27
20	57.5	48.4	37.7	27.9	20.0	14.4	10.2	7.51	5.26	3.66	2.41	1.52	0.93	0.47	0.27	0.24	0.25	0.27
30	21.3	19.4	16.7	13.9	11.4	9.37	7.62	5.75	4.37	3.20	2.18	1.46	0.89	0.50	0.34	0.28	0.27	0.27
40	9.91	9.48	8.83	8.00	7.06	5.94	4.93	4.16	3.36	2.59	1.86	1.28	0.84	0.54	0.40	0.32	0.28	0.27
50	5.44	5.26	4.96	4.59	4.16	3.67	3.18	2.70	2.27	1.89	1.50	1.09	0.78	0.57	0.43	0.35	0.30	0.27
60	2.86	2.78	2.65	2.49	2.30	2.09	1.87	1.67	1.48	1.32	1.18	0.96	0.74	0.58	0.46	0.37	0.31	0.27
70	1.46	1.43	1.39	1.34	1.27	1.21	1.15	1.10	1.04	0.99	0.93	0.85	0.69	0.57	0.47	0.38	0.32	0.27
80	0.89	0.88	0.87	0.86	0.85	0.84	0.83	0.81	0.80	0.78	0.76	0.74	0.64	0.55	0.46	0.39	0.33	0.27
90	0.63	0.63	0.63	0.63	0.63	0.63	0.63	0.63	0.64	0.64	0.64	0.64	0.58	0.52	0.46	0.40	0.33	0.27
100	0.51	0.51	0.51	0.51	0.51	0.51	0.52	0.53	0.53	0.54	0.55	0.56	0.53	0.50	0.45	0.40	0.34	0.27
110	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.51	0.51	0.51	0.50	0.47	0.44	0.41	0.35	0.27
120	0.61	0.61	0.59	0.58	0.56	0.54	0.53	0.52	0.51	0.50	0.50	0.49	0.47	0.46	0.43	0.40	0.35	0.27
130	1.08	1.05	1.00	0.93	0.85	0.76	0.68	0.62	0.57	0.53	0.50	0.47	0.46	0.44	0.43	0.40	0.35	0.27
140	1.51	1.49	1.46	1.40	1.31	1.18	1.03	0.87	0.73	0.60	0.50	0.45	0.43	0.43	0.41	0.39	0.35	0.27
150	1.67	1.65	1.63	1.59	1.54	1.47	1.34	1.17	0.88	0.64	0.49	0.42	0.40	0.41	0.40	0.39	0.35	0.27
160	1.77	1.75	1.70	1.66	1.62	1.57	1.37	1.11	0.84	0.60	0.44	0.37	0.37	0.38	0.39	0.38	0.35	0.27
170	1.66	1.65	1.64	1.55	1.40	1.23	1.06	0.86	0.65	0.46	0.35	0.31	0.32	0.36	0.38	0.38	0.34	0.27
180	1.32	1.26	1.18	1.07	0.94	0.81	0.66	0.50	0.35	0.25	0.21	0.23	0.28	0.34	0.36	0.37	0.34	0.27

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-05-04

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks: