

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1268.9 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax At 50% of Imax At 90% of Imax	61.1V x 61.6H 31.0V x 31.4H 12.0V x 13.7H
Beam Flux	Total To 10% of Imax To 50% of Imax To 90% of Imax	486.0 lumens per klm. 401.8 lumens per klm. 212.5 lumens per klm. 43.6 lumens per klm.
	Upward LOR Downward LOR	0.0 % 48.6 %
Luminaire Efficiency(Light Output Ratio)		48.6 %

***H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:09 December 2024***

***V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:***

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.3600A P:8.640W PF:0.4805 Freq:49.99Hz Lamp Flux:120.303x8 lm		
NAME:Medusa Mini-127mm-RGBW 3000K-30D-Rev1	Type:RGBW-ALL	WEIGHT:
SPEC.:30 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

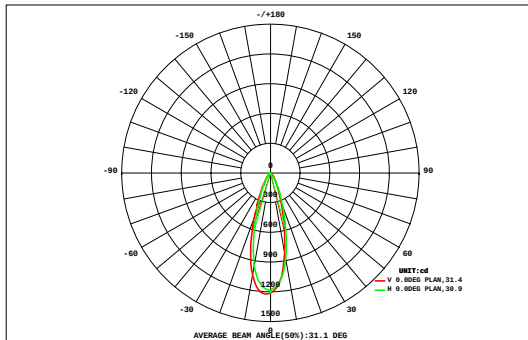

DATA OF LAMP		Eff:54.12lm/W	
MODEL		Imax(cd)	1221
NOMINAL POWER(W)	8	AVAILABILITY(%)	40.2
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	386.5
NOMINAL FLUX(lm)	120.303	LOR(%)	48.6
LAMPS INSIDE	8	TOTAL FLUX(lm)	467.6
TEST VOLTAGE(V)	24	θ @50%(H,V)	31,31DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.01	0.01	0.00	0.00	0.35	0.00
90	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.07	0.07	0.06	0.05	0.03	0.02	0.01	0.00	0.00	0.60	0.00
80	0.00	0.00	0.01	0.03	0.05	0.09	0.13	0.16	0.18	0.18	0.17	0.15	0.11	0.07	0.03	0.02	0.01	0.00	1.38	0.00
70	0.00	0.00	0.02	0.04	0.11	0.21	0.32	0.41	0.47	0.47	0.42	0.34	0.23	0.14	0.06	0.02	0.01	0.00	3.27	0.00
60	0.00	0.01	0.02	0.08	0.21	0.40	0.64	0.89	1.06	1.06	0.91	0.66	0.43	0.24	0.11	0.03	0.01	0.00	6.75	0.00
50	0.00	0.01	0.03	0.12	0.33	0.67	1.21	1.89	2.46	2.53	2.01	1.30	0.73	0.38	0.16	0.05	0.01	0.00	13.9	0.42
40	0.00	0.01	0.04	0.17	0.47	1.06	2.19	4.18	6.56	7.13	5.03	2.60	1.21	0.54	0.21	0.06	0.01	0.00	31.5	21.7
30	0.00	0.01	0.05	0.20	0.59	1.48	3.65	9.06	17.3	19.4	12.4	5.05	1.86	0.72	0.26	0.07	0.01	0.00	72.1	65.2
20	0.00	0.01	0.05	0.21	0.66	1.78	5.06	14.7	29.7	32.4	20.8	7.64	2.41	0.85	0.28	0.08	0.01	0.00	117	111
10	0.00	0.01	0.05	0.19	0.61	1.69	4.81	13.9	27.9	32.2	20.7	7.66	2.46	0.87	0.28	0.08	0.01	0.00	113	108
0	0.00	0.01	0.04	0.16	0.47	1.30	3.31	8.39	15.9	18.2	11.9	5.12	1.97	0.73	0.24	0.07	0.01	0.00	67.8	61.0
-10	0.00	0.00	0.03	0.12	0.33	0.83	1.91	3.79	6.10	6.74	4.96	2.74	1.29	0.50	0.18	0.05	0.01	0.00	29.6	20.0
-20	0.00	0.00	0.01	0.05	0.16	0.32	0.67	1.17	1.65	1.80	1.51	1.00	0.50	0.26	0.10	0.03	0.01	0.00	9.27	0.00
-30	0.00	0.00	0.01	0.01	0.03	0.05	0.07	0.09	0.12	0.13	0.12	0.10	0.08	0.07	0.03	0.01	0.00	0.00	0.93	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.07	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
Φ t	0.00	0.06	0.39	1.42	4.07	9.93	24.1	58.8	109	122	81.0	34.5	13.4	5.43	1.99	0.61	0.12	0.01	468	---
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	13.2	51.5	103	116	74.4	26.2	1.70	0.00	0.00	0.00	0.00	0.00	---	387

one-half-peak spread: U:15.2,D:16.0 , L:15.6,R:15.9


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:09 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.3600A P:8.640W PF:0.4805 Freq:49.99Hz Lamp Flux:120.303x8 lm		
NAME:Medusa Mini-127mm-RGBW 3000K-30D-Rev1	Type:RGBW-ALL	WEIGHT:
SPEC.:30 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

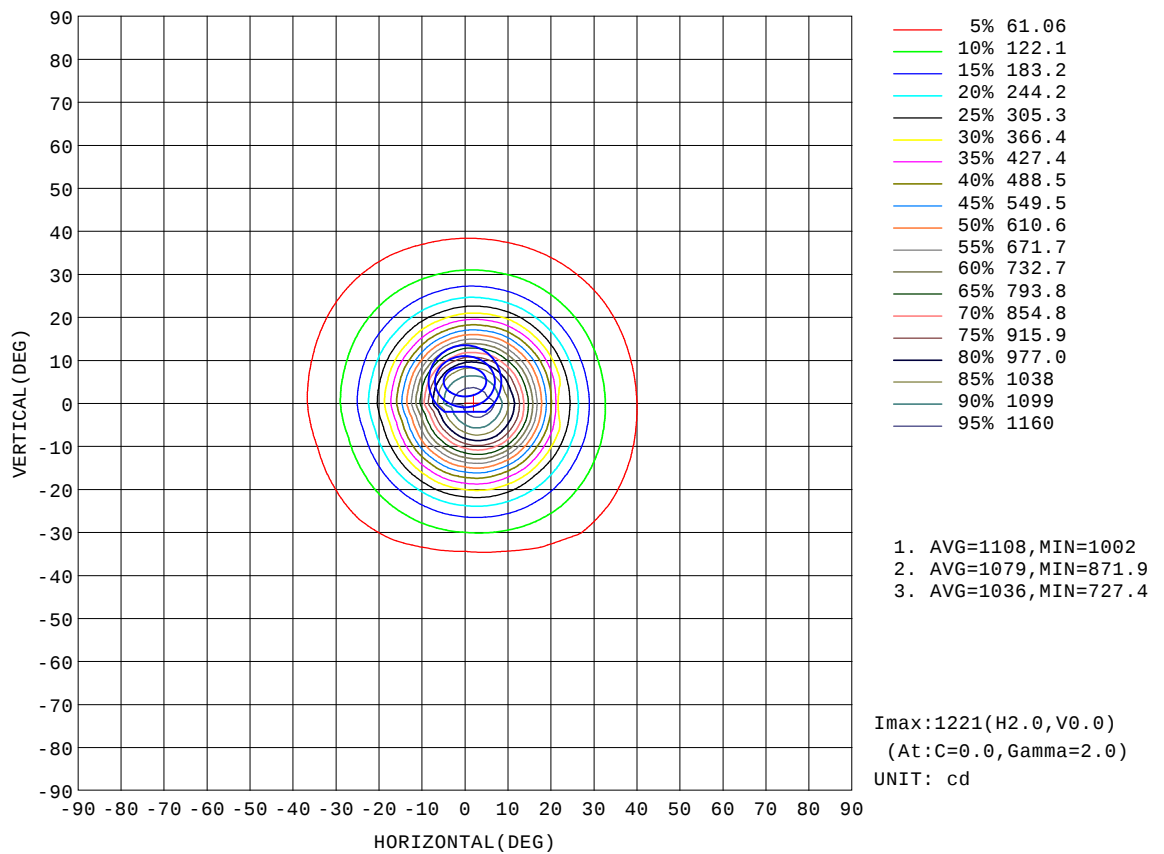


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:09 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:24.00V I:0.3600A P:8.640W PF:0.4805 Freq:49.99Hz Lamp Flux:120.303x8 lm		
NAME:Medusa Mini-127mm-RGBW 3000K-30D-Rev1	Type:RGBW-ALL	WEIGHT:
SPEC.:30 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

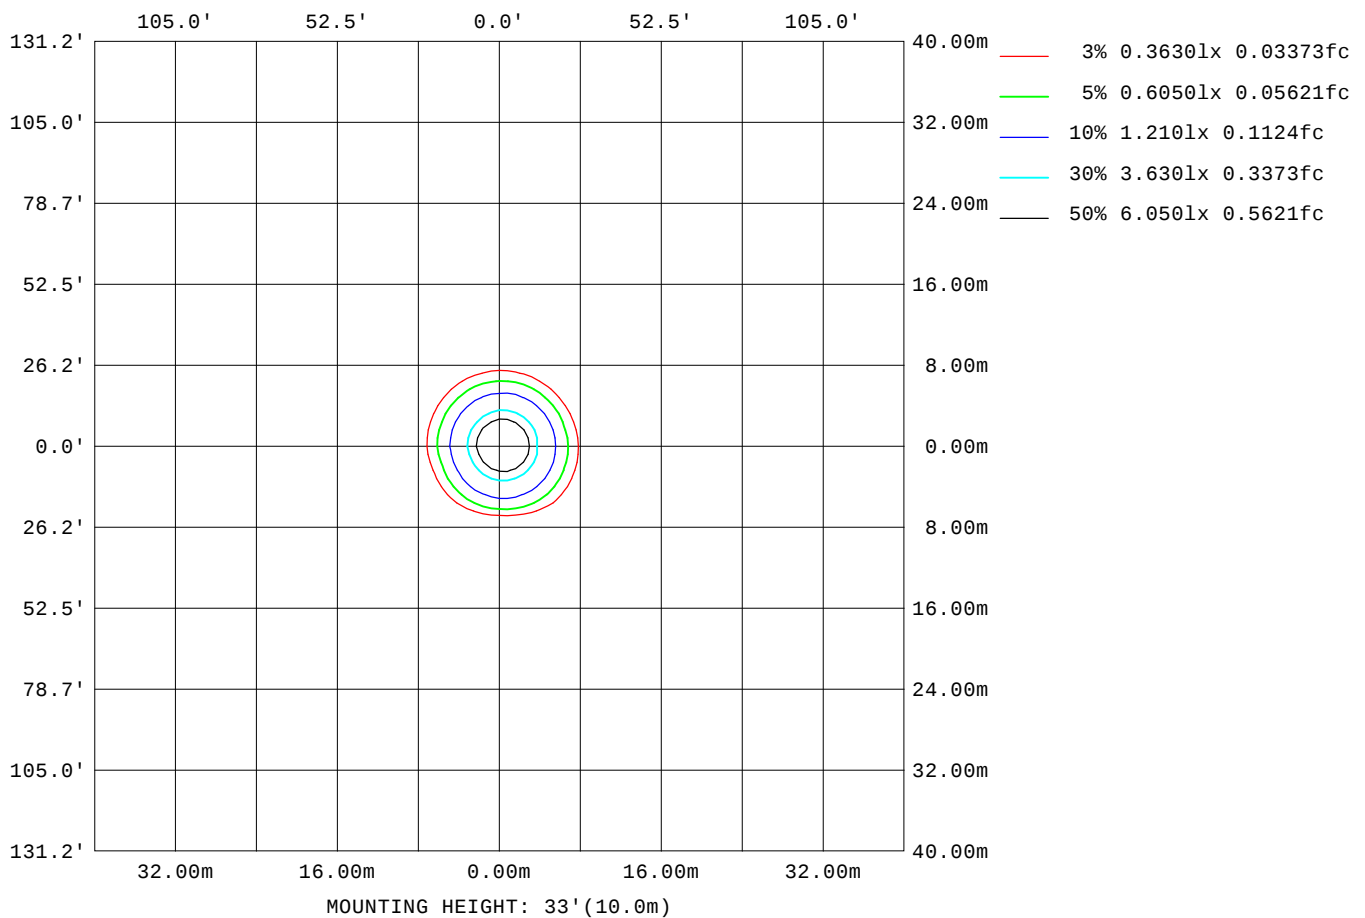

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:09 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

Planar Illuminance Curve

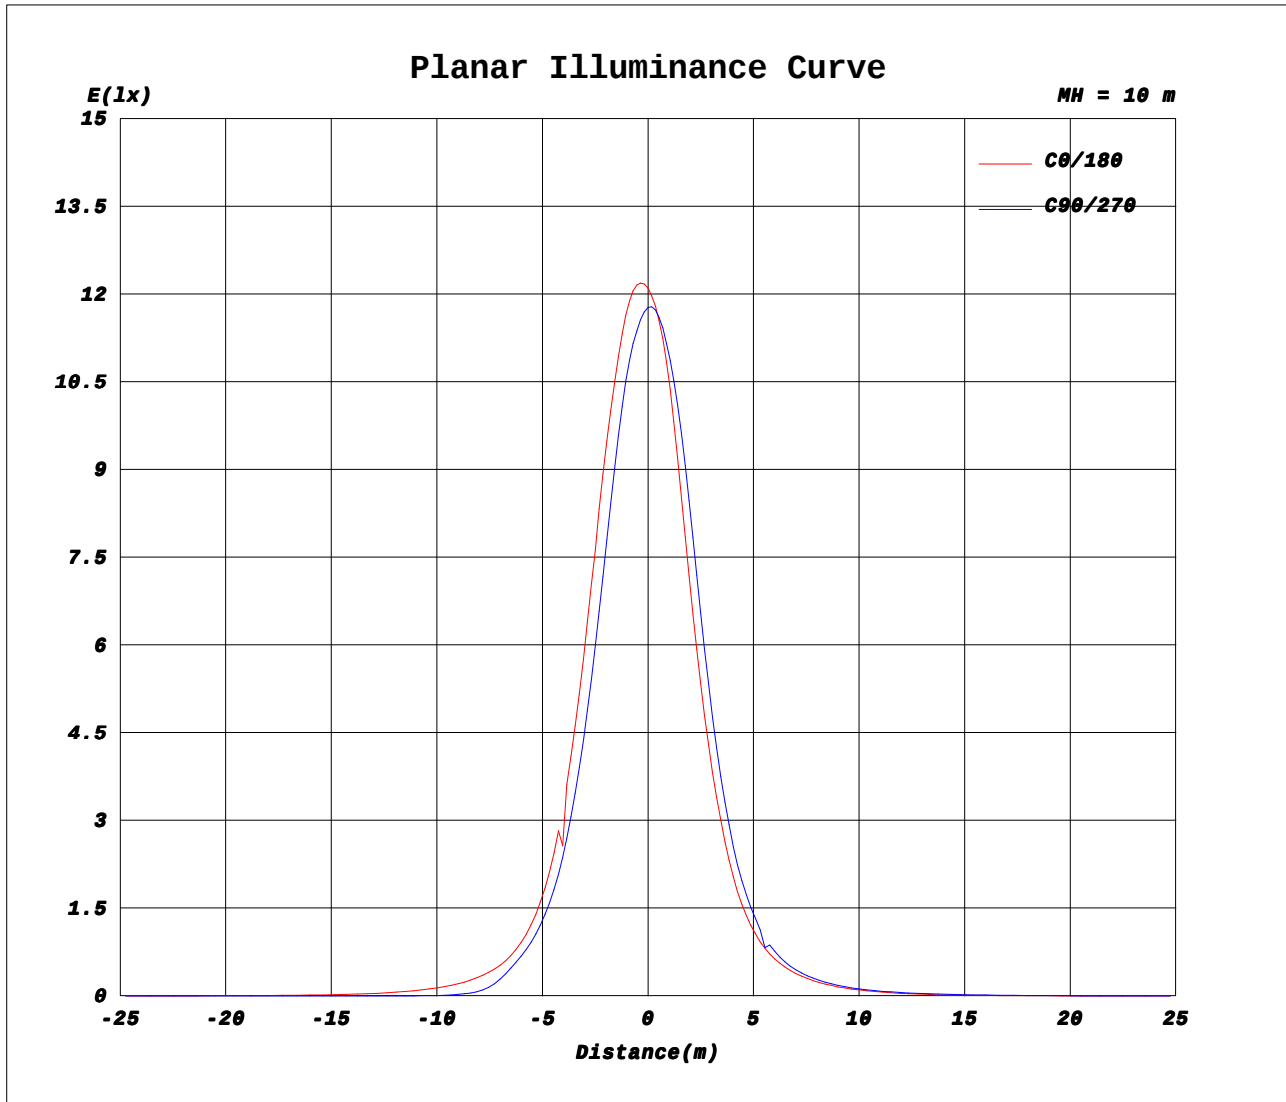


H(β) Range: -90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: CA0LE
Test Date: 09 December 2024

V(B) Range: -90 - 90DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 9.060m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.3600A P:8.640W PF:0.4805 Freq:49.99Hz Lamp Flux:120.303x8 lm		
NAME:Medusa Mini-127mm-RGBW 3000K-30D-Rev1	Type:RGBW-ALL	WEIGHT:
SPEC.:30 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

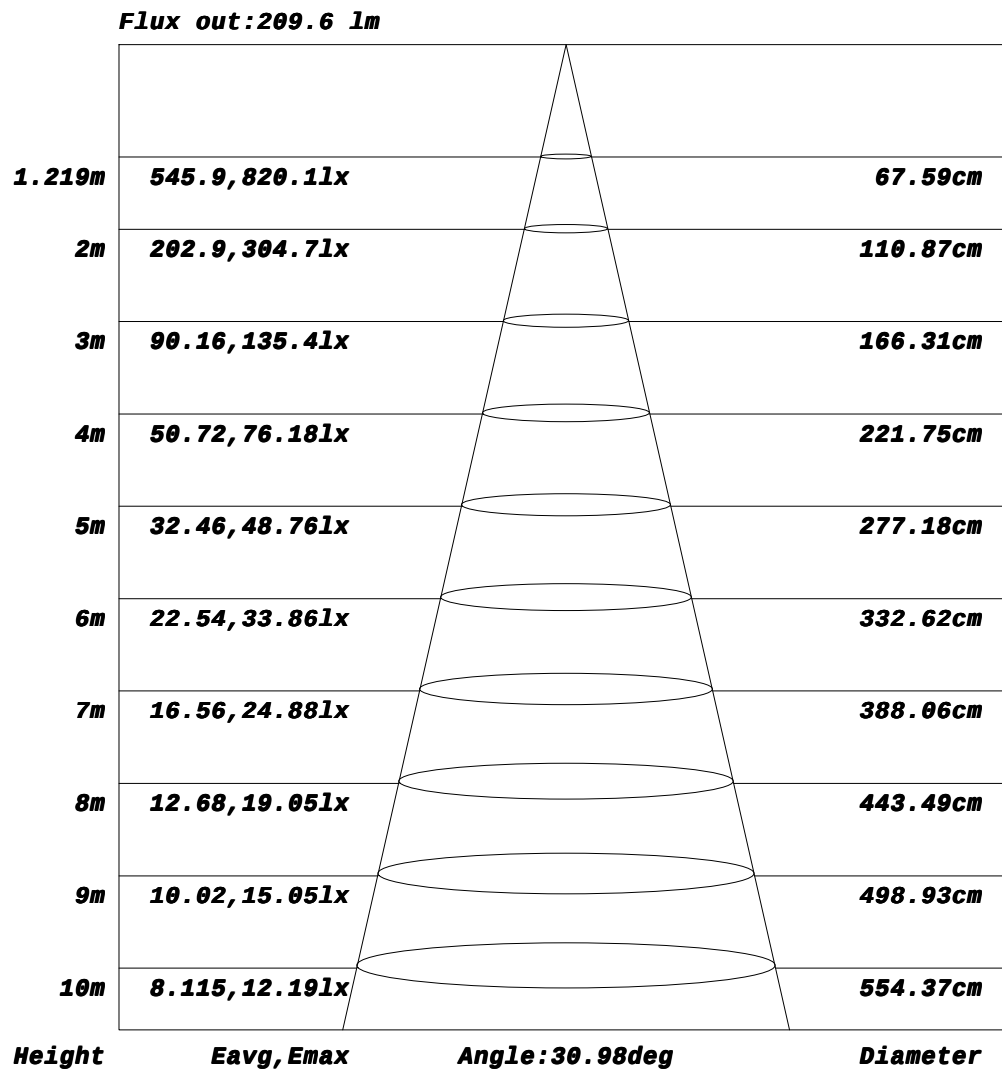

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:09 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.3600A P:8.640W PF:0.4805 Freq:49.99Hz Lamp Flux:120.303x8 lm		
NAME:Medusa Mini-127mm-RGBW 3000K-30D-Rev1	Type:RGBW-ALL	WEIGHT:
SPEC.:30 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	0.00	0.01	0.01
-60	0.00	0.00	0.00	0.01	0.00	0.00	0.03	0.01	0.02	0.03	0.00	0.01	0.02	0.03	0.02	0.01	0.01	0.03	0.05
-55	0.00	0.00	0.00	0.03	0.00	0.05	0.12	0.05	0.11	0.14	0.03	0.07	0.12	0.10	0.11	0.10	0.09	0.12	0.14
-50	0.00	0.00	0.01	0.05	0.01	0.18	0.30	0.30	0.34	0.41	0.44	0.43	0.54	0.56	0.63	0.68	0.70	0.79	0.79
-45	0.00	0.00	0.04	0.09	0.10	0.37	0.64	0.85	0.75	1.22	1.87	1.23	1.65	1.98	2.08	2.47	2.66	3.00	2.97
-40	0.00	0.00	0.05	0.13	0.26	0.64	1.22	1.70	1.95	3.70	5.02	4.41	5.51	7.56	6.79	9.44	10.0	11.9	12.0
-35	0.00	0.00	0.07	0.19	0.45	1.02	2.00	2.93	4.34	7.86	9.83	11.4	17.6	22.6	28.8	37.9	44.7	51.7	53.4
-30	0.00	0.00	0.10	0.26	0.65	1.49	3.00	4.54	7.23	11.5	16.1	21.6	33.1	46.5	61.8	80.1	98.4	114	123
-25	0.00	0.00	0.13	0.36	0.86	1.99	4.03	6.41	9.83	14.6	21.4	32.5	47.8	67.6	92.9	125	161	195	214
-20	0.00	0.00	0.16	0.45	1.07	2.47	4.86	7.99	11.9	17.6	27.3	42.1	61.7	89.9	131	189	259	329	370
-15	0.00	0.00	0.20	0.54	1.28	2.90	5.60	9.23	13.8	20.7	33.1	50.5	75.7	115	180	277	403	527	602
-10	0.00	0.00	0.23	0.62	1.46	3.29	6.24	10.0	15.6	24.4	38.5	58.0	88.7	141	233	378	571	754	881
-5	0.00	0.00	0.25	0.69	1.61	3.60	6.74	10.2	17.1	27.4	43.0	65.7	102	166	280	462	706	954	1100
0	0.00	0.00	0.27	0.75	1.72	3.80	7.06	10.3	18.1	29.5	45.8	70.4	111	185	318	533	822	1098	1210
5	0.00	0.01	0.29	0.79	1.76	3.84	7.11	10.9	18.5	29.5	45.3	69.0	107	176	298	496	765	1031	1130
10	0.00	0.02	0.31	0.81	1.76	3.76	6.95	11.3	18.3	28.5	42.8	64.3	97.4	154	253	410	615	829	950
15	0.00	0.03	0.32	0.82	1.72	3.58	6.61	11.1	17.4	26.6	39.1	57.5	84.8	127	196	298	435	572	659
20	0.00	0.04	0.32	0.82	1.65	3.33	6.12	10.2	16.1	24.0	34.7	49.6	70.7	101	144	206	281	351	400
25	0.00	0.05	0.31	0.80	1.55	3.01	5.53	9.14	14.4	21.2	29.8	41.3	56.8	77.1	104	137	175	211	232
30	0.00	0.06	0.31	0.76	1.44	2.67	4.85	8.01	12.6	18.2	25.0	33.5	44.5	58.1	74.2	92.4	110	125	135
35	0.00	0.07	0.30	0.74	1.32	2.31	4.09	6.79	10.6	15.3	20.4	26.5	34.0	43.0	53.0	62.7	71.3	78.4	81.9
40	0.00	0.08	0.29	0.69	1.20	1.98	3.33	5.55	8.59	12.3	16.3	20.7	25.7	31.4	37.4	43.0	47.7	51.3	52.9
45	0.00	0.08	0.28	0.64	1.10	1.69	2.66	4.29	6.60	9.44	12.6	15.9	19.3	22.8	26.4	29.6	32.2	34.1	34.8
50	0.00	0.08	0.26	0.59	0.98	1.44	2.11	3.21	4.88	6.93	9.30	11.7	14.2	16.5	18.6	20.4	21.9	22.9	23.2
55	0.00	0.09	0.24	0.54	0.87	1.24	1.71	2.38	3.46	4.92	6.58	8.19	9.91	11.6	12.7	13.7	14.5	15.1	15.3
60	0.00	0.09	0.22	0.49	0.76	1.06	1.41	1.85	2.46	3.34	4.39	5.46	6.52	7.46	8.13	8.66	9.15	9.50	9.63
65	0.00	0.09	0.22	0.43	0.66	0.89	1.16	1.47	1.83	2.29	2.83	3.41	3.91	4.44	4.91	5.16	5.42	5.61	5.68
70	0.00	0.08	0.21	0.37	0.56	0.76	0.95	1.18	1.41	1.68	1.94	2.21	2.50	2.75	2.94	3.08	3.21	3.30	3.34
75	0.00	0.08	0.20	0.34	0.47	0.62	0.78	0.96	1.12	1.30	1.45	1.59	1.72	1.86	1.99	2.11	2.17	2.21	2.24
80	0.00	0.07	0.18	0.30	0.42	0.54	0.66	0.78	0.90	1.04	1.13	1.21	1.30	1.38	1.47	1.54	1.57	1.60	1.62
85	0.00	0.07	0.15	0.24	0.36	0.46	0.56	0.67	0.78	0.89	0.94	0.99	1.04	1.09	1.14	1.19	1.19	1.19	1.19
90	0.00	0.06	0.13	0.19	0.29	0.39	0.49	0.58	0.66	0.75	0.80	0.84	0.89	0.91	0.94	0.97	0.97	0.97	0.97

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:09 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.3600A P:8.640W PF:0.4805 Freq:49.99Hz Lamp Flux:120.303x8 lm		
NAME:Medusa Mini-127mm-RGBW 3000K-30D-Rev1	Type:RGBW-ALL	WEIGHT:
SPEC.:30 DEG	DIM.:127mm	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.01	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.01	0.05	0.02	0.00	
-65	0.01	0.00	0.00	0.01	0.01	0.01	0.00	0.00	0.01	0.01	0.01	0.04	0.04	0.00	0.03	0.07	0.04	0.00	
-60	0.03	0.01	0.01	0.03	0.04	0.04	0.02	0.00	0.09	0.09	0.04	0.14	0.15	0.05	0.05	0.10	0.05	0.00	
-55	0.14	0.12	0.14	0.19	0.15	0.24	0.21	0.14	0.29	0.31	0.20	0.35	0.31	0.17	0.09	0.13	0.07	0.00	
-50	0.87	0.84	0.89	0.88	0.85	0.88	0.77	0.99	0.86	0.70	0.77	0.82	0.57	0.31	0.17	0.16	0.09	0.00	
-45	3.21	2.97	3.15	2.86	2.96	2.61	1.99	3.44	2.83	1.48	1.68	1.56	1.01	0.52	0.29	0.20	0.11	0.00	
-40	13.4	12.5	13.0	9.91	11.8	9.20	6.94	8.01	6.95	4.07	3.10	2.57	1.65	0.79	0.42	0.24	0.12	0.00	
-35	56.7	53.7	49.6	41.6	34.8	27.8	18.3	14.9	12.8	7.83	5.11	3.83	2.45	1.10	0.55	0.29	0.14	0.00	
-30	124	116	101	83.9	67.3	51.1	34.8	24.7	17.5	11.5	7.61	5.46	3.18	1.45	0.68	0.34	0.16	0.00	
-25	216	196	163	128	96.9	71.0	51.1	34.4	22.2	14.8	10.1	6.85	3.84	1.81	0.83	0.40	0.17	0.00	
-20	373	327	257	190	133	92.2	63.9	43.4	27.8	17.6	11.9	7.77	4.43	2.15	0.97	0.46	0.19	0.00	
-15	605	522	402	272	178	115	76.3	51.1	33.1	20.3	13.2	8.55	4.94	2.45	1.11	0.52	0.20	0.00	
-10	895	776	565	372	228	139	87.5	56.7	36.8	22.6	14.2	9.18	5.37	2.70	1.22	0.57	0.21	0.00	
-5	1108	972	723	458	270	156	94.5	60.2	38.9	24.2	15.0	9.60	5.66	2.88	1.32	0.61	0.22	0.00	
0	1202	1048	782	494	286	162	96.4	61.0	39.5	25.0	15.4	9.80	5.81	3.00	1.40	0.65	0.23	0.00	
5	1111	967	717	464	268	153	92.3	58.8	38.3	24.6	15.4	9.82	5.79	3.01	1.42	0.67	0.24	0.00	
10	928	786	589	382	226	134	83.4	54.2	35.9	23.5	15.1	9.59	5.64	2.96	1.42	0.69	0.25	0.00	
15	647	559	418	277	175	110	71.7	48.1	32.4	21.9	14.4	9.11	5.33	2.84	1.40	0.69	0.25	0.00	
20	396	348	266	188	128	86.4	59.3	41.2	28.6	19.9	13.3	8.45	4.96	2.68	1.36	0.69	0.25	0.00	
25	228	203	160	124	90.8	65.7	47.6	34.2	24.6	17.5	11.9	7.60	4.54	2.48	1.31	0.68	0.26	0.00	
30	132	121	103	82.8	64.3	49.3	35.2	27.9	20.7	15.0	10.4	6.68	4.08	2.26	1.24	0.66	0.25	0.00	
35	80.6	74.8	66.3	56.0	45.8	36.3	28.7	22.4	17.1	12.7	8.89	5.69	3.54	2.03	1.17	0.63	0.25	0.00	
40	51.9	48.7	44.3	38.7	32.7	27.1	22.0	17.7	13.8	10.5	7.37	4.81	2.99	1.80	1.09	0.60	0.24	0.00	
45	34.3	32.7	30.1	27.0	23.5	20.1	16.8	13.7	11.0	8.41	5.86	3.94	2.50	1.59	1.01	0.57	0.23	0.00	
50	23.0	22.1	20.7	19.1	17.0	14.8	12.5	10.4	8.42	6.38	4.58	3.09	2.07	1.40	0.93	0.54	0.22	0.00	
55	15.3	14.8	14.1	13.1	12.0	10.6	9.16	7.69	6.13	4.71	3.40	2.41	1.72	1.24	0.85	0.50	0.21	0.00	
60	9.68	9.51	9.17	8.73	8.15	7.32	6.32	5.36	4.34	3.34	2.52	1.90	1.44	1.08	0.76	0.45	0.19	0.00	
65	5.78	5.76	5.63	5.44	5.15	4.72	4.16	3.58	2.97	2.39	1.92	1.52	1.21	0.94	0.69	0.42	0.17	0.00	
70	3.42	3.44	3.40	3.32	3.17	2.97	2.68	2.39	2.09	1.75	1.47	1.24	1.02	0.81	0.60	0.38	0.15	0.00	
75	2.27	2.28	2.26	2.19	2.10	1.98	1.81	1.62	1.50	1.37	1.19	1.01	0.85	0.69	0.55	0.33	0.14	0.00	
80	1.63	1.63	1.63	1.57	1.51	1.44	1.36	1.29	1.20	1.08	0.96	0.85	0.71	0.59	0.46	0.28	0.12	0.00	
85	1.21	1.22	1.23	1.19	1.14	1.10	1.06	1.02	0.97	0.88	0.77	0.67	0.58	0.49	0.39	0.25	0.12	0.00	
90	0.98	0.98	0.98	0.97	0.96	0.95	0.90	0.84	0.79	0.73	0.66	0.59	0.50	0.42	0.33	0.22	0.11	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CA0LE
Test Date:09 December 2024

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:9.060m [K=1.0000]
Remarks: