

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2305.3 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	57.2V x 76.2H
	At 50% of Imax	22.2V x 41.9H
	At 90% of Imax	7.7V x 17.5H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	779.2 lumens per klm.
	To 50% of Imax	373.3 lumens per klm.
	To 90% of Imax	68.7 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-TW-1800K-2040D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:20X40 DEG	DIM.:600MM	SERIAL No.:IES003015
MFR.:	SUR.:1	Shielding Angle:

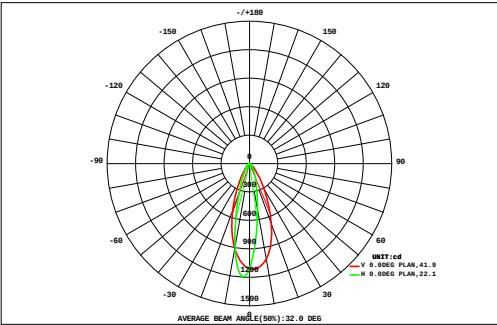

DATA OF LAMP		Eff:59.47lm/W	
MODEL		Imax(cd)	1193
NOMINAL POWER(W)	8.7	AVAILABILITY(%)	78.0
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	403.7
NOMINAL FLUX(lm)	517.4	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	517.4
TEST VOLTAGE(V)	24	q @50%(H,V)	42,22DEG


AREA FLUX DIAGRAM																	UNIT:lm			F t	F a
VERTICAL (DEG)	72	0.02	0.03	0.04	0.05	0.07	0.09	0.10	0.12	0.13	0.13	0.12	0.11	0.10	0.08	0.06	0.04	0.02	0.01	1.32	0.00
	64	0.02	0.04	0.06	0.08	0.11	0.14	0.18	0.21	0.24	0.24	0.23	0.21	0.17	0.13	0.09	0.06	0.03	0.02	2.24	0.00
	56	0.03	0.05	0.08	0.11	0.16	0.23	0.30	0.37	0.42	0.44	0.43	0.39	0.31	0.22	0.14	0.08	0.04	0.02	3.81	0.00
	48	0.03	0.06	0.10	0.16	0.24	0.36	0.49	0.62	0.71	0.78	0.79	0.70	0.55	0.37	0.21	0.11	0.05	0.02	6.37	0.00
	40	0.04	0.07	0.13	0.23	0.36	0.53	0.77	1.02	1.20	1.35	1.42	1.26	0.95	0.61	0.32	0.15	0.07	0.03	10.5	0.00
	32	0.04	0.09	0.17	0.31	0.55	0.84	1.22	1.73	2.09	2.39	2.52	2.17	1.59	0.96	0.48	0.20	0.08	0.03	17.5	5.35
	24	0.05	0.10	0.20	0.42	0.85	1.47	2.15	3.12	3.89	4.39	4.41	3.67	2.59	1.46	0.68	0.26	0.09	0.03	29.8	23.1
		0.05	0.11	0.23	0.56	1.25	2.56	4.51	6.20	7.95	8.73	8.09	6.52	4.07	2.06	0.88	0.31	0.10	0.03	54.2	49.7
		0.05	0.12	0.26	0.67	1.65	3.89	7.99	12.6	15.7	16.8	14.8	10.5	5.72	2.61	1.04	0.35	0.10	0.03	94.8	91.0
		0.05	0.12	0.26	0.68	1.71	4.13	8.90	15.4	21.1	21.9	17.6	11.2	5.82	2.60	1.03	0.35	0.10	0.03	113	109
		0.05	0.11	0.24	0.59	1.40	3.09	6.34	11.1	14.5	15.2	12.6	7.83	4.21	2.02	0.85	0.30	0.10	0.03	80.5	76.3
	-24	0.04	0.10	0.21	0.47	1.01	2.00	3.58	5.60	6.66	6.98	6.31	4.29	2.60	1.39	0.64	0.24	0.09	0.03	42.3	36.9
-32	0.04	0.08	0.17	0.35	0.68	1.20	1.92	2.66	3.02	3.15	2.95	2.23	1.47	0.87	0.43	0.18	0.07	0.03	21.5	12.1	
-40	0.03	0.07	0.13	0.25	0.44	0.71	1.04	1.35	1.50	1.54	1.47	1.19	0.83	0.52	0.28	0.13	0.06	0.02	11.6	0.00	
-48	0.03	0.05	0.10	0.17	0.28	0.43	0.59	0.72	0.80	0.81	0.77	0.64	0.47	0.31	0.18	0.09	0.04	0.02	6.50	0.00	
-56	0.02	0.04	0.07	0.11	0.17	0.25	0.33	0.40	0.44	0.44	0.41	0.35	0.26	0.18	0.11	0.06	0.03	0.01	3.67	0.00	
-64	0.02	0.03	0.04	0.06	0.09	0.13	0.18	0.21	0.23	0.24	0.22	0.18	0.14	0.10	0.06	0.04	0.02	0.01	2.00	0.00	
-72	0.01	0.02	0.03	0.04	0.05	0.07	0.09	0.10	0.12	0.12	0.11	0.09	0.07	0.05	0.03	0.02	0.01	0.01	1.03	0.00	
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72	
F t	0.63	1.28	2.52	5.31	11.1	22.1	40.7	63.5	80.6	85.6	75.2	53.5	31.9	16.5	7.52	2.97	1.11	0.43	503	---	
F a	0.00	0.00	0.00	0.00	1.61	14.4	33.0	56.0	73.3	78.2	68.1	46.5	24.7	7.89	0.00	0.00	0.00	0.00	---	404	

one-half-peak spread: U:11.3,D:11.0 , L:21.3,NE20.8 Seam Type: Type 5 x 4 (H x V)

H _(b) Range:-90 - 90DEG	V(B) Range:-180 - 180DEG
H _(b) Interval: 0.5DEG	V(B) Interval: 0.5DEG
Test Speed: LOW	Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Temperature:25.3DEG	Humidity:65.0%
Operators:	Test Distance:8.630m [K=1.0000]
Test Date:2024-09-29	Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-TW-1800K-2040D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:20X40 DEG	DIM.:600MM	SERIAL No.:IES003015
MFR.:	SUR.:1	Shielding Angle:

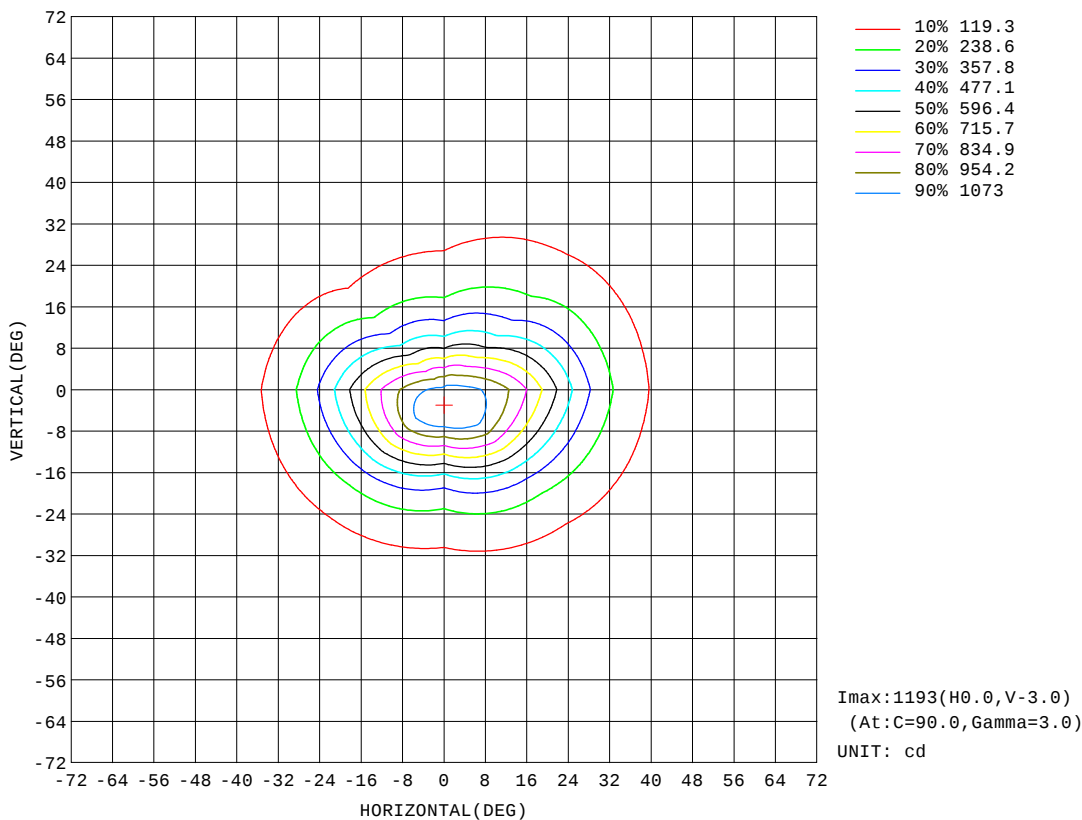


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-TW-1800K-2040D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:20X40 DEG	DIM.:600MM	SERIAL No.:IES003015
MFR.:	SUR.:1	Shielding Angle:

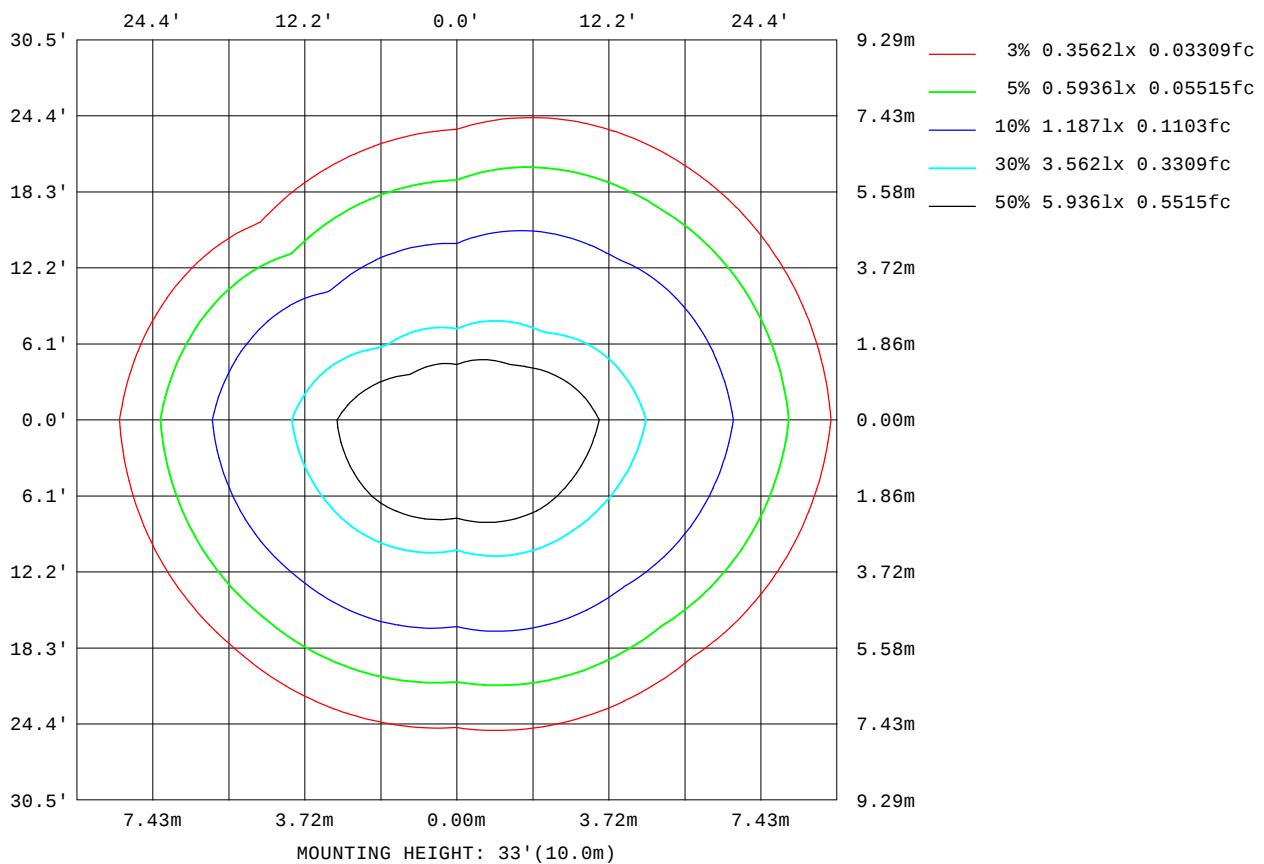

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

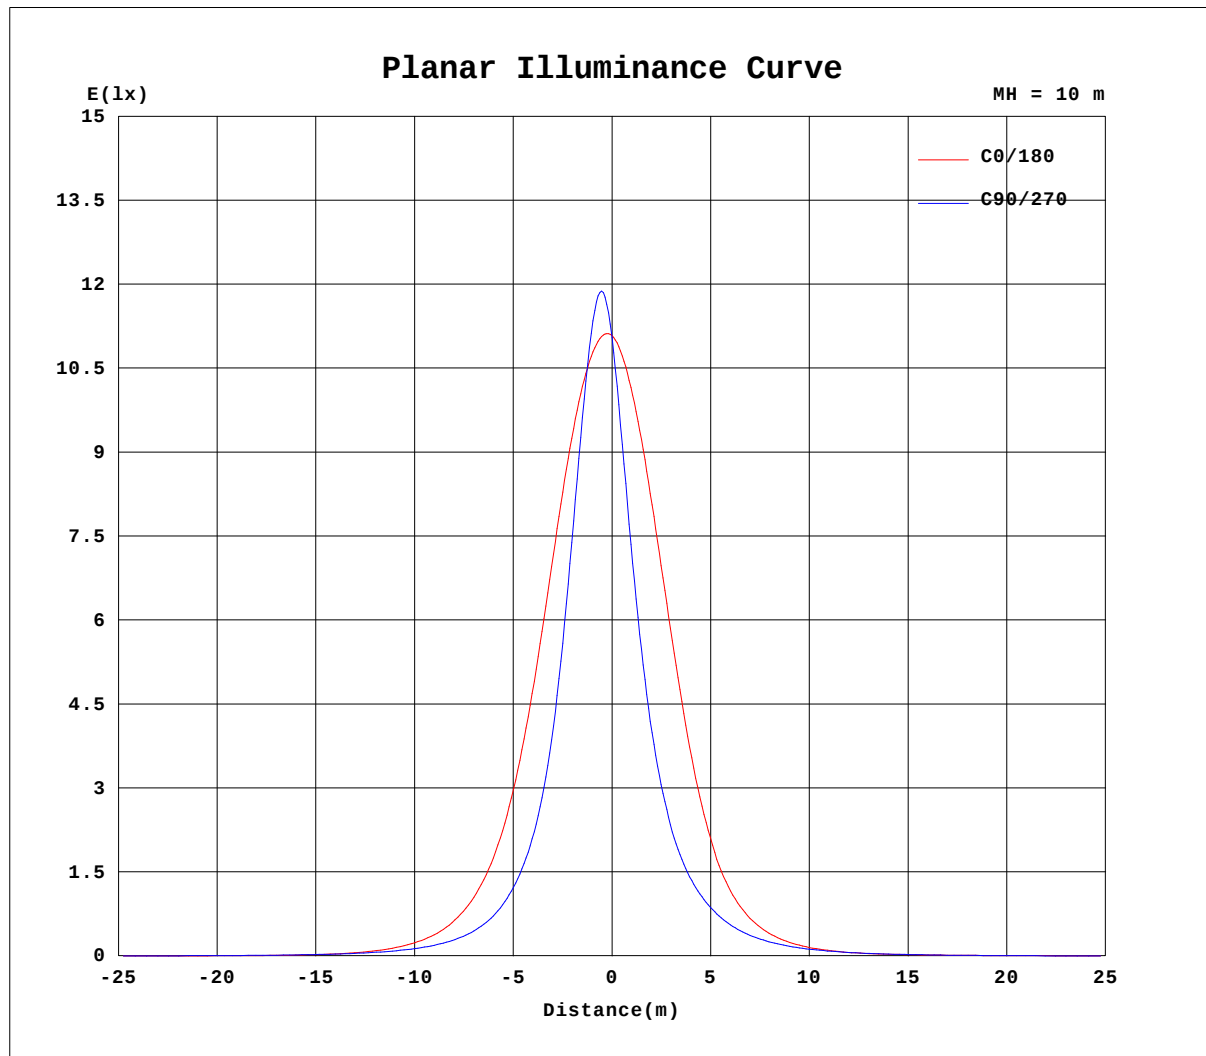


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-TW-1800K-2040D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:20X40 DEG	DIM.:600MM	SERIAL No.:IES003015
MFR.:	SUR.:1	Shielding Angle:

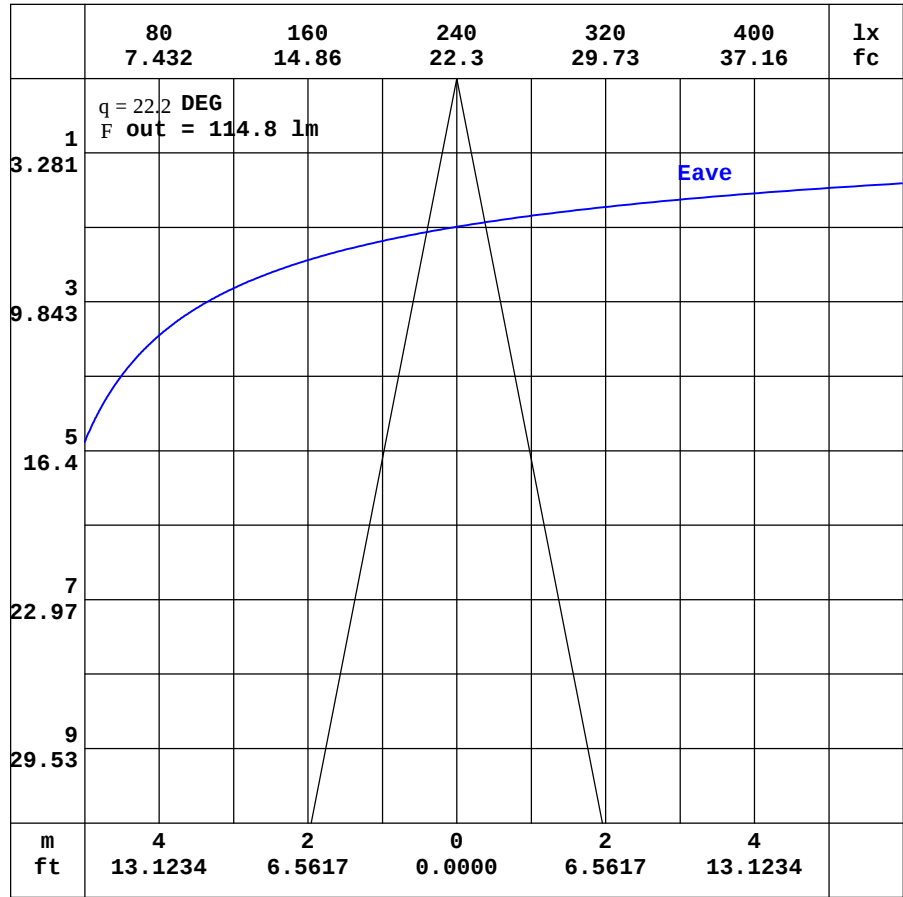

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-TW-1800K-2040D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:20X40 DEG	DIM.:600MM	SERIAL No.:IES003015
MFR.:	SUR.:1	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.89	1.76	1.73	1.75	1.86	2.06	2.34	2.66	3.02	3.35	3.64	3.85	4.00	4.04	4.04	4.02	3.97	3.93	3.87
-170	1.89	1.74	1.69	1.69	1.76	1.91	2.11	2.34	2.58	2.81	3.01	3.16	3.27	3.35	3.39	3.41	3.38	3.53	3.67
-160	1.89	1.72	1.65	1.63	1.66	1.74	1.85	1.99	2.11	2.23	2.32	2.38	2.43	2.46	2.47	2.66	2.86	2.99	3.04
-150	1.89	1.71	1.62	1.56	1.55	1.57	1.61	1.65	1.67	1.67	1.66	1.61	1.54	1.55	1.72	1.88	1.99	2.05	2.05
-140	1.89	1.70	1.59	1.52	1.46	1.43	1.41	1.38	1.33	1.25	1.14	1.00	0.96	1.03	1.10	1.16	1.20	1.20	1.18
-130	1.89	1.70	1.56	1.48	1.39	1.32	1.26	1.19	1.10	0.99	0.85	0.77	0.76	0.77	0.77	0.75	0.74	0.72	0.69
-120	1.89	1.70	1.56	1.44	1.35	1.25	1.16	1.07	0.97	0.86	0.75	0.76	0.75	0.75	0.74	0.73	0.72	0.70	0.69
-110	1.89	1.71	1.56	1.43	1.31	1.21	1.11	1.01	0.90	0.79	0.75	0.76	0.76	0.77	0.77	0.77	0.78	0.78	0.78
-100	1.89	1.73	1.58	1.44	1.31	1.18	1.07	0.95	0.85	0.75	0.74	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75
-90	1.89	1.75	1.61	1.47	1.33	1.19	1.05	0.91	0.77	0.63	0.62	0.62	0.61	0.61	0.60	0.59	0.59	0.58	0.58
-80	1.89	1.78	1.67	1.55	1.46	1.37	1.23	1.11	1.00	0.88	0.95	1.03	1.11	1.19	1.26	1.33	1.39	1.44	1.47
-70	1.89	1.82	1.80	1.78	1.79	1.86	1.91	1.97	2.03	2.09	2.36	2.75	3.13	3.53	3.91	4.26	4.56	4.80	4.97
-60	1.89	1.86	1.96	2.12	2.37	2.69	3.02	3.40	3.85	4.36	5.01	6.09	7.24	8.42	9.51	10.5	11.3	11.8	12.1
-50	1.89	1.94	2.16	2.57	3.10	3.71	4.47	5.41	6.60	8.18	10.1	12.5	15.2	17.9	20.5	22.8	24.6	25.7	26.1
-40	1.89	2.09	2.41	3.07	3.86	4.88	6.23	8.04	10.6	13.8	18.0	23.2	29.2	35.6	42.0	47.8	52.2	54.7	55.0
-30	1.89	2.17	2.66	3.54	4.61	6.11	8.14	11.1	15.1	20.9	29.5	40.7	54.1	69.9	88.1	106	120	127	124
-20	1.89	2.20	2.87	3.94	5.31	7.22	9.92	13.8	19.8	30.0	45.7	67.9	98.8	140	190	254	310	337	321
-10	1.89	2.23	3.04	4.25	5.85	8.07	11.2	15.8	23.9	39.1	63.3	101	160	253	384	552	746	870	893
0	1.89	2.27	3.14	4.44	6.17	8.51	11.8	16.6	25.7	43.5	73.5	123	205	340	522	725	907	1041	1108
10	1.89	2.26	3.09	4.32	5.94	8.15	11.2	15.6	23.1	37.1	58.9	91.7	140	210	290	360	394	481	490
20	1.89	2.26	2.98	4.10	5.50	7.40	9.96	13.5	18.7	27.4	40.0	56.4	76.0	96.8	112	141	174	196	198
30	1.89	2.25	2.81	3.77	4.90	6.42	8.37	10.9	14.4	18.9	25.3	32.5	39.5	46.8	58.7	71.3	82.7	91.2	95.0
40	1.89	2.20	2.61	3.37	4.23	5.32	6.67	8.35	10.4	13.0	16.0	19.4	23.3	28.1	33.3	38.4	42.9	46.5	48.6
50	1.89	2.06	2.40	2.92	3.57	4.26	5.09	6.07	7.17	8.48	9.93	11.8	14.0	16.3	18.6	20.7	22.6	24.1	25.0
60	1.89	2.00	2.24	2.53	2.91	3.35	3.79	4.27	4.79	5.35	5.97	6.83	7.79	8.76	9.68	10.6	11.3	11.9	12.3
70	1.89	1.96	2.09	2.24	2.39	2.58	2.78	2.98	3.17	3.36	3.62	3.91	4.22	4.53	4.82	5.09	5.31	5.47	5.57
80	1.89	1.93	1.97	2.01	2.09	2.17	2.19	2.23	2.26	2.29	2.33	2.39	2.44	2.48	2.52	2.56	2.58	2.60	2.60
90	1.89	1.89	1.90	1.90	1.90	1.91	1.91	1.92	1.92	1.92	1.92	1.92	1.92	1.91	1.91	1.91	1.90	1.90	1.90
100	1.89	1.87	1.84	1.82	1.80	1.78	1.76	1.74	1.73	1.71	1.70	1.69	1.67	1.66	1.66	1.65	1.65	1.64	1.64
110	1.89	1.84	1.80	1.76	1.72	1.71	1.69	1.67	1.66	1.65	1.64	1.64	1.64	1.65	1.66	1.67	1.67	1.67	1.67
120	1.89	1.81	1.76	1.72	1.70	1.69	1.68	1.68	1.69	1.73	1.77	1.84	1.90	1.95	2.00	2.04	2.06	2.07	2.06
130	1.89	1.80	1.73	1.71	1.70	1.71	1.74	1.81	1.90	2.03	2.17	2.33	2.48	2.63	2.78	2.90	2.99	3.06	3.09
140	1.89	1.78	1.72	1.71	1.72	1.77	1.87	2.02	2.21	2.44	2.69	2.94	3.19	3.42	3.61	3.76	3.88	3.95	3.98
150	1.89	1.77	1.72	1.72	1.75	1.86	2.03	2.26	2.54	2.85	3.16	3.47	3.73	3.96	4.13	4.26	4.34	4.40	4.44
160	1.89	1.77	1.72	1.73	1.80	1.95	2.18	2.47	2.81	3.15	3.49	3.78	4.02	4.21	4.33	4.42	4.49	4.55	4.65
170	1.89	1.76	1.72	1.74	1.84	2.02	2.29	2.61	2.96	3.32	3.64	3.89	4.08	4.19	4.23	4.21	4.09	4.11	4.25
180	1.89	1.76	1.73	1.75	1.86	2.06	2.34	2.66	3.02	3.35	3.64	3.85	4.00	4.04	4.04	4.02	3.97	3.93	3.88

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators:

Test Date: 2024-09-29

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-TW-1800K-2040D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:20X40 DEG	DIM.:600MM	SERIAL No.:IES003015
MFR.:	SUR.:1	Shielding Angle:

Table--2		UNIT: cd																	
H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	3.60	3.33	3.05	2.71	2.35	1.99	1.66	1.36	1.09	0.93	0.82	0.76	0.73	0.72	0.71	0.65	0.59	0.53	
-170	3.58	3.41	3.07	2.69	2.29	1.92	1.58	1.28	1.05	0.90	0.80	0.75	0.73	0.72	0.71	0.65	0.58	0.53	
-160	2.97	2.81	2.57	2.27	1.94	1.62	1.34	1.10	0.94	0.84	0.77	0.74	0.73	0.72	0.70	0.65	0.58	0.53	
-150	2.02	1.93	1.78	1.59	1.40	1.21	1.04	0.91	0.83	0.78	0.75	0.74	0.73	0.71	0.70	0.65	0.57	0.53	
-140	1.18	1.15	1.09	1.02	0.94	0.87	0.82	0.78	0.76	0.75	0.74	0.73	0.73	0.72	0.68	0.64	0.57	0.53	
-130	0.71	0.71	0.73	0.73	0.73	0.73	0.74	0.74	0.74	0.74	0.74	0.73	0.72	0.71	0.67	0.62	0.56	0.53	
-120	0.70	0.71	0.72	0.73	0.74	0.75	0.75	0.74	0.74	0.74	0.73	0.73	0.71	0.68	0.65	0.60	0.55	0.53	
-110	0.78	0.77	0.77	0.77	0.77	0.76	0.75	0.75	0.75	0.74	0.73	0.71	0.68	0.64	0.61	0.57	0.54	0.53	
-100	0.75	0.75	0.74	0.74	0.73	0.73	0.72	0.70	0.69	0.67	0.65	0.63	0.61	0.59	0.57	0.55	0.54	0.53	
-90	0.57	0.57	0.57	0.57	0.56	0.56	0.56	0.56	0.55	0.55	0.55	0.55	0.54	0.54	0.54	0.54	0.53	0.53	
-80	1.43	1.38	1.31	1.24	1.16	1.07	0.99	0.90	0.81	0.76	0.71	0.66	0.61	0.58	0.56	0.55	0.53	0.53	
-70	4.79	4.55	4.24	3.89	3.50	3.10	2.70	2.30	1.96	1.69	1.44	1.23	1.03	0.85	0.69	0.59	0.54	0.53	
-60	11.9	11.4	10.7	9.75	8.62	7.39	6.16	5.04	4.11	3.34	2.68	2.10	1.64	1.26	0.97	0.69	0.56	0.53	
-50	26.2	25.5	24.0	21.9	19.3	16.5	13.5	10.7	8.07	5.98	4.46	3.33	2.43	1.76	1.24	0.84	0.59	0.53	
-40	56.7	55.8	52.4	46.9	40.2	33.1	26.5	20.2	14.7	10.3	7.04	4.83	3.37	2.28	1.55	1.01	0.62	0.53	
-30	133	130	119	102	83.0	66.4	51.0	37.0	25.1	16.2	10.4	6.63	4.32	2.85	1.82	1.13	0.65	0.53	
-20	357	344	293	227	177	131	92.8	62.9	40.3	24.1	14.0	8.41	5.17	3.31	2.05	1.24	0.68	0.53	
-10	920	834	647	477	335	226	148	93.1	56.7	32.3	17.1	9.68	5.79	3.62	2.20	1.32	0.69	0.53	
0	1099	1021	872	673	470	306	191	115	67.1	36.7	18.5	10.1	5.98	3.73	2.25	1.35	0.70	0.53	
10	537	496	476	408	315	224	150	95.3	58.3	33.3	17.7	10.0	6.04	3.79	2.31	1.39	0.73	0.53	
20	228	234	220	197	172	134	97.6	66.8	43.1	25.8	14.9	9.02	5.64	3.64	2.26	1.37	0.74	0.53	
30	108	114	111	103	90.0	74.1	57.3	41.4	28.1	18.0	11.5	7.50	4.97	3.31	2.13	1.32	0.74	0.53	
40	53.1	55.1	54.5	51.1	45.7	39.1	31.6	23.8	17.1	12.0	8.35	5.87	4.14	2.84	1.94	1.25	0.73	0.53	
50	26.1	26.4	25.8	24.3	22.1	19.5	16.5	13.2	10.1	7.73	5.88	4.43	3.27	2.38	1.68	1.13	0.72	0.53	
60	12.4	12.2	11.8	11.1	10.2	9.29	8.29	7.32	6.10	5.00	4.05	3.20	2.52	1.94	1.45	1.01	0.72	0.53	
70	5.59	5.53	5.41	5.23	4.99	4.73	4.44	4.13	3.73	3.23	2.75	2.32	1.92	1.56	1.21	0.93	0.71	0.53	
80	2.63	2.65	2.66	2.65	2.64	2.61	2.58	2.54	2.48	2.24	2.00	1.75	1.52	1.30	1.09	0.89	0.70	0.53	
90	1.91	1.93	1.94	1.96	1.97	1.98	2.00	2.01	2.03	1.86	1.70	1.53	1.36	1.20	1.03	0.86	0.70	0.53	
100	1.65	1.66	1.68	1.69	1.71	1.73	1.75	1.77	1.77	1.66	1.53	1.41	1.28	1.14	1.00	0.84	0.69	0.53	
110	1.68	1.68	1.68	1.68	1.68	1.68	1.69	1.69	1.66	1.55	1.45	1.34	1.23	1.11	0.98	0.84	0.68	0.53	
120	2.06	2.04	2.00	1.96	1.90	1.85	1.80	1.75	1.62	1.50	1.39	1.29	1.18	1.07	0.96	0.83	0.68	0.53	
130	3.03	2.94	2.81	2.67	2.51	2.35	2.20	1.98	1.72	1.52	1.35	1.24	1.14	1.04	0.93	0.81	0.67	0.53	
140	3.91	3.81	3.66	3.47	3.25	2.99	2.64	2.22	1.86	1.57	1.35	1.19	1.08	1.00	0.89	0.79	0.66	0.53	
150	4.38	4.29	4.16	4.00	3.78	3.34	2.82	2.34	1.93	1.58	1.32	1.14	1.02	0.93	0.86	0.77	0.64	0.53	
160	4.58	4.52	4.42	4.22	3.71	3.20	2.71	2.23	1.82	1.48	1.23	1.05	0.94	0.87	0.82	0.73	0.63	0.53	
170	4.25	4.29	4.01	3.62	3.18	2.74	2.30	1.89	1.53	1.26	1.05	0.91	0.84	0.79	0.76	0.69	0.61	0.53	
180	3.60	3.33	3.05	2.71	2.35	1.99	1.66	1.36	1.09	0.93	0.82	0.76	0.73	0.72	0.71	0.65	0.59	0.53	

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: