

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2233.5 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	58.1V x 76.1H
	At 50% of Imax	23.2V x 41.4H
	At 90% of Imax	9.2V x 17.3H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	784.6 lumens per klm.
	To 50% of Imax	388.5 lumens per klm.
	To 90% of Imax	87.0 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-TW-6000K-2040D-Rev1	TYPE:6000K	WEIGHT:
SPEC.:20X40 DEG	DIM.:600MM	SERIAL No.:IES003016
MFR.:	SUR.:1	Shielding Angle:

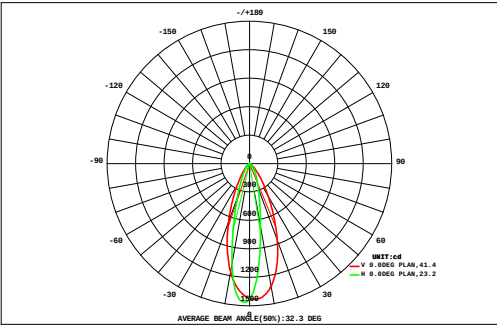

DATA OF LAMP		Eff:73.57lm/W	
MODEL		Imax(cd)	1463
NOMINAL POWER(W)	8.9	AVAILABILITY(%)	78.5
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	513.9
NOMINAL FLUX(lm)	654.8	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	654.8
TEST VOLTAGE(V)	24	q @50%(H,V)	41,23DEG

		AREA FLUX DIAGRAM																UNIT:lm			F t	F a
VERTICAL (DEG)	72	0.02	0.04	0.05	0.07	0.09	0.11	0.14	0.15	0.17	0.17	0.16	0.14	0.12	0.10	0.07	0.05	0.03	0.02	1.68	0.00	
	64	0.03	0.05	0.07	0.10	0.14	0.19	0.24	0.28	0.31	0.31	0.29	0.25	0.20	0.15	0.11	0.07	0.04	0.02	2.86	0.00	
	56	0.03	0.06	0.10	0.15	0.23	0.32	0.42	0.51	0.56	0.56	0.52	0.44	0.35	0.24	0.16	0.09	0.05	0.02	4.83	0.00	
	48	0.04	0.08	0.13	0.22	0.36	0.53	0.71	0.87	0.96	0.98	0.91	0.76	0.58	0.39	0.24	0.13	0.06	0.03	7.99	0.00	
	40	0.05	0.09	0.18	0.32	0.54	0.83	1.18	1.49	1.66	1.70	1.58	1.28	0.93	0.63	0.36	0.17	0.08	0.03	13.1	0.00	
	32	0.05	0.11	0.22	0.43	0.81	1.32	1.95	2.61	2.94	3.02	2.80	2.17	1.56	1.02	0.54	0.24	0.10	0.04	21.9	6.78	
	24	0.06	0.13	0.27	0.58	1.19	2.17	3.36	4.69	5.50	5.70	5.12	3.91	2.82	1.64	0.79	0.31	0.11	0.04	38.4	30.6	
		0.06	0.14	0.30	0.73	1.66	3.51	6.25	8.94	11.2	11.8	10.1	7.80	4.85	2.47	1.07	0.39	0.13	0.04	71.4	66.0	
		0.07	0.15	0.33	0.84	2.10	5.01	10.2	16.6	21.6	22.8	19.2	13.2	7.20	3.29	1.32	0.44	0.13	0.04	125	120	
		0.07	0.15	0.32	0.83	2.09	5.06	10.8	18.9	25.8	27.0	22.2	14.4	7.60	3.43	1.36	0.45	0.14	0.04	141	136	
		0.06	0.14	0.29	0.69	1.60	3.55	7.18	12.6	17.1	18.3	15.8	10.4	5.79	2.80	1.18	0.41	0.13	0.04	98.1	92.9	
	-24	0.06	0.12	0.25	0.52	1.09	2.09	3.68	6.07	7.65	8.53	8.35	6.26	3.87	2.05	0.92	0.34	0.12	0.04	52.0	45.4	
-32	0.05	0.10	0.20	0.38	0.69	1.15	1.87	2.79	3.39	3.91	4.12	3.46	2.41	1.38	0.66	0.26	0.10	0.04	26.9	16.4		
-40	0.04	0.08	0.16	0.27	0.44	0.67	1.03	1.41	1.67	1.93	2.09	1.87	1.41	0.87	0.44	0.19	0.08	0.03	14.7	0.00		
-48	0.04	0.07	0.12	0.19	0.28	0.43	0.60	0.78	0.91	1.03	1.09	0.99	0.77	0.52	0.28	0.13	0.06	0.02	8.30	0.00		
-56	0.03	0.05	0.08	0.12	0.18	0.27	0.36	0.45	0.51	0.56	0.57	0.51	0.41	0.28	0.16	0.09	0.04	0.02	4.69	0.00		
-64	0.02	0.04	0.05	0.08	0.11	0.16	0.21	0.25	0.28	0.30	0.29	0.25	0.20	0.14	0.09	0.05	0.03	0.01	2.57	0.00		
-72	0.02	0.03	0.03	0.04	0.06	0.08	0.11	0.13	0.15	0.15	0.14	0.12	0.10	0.07	0.05	0.03	0.02	0.01	1.33	0.00		
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)				16	24	32	40	48	56	64	72		
F t	0.80	1.62	3.15	6.55	13.7	27.4	50.4	79.6	102	109	95.3	68.2	41.2	21.5	9.78	3.85	1.44	0.55	636	---		
F a	0.00	0.00	0.00	0.00	2.01	17.9	41.1	70.6	93.1	99.7	86.5	59.3	32.5	11.2	0.00	0.00	0.00	0.00	---	514		


one-half-peak spread: U:12.0,D:11.4 , L:21.4,NEZ0.3 Beam Type: Type 5 x 4 (H x V)

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-TW-6000K-2040D-Rev1	TYPE:6000K	WEIGHT:
SPEC.:20X40 DEG	DIM.:600MM	SERIAL No.:IES003016
MFR.:	SUR.:1	Shielding Angle:

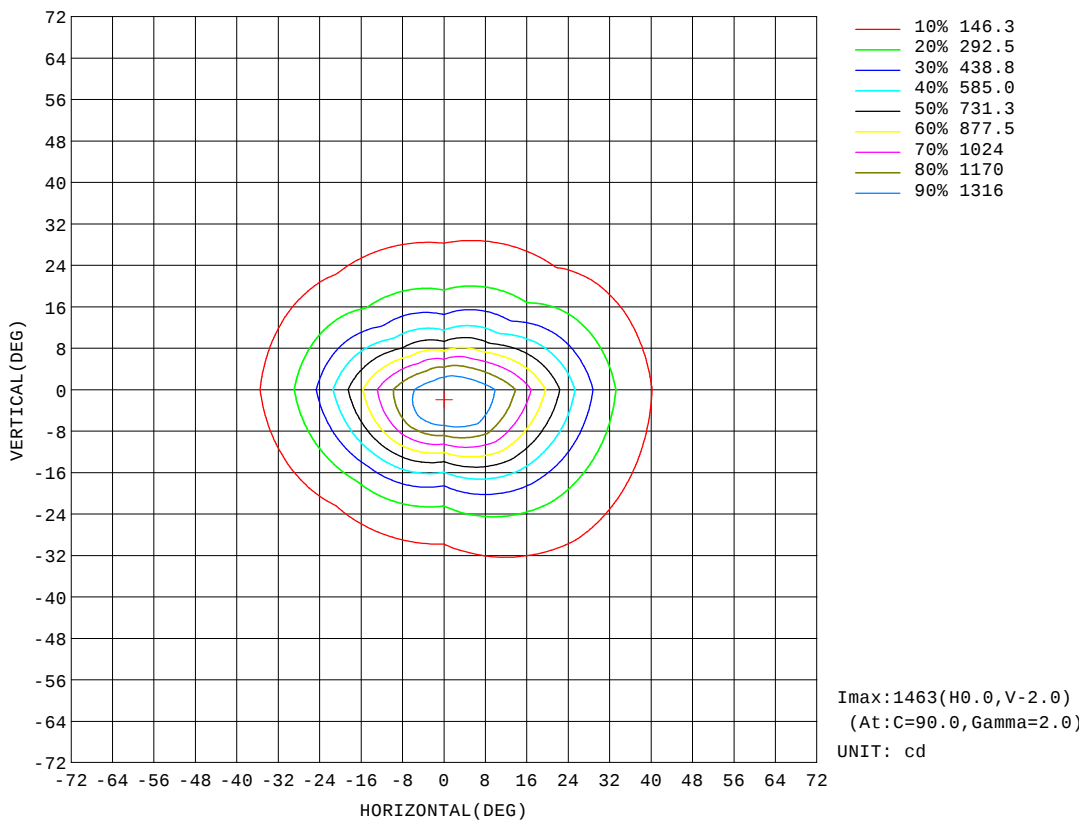


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-TW-6000K-2040D-Rev1	TYPE:6000K	WEIGHT:
SPEC.:20X40 DEG	DIM.:600MM	SERIAL No.:IES003016
MFR.:	SUR.:1	Shielding Angle:

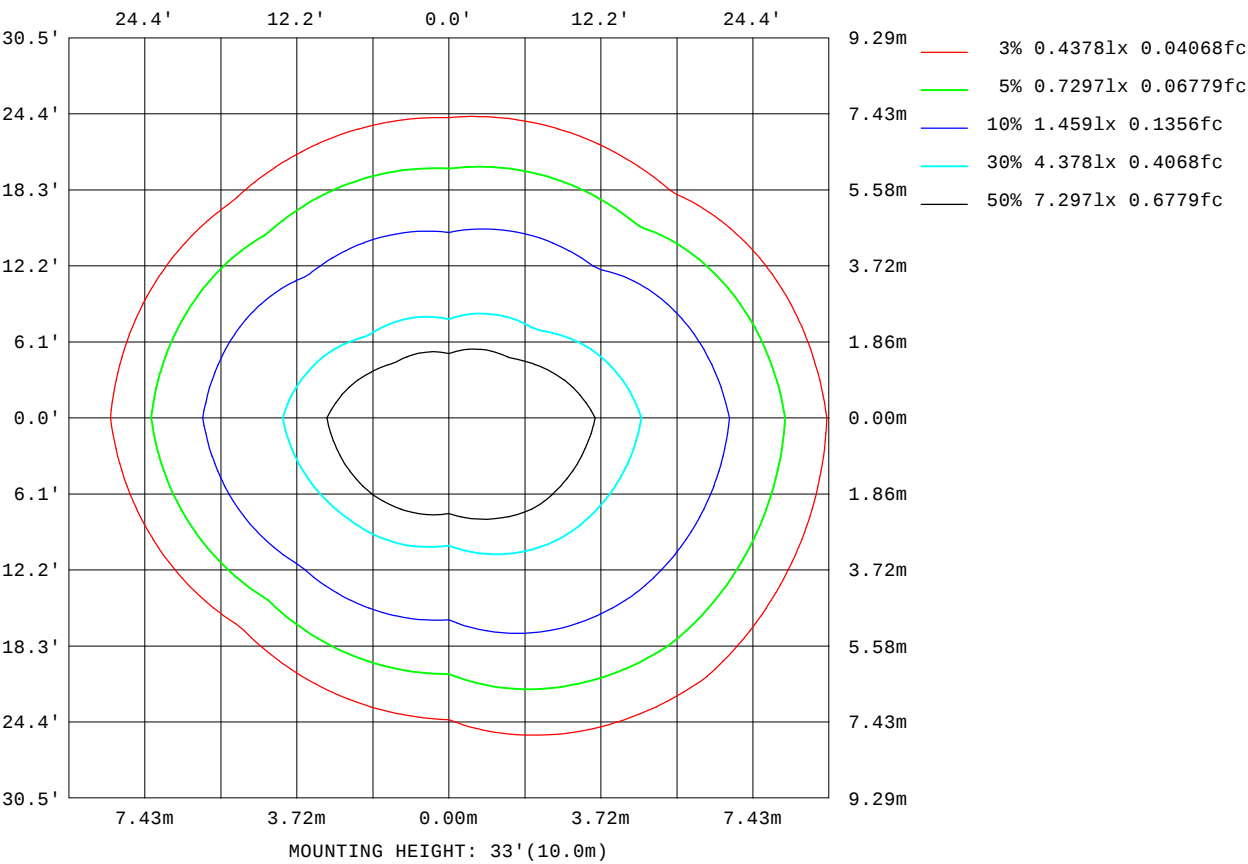

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

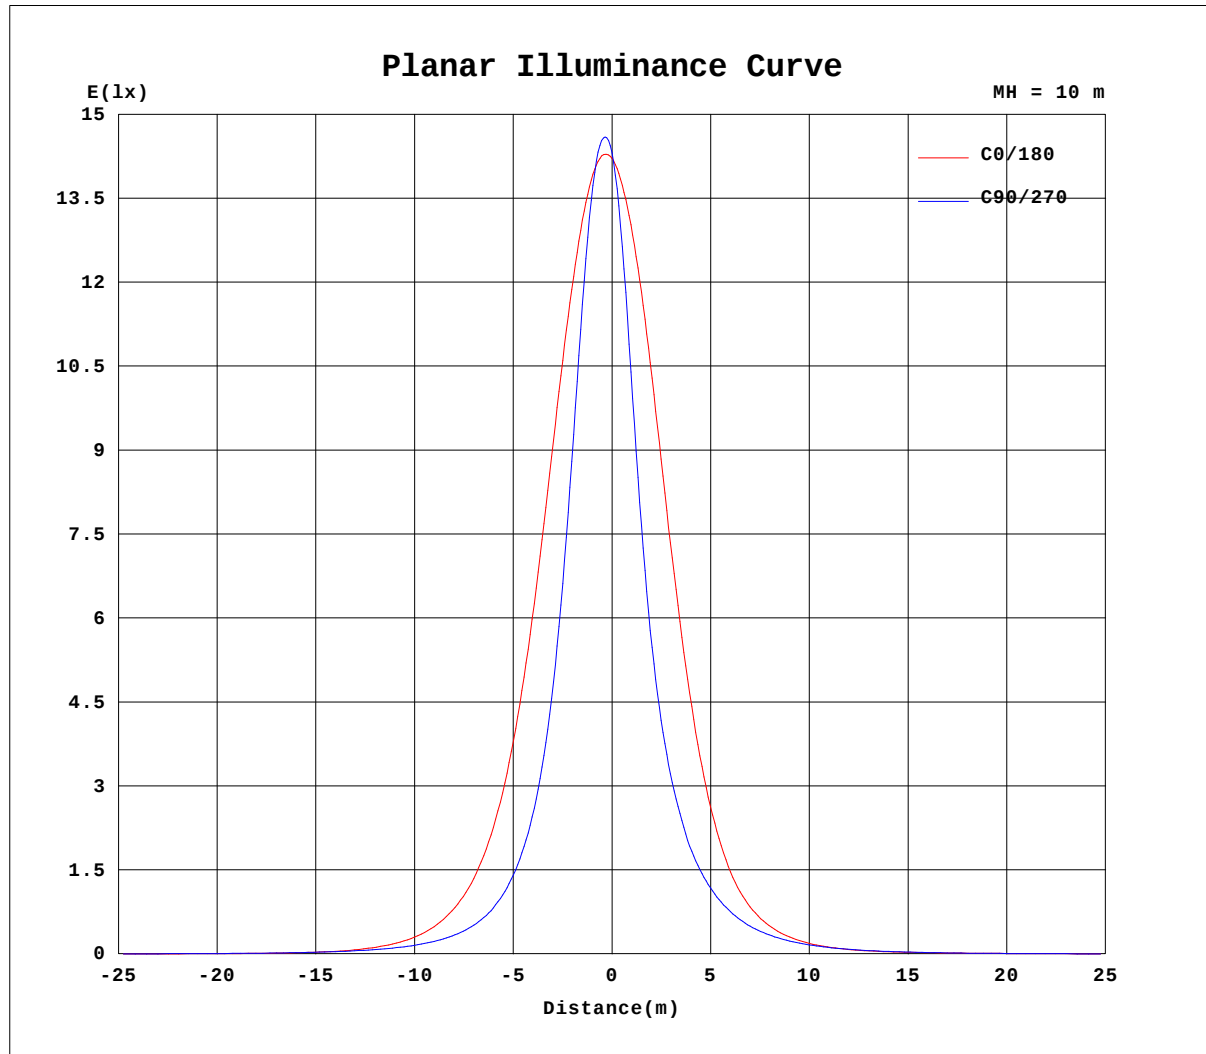


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-TW-6000K-2040D-Rev1	TYPE:6000K	WEIGHT:
SPEC.:20X40 DEG	DIM.:600MM	SERIAL No.:IES003016
MFR.:	SUR.:1	Shielding Angle:

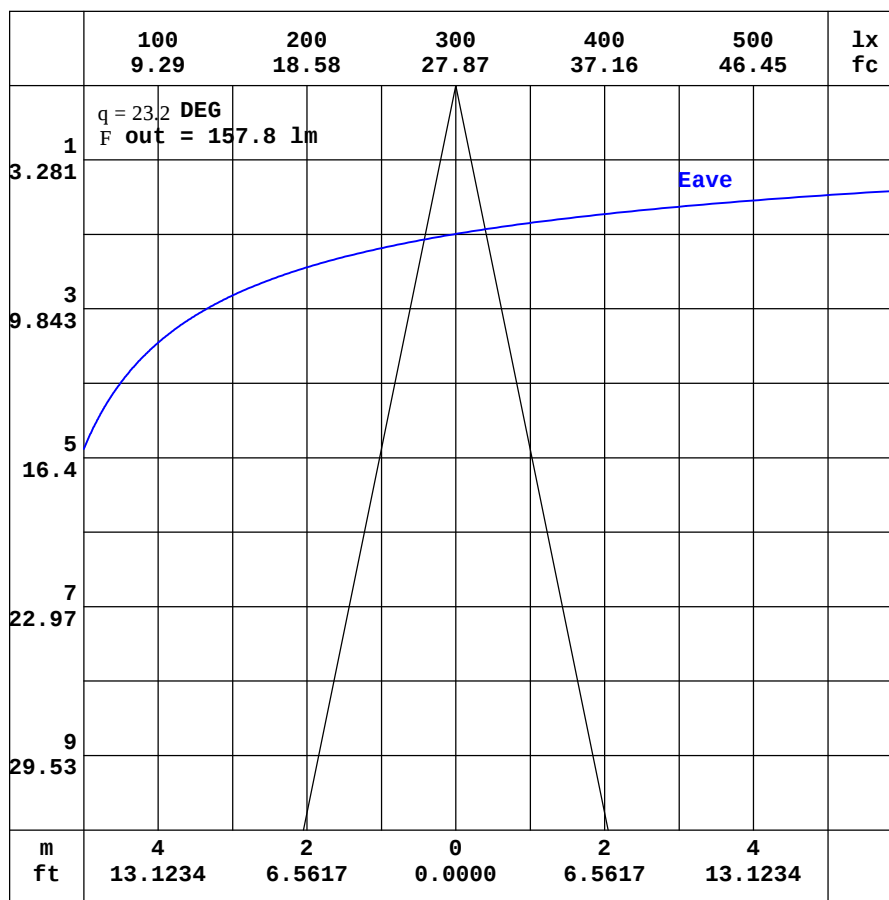

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-TW-6000K-2040D-Rev1	TYPE:6000K	WEIGHT:
SPEC.:20X40 DEG	DIM.:600MM	SERIAL No.:IES003016
MFR.:	SUR.:1	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.42	2.24	2.21	2.24	2.38	2.64	2.99	3.40	3.85	4.28	4.64	4.91	5.08	5.12	5.11	5.04	4.96	4.89	4.82
-170	2.42	2.22	2.16	2.16	2.25	2.44	2.69	2.99	3.28	3.58	3.83	4.02	4.18	4.26	4.31	4.31	4.24	4.41	4.60
-160	2.42	2.20	2.11	2.08	2.11	2.21	2.36	2.51	2.68	2.81	2.93	3.02	3.09	3.14	3.16	3.41	3.65	3.80	3.87
-150	2.42	2.19	2.07	2.00	1.98	2.00	2.04	2.08	2.11	2.10	2.06	2.01	1.94	1.96	2.20	2.41	2.57	2.66	2.65
-140	2.42	2.18	2.03	1.94	1.86	1.82	1.78	1.73	1.66	1.54	1.39	1.20	1.16	1.28	1.38	1.48	1.55	1.57	1.55
-130	2.42	2.17	1.99	1.88	1.78	1.68	1.59	1.48	1.36	1.21	1.02	0.91	0.92	0.92	0.93	0.93	0.94	0.93	0.91
-120	2.42	2.18	1.99	1.84	1.72	1.59	1.48	1.35	1.21	1.05	0.91	0.91	0.91	0.91	0.90	0.89	0.89	0.88	0.87
-110	2.42	2.18	2.00	1.83	1.68	1.54	1.41	1.27	1.14	1.00	0.95	0.95	0.96	0.96	0.97	0.98	0.99	0.99	1.00
-100	2.42	2.21	2.01	1.84	1.68	1.52	1.37	1.23	1.09	0.95	0.94	0.94	0.94	0.95	0.95	0.96	0.96	0.97	0.97
-90	2.42	2.24	2.06	1.88	1.71	1.53	1.35	1.18	1.00	0.82	0.82	0.81	0.80	0.80	0.79	0.78	0.78	0.77	0.76
-80	2.42	2.27	2.13	1.97	1.87	1.76	1.58	1.43	1.28	1.12	1.20	1.31	1.41	1.50	1.60	1.69	1.77	1.84	1.89
-70	2.42	2.32	2.30	2.28	2.28	2.36	2.41	2.46	2.51	2.56	2.87	3.34	3.84	4.35	4.84	5.30	5.71	6.04	6.29
-60	2.42	2.37	2.51	2.69	3.01	3.37	3.78	4.19	4.68	5.21	5.87	7.09	8.42	9.79	11.1	12.4	13.4	14.3	14.9
-50	2.42	2.48	2.75	3.27	3.92	4.64	5.54	6.60	7.85	9.35	11.0	13.2	16.1	19.1	22.2	25.1	27.8	29.9	31.3
-40	2.42	2.68	3.06	3.88	4.88	6.12	7.66	9.63	12.2	15.2	18.6	22.7	27.9	34.8	42.2	49.7	56.3	61.3	64.1
-30	2.42	2.77	3.39	4.49	5.81	7.63	9.97	13.2	17.2	22.8	30.7	40.4	51.4	64.9	85.4	107	127	141	144
-20	2.42	2.81	3.66	5.02	6.73	9.04	12.3	16.6	22.9	33.7	50.0	72.8	104	144	193	266	340	384	378
-10	2.42	2.86	3.87	5.42	7.46	10.2	14.0	19.3	28.4	45.8	73.6	118	187	293	443	637	859	1028	1071
0	2.42	2.90	4.00	5.67	7.89	10.8	14.9	20.8	31.9	53.9	91.5	154	259	425	650	914	1160	1334	1421
10	2.42	2.90	3.94	5.53	7.63	10.4	14.4	20.0	29.7	47.8	76.6	121	188	282	392	499	573	683	678
20	2.42	2.89	3.80	5.24	7.06	9.50	12.9	17.7	24.9	37.1	55.1	79.5	111	146	179	218	257	278	273
30	2.42	2.87	3.59	4.81	6.26	8.26	10.8	14.4	19.3	26.3	36.2	48.3	61.8	76.0	92.9	109	122	129	129
40	2.42	2.82	3.32	4.29	5.45	6.88	8.66	10.9	14.0	17.9	22.9	28.9	35.6	42.7	49.7	56.0	61.1	64.1	64.9
50	2.42	2.64	3.07	3.74	4.57	5.50	6.63	7.97	9.55	11.4	13.7	16.6	19.8	23.1	26.1	28.8	31.0	32.5	33.1
60	2.42	2.54	2.88	3.23	3.73	4.30	4.92	5.56	6.32	7.13	8.07	9.23	10.5	11.7	13.0	14.1	15.0	15.7	16.0
70	2.42	2.50	2.69	2.87	3.06	3.32	3.59	3.86	4.13	4.41	4.75	5.15	5.55	5.93	6.30	6.62	6.89	7.07	7.18
80	2.42	2.46	2.51	2.57	2.68	2.79	2.82	2.87	2.92	2.96	3.02	3.09	3.16	3.22	3.27	3.32	3.35	3.37	3.37
90	2.42	2.42	2.43	2.44	2.45	2.46	2.46	2.47	2.48	2.49	2.49	2.48	2.48	2.48	2.48	2.48	2.48	2.48	2.47
100	2.42	2.39	2.35	2.33	2.31	2.30	2.27	2.26	2.24	2.22	2.21	2.19	2.18	2.17	2.16	2.15	2.13	2.12	2.11
110	2.42	2.35	2.30	2.25	2.22	2.20	2.19	2.17	2.16	2.15	2.14	2.14	2.13	2.14	2.14	2.14	2.14	2.13	2.12
120	2.42	2.32	2.25	2.21	2.19	2.18	2.18	2.19	2.21	2.26	2.32	2.40	2.45	2.51	2.55	2.58	2.59	2.59	2.56
130	2.42	2.30	2.22	2.20	2.19	2.21	2.25	2.35	2.48	2.63	2.81	2.99	3.16	3.33	3.48	3.61	3.71	3.77	3.77
140	2.42	2.28	2.21	2.20	2.21	2.28	2.42	2.61	2.85	3.13	3.44	3.74	4.02	4.30	4.52	4.71	4.85	4.93	4.98
150	2.42	2.27	2.21	2.21	2.25	2.40	2.62	2.91	3.26	3.64	4.01	4.38	4.71	4.98	5.19	5.33	5.44	5.51	5.56
160	2.42	2.25	2.21	2.22	2.31	2.51	2.80	3.16	3.59	4.01	4.42	4.78	5.07	5.30	5.45	5.51	5.60	5.69	5.80
170	2.42	2.25	2.21	2.23	2.35	2.59	2.93	3.34	3.78	4.23	4.62	4.94	5.17	5.28	5.32	5.30	5.15	5.16	5.36
180	2.42	2.24	2.21	2.24	2.38	2.64	2.99	3.40	3.85	4.28	4.64	4.91	5.08	5.12	5.11	5.04	4.96	4.89	4.83

H_b Range:-90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:

Test Date:2024-09-29

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-TW-6000K-2040D-Rev1	TYPE:6000K	WEIGHT:
SPEC.:20X40 DEG	DIM.:600MM	SERIAL No.:IES003016
MFR.:	SUR.:1	Shielding Angle:

Table--2																		UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	4.43	4.10	3.75	3.36	2.91	2.47	2.07	1.70	1.38	1.18	1.04	0.96	0.93	0.92	0.88	0.85	0.75	0.67	
-170	4.43	4.19	3.79	3.34	2.87	2.41	1.99	1.63	1.33	1.14	1.03	0.97	0.93	0.92	0.89	0.85	0.75	0.67	
-160	3.75	3.53	3.23	2.86	2.46	2.07	1.72	1.42	1.21	1.07	0.99	0.96	0.93	0.93	0.89	0.84	0.75	0.67	
-150	2.61	2.49	2.30	2.07	1.83	1.59	1.37	1.20	1.08	1.01	0.97	0.95	0.94	0.92	0.89	0.83	0.74	0.67	
-140	1.56	1.52	1.44	1.35	1.26	1.17	1.10	1.04	0.99	0.97	0.95	0.94	0.94	0.91	0.87	0.81	0.73	0.67	
-130	0.94	0.95	0.95	0.96	0.97	0.97	0.98	0.97	0.96	0.96	0.95	0.95	0.93	0.90	0.86	0.79	0.72	0.67	
-120	0.89	0.91	0.92	0.94	0.95	0.96	0.97	0.97	0.96	0.96	0.95	0.93	0.91	0.88	0.82	0.77	0.71	0.67	
-110	1.00	1.00	0.99	0.99	0.98	0.98	0.98	0.97	0.97	0.95	0.92	0.90	0.86	0.82	0.78	0.73	0.69	0.67	
-100	0.96	0.96	0.95	0.94	0.93	0.92	0.91	0.89	0.87	0.85	0.82	0.81	0.77	0.75	0.73	0.70	0.68	0.67	
-90	0.76	0.75	0.75	0.74	0.74	0.73	0.73	0.72	0.72	0.71	0.71	0.70	0.70	0.69	0.69	0.68	0.68	0.67	
-80	1.85	1.80	1.73	1.65	1.55	1.46	1.35	1.25	1.13	1.04	0.96	0.87	0.80	0.75	0.71	0.69	0.68	0.67	
-70	6.17	5.95	5.64	5.26	4.81	4.32	3.81	3.30	2.81	2.37	1.98	1.66	1.38	1.12	0.89	0.75	0.69	0.67	
-60	15.2	15.1	14.6	13.7	12.4	10.8	9.20	7.56	6.03	4.80	3.76	2.88	2.21	1.67	1.25	0.88	0.71	0.67	
-50	33.5	34.6	34.2	32.6	29.7	26.0	21.7	16.9	12.4	8.85	6.36	4.61	3.29	2.33	1.62	1.08	0.74	0.67	
-40	72.8	77.5	77.9	73.7	66.2	56.3	44.6	32.6	22.7	15.4	10.2	6.73	4.56	3.03	2.02	1.30	0.78	0.67	
-30	169	178	175	160	139	111	82.3	57.7	38.1	23.8	14.9	9.22	5.84	3.76	2.38	1.45	0.82	0.67	
-20	441	445	404	339	263	196	138	91.9	58.1	34.2	19.5	11.5	6.95	4.34	2.65	1.59	0.86	0.67	
-10	1114	1027	825	625	451	308	202	128	77.0	43.5	23.0	12.9	7.63	4.71	2.83	1.69	0.88	0.67	
0	1418	1312	1115	857	600	394	246	149	86.1	47.1	23.7	13.0	7.71	4.80	2.88	1.72	0.89	0.67	
10	730	642	591	496	381	271	181	117	71.4	41.1	22.0	12.6	7.67	4.83	2.94	1.76	0.92	0.67	
20	291	278	242	205	184	147	110	76.3	50.3	30.7	18.1	11.2	7.11	4.58	2.87	1.74	0.93	0.67	
30	133	130	118	103	85.3	73.0	59.6	45.1	31.7	20.9	13.8	9.19	6.21	4.14	2.69	1.67	0.93	0.67	
40	65.5	63.6	59.5	53.5	46.6	39.3	32.6	25.7	19.2	13.9	10.0	7.20	5.13	3.55	2.44	1.58	0.93	0.67	
50	33.0	32.0	30.1	27.6	24.7	21.4	18.0	14.7	11.7	9.16	7.13	5.43	4.05	2.98	2.12	1.42	0.91	0.67	
60	15.8	15.3	14.5	13.4	12.3	11.0	9.77	8.58	7.31	6.05	4.95	3.95	3.13	2.43	1.83	1.28	0.91	0.67	
70	7.13	6.99	6.77	6.50	6.16	5.81	5.43	5.03	4.56	3.96	3.41	2.89	2.40	1.96	1.53	1.17	0.89	0.67	
80	3.39	3.40	3.39	3.37	3.34	3.29	3.24	3.18	3.10	2.81	2.51	2.21	1.92	1.64	1.37	1.12	0.89	0.67	
90	2.48	2.49	2.51	2.52	2.53	2.54	2.55	2.56	2.57	2.36	2.15	1.94	1.73	1.51	1.30	1.09	0.88	0.67	
100	2.12	2.14	2.16	2.17	2.18	2.20	2.22	2.24	2.26	2.11	1.95	1.80	1.63	1.45	1.28	1.08	0.88	0.67	
110	2.12	2.12	2.12	2.12	2.12	2.12	2.12	2.13	2.09	1.96	1.83	1.70	1.56	1.41	1.25	1.07	0.87	0.67	
120	2.55	2.53	2.49	2.43	2.37	2.31	2.25	2.19	2.03	1.89	1.76	1.62	1.49	1.37	1.22	1.06	0.87	0.67	
130	3.72	3.62	3.47	3.30	3.11	2.91	2.72	2.45	2.14	1.90	1.70	1.56	1.43	1.31	1.19	1.04	0.86	0.67	
140	4.89	4.76	4.58	4.34	4.05	3.73	3.29	2.76	2.32	1.96	1.69	1.50	1.37	1.25	1.14	1.00	0.84	0.67	
150	5.50	5.41	5.26	5.07	4.79	4.21	3.54	2.93	2.40	1.97	1.65	1.43	1.28	1.19	1.09	0.98	0.82	0.67	
160	5.76	5.71	5.62	5.36	4.71	4.06	3.42	2.80	2.27	1.85	1.53	1.32	1.18	1.11	1.03	0.94	0.81	0.67	
170	5.38	5.47	5.07	4.57	4.02	3.45	2.90	2.38	1.92	1.57	1.33	1.16	1.07	1.02	0.96	0.90	0.78	0.67	
180	4.43	4.10	3.75	3.36	2.91	2.47	2.07	1.70	1.38	1.18	1.04	0.96	0.93	0.92	0.88	0.85	0.75	0.67	

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: