

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	3324.8 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	52.9V x 53.3H
	At 50% of Imax	23.7V x 23.8H
	At 90% of Imax	9.2V x 9.1H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	721.3 lumens per klm.
	To 50% of Imax	328.9 lumens per klm.
	To 90% of Imax	73.0 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-TW-6000K-20D-Rev1	TYPE:6000K	WEIGHT:
SPEC.:20 DEG	DIM.:600MM	SERIAL No.:IES003010
MFR.:	SUR.:1	Shielding Angle:

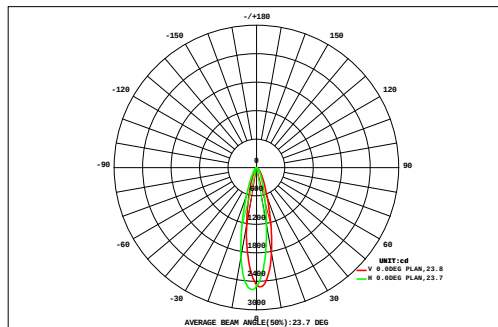

DATA OF LAMP		Eff:86.87lm/W	
MODEL		Imax(cd)	2570
NOMINAL POWER(W)	8.9	AVAILABILITY(%)	72.0
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	556.8
NOMINAL FLUX(lm)	773.1	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	773.1
TEST VOLTAGE(V)	24	q @50%(H,V)	24,24DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				F t	F a													
	45	40	35	30	25	20	15	10	5	0	-5	-10	-15	-20	-25	-30	-35	-40	-45	-45	-40	-35	-30	-25	-20	-15	-10	10	15	20	25	30	35	40	45
	0.11	0.15	0.19	0.24	0.29	0.35	0.40	0.45	0.48	0.48	0.46	0.43	0.38	0.32	0.27	0.21	0.17	0.13	5.51	0.00															
	0.13	0.18	0.24	0.31	0.39	0.48	0.57	0.64	0.69	0.70	0.67	0.60	0.52	0.44	0.35	0.28	0.22	0.16	7.57	0.00															
	0.16	0.22	0.30	0.40	0.52	0.66	0.81	0.93	1.02	1.03	0.97	0.86	0.73	0.59	0.46	0.36	0.28	0.20	10.5	0.00															
	0.18	0.26	0.37	0.51	0.70	0.93	1.18	1.39	1.54	1.56	1.45	1.26	1.02	0.79	0.62	0.48	0.35	0.25	14.9	0.00															
	0.21	0.31	0.44	0.65	0.94	1.30	1.71	2.12	2.41	2.46	2.24	1.86	1.44	1.10	0.84	0.62	0.44	0.30	21.4	9.39															
	0.23	0.35	0.52	0.80	1.21	1.77	2.48	3.28	3.91	4.04	3.59	2.80	2.07	1.55	1.13	0.80	0.55	0.36	31.4	22.5															
	0.25	0.38	0.59	0.94	1.48	2.34	3.57	5.20	6.68	7.04	5.99	4.37	3.10	2.14	1.47	0.99	0.65	0.42	47.6	40.4															
	0.26	0.41	0.64	1.04	1.74	2.98	5.05	8.06	11.2	12.0	9.87	7.00	4.48	2.82	1.81	1.18	0.75	0.47	71.8	65.4															
	0.27	0.41	0.66	1.08	1.89	3.45	6.44	11.2	15.8	17.1	14.4	9.86	5.85	3.43	2.11	1.33	0.83	0.51	96.6	90.7															
	0.26	0.41	0.65	1.08	1.94	3.71	7.27	12.9	18.1	19.1	16.1	10.9	6.38	3.69	2.24	1.40	0.87	0.53	108	102															
	0.25	0.39	0.62	1.04	1.86	3.53	6.85	11.9	15.9	16.7	14.2	9.68	5.84	3.50	2.19	1.38	0.86	0.53	97.1	91.3															
	0.23	0.36	0.56	0.91	1.57	2.82	5.05	8.18	10.8	11.5	9.90	7.32	4.78	3.07	2.00	1.29	0.81	0.50	71.6	65.7															
	0.21	0.31	0.47	0.74	1.20	1.99	3.25	4.83	6.19	6.63	6.01	4.87	3.66	2.56	1.73	1.14	0.73	0.46	47.0	40.1															
	0.18	0.26	0.38	0.57	0.87	1.35	2.03	2.80	3.43	3.71	3.57	3.15	2.63	2.03	1.43	0.97	0.64	0.41	30.4	22.4															
	0.15	0.22	0.30	0.43	0.62	0.92	1.28	1.67	1.98	2.17	2.20	2.06	1.81	1.50	1.14	0.79	0.53	0.35	20.1	7.22															
	0.13	0.17	0.23	0.32	0.45	0.63	0.83	1.03	1.20	1.32	1.38	1.34	1.22	1.06	0.86	0.63	0.43	0.28	13.5	0.00															
	0.10	0.14	0.18	0.24	0.33	0.44	0.55	0.66	0.75	0.83	0.88	0.88	0.82	0.73	0.61	0.48	0.34	0.23	9.18	0.00															
	0.08	0.11	0.14	0.19	0.24	0.31	0.38	0.44	0.49	0.54	0.58	0.58	0.55	0.50	0.43	0.35	0.25	0.17	6.33	0.00															
-45 -40 -35 -30 -25 -20 -15 -10 HORIZONTAL (DEG) 10 15 20 25 30 35 40 45																																			
F t	3.41	5.03	7.51	11.5	18.2	29.9	49.7	77.7	103	109	94.4	69.8	47.3	31.8	21.7	14.7	9.72	6.25	710	---															
F a	0.00	0.00	0.00	0.00	4.96	20.6	41.6	70.2	95.5	102	87.3	62.2	39.1	23.1	10.5	0.00	0.00	0.00	---	557															

one-half-peak spread: U:11.7,D:12.2 , L:11.9,R:12.1


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-TW-6000K-20D-Rev1	TYPE:6000K	WEIGHT:
SPEC.:20 DEG	DIM.:600MM	SERIAL No.:IES003010
MFR.:	SUR.:1	Shielding Angle:

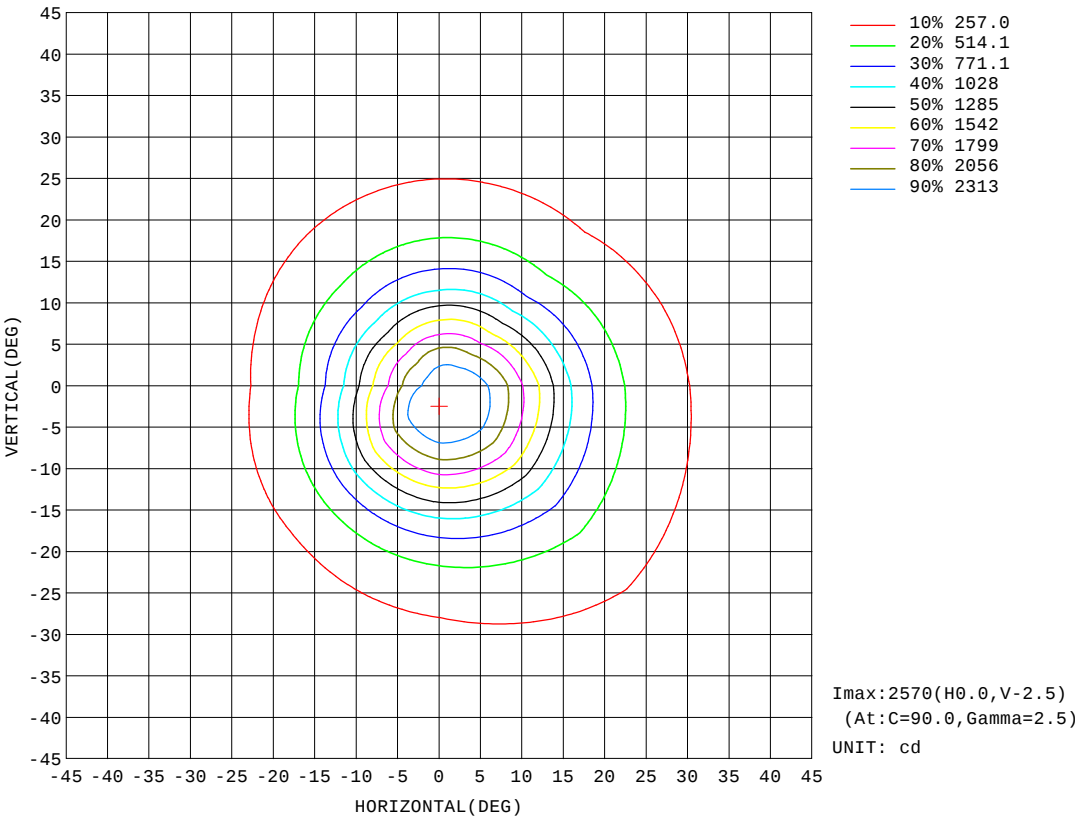


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-TW-6000K-20D-Rev1	TYPE:6000K	WEIGHT:
SPEC.:20 DEG	DIM.:600MM	SERIAL No.:IES003010
MFR.:	SUR.:1	Shielding Angle:

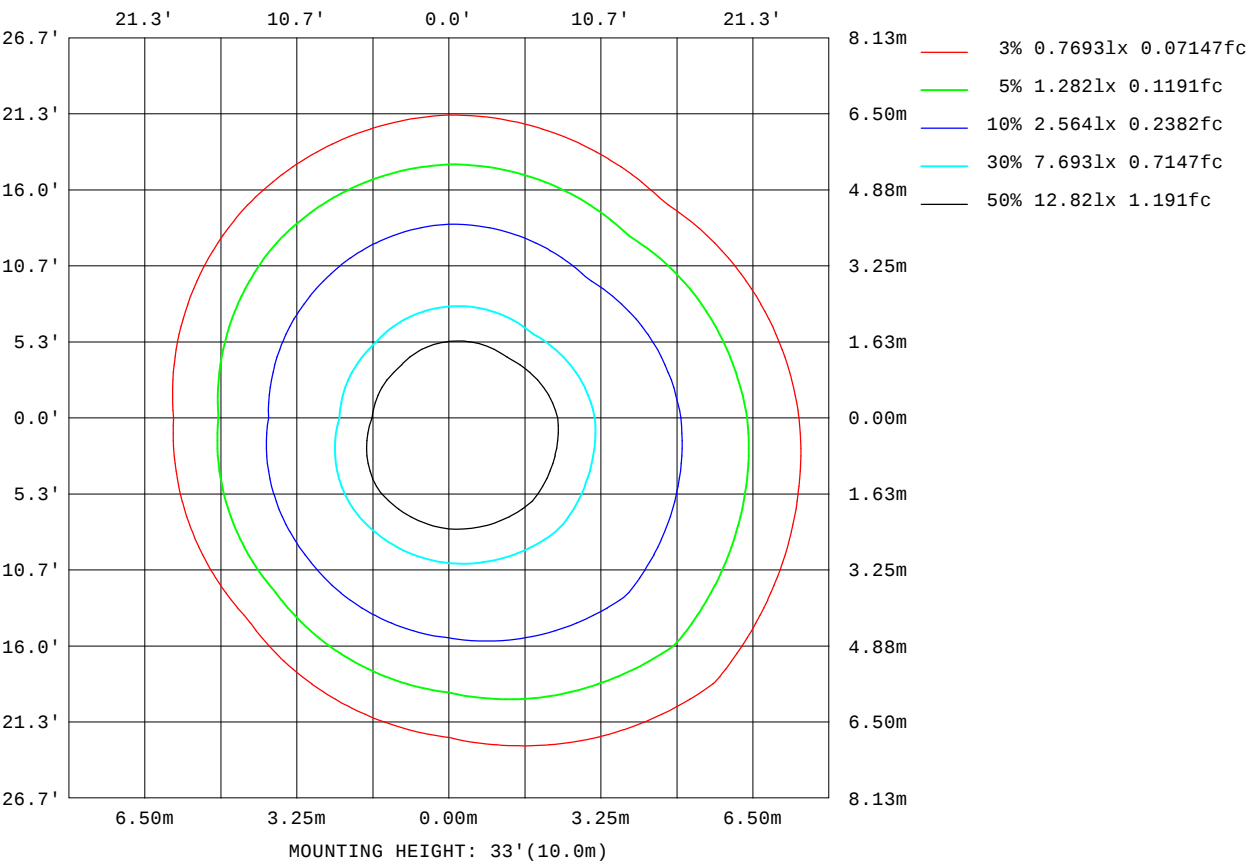

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

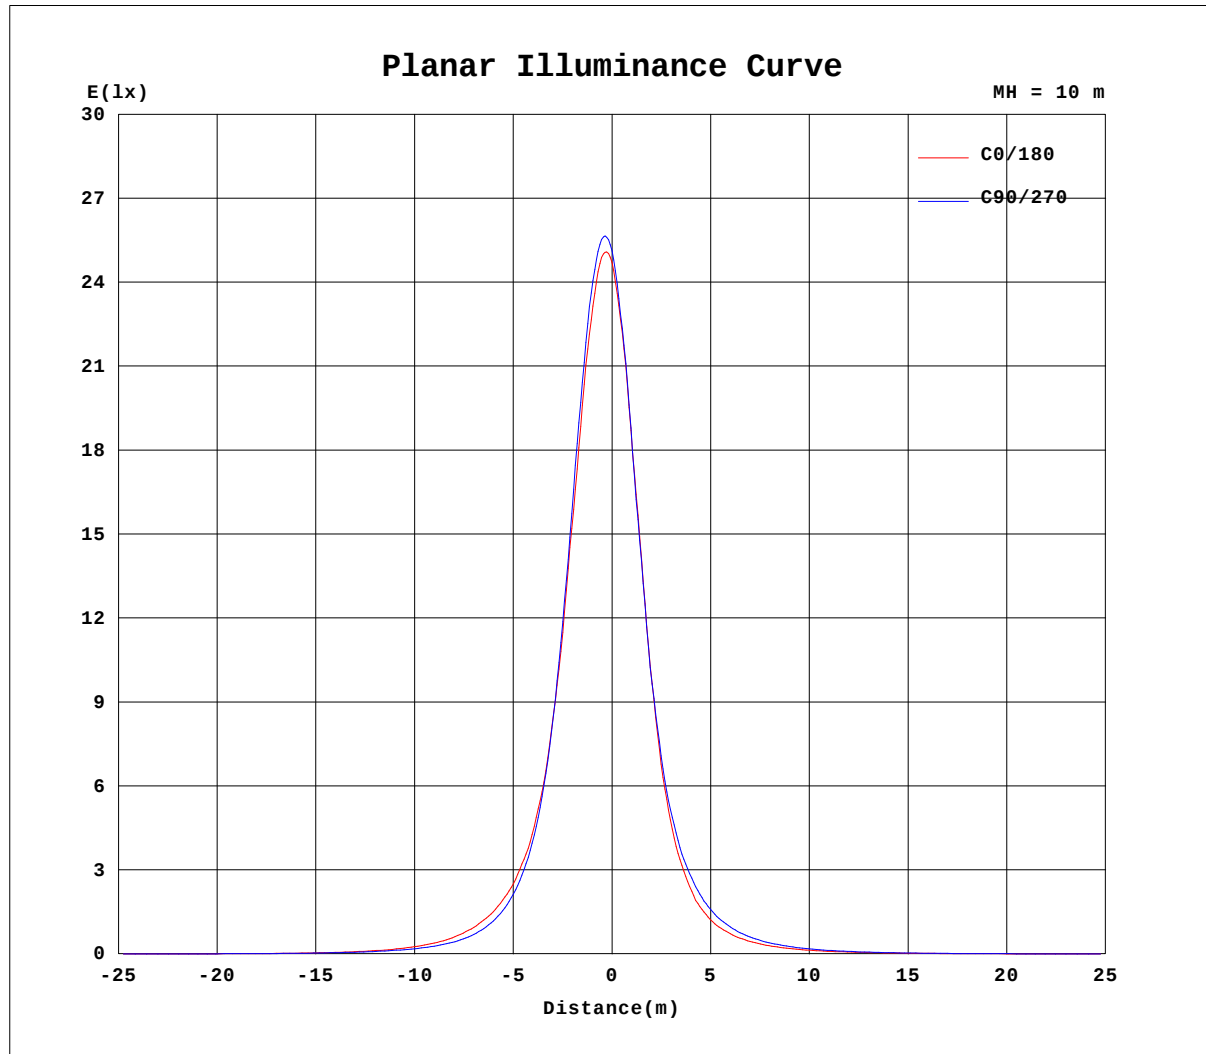


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-TW-6000K-20D-Rev1	TYPE:6000K	WEIGHT:
SPEC.:20 DEG	DIM.:600MM	SERIAL No.:IES003010
MFR.:	SUR.:1	Shielding Angle:

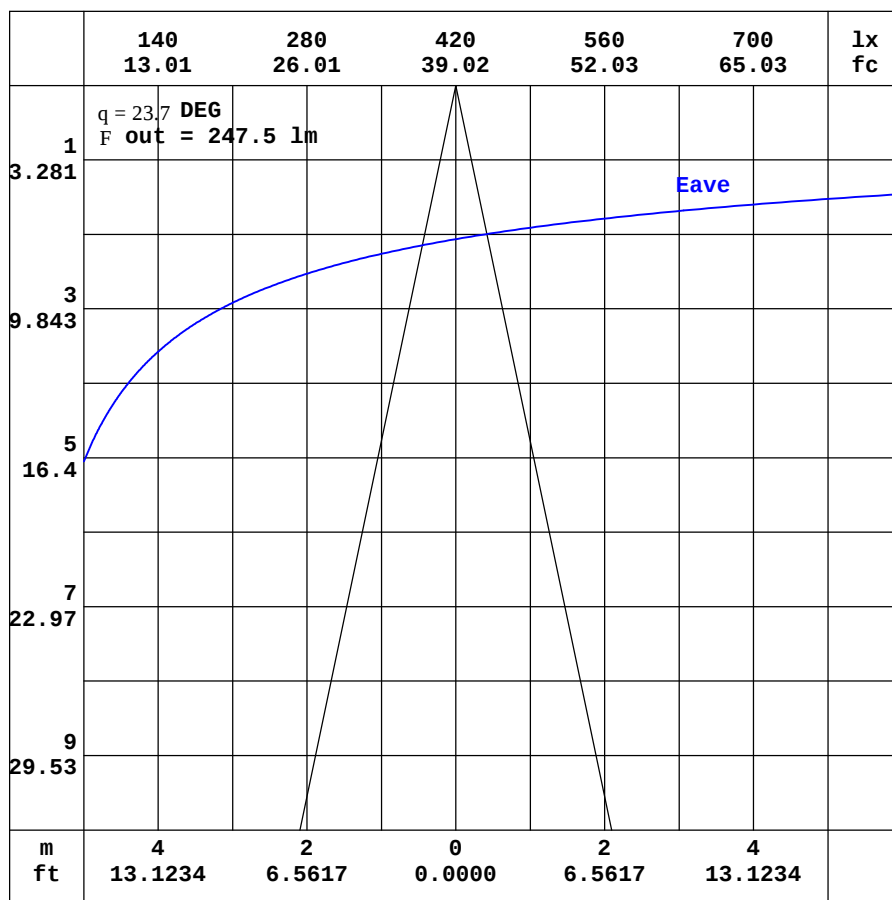

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

$H(b)$ Range:-90 - 90DEG
 $H(b)$ Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

$V(B)$ Range:-180 - 180DEG
 $V(B)$ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-TW-6000K-20D-Rev1	TYPE:6000K	WEIGHT:
SPEC.:20 DEG	DIM.:600MM	SERIAL No.:IES003010
MFR.:	SUR.:1	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.75	2.52	2.41	2.42	2.54	2.81	3.25	3.86	4.61	5.32	5.87	6.17	6.25	6.24	6.18	6.08	5.96	5.82	5.76
-170	2.75	2.50	2.37	2.35	2.42	2.60	2.92	3.35	3.88	4.39	4.78	5.02	5.12	5.17	5.22	5.24	5.17	5.31	5.44
-160	2.75	2.48	2.32	2.28	2.29	2.38	2.54	2.79	3.07	3.35	3.58	3.71	3.76	3.79	3.81	4.11	4.40	4.57	4.60
-150	2.75	2.47	2.29	2.21	2.18	2.17	2.21	2.27	2.34	2.39	2.40	2.35	2.26	2.27	2.60	2.88	3.08	3.18	3.18
-140	2.75	2.47	2.27	2.16	2.07	2.01	1.96	1.89	1.81	1.70	1.53	1.31	1.27	1.43	1.59	1.73	1.83	1.88	1.87
-130	2.75	2.47	2.26	2.11	2.01	1.90	1.81	1.69	1.54	1.34	1.12	1.00	1.01	1.03	1.06	1.08	1.10	1.12	1.12
-120	2.75	2.48	2.27	2.09	1.96	1.84	1.72	1.60	1.46	1.29	1.12	1.10	1.08	1.07	1.06	1.07	1.07	1.08	1.09
-110	2.75	2.50	2.28	2.10	1.94	1.80	1.67	1.54	1.41	1.29	1.23	1.23	1.23	1.24	1.24	1.24	1.25	1.26	1.28
-100	2.75	2.53	2.32	2.13	1.95	1.79	1.64	1.50	1.37	1.24	1.23	1.23	1.23	1.22	1.23	1.23	1.23	1.23	1.23
-90	2.75	2.56	2.37	2.18	1.99	1.80	1.60	1.41	1.22	1.03	1.02	1.01	1.00	0.99	0.98	0.97	0.96	0.95	0.94
-80	2.75	2.60	2.44	2.27	2.16	2.06	1.81	1.60	1.40	1.22	1.31	1.42	1.53	1.64	1.74	1.85	1.94	2.01	2.07
-70	2.75	2.65	2.64	2.62	2.49	2.49	2.51	2.56	2.65	2.77	3.12	3.63	4.16	4.69	5.22	5.71	6.14	6.50	6.76
-60	2.75	2.71	2.90	2.89	3.10	3.42	3.87	4.37	4.94	5.55	6.26	7.53	8.91	10.4	11.9	13.4	14.7	15.8	16.6
-50	2.75	2.83	3.02	3.36	3.92	4.72	5.69	6.84	8.12	9.56	11.1	13.3	16.4	19.9	23.6	27.5	31.1	34.3	36.7
-40	2.75	3.09	3.26	3.90	4.89	6.21	7.83	9.83	12.2	15.1	18.2	22.0	27.6	35.6	45.1	55.5	65.9	75.1	81.8
-30	2.75	3.22	3.52	4.44	5.81	7.73	10.1	13.2	17.1	21.9	28.1	36.3	47.1	62.9	87.9	120	155	187	209
-20	2.75	3.27	3.76	4.95	6.73	9.13	12.4	16.6	22.1	29.5	40.1	55.7	79.5	117	178	279	410	544	631
-10	2.75	3.31	3.95	5.34	7.43	10.2	14.0	19.1	26.1	36.1	51.1	74.5	114	184	324	592	1079	1604	1910
0	2.75	3.35	4.08	5.58	7.83	10.8	15.0	20.5	28.3	39.5	56.3	82.4	125	202	357	655	1226	1975	2470
10	2.75	3.35	4.03	5.48	7.65	10.6	14.6	20.1	27.7	38.5	54.5	78.8	118	182	288	455	699	1018	1223
20	2.75	3.35	3.92	5.21	7.13	9.77	13.4	18.3	24.8	33.7	46.0	63.5	88.9	127	179	241	312	377	409
30	2.75	3.34	3.76	4.82	6.36	8.58	11.4	15.3	20.2	26.6	34.8	45.4	58.7	75.7	96.3	119	141	158	167
40	2.75	3.24	3.57	4.37	5.56	7.16	9.21	11.9	15.2	19.3	24.3	30.1	36.8	44.3	52.3	60.1	67.7	73.4	76.6
50	2.75	3.01	3.40	3.92	4.68	5.72	7.05	8.67	10.6	12.9	15.6	18.5	21.7	25.1	28.3	31.3	34.0	36.0	37.2
60	2.75	2.90	3.32	3.51	3.94	4.49	5.20	6.02	6.99	8.08	9.27	10.6	12.0	13.3	14.6	15.8	16.7	17.3	17.7
70	2.75	2.86	3.07	3.30	3.41	3.62	3.88	4.17	4.51	4.91	5.35	5.83	6.30	6.75	7.17	7.54	7.83	8.04	8.15
80	2.75	2.81	2.87	2.93	3.07	3.22	3.24	3.27	3.32	3.37	3.45	3.53	3.62	3.69	3.77	3.83	3.89	3.93	3.95
90	2.75	2.76	2.77	2.78	2.79	2.80	2.81	2.82	2.83	2.84	2.85	2.85	2.86	2.86	2.87	2.87	2.88	2.88	2.89
100	2.75	2.72	2.68	2.65	2.62	2.60	2.58	2.56	2.55	2.54	2.52	2.51	2.49	2.48	2.47	2.45	2.45	2.44	2.43
110	2.75	2.67	2.60	2.55	2.50	2.47	2.45	2.45	2.44	2.44	2.44	2.44	2.44	2.45	2.46	2.47	2.47	2.47	2.47
120	2.75	2.64	2.54	2.47	2.44	2.43	2.43	2.45	2.49	2.55	2.63	2.72	2.80	2.88	2.95	3.01	3.04	3.06	3.04
130	2.75	2.60	2.49	2.43	2.42	2.44	2.49	2.60	2.75	2.95	3.19	3.44	3.68	3.92	4.13	4.30	4.42	4.48	4.49
140	2.75	2.58	2.45	2.42	2.43	2.50	2.64	2.88	3.19	3.58	4.02	4.49	4.90	5.24	5.50	5.69	5.82	5.89	5.90
150	2.75	2.55	2.43	2.42	2.46	2.59	2.85	3.22	3.71	4.29	4.89	5.41	5.82	6.09	6.28	6.41	6.50	6.57	6.61
160	2.75	2.54	2.42	2.42	2.49	2.70	3.05	3.55	4.19	4.88	5.49	5.95	6.23	6.41	6.51	6.59	6.68	6.77	6.90
170	2.75	2.53	2.41	2.42	2.53	2.78	3.19	3.78	4.51	5.23	5.80	6.16	6.33	6.38	6.40	6.33	6.18	6.16	6.31
180	2.75	2.52	2.41	2.42	2.54	2.81	3.25	3.86	4.61	5.32	5.87	6.17	6.25	6.24	6.18	6.08	5.96	5.82	5.78

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-TW-6000K-20D-Rev1	TYPE:6000K	WEIGHT:
SPEC.:20 DEG	DIM.:600MM	SERIAL No.:IES003010
MFR.:	SUR.:1	Shielding Angle:

Table--2																	UNIT: cd		
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	5.31	4.95	4.55	4.04	3.48	2.90	2.31	1.77	1.32	1.06	1.01	1.05	1.14	1.21	1.20	1.13	1.00	0.80	
-170	5.22	4.91	4.47	3.94	3.36	2.77	2.20	1.68	1.28	1.06	1.02	1.06	1.15	1.21	1.20	1.13	0.99	0.80	
-160	4.44	4.16	3.77	3.30	2.80	2.30	1.84	1.44	1.17	1.04	1.03	1.08	1.17	1.21	1.19	1.13	0.99	0.80	
-150	3.10	2.91	2.65	2.34	2.00	1.68	1.40	1.18	1.06	1.04	1.06	1.13	1.20	1.21	1.19	1.11	0.98	0.80	
-140	1.84	1.75	1.63	1.48	1.33	1.20	1.11	1.06	1.05	1.07	1.13	1.19	1.21	1.21	1.17	1.08	0.95	0.80	
-130	1.11	1.10	1.08	1.07	1.06	1.06	1.06	1.08	1.11	1.16	1.20	1.21	1.21	1.19	1.15	1.05	0.93	0.80	
-120	1.09	1.09	1.10	1.11	1.13	1.15	1.17	1.19	1.21	1.22	1.22	1.21	1.20	1.15	1.09	1.01	0.91	0.80	
-110	1.27	1.26	1.25	1.25	1.25	1.24	1.23	1.23	1.22	1.22	1.20	1.17	1.13	1.08	1.01	0.94	0.87	0.80	
-100	1.22	1.22	1.21	1.20	1.19	1.18	1.16	1.14	1.11	1.10	1.06	1.03	1.00	0.96	0.92	0.88	0.84	0.80	
-90	0.93	0.92	0.92	0.91	0.90	0.90	0.89	0.89	0.88	0.87	0.86	0.85	0.84	0.84	0.83	0.82	0.81	0.80	
-80	2.04	1.99	1.92	1.84	1.73	1.62	1.49	1.37	1.22	1.10	1.00	0.92	0.86	0.83	0.82	0.82	0.81	0.80	
-70	6.85	6.81	6.65	6.35	5.94	5.42	4.82	4.19	3.51	2.79	2.19	1.70	1.32	1.05	0.89	0.82	0.81	0.80	
-60	17.4	17.8	17.6	17.0	15.8	14.3	12.6	10.7	8.46	6.44	4.73	3.37	2.32	1.58	1.12	0.87	0.81	0.80	
-50	39.9	41.6	41.8	40.2	37.3	33.2	28.4	22.7	17.0	12.4	8.76	5.96	3.84	2.39	1.46	0.97	0.82	0.80	
-40	90.9	95.3	94.8	89.5	80.8	69.8	55.9	41.5	29.9	20.8	14.1	9.22	5.77	3.37	1.90	1.10	0.82	0.80	
-30	227	228	214	192	165	128	93.4	66.6	46.2	31.1	20.3	12.8	7.78	4.43	2.33	1.23	0.84	0.80	
-20	634	568	476	379	277	196	136	93.3	62.6	40.9	26.0	16.0	9.45	5.29	2.70	1.34	0.85	0.80	
-10	1789	1413	918	579	378	254	170	112	73.8	47.3	29.5	17.9	10.5	5.84	2.91	1.42	0.85	0.80	
0	2388	1815	1130	660	408	262	174	114	74.4	47.7	29.8	18.1	10.6	5.93	2.94	1.43	0.85	0.80	
10	1152	863	620	422	289	202	140	95.5	65.0	42.9	27.6	17.2	10.3	5.88	3.01	1.51	0.90	0.80	
20	395	340	268	206	164	126	94.7	69.3	49.6	34.3	23.0	14.9	9.24	5.41	2.90	1.52	0.94	0.80	
30	162	149	128	107	86.8	71.6	58.1	45.5	34.4	25.1	17.6	11.9	7.73	4.69	2.66	1.49	0.97	0.80	
40	75.1	70.8	64.4	57.0	49.0	41.2	34.5	28.4	22.5	17.2	12.7	8.95	6.05	3.82	2.36	1.44	1.00	0.80	
50	36.6	35.1	32.8	30.1	27.0	23.7	20.4	17.2	14.1	11.2	8.62	6.37	4.48	3.06	2.04	1.39	1.02	0.80	
60	17.5	17.1	16.3	15.4	14.2	12.8	11.5	10.1	8.57	7.07	5.63	4.34	3.30	2.45	1.81	1.35	1.04	0.80	
70	8.12	7.99	7.77	7.47	7.10	6.68	6.23	5.75	5.18	4.43	3.75	3.11	2.55	2.07	1.66	1.33	1.05	0.80	
80	3.96	3.96	3.94	3.91	3.86	3.81	3.75	3.69	3.61	3.24	2.89	2.54	2.21	1.89	1.60	1.32	1.05	0.80	
90	2.90	2.92	2.94	2.95	2.97	2.99	3.00	3.02	3.03	2.79	2.54	2.29	2.04	1.79	1.55	1.30	1.05	0.80	
100	2.45	2.46	2.48	2.50	2.52	2.54	2.57	2.61	2.62	2.47	2.31	2.14	1.96	1.76	1.55	1.32	1.07	0.80	
110	2.46	2.44	2.43	2.42	2.41	2.41	2.40	2.41	2.38	2.26	2.14	2.02	1.88	1.72	1.54	1.33	1.08	0.80	
120	3.00	2.93	2.85	2.75	2.65	2.55	2.47	2.40	2.29	2.16	2.03	1.92	1.80	1.68	1.52	1.33	1.10	0.80	
130	4.40	4.25	4.05	3.81	3.53	3.25	2.98	2.65	2.33	2.10	1.95	1.84	1.73	1.62	1.50	1.32	1.09	0.80	
140	5.82	5.68	5.47	5.18	4.81	4.37	3.75	3.06	2.51	2.12	1.88	1.73	1.65	1.55	1.44	1.30	1.08	0.80	
150	6.55	6.45	6.30	6.09	5.78	5.06	4.16	3.33	2.62	2.12	1.79	1.62	1.55	1.48	1.39	1.27	1.07	0.80	
160	6.82	6.76	6.65	6.38	5.63	4.83	4.01	3.19	2.49	1.95	1.63	1.47	1.42	1.39	1.33	1.24	1.05	0.80	
170	6.35	6.46	6.02	5.42	4.77	4.07	3.35	2.65	2.03	1.59	1.36	1.27	1.29	1.30	1.27	1.19	1.03	0.80	
180	5.31	4.95	4.55	4.04	3.48	2.90	2.31	1.77	1.32	1.06	1.01	1.05	1.14	1.21	1.20	1.13	1.00	0.80	

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: