

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	838.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	---

Beam Spread	At 10% of Imax	102.1V x 100.2H
	At 50% of Imax	65.2V x 63.8H
	At 90% of Imax	35.3V x 33.2H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	908.3 lumens per klm.
	To 50% of Imax	629.6 lumens per klm.
	To 90% of Imax	213.2 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-TW-6000K-65D-Rev1	TYPE:6000K	WEIGHT:
SPEC.:65 DEG	DIM.:600MM	SERIAL No.:IES003014
MFR.:	SUR.:1	Shielding Angle:

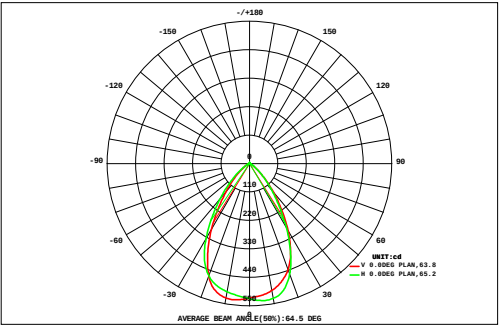

DATA OF LAMP		Eff:71.73lm/W	
MODEL		Imax(cd)	535.5
NOMINAL POWER(W)	8.9	AVAILABILITY(%)	90.8
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	579.8
NOMINAL FLUX(lm)	638.4	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	638.4
TEST VOLTAGE(V)	24	q @50%(H,V)	64,65DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.01	0.02	0.04	0.05	0.06	0.07	0.08	0.09	0.09	0.09	0.09	0.08	0.07	0.06	0.04	0.02	0.01	0.00	0.98	0.00
90	0.01	0.02	0.04	0.06	0.08	0.11	0.13	0.15	0.16	0.16	0.14	0.13	0.10	0.08	0.05	0.03	0.01	0.00	1.46	0.00
80	0.01	0.03	0.05	0.09	0.13	0.18	0.24	0.30	0.33	0.32	0.29	0.23	0.18	0.12	0.07	0.03	0.01	0.00	2.62	0.00
70	0.01	0.03	0.07	0.13	0.21	0.36	0.56	0.76	0.89	0.86	0.70	0.49	0.31	0.19	0.10	0.05	0.02	0.00	5.72	0.00
60	0.01	0.03	0.09	0.18	0.39	0.83	1.50	2.19	2.60	2.50	1.95	1.24	0.65	0.31	0.14	0.06	0.02	0.00	14.7	9.61
50	0.01	0.04	0.11	0.27	0.73	1.78	3.44	5.14	6.09	5.82	4.50	2.77	1.41	0.58	0.20	0.07	0.02	0.00	33.0	30.3
40	0.01	0.04	0.13	0.39	1.22	3.12	6.32	9.56	11.2	10.8	8.28	5.14	2.63	1.02	0.29	0.08	0.02	0.00	60.3	58.3
30	0.01	0.05	0.14	0.51	1.70	4.46	9.04	13.3	15.1	14.6	11.9	7.95	4.07	1.51	0.40	0.09	0.02	0.00	84.9	83.3
20	0.01	0.05	0.16	0.59	2.00	5.26	10.4	14.7	16.1	15.6	13.7	9.86	5.18	1.89	0.48	0.09	0.02	0.00	96.2	94.7
10	0.01	0.05	0.16	0.59	2.01	5.25	10.4	14.5	15.6	15.3	13.8	10.3	5.50	1.99	0.50	0.09	0.02	0.00	96.2	94.7
0	0.01	0.04	0.14	0.52	1.73	4.46	8.96	13.1	14.7	14.5	13.0	9.52	4.89	1.78	0.45	0.09	0.02	0.00	88.0	86.5
-10	0.01	0.04	0.12	0.39	1.26	3.17	6.28	9.87	12.0	12.2	10.5	7.24	3.59	1.32	0.34	0.08	0.02	0.00	68.5	66.7
-20	0.01	0.04	0.10	0.26	0.77	1.86	3.65	5.77	7.36	7.58	6.32	4.22	2.15	0.80	0.22	0.06	0.02	0.00	41.2	38.9
-30	0.01	0.03	0.07	0.16	0.39	0.89	1.72	2.69	3.43	3.52	2.90	1.94	1.01	0.39	0.13	0.05	0.01	0.00	19.3	15.8
-40	0.01	0.03	0.05	0.10	0.17	0.35	0.64	0.97	1.22	1.24	1.01	0.68	0.36	0.16	0.08	0.03	0.01	0.00	7.12	1.07
-50	0.01	0.02	0.04	0.06	0.08	0.13	0.20	0.28	0.34	0.34	0.28	0.20	0.13	0.08	0.04	0.02	0.01	0.00	2.25	0.00
-60	0.01	0.02	0.03	0.03	0.04	0.05	0.07	0.09	0.11	0.11	0.09	0.07	0.05	0.03	0.02	0.01	0.01	0.00	0.84	0.00
-70	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.32	0.00
-80	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.32	0.00
-90	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.32	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
F t	0.14	0.59	1.54	4.38	13.0	32.3	63.7	93.5	107	106	89.6	62.1	32.3	12.3	3.55	0.97	0.29	0.05	623	---
F a	0.00	0.00	0.00	0.00	8.97	29.1	60.7	90.6	105	103	86.7	59.1	29.1	8.19	0.00	0.00	0.00	0.00	---	580


one-half-peak spread: U:40.9,D:24.6 , L:24.9,R:39.2 NEMA Beam Type: Type 6

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-TW-6000K-65D-Rev1	TYPE:6000K	WEIGHT:
SPEC.:65 DEG	DIM.:600MM	SERIAL No.:IES003014
MFR.:	SUR.:1	Shielding Angle:

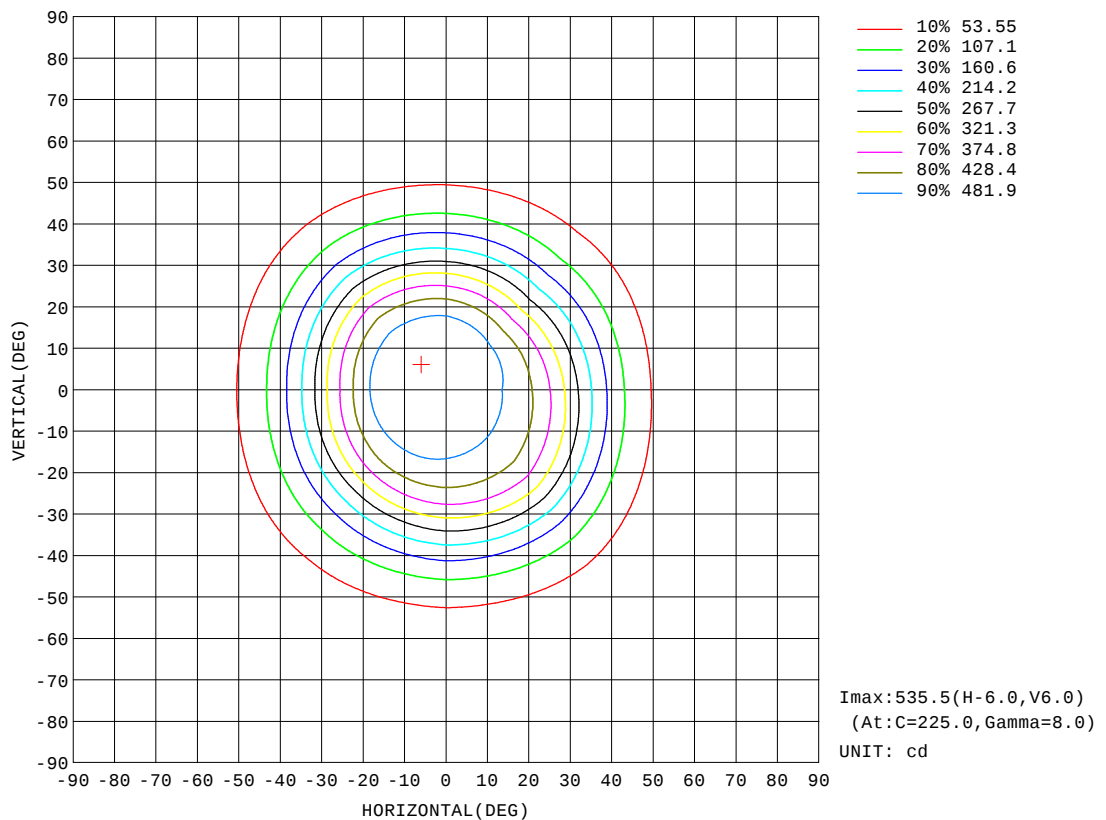


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-TW-6000K-65D-Rev1	TYPE:6000K	WEIGHT:
SPEC.:65 DEG	DIM.:600MM	SERIAL No.:IES003014
MFR.:	SUR.:1	Shielding Angle:

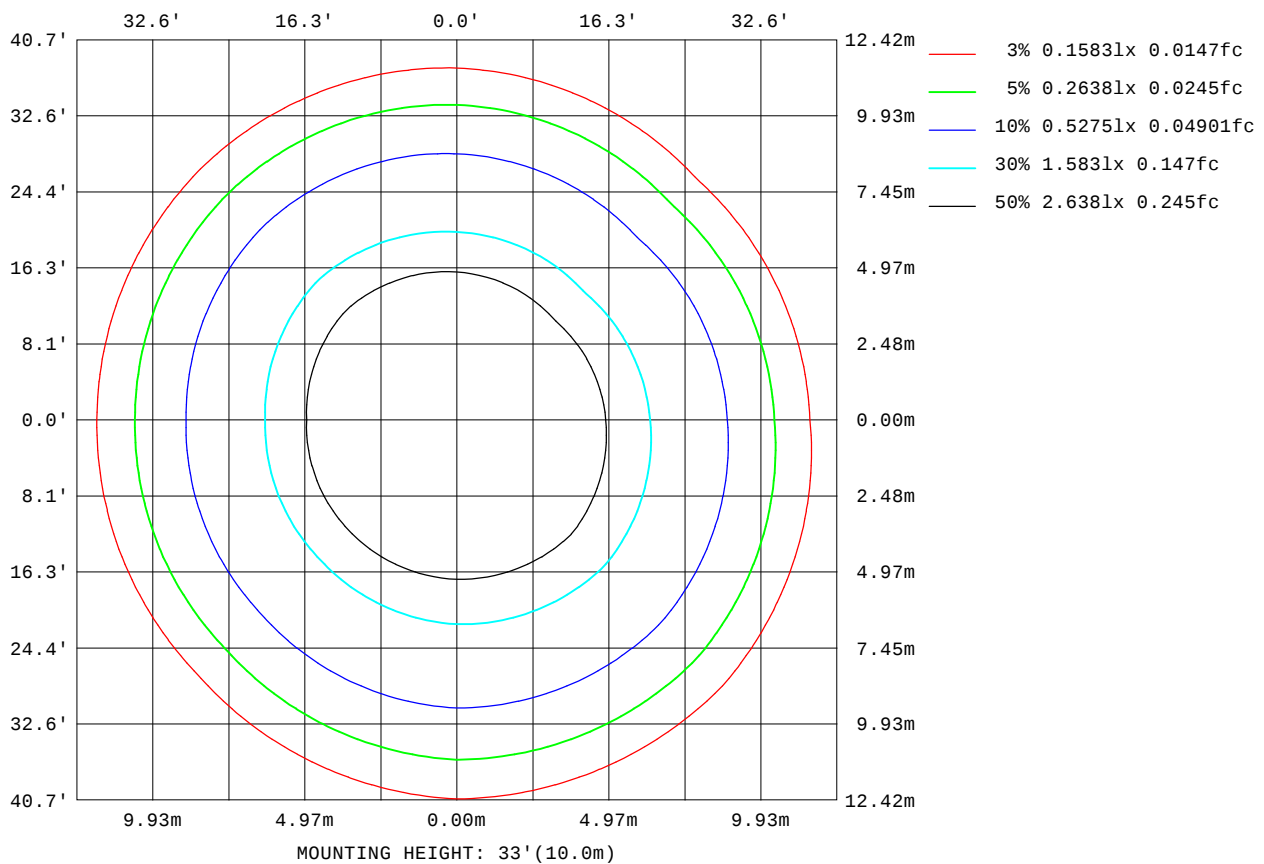

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

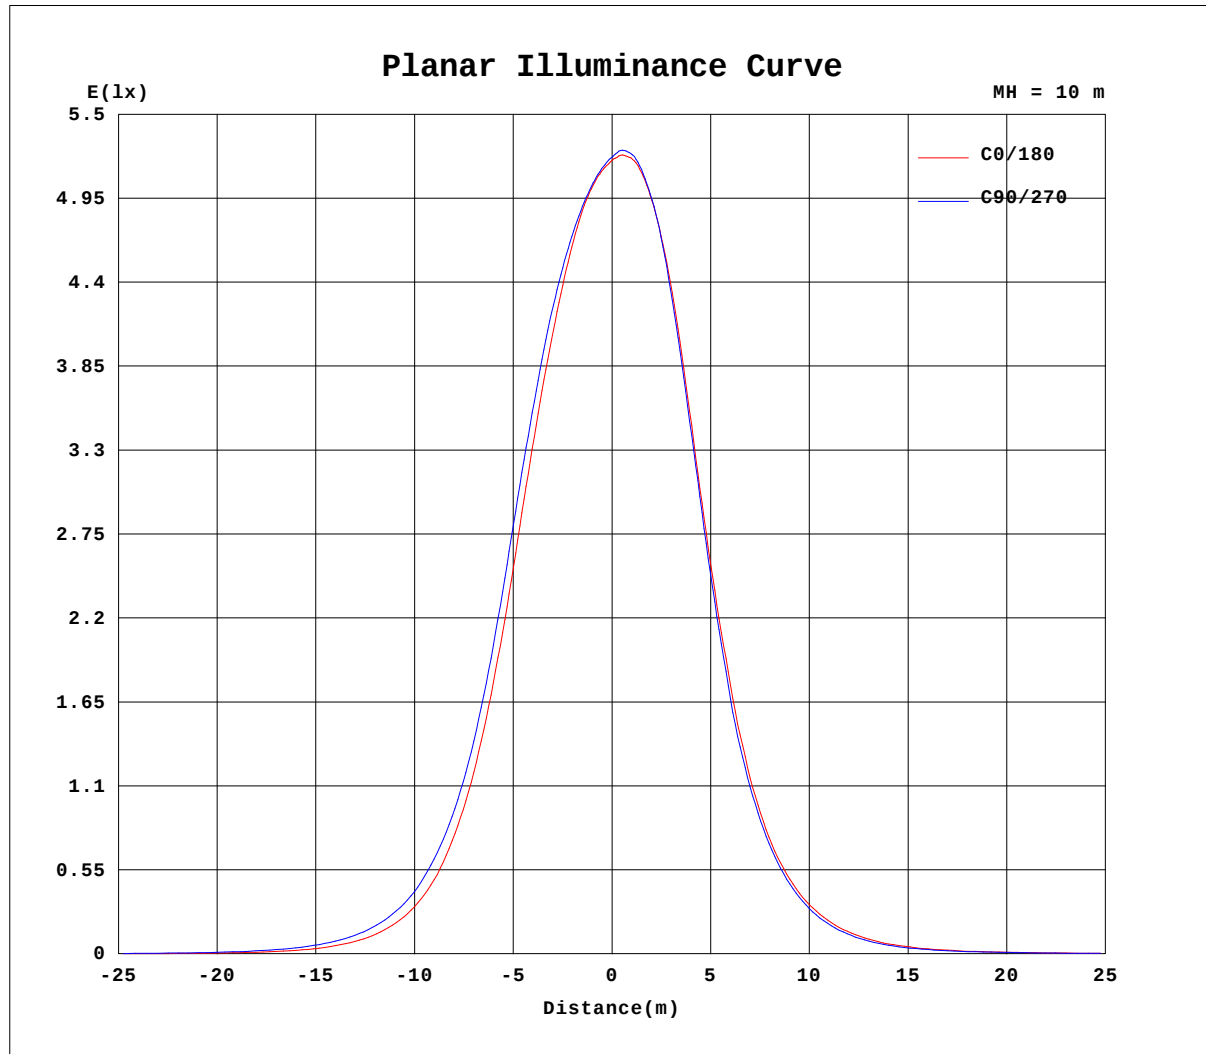


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-TW-6000K-65D-Rev1	TYPE:6000K	WEIGHT:
SPEC.:65 DEG	DIM.:600MM	SERIAL No.:IES003014
MFR.:	SUR.:1	Shielding Angle:

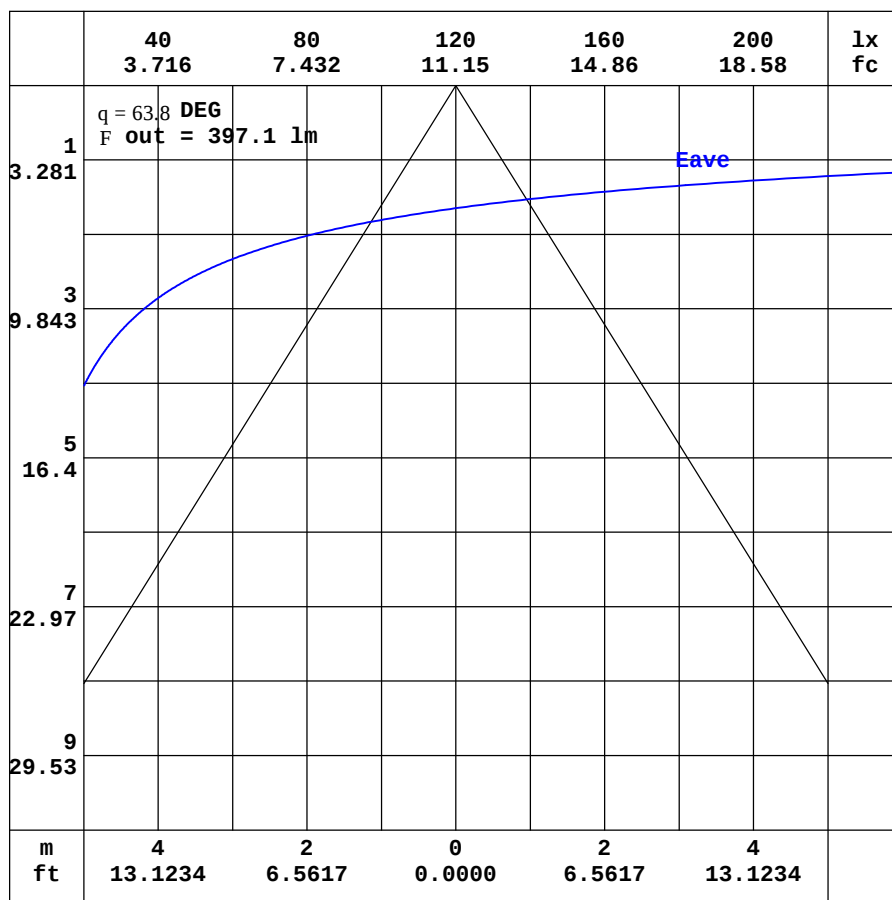

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-TW-6000K-65D-Rev1	TYPE:6000K	WEIGHT:
SPEC.:65 DEG	DIM.:600MM	SERIAL No.:IES003014
MFR.:	SUR.:1	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.64	2.46	2.42	2.45	2.57	2.76	3.00	3.28	3.57	3.87	4.17	4.45	4.70	4.88	4.98	4.99	4.98	4.93	4.84
-170	2.64	2.42	2.35	2.35	2.42	2.55	2.72	2.92	3.12	3.32	3.51	3.68	3.80	3.88	3.88	3.82	3.69	3.92	4.04
-160	2.64	2.40	2.29	2.24	2.26	2.32	2.41	2.52	2.63	2.72	2.80	2.85	2.87	2.83	2.74	2.89	3.08	3.22	3.28
-150	2.64	2.38	2.23	2.14	2.10	2.10	2.11	2.13	2.14	2.14	2.12	2.07	1.98	1.97	2.15	2.31	2.44	2.52	2.56
-140	2.64	2.37	2.17	2.05	1.96	1.89	1.83	1.78	1.72	1.63	1.53	1.40	1.41	1.53	1.65	1.76	1.84	1.90	1.93
-130	2.64	2.35	2.13	1.98	1.84	1.72	1.61	1.50	1.38	1.24	1.09	1.04	1.11	1.17	1.24	1.29	1.34	1.37	1.39
-120	2.64	2.35	2.11	1.92	1.75	1.59	1.44	1.29	1.14	0.97	0.83	0.86	0.89	0.92	0.94	0.96	0.99	1.00	1.00
-110	2.64	2.36	2.12	1.89	1.69	1.51	1.33	1.15	0.98	0.80	0.74	0.75	0.75	0.76	0.77	0.78	0.78	0.77	0.77
-100	2.64	2.38	2.14	1.91	1.70	1.49	1.28	1.08	0.89	0.70	0.68	0.67	0.67	0.67	0.67	0.66	0.66	0.65	0.65
-90	2.64	2.42	2.19	1.97	1.75	1.52	1.30	1.08	0.85	0.63	0.63	0.63	0.62	0.62	0.62	0.62	0.61	0.61	0.61
-80	2.64	2.46	2.27	2.08	1.91	1.75	1.54	1.35	1.15	0.95	1.04	1.17	1.29	1.41	1.53	1.64	1.74	1.83	1.90
-70	2.64	2.51	2.42	2.37	2.35	2.43	2.40	2.38	2.39	2.39	2.68	3.15	3.63	4.12	4.60	5.05	5.44	5.74	5.96
-60	2.64	2.57	2.65	2.86	3.11	3.37	3.72	4.13	4.66	5.23	6.09	7.85	9.84	12.1	14.5	16.8	18.8	20.3	21.2
-50	2.64	2.67	2.90	3.43	3.95	4.65	5.70	6.82	8.66	11.6	15.9	21.9	29.5	38.0	46.7	55.3	62.7	68.2	71.4
-40	2.64	2.81	3.31	3.97	4.93	6.39	8.03	11.1	16.4	24.9	36.5	51.6	69.8	91.8	115	137	156	170	178
-30	2.64	2.91	3.67	4.58	5.99	7.99	11.1	17.4	28.4	45.0	67.7	98.1	134	175	220	263	301	326	338
-20	2.64	3.00	3.92	5.12	7.13	9.53	14.4	24.5	41.7	67.4	104	151	210	280	349	405	441	457	462
-10	2.64	3.06	4.12	5.54	7.96	10.8	17.3	30.4	52.6	86.0	133	195	276	361	435	482	503	507	503
0	2.64	3.11	4.26	5.82	8.45	11.5	18.6	32.5	56.1	91.7	141	210	299	384	462	509	527	528	520
10	2.64	3.10	4.21	5.69	8.17	11.0	17.3	30.1	51.9	85.1	132	196	278	363	439	491	519	529	528
20	2.64	3.08	4.10	5.41	7.55	9.99	14.6	24.1	40.6	65.8	102	151	212	283	354	405	437	453	455
30	2.64	3.04	3.93	4.99	6.59	8.75	11.7	17.4	27.4	43.0	65.2	94.7	132	173	211	246	270	285	285
40	2.64	2.97	3.64	4.48	5.66	7.37	9.14	11.9	16.6	23.8	34.2	48.1	64.6	82.3	99.9	115	127	134	133
50	2.64	2.86	3.30	4.03	4.78	5.76	7.10	8.44	10.1	12.6	16.1	20.6	26.0	31.9	38.0	43.2	47.3	49.7	50.0
60	2.64	2.78	3.09	3.54	4.01	4.53	5.19	5.92	6.77	7.59	8.51	9.67	10.9	12.3	13.5	14.7	15.5	16.1	16.2
70	2.64	2.73	2.89	3.09	3.32	3.64	3.88	4.13	4.43	4.75	5.12	5.53	5.92	6.29	6.63	6.92	7.14	7.29	7.36
80	2.64	2.69	2.74	2.80	2.89	2.99	3.05	3.12	3.19	3.25	3.30	3.37	3.42	3.47	3.52	3.55	3.57	3.58	3.58
90	2.64	2.65	2.65	2.66	2.67	2.68	2.68	2.69	2.70	2.70	2.69	2.68	2.67	2.66	2.65	2.64	2.63	2.62	2.60
100	2.64	2.60	2.57	2.55	2.53	2.52	2.50	2.49	2.49	2.48	2.47	2.46	2.45	2.45	2.45	2.44	2.44	2.44	2.43
110	2.64	2.57	2.52	2.48	2.45	2.44	2.44	2.44	2.45	2.45	2.46	2.47	2.47	2.50	2.52	2.55	2.57	2.59	2.61
120	2.64	2.54	2.47	2.44	2.44	2.44	2.45	2.48	2.53	2.60	2.66	2.74	2.81	2.88	2.94	2.99	3.03	3.06	3.07
130	2.64	2.52	2.44	2.43	2.44	2.46	2.53	2.63	2.74	2.86	2.99	3.11	3.24	3.36	3.47	3.55	3.63	3.68	3.71
140	2.64	2.50	2.43	2.43	2.46	2.54	2.66	2.81	2.98	3.16	3.35	3.54	3.70	3.87	4.01	4.13	4.22	4.29	4.33
150	2.64	2.48	2.42	2.44	2.50	2.63	2.79	2.99	3.22	3.46	3.69	3.91	4.11	4.29	4.46	4.58	4.68	4.75	4.79
160	2.64	2.47	2.42	2.44	2.53	2.70	2.90	3.14	3.42	3.68	3.95	4.20	4.43	4.61	4.72	4.83	4.93	4.99	5.03
170	2.64	2.46	2.42	2.45	2.56	2.74	2.98	3.25	3.53	3.83	4.12	4.39	4.62	4.79	4.91	4.96	4.97	5.00	5.04
180	2.64	2.46	2.42	2.45	2.57	2.76	3.00	3.28	3.57	3.87	4.17	4.45	4.70	4.88	4.98	4.99	4.98	4.93	4.87

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-TW-6000K-65D-Rev1	TYPE:6000K	WEIGHT:
SPEC.:65 DEG	DIM.:600MM	SERIAL No.:IES003014
MFR.:	SUR.:1	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	4.49	4.13	3.75	3.37	2.97	2.60	2.23	1.90	1.58	1.34	1.14	0.98	0.85	0.75	0.70	0.64	0.59	0.59
-170	3.95	3.73	3.45	3.15	2.83	2.49	2.16	1.85	1.56	1.33	1.13	0.97	0.85	0.76	0.70	0.64	0.59	0.59
-160	3.23	3.11	2.94	2.73	2.49	2.22	1.96	1.68	1.46	1.25	1.08	0.94	0.83	0.75	0.69	0.64	0.59	0.59
-150	2.54	2.48	2.37	2.23	2.06	1.87	1.67	1.47	1.30	1.14	1.01	0.89	0.80	0.73	0.68	0.64	0.59	0.59
-140	1.92	1.88	1.81	1.72	1.62	1.50	1.38	1.25	1.12	1.01	0.91	0.83	0.76	0.71	0.67	0.62	0.59	0.59
-130	1.39	1.37	1.34	1.29	1.24	1.17	1.11	1.03	0.95	0.89	0.82	0.77	0.72	0.68	0.65	0.61	0.59	0.59
-120	1.00	1.00	0.99	0.97	0.94	0.92	0.89	0.86	0.82	0.78	0.75	0.72	0.68	0.66	0.63	0.60	0.59	0.59
-110	0.78	0.78	0.78	0.77	0.77	0.76	0.75	0.74	0.73	0.71	0.69	0.67	0.65	0.63	0.61	0.59	0.59	0.59
-100	0.65	0.66	0.66	0.66	0.66	0.66	0.66	0.67	0.67	0.65	0.64	0.63	0.62	0.60	0.60	0.59	0.59	0.59
-90	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.60	0.60	0.60	0.59	0.59	0.59	0.59
-80	1.84	1.76	1.67	1.57	1.46	1.34	1.22	1.10	0.99	0.93	0.87	0.79	0.73	0.68	0.64	0.61	0.59	0.59
-70	5.75	5.46	5.08	4.64	4.17	3.71	3.25	2.79	2.38	2.04	1.74	1.47	1.25	1.08	0.84	0.68	0.61	0.59
-60	20.4	19.0	17.1	14.8	12.3	9.99	7.92	6.15	4.94	4.07	3.26	2.51	1.94	1.50	1.20	0.84	0.64	0.59
-50	69.7	65.4	58.9	50.6	41.5	32.2	23.8	16.4	10.9	7.41	5.28	4.19	2.92	2.05	1.46	1.09	0.67	0.59
-40	175	165	149	128	105	82.3	59.8	40.0	25.1	14.8	8.67	5.64	4.31	2.73	1.80	1.25	0.72	0.59
-30	335	319	292	251	206	157	112	75.3	46.9	26.8	14.3	7.77	5.03	3.63	2.12	1.34	0.76	0.59
-20	456	441	417	378	314	238	170	112	70.1	40.1	20.8	10.2	5.88	4.34	2.39	1.45	0.81	0.59
-10	497	485	464	428	370	294	211	140	86.1	49.2	25.4	12.1	6.43	4.62	2.59	1.53	0.84	0.59
0	511	498	474	436	377	299	217	144	88.2	50.3	26.0	12.3	6.46	4.69	2.66	1.57	0.86	0.59
10	515	489	452	399	332	259	186	124	77.3	44.6	23.6	11.7	6.54	4.80	2.72	1.62	0.89	0.59
20	437	402	351	292	238	183	132	89.3	56.7	33.4	18.3	9.85	6.21	4.70	2.64	1.61	0.89	0.59
30	272	245	212	175	137	105	77.2	53.5	34.8	21.4	12.8	7.96	5.63	4.15	2.48	1.58	0.88	0.59
40	128	117	102	84.9	67.4	51.0	37.6	27.0	18.7	12.7	8.80	6.49	5.14	3.37	2.27	1.57	0.88	0.59
50	47.9	44.0	38.8	33.0	27.0	21.6	16.9	13.4	10.5	8.28	6.56	5.38	3.89	2.80	2.01	1.46	0.86	0.59
60	15.7	14.9	13.8	12.6	11.4	10.2	9.08	8.02	6.87	5.87	4.81	3.80	2.99	2.33	1.84	1.26	0.85	0.59
70	7.25	7.06	6.81	6.50	6.13	5.75	5.35	4.94	4.46	3.87	3.33	2.83	2.38	2.00	1.54	1.14	0.83	0.59
80	3.57	3.55	3.52	3.48	3.43	3.37	3.31	3.24	3.17	2.87	2.57	2.25	1.93	1.64	1.36	1.08	0.82	0.59
90	2.61	2.62	2.63	2.64	2.65	2.66	2.66	2.67	2.68	2.45	2.22	1.98	1.75	1.52	1.28	1.05	0.82	0.59
100	2.43	2.44	2.44	2.44	2.44	2.45	2.45	2.46	2.46	2.26	2.06	1.86	1.65	1.44	1.24	1.03	0.81	0.59
110	2.60	2.58	2.56	2.54	2.51	2.48	2.46	2.44	2.37	2.17	1.98	1.78	1.59	1.39	1.19	0.99	0.79	0.59
120	3.06	3.03	2.99	2.93	2.86	2.80	2.72	2.64	2.41	2.16	1.92	1.72	1.53	1.34	1.15	0.96	0.77	0.59
130	3.68	3.63	3.55	3.47	3.36	3.24	3.11	2.86	2.52	2.21	1.93	1.68	1.46	1.28	1.10	0.92	0.75	0.59
140	4.30	4.24	4.15	4.04	3.89	3.72	3.42	2.99	2.59	2.23	1.91	1.63	1.40	1.21	1.04	0.88	0.72	0.59
150	4.76	4.71	4.63	4.51	4.36	3.95	3.45	2.99	2.56	2.17	1.84	1.55	1.31	1.12	0.97	0.83	0.69	0.59
160	4.99	4.94	4.88	4.71	4.25	3.76	3.28	2.80	2.39	2.01	1.69	1.41	1.19	1.02	0.89	0.77	0.66	0.59
170	4.98	4.93	4.55	4.16	3.74	3.30	2.86	2.44	2.05	1.73	1.45	1.22	1.03	0.90	0.80	0.71	0.63	0.59
180	4.49	4.13	3.75	3.37	2.97	2.60	2.23	1.90	1.58	1.34	1.14	0.98	0.85	0.75	0.70	0.64	0.59	0.59

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: