

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2464.8 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	55.6V x 73.7H
	At 50% of Imax	20.4V x 41.6H
	At 90% of Imax	6.3V x 17.7H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	774.3 lumens per klm.
	To 50% of Imax	359.2 lumens per klm.
	To 90% of Imax	66.8 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-TW-2200K-2040D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:20x40 DEG	DIM.:600MM	SERIAL No.:IES00307
MFR.:	SUR.:1	Shielding Angle:

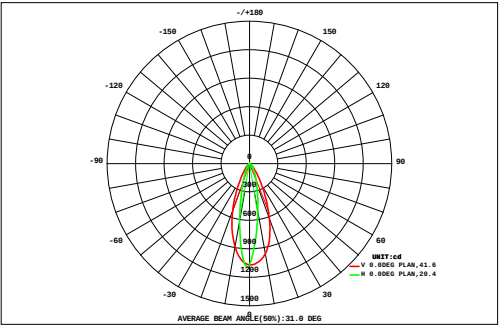

DATA OF LAMP		Eff:50.71lm/W	
MODEL		Imax(cd)	1087
NOMINAL POWER(W)	8.7	AVAILABILITY(%)	77.4
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	341.6
NOMINAL FLUX(lm)	441.2	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	441.2
TEST VOLTAGE(V)	24	q @50%(H,V)	42,20DEG

		AREA FLUX DIAGRAM																UNIT:lm			F t	F a
VERTICAL (DEG)	72	0.02	0.03	0.04	0.05	0.07	0.09	0.10	0.12	0.13	0.14	0.13	0.11	0.09	0.08	0.06	0.04	0.02	0.01	1.31	0.00	
	64	0.02	0.03	0.05	0.07	0.10	0.14	0.18	0.22	0.25	0.26	0.24	0.21	0.17	0.12	0.08	0.05	0.03	0.01	2.25	0.00	
	56	0.02	0.04	0.07	0.11	0.16	0.23	0.31	0.39	0.45	0.47	0.45	0.39	0.31	0.21	0.13	0.07	0.04	0.02	3.88	0.00	
	48	0.03	0.05	0.09	0.15	0.24	0.36	0.51	0.66	0.78	0.84	0.83	0.72	0.55	0.36	0.20	0.10	0.05	0.02	6.55	0.00	
	40	0.03	0.07	0.12	0.22	0.36	0.55	0.82	1.11	1.33	1.47	1.48	1.27	0.94	0.58	0.29	0.13	0.06	0.02	10.9	0.00	
	32	0.04	0.08	0.15	0.30	0.54	0.87	1.32	1.91	2.33	2.60	2.61	2.18	1.52	0.87	0.42	0.17	0.07	0.03	18.0	8.83	
	24	0.04	0.09	0.18	0.40	0.83	1.50	2.30	3.42	4.28	4.68	4.51	3.60	2.37	1.25	0.56	0.21	0.07	0.03	30.3	24.8	
		0.04	0.10	0.21	0.52	1.20	2.56	4.69	6.61	8.42	8.96	8.02	6.17	3.60	1.68	0.69	0.24	0.08	0.03	53.8	49.8	
		0.04	0.10	0.23	0.62	1.57	3.85	8.05	12.6	15.6	16.3	14.2	9.67	4.93	2.05	0.78	0.25	0.08	0.03	90.9	87.5	
		0.04	0.10	0.23	0.61	1.57	3.89	8.26	13.5	18.0	18.6	14.9	9.59	4.77	1.96	0.74	0.24	0.07	0.03	97.0	93.6	
		0.04	0.09	0.21	0.51	1.20	2.64	5.05	7.84	9.93	10.2	8.40	5.66	3.12	1.43	0.59	0.21	0.07	0.02	57.3	53.2	
	-24	0.04	0.08	0.17	0.39	0.82	1.55	2.52	3.66	4.23	4.31	3.78	2.63	1.70	0.91	0.42	0.16	0.06	0.02	27.5	21.6	
-32	0.03	0.07	0.14	0.27	0.52	0.86	1.30	1.72	1.85	1.86	1.72	1.28	0.86	0.54	0.28	0.12	0.05	0.02	13.5	2.34		
-40	0.03	0.06	0.10	0.19	0.32	0.50	0.70	0.87	0.91	0.91	0.85	0.68	0.47	0.31	0.18	0.09	0.04	0.02	7.22	0.00		
-48	0.02	0.04	0.08	0.13	0.20	0.29	0.39	0.47	0.49	0.49	0.45	0.37	0.28	0.18	0.11	0.06	0.03	0.01	4.10	0.00		
-56	0.02	0.03	0.05	0.08	0.12	0.17	0.22	0.26	0.28	0.27	0.25	0.21	0.16	0.11	0.07	0.04	0.02	0.01	2.36	0.00		
-64	0.01	0.02	0.03	0.05	0.06	0.09	0.12	0.14	0.15	0.15	0.13	0.11	0.09	0.06	0.04	0.03	0.01	0.01	1.30	0.00		
-72	0.01	0.02	0.02	0.02	0.03	0.05	0.06	0.07	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.02	0.01	0.01	0.66	0.00		
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)				16	24	32	40	48	56	64	72		
F t	0.54	1.10	2.18	4.68	9.92	20.2	36.9	55.6	69.5	72.6	62.9	44.9	26.0	12.8	5.64	2.21	0.85	0.34	429	---		
F a	0.00	0.00	0.00	0.00	1.56	13.3	30.0	48.9	62.8	66.1	56.6	38.5	19.5	4.46	0.00	0.00	0.00	0.00	---	342		


one-half-peak spread: U:9.6,D:11.0 , L:20.3,RN21MA5Beam Type: Type 5 x 4 (H x V)

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-TW-2200K-2040D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:20x40 DEG	DIM.:600MM	SERIAL No.:IES00307
MFR.:	SUR.:1	Shielding Angle:

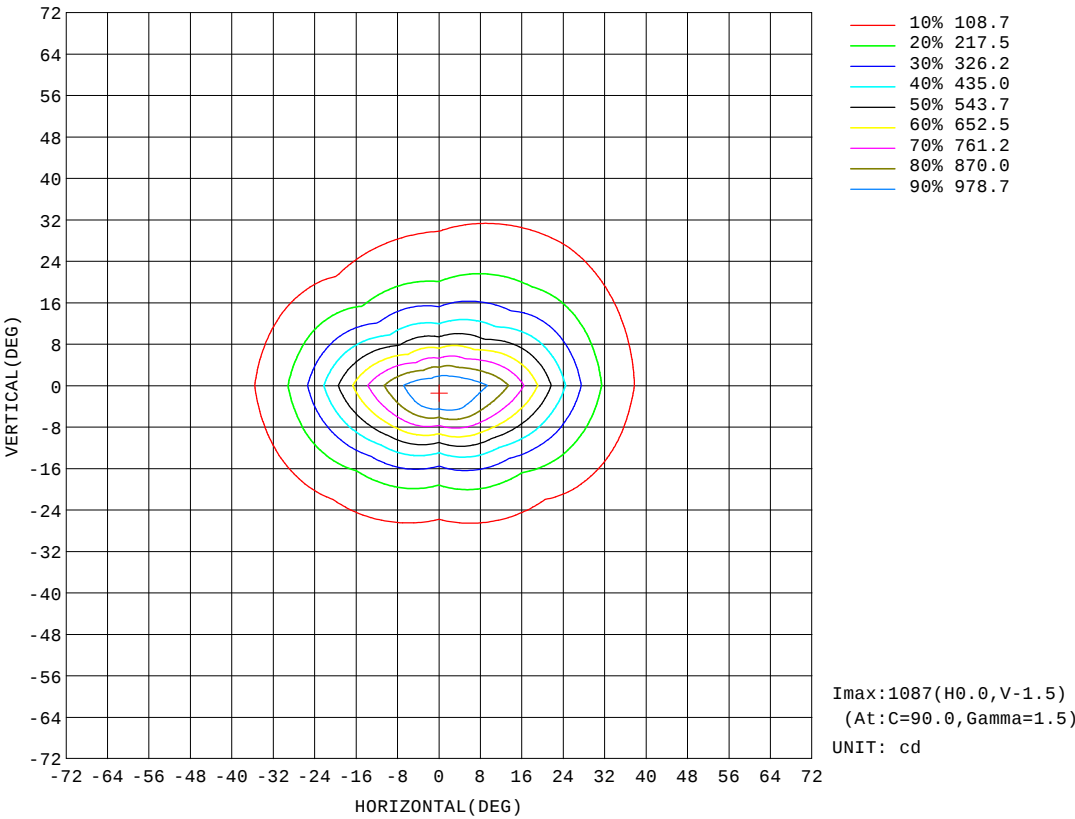


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-TW-2200K-2040D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:20x40 DEG	DIM.:600MM	SERIAL No.:IES00307
MFR.:	SUR.:1	Shielding Angle:

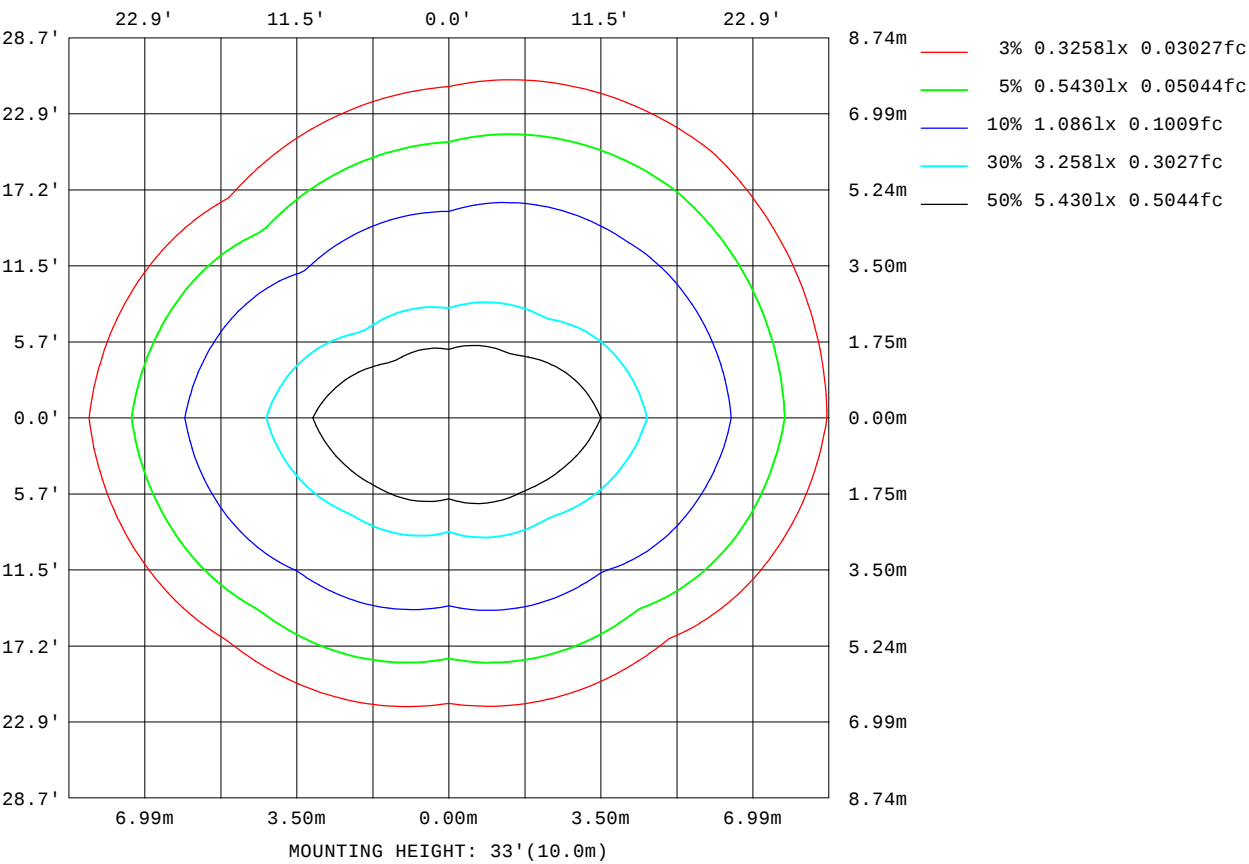

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

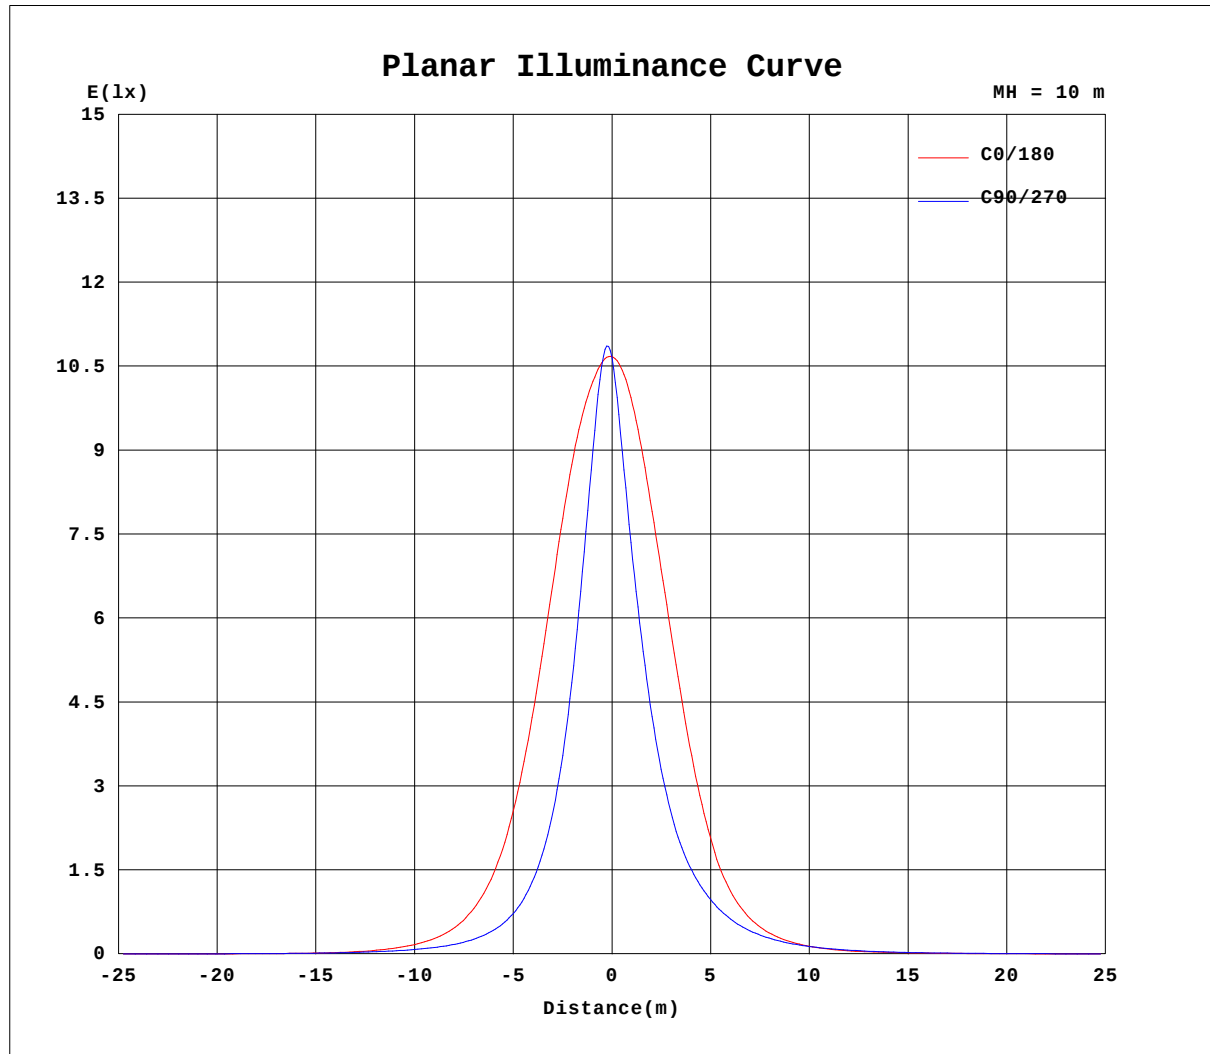


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-TW-2200K-2040D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:20x40 DEG	DIM.:600MM	SERIAL No.:IES00307
MFR.:	SUR.:1	Shielding Angle:

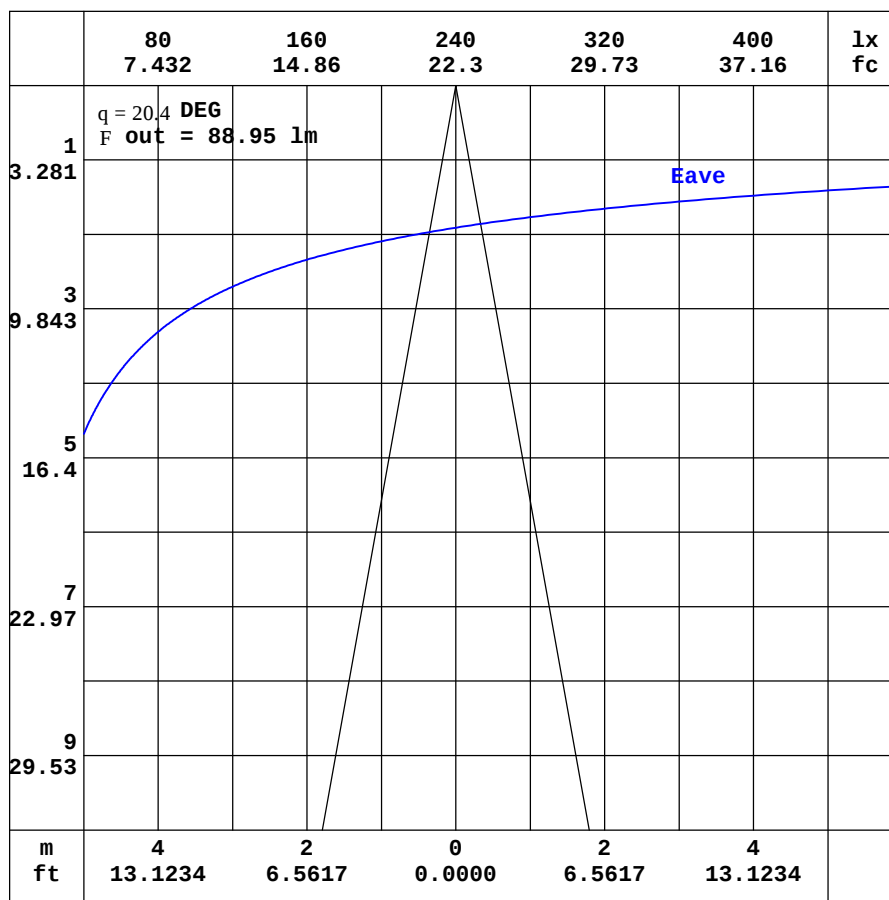

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-TW-2200K-2040D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:20x40 DEG	DIM.:600MM	SERIAL No.:IES00307
MFR.:	SUR.:1	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.62	1.49	1.46	1.47	1.56	1.72	1.94	2.21	2.50	2.79	3.02	3.20	3.33	3.37	3.36	3.32	3.31	3.28	3.33
-170	1.62	1.48	1.43	1.42	1.48	1.59	1.75	1.94	2.15	2.35	2.52	2.67	2.78	2.86	2.91	2.94	2.94	3.07	3.21
-160	1.62	1.46	1.40	1.37	1.39	1.45	1.54	1.65	1.76	1.87	1.97	2.05	2.11	2.17	2.21	2.39	2.57	2.70	2.76
-150	1.62	1.45	1.37	1.32	1.30	1.31	1.34	1.37	1.40	1.41	1.42	1.40	1.38	1.41	1.58	1.73	1.85	1.91	1.92
-140	1.62	1.45	1.34	1.28	1.23	1.20	1.18	1.15	1.11	1.05	0.97	0.87	0.86	0.94	1.01	1.08	1.13	1.16	1.14
-130	1.62	1.45	1.32	1.24	1.17	1.11	1.05	0.99	0.91	0.82	0.71	0.65	0.65	0.65	0.65	0.66	0.66	0.65	0.63
-120	1.62	1.46	1.32	1.22	1.13	1.05	0.97	0.89	0.80	0.71	0.62	0.62	0.62	0.61	0.60	0.59	0.58	0.57	0.55
-110	1.62	1.47	1.33	1.21	1.11	1.02	0.93	0.84	0.75	0.66	0.62	0.63	0.63	0.63	0.63	0.64	0.64	0.64	0.64
-100	1.62	1.48	1.35	1.23	1.11	1.01	0.90	0.81	0.72	0.63	0.62	0.62	0.62	0.63	0.62	0.63	0.63	0.63	0.63
-90	1.62	1.50	1.38	1.26	1.14	1.02	0.90	0.78	0.66	0.54	0.53	0.52	0.52	0.51	0.51	0.50	0.49	0.49	0.48
-80	1.62	1.52	1.43	1.31	1.24	1.16	1.00	0.86	0.72	0.59	0.61	0.65	0.69	0.72	0.75	0.78	0.80	0.81	0.82
-70	1.62	1.56	1.54	1.51	1.47	1.49	1.48	1.48	1.47	1.45	1.57	1.80	2.04	2.27	2.49	2.69	2.84	2.96	3.03
-60	1.62	1.59	1.68	1.76	1.94	2.15	2.35	2.59	2.84	3.12	3.48	4.19	4.93	5.65	6.30	6.86	7.27	7.53	7.63
-50	1.62	1.67	1.82	2.14	2.55	2.98	3.54	4.18	4.99	6.03	7.25	8.81	10.6	12.3	13.7	15.0	15.8	16.2	16.2
-40	1.62	1.80	2.03	2.57	3.18	4.00	4.98	6.32	8.10	10.4	13.3	16.6	20.4	24.4	28.2	31.3	33.3	33.9	33.0
-30	1.62	1.87	2.26	2.98	3.86	5.03	6.63	8.85	12.0	16.3	22.7	30.6	39.3	48.4	59.6	69.7	76.5	78.2	73.8
-20	1.62	1.90	2.44	3.33	4.50	6.02	8.22	11.4	16.2	24.6	37.4	54.9	77.7	106	133	168	200	215	200
-10	1.62	1.93	2.60	3.61	5.00	6.83	9.49	13.5	20.5	33.9	55.2	88.4	141	220	317	423	524	617	607
0	1.62	1.96	2.70	3.80	5.31	7.31	10.2	14.5	22.9	39.8	68.1	116	199	338	521	717	889	1018	1068
10	1.62	1.96	2.66	3.72	5.17	7.07	9.80	13.9	21.0	34.4	55.5	87.9	138	212	299	376	419	504	515
20	1.62	1.95	2.56	3.54	4.83	6.48	8.83	12.2	17.2	25.7	38.3	55.2	76.2	100.0	120	154	192	215	218
30	1.62	1.95	2.44	3.28	4.32	5.67	7.47	9.93	13.3	17.9	24.4	32.2	40.3	49.4	63.1	77.6	91.3	102	107
40	1.62	1.90	2.26	2.95	3.73	4.76	5.99	7.61	9.67	12.3	15.6	19.3	23.6	29.2	35.1	41.2	46.7	51.1	54.0
50	1.62	1.78	2.08	2.56	3.16	3.82	4.64	5.56	6.66	8.03	9.59	11.6	14.0	16.6	19.2	21.7	24.0	25.9	27.1
60	1.62	1.71	1.95	2.21	2.58	3.01	3.45	3.95	4.49	5.07	5.74	6.67	7.71	8.81	9.87	10.9	11.8	12.6	13.1
70	1.62	1.69	1.82	1.96	2.11	2.31	2.52	2.75	2.98	3.21	3.49	3.82	4.17	4.53	4.88	5.20	5.48	5.72	5.88
80	1.62	1.66	1.70	1.74	1.83	1.92	1.95	2.00	2.05	2.10	2.16	2.23	2.30	2.36	2.42	2.47	2.52	2.55	2.57
90	1.62	1.63	1.64	1.66	1.67	1.68	1.69	1.70	1.71	1.72	1.72	1.71	1.70	1.70	1.69	1.69	1.68	1.67	1.67
100	1.62	1.60	1.59	1.58	1.56	1.54	1.53	1.52	1.50	1.49	1.47	1.45	1.44	1.42	1.42	1.41	1.39	1.39	1.38
110	1.62	1.58	1.54	1.51	1.48	1.46	1.44	1.42	1.41	1.39	1.38	1.37	1.37	1.37	1.37	1.36	1.36	1.36	1.36
120	1.62	1.56	1.50	1.47	1.45	1.43	1.42	1.41	1.41	1.40	1.42	1.45	1.49	1.52	1.55	1.57	1.58	1.58	1.57
130	1.62	1.54	1.48	1.46	1.44	1.44	1.45	1.47	1.53	1.60	1.69	1.81	1.91	2.03	2.13	2.23	2.30	2.35	2.36
140	1.62	1.52	1.47	1.45	1.45	1.47	1.54	1.64	1.77	1.93	2.12	2.32	2.52	2.72	2.89	3.03	3.14	3.20	3.25
150	1.62	1.51	1.46	1.45	1.47	1.54	1.66	1.83	2.04	2.29	2.54	2.79	3.03	3.24	3.41	3.53	3.61	3.67	3.71
160	1.62	1.50	1.46	1.46	1.51	1.61	1.79	2.01	2.28	2.56	2.85	3.10	3.32	3.50	3.65	3.73	3.83	3.92	4.01
170	1.62	1.49	1.46	1.47	1.54	1.68	1.89	2.14	2.44	2.73	3.00	3.22	3.39	3.51	3.58	3.60	3.58	3.62	3.80
180	1.62	1.49	1.46	1.47	1.56	1.72	1.94	2.21	2.50	2.79	3.02	3.20	3.33	3.37	3.36	3.32	3.31	3.28	3.36

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators:

Test Date: 2024-09-29

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-TW-2200K-2040D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:20x40 DEG	DIM.:600MM	SERIAL No.:IES00307
MFR.:	SUR.:1	Shielding Angle:

Table--2		UNIT: cd																	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	3.01	2.80	2.56	2.29	1.99	1.69	1.41	1.16	0.92	0.78	0.68	0.63	0.60	0.59	0.58	0.55	0.49	0.45	
-170	3.12	3.00	2.68	2.36	2.01	1.68	1.38	1.11	0.89	0.76	0.67	0.62	0.60	0.59	0.58	0.56	0.49	0.45	
-160	2.69	2.54	2.32	2.06	1.75	1.46	1.20	0.97	0.81	0.70	0.64	0.62	0.60	0.59	0.57	0.55	0.49	0.45	
-150	1.89	1.80	1.66	1.49	1.30	1.11	0.93	0.80	0.71	0.65	0.62	0.61	0.60	0.59	0.58	0.54	0.49	0.45	
-140	1.14	1.10	1.03	0.95	0.86	0.79	0.72	0.67	0.63	0.62	0.61	0.60	0.60	0.59	0.57	0.53	0.49	0.45	
-130	0.64	0.64	0.64	0.63	0.63	0.62	0.62	0.61	0.61	0.61	0.61	0.61	0.60	0.59	0.57	0.52	0.48	0.45	
-120	0.56	0.57	0.58	0.59	0.60	0.61	0.61	0.61	0.61	0.62	0.61	0.60	0.59	0.58	0.54	0.51	0.46	0.45	
-110	0.64	0.64	0.64	0.64	0.63	0.63	0.63	0.63	0.63	0.62	0.61	0.60	0.58	0.55	0.52	0.49	0.46	0.45	
-100	0.63	0.63	0.63	0.63	0.63	0.63	0.62	0.61	0.60	0.59	0.57	0.54	0.53	0.51	0.48	0.46	0.45	0.45	
-90	0.48	0.48	0.49	0.49	0.49	0.49	0.49	0.49	0.49	0.49	0.48	0.48	0.47	0.47	0.46	0.46	0.45	0.45	
-80	0.81	0.79	0.76	0.73	0.70	0.66	0.62	0.58	0.54	0.52	0.51	0.50	0.49	0.48	0.46	0.46	0.45	0.45	
-70	2.93	2.79	2.61	2.40	2.17	1.93	1.69	1.46	1.28	1.13	1.00	0.88	0.76	0.66	0.55	0.49	0.46	0.45	
-60	7.44	7.10	6.62	6.02	5.31	4.56	3.84	3.16	2.66	2.24	1.85	1.50	1.21	0.96	0.77	0.56	0.46	0.45	
-50	16.0	15.4	14.4	13.1	11.6	9.85	8.10	6.46	5.09	3.93	3.06	2.37	1.79	1.34	0.98	0.68	0.49	0.45	
-40	33.6	32.6	30.3	26.9	23.0	19.0	15.5	12.3	9.17	6.62	4.73	3.41	2.48	1.75	1.23	0.83	0.51	0.45	
-30	78.1	76.2	68.8	58.2	46.6	38.7	30.9	23.1	15.9	10.5	6.93	4.62	3.19	2.18	1.45	0.92	0.54	0.45	
-20	220	206	172	137	114	86.3	61.0	41.4	26.7	15.9	9.46	5.90	3.81	2.56	1.63	1.02	0.56	0.45	
-10	644	561	465	360	258	170	107	65.4	39.3	22.1	11.8	6.87	4.28	2.83	1.77	1.09	0.58	0.45	
0	1043	966	817	615	412	253	148	84.7	48.3	26.0	13.0	7.32	4.49	2.95	1.84	1.12	0.58	0.45	
10	541	490	461	383	284	192	122	74.9	44.9	25.1	13.4	7.71	4.73	3.08	1.91	1.16	0.61	0.45	
20	241	241	222	195	161	120	84.1	56.0	35.3	20.7	12.1	7.31	4.62	3.03	1.90	1.16	0.62	0.45	
30	117	119	114	104	89.2	71.0	52.7	37.0	24.4	15.5	9.82	6.30	4.21	2.81	1.82	1.12	0.62	0.45	
40	57.3	58.1	56.3	51.9	45.9	38.7	30.6	22.4	15.7	10.8	7.32	5.12	3.60	2.46	1.67	1.07	0.62	0.45	
50	27.8	27.6	26.6	24.7	22.2	19.3	16.2	12.7	9.40	7.04	5.29	3.95	2.90	2.09	1.47	0.97	0.61	0.45	
60	13.0	12.7	12.1	11.2	10.2	9.09	7.98	6.93	5.70	4.62	3.70	2.90	2.25	1.71	1.27	0.86	0.60	0.45	
70	5.82	5.68	5.48	5.22	4.92	4.60	4.25	3.90	3.49	2.98	2.52	2.09	1.70	1.36	1.04	0.80	0.59	0.45	
80	2.57	2.57	2.55	2.51	2.47	2.42	2.36	2.30	2.22	1.99	1.75	1.53	1.32	1.12	0.92	0.75	0.59	0.45	
90	1.67	1.68	1.69	1.70	1.70	1.71	1.72	1.72	1.73	1.59	1.45	1.30	1.16	1.02	0.87	0.73	0.59	0.45	
100	1.39	1.40	1.41	1.42	1.43	1.45	1.46	1.48	1.49	1.40	1.29	1.19	1.08	0.97	0.84	0.71	0.58	0.45	
110	1.36	1.37	1.37	1.37	1.37	1.38	1.38	1.39	1.36	1.28	1.20	1.12	1.02	0.93	0.82	0.71	0.58	0.45	
120	1.58	1.57	1.55	1.53	1.50	1.46	1.43	1.41	1.32	1.23	1.14	1.06	0.98	0.90	0.80	0.70	0.56	0.45	
130	2.33	2.27	2.17	2.07	1.96	1.84	1.73	1.57	1.37	1.21	1.09	1.01	0.93	0.86	0.78	0.68	0.57	0.45	
140	3.18	3.09	2.96	2.80	2.61	2.39	2.11	1.77	1.48	1.26	1.09	0.96	0.88	0.82	0.75	0.66	0.56	0.45	
150	3.66	3.59	3.47	3.33	3.12	2.73	2.29	1.89	1.54	1.27	1.06	0.92	0.83	0.77	0.71	0.64	0.54	0.45	
160	3.94	3.87	3.77	3.58	3.13	2.68	2.25	1.83	1.48	1.20	0.99	0.86	0.76	0.71	0.66	0.62	0.53	0.45	
170	3.80	3.82	3.45	3.09	2.70	2.32	1.94	1.58	1.26	1.03	0.86	0.75	0.69	0.65	0.62	0.59	0.51	0.45	
180	3.01	2.80	2.56	2.29	1.99	1.69	1.41	1.16	0.92	0.78	0.68	0.63	0.60	0.59	0.58	0.55	0.49	0.45	

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: