

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2272.8 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	57.8V x 75.2H
	At 50% of Imax	23.3V x 40.9H
	At 90% of Imax	9.9V x 16.9H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	784.4 lumens per klm.
	To 50% of Imax	390.3 lumens per klm.
	To 90% of Imax	88.7 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-TW-4000K-2040D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:20x40 DEG	DIM.:600MM	SERIAL No.:IES00308
MFR.:	SUR.:1	Shielding Angle:

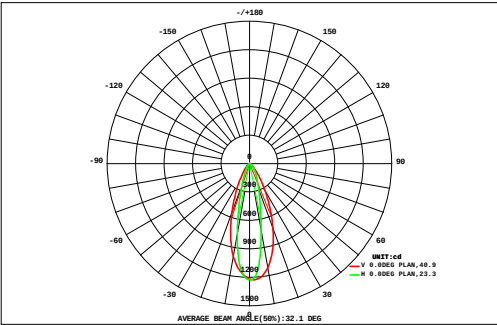

DATA OF LAMP		Eff:60.68lm/W	
MODEL		Imax(cd)	1227
NOMINAL POWER(W)	8.9	AVAILABILITY(%)	78.4
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	423.3
NOMINAL FLUX(lm)	540	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	540.0
TEST VOLTAGE(V)	24	q @50%(H,V)	41,23DEG

AREA FLUX DIAGRAM																UNIT:lm				F t	F a
72	0.02	0.03	0.05	0.07	0.09	0.11	0.14	0.16	0.17	0.17	0.16	0.14	0.11	0.09	0.07	0.04	0.03	0.01	1.65	0.00	
64	0.03	0.04	0.07	0.10	0.14	0.19	0.24	0.29	0.32	0.32	0.29	0.24	0.19	0.14	0.10	0.06	0.03	0.02	2.82	0.00	
56	0.03	0.05	0.09	0.14	0.22	0.33	0.43	0.53	0.58	0.58	0.52	0.43	0.33	0.23	0.14	0.08	0.04	0.02	4.80	0.00	
48	0.04	0.07	0.12	0.22	0.36	0.55	0.75	0.92	1.03	1.02	0.91	0.74	0.54	0.36	0.21	0.11	0.06	0.02	8.02	0.00	
40	0.04	0.08	0.16	0.30	0.55	0.88	1.26	1.60	1.79	1.78	1.58	1.23	0.86	0.56	0.31	0.15	0.07	0.03	13.2	0.00	
32	0.05	0.10	0.20	0.41	0.80	1.38	2.08	2.78	3.14	3.16	2.80	2.06	1.41	0.88	0.46	0.20	0.08	0.03	22.0	12.3	
24	0.05	0.11	0.24	0.53	1.13	2.13	3.44	4.89	5.75	5.92	5.18	3.70	2.49	1.38	0.65	0.25	0.09	0.03	38.0	32.1	
VERTICAL (DEG)	0.05	0.12	0.27	0.65	1.51	3.20	5.87	9.06	11.7	12.2	10.2	7.11	4.18	2.05	0.86	0.31	0.10	0.04	69.4	65.0	
	0.06	0.12	0.28	0.72	1.82	4.29	8.86	15.1	20.4	21.3	17.2	11.4	6.07	2.70	1.04	0.34	0.10	0.04	112	108	
	0.05	0.12	0.27	0.69	1.74	4.13	8.68	15.2	20.6	21.7	17.8	11.6	6.12	2.71	1.04	0.34	0.10	0.03	113	109	
	0.05	0.11	0.24	0.56	1.29	2.75	5.23	8.74	11.9	12.9	11.1	7.50	4.27	2.06	0.85	0.29	0.09	0.03	69.9	65.4	
	0.05	0.10	0.20	0.41	0.85	1.54	2.47	3.88	4.85	5.45	5.30	3.92	2.55	1.38	0.63	0.23	0.08	0.03	33.9	27.4	
	0.04	0.08	0.16	0.29	0.52	0.81	1.23	1.76	2.06	2.34	2.45	2.01	1.41	0.85	0.42	0.17	0.07	0.03	16.7	4.32	
	0.03	0.07	0.12	0.20	0.32	0.46	0.68	0.89	1.02	1.14	1.21	1.06	0.78	0.50	0.27	0.12	0.05	0.02	8.95	0.00	
	0.03	0.05	0.09	0.14	0.20	0.29	0.40	0.50	0.56	0.61	0.63	0.56	0.43	0.29	0.17	0.08	0.04	0.02	5.11	0.00	
	0.02	0.04	0.06	0.09	0.13	0.18	0.24	0.29	0.32	0.34	0.34	0.30	0.24	0.16	0.10	0.06	0.03	0.01	2.95	0.00	
	0.02	0.03	0.04	0.05	0.07	0.11	0.14	0.16	0.18	0.18	0.18	0.15	0.12	0.09	0.06	0.04	0.02	0.01	1.64	0.00	
-24	0.01	0.02	0.02	0.03	0.04	0.05	0.07	0.08	0.09	0.09	0.08	0.07	0.06	0.04	0.03	0.02	0.01	0.01	0.84	0.00	
-32																					
-40																					
-48																					
-56																					
-64																					
-72																					
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72	
F t	0.67	1.35	2.66	5.61	11.8	23.4	42.2	66.7	86.3	91.2	77.9	54.2	32.2	16.5	7.40	2.90	1.11	0.44	525	---	
F a	0.00	0.00	0.00	0.00	1.87	15.4	34.5	59.3	78.8	83.8	70.5	46.7	24.7	7.81	0.00	0.00	0.00	0.00	---	423	


one-half-peak spread: U:12.4,D:11.1 , L:21.1,NEZ0.0 Beam Type: Type 5 x 4 (H x V)

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-TW-4000K-2040D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:20x40 DEG	DIM.:600MM	SERIAL No.:IES00308
MFR.:	SUR.:1	Shielding Angle:

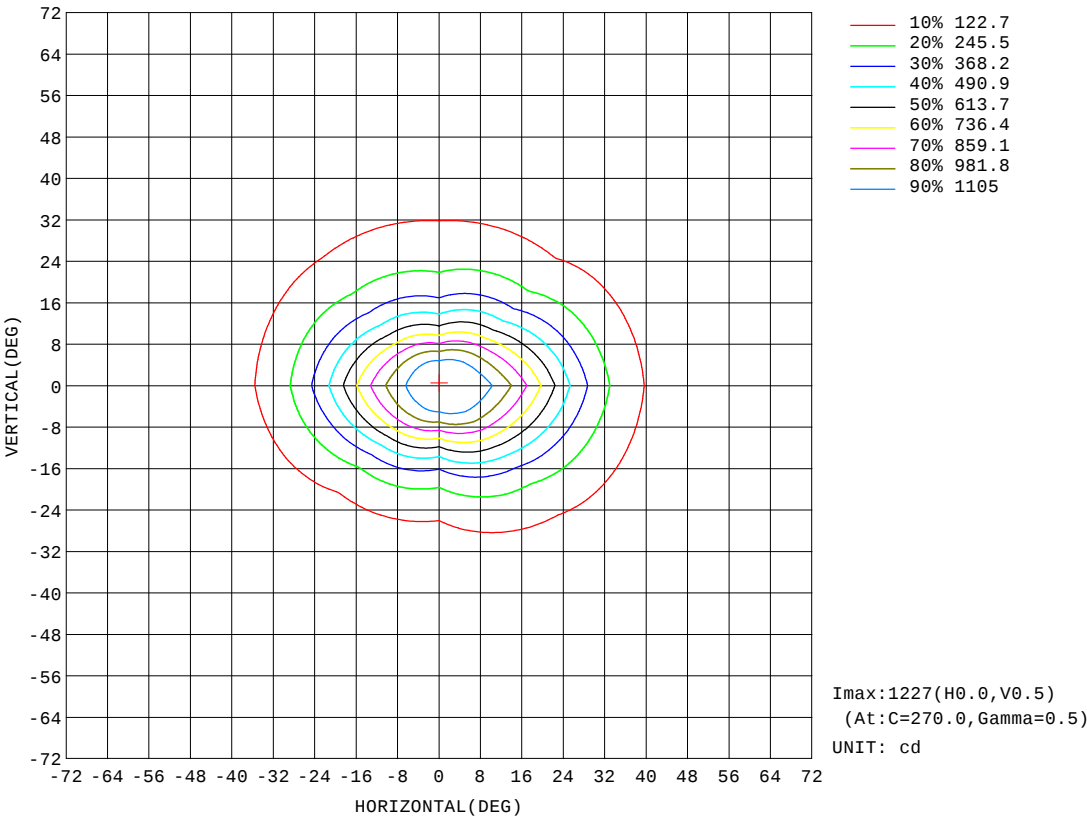


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-TW-4000K-2040D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:20x40 DEG	DIM.:600MM	SERIAL No.:IES00308
MFR.:	SUR.:1	Shielding Angle:

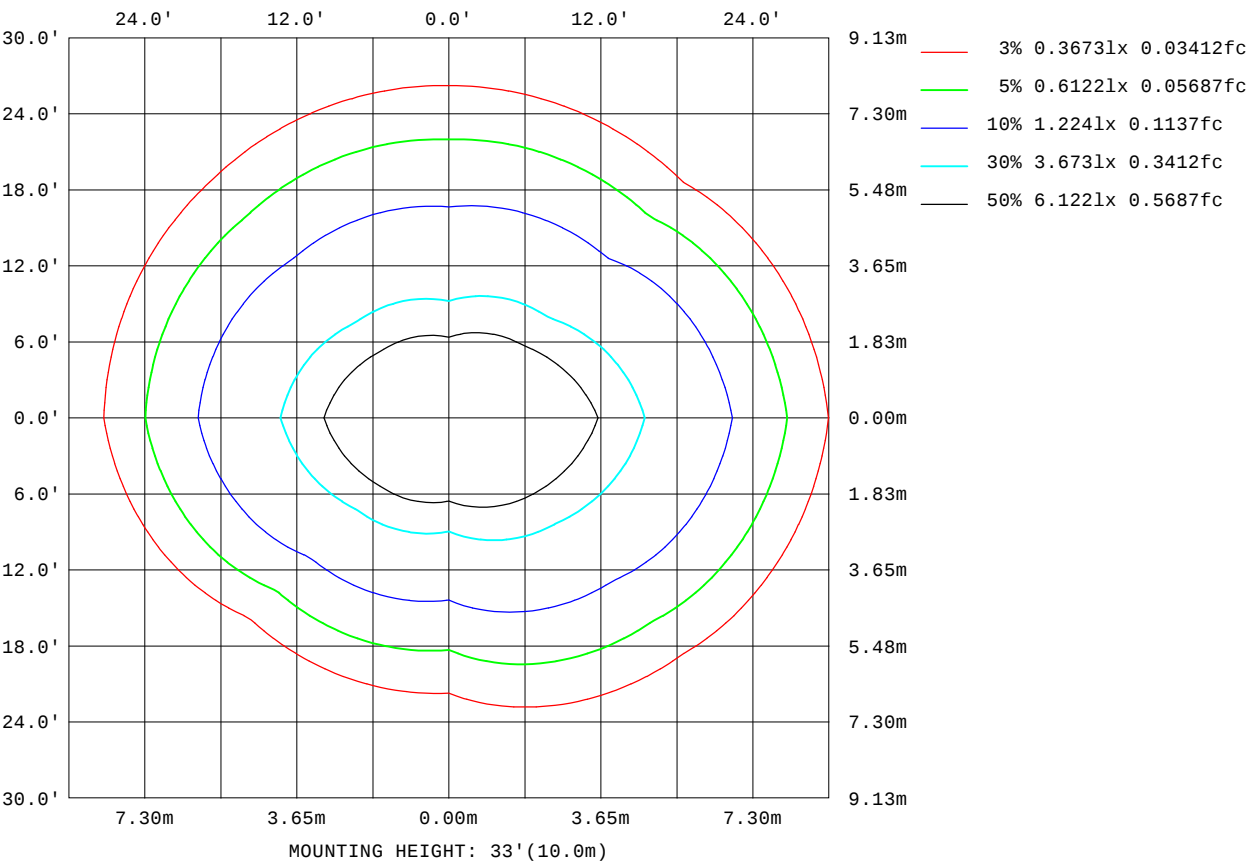

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

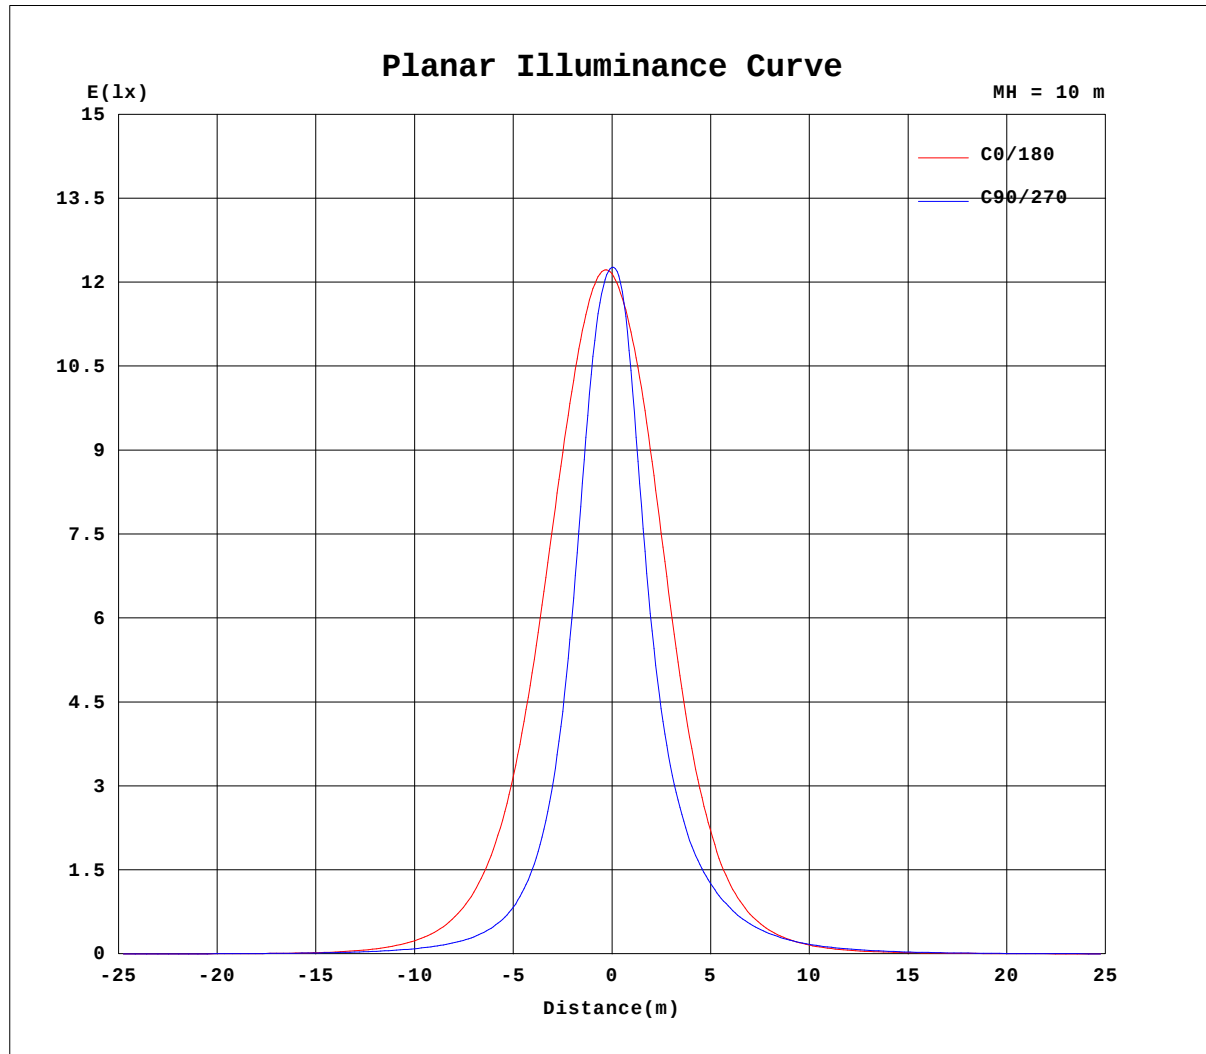


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-TW-4000K-2040D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:20x40 DEG	DIM.:600MM	SERIAL No.:IES00308
MFR.:	SUR.:1	Shielding Angle:

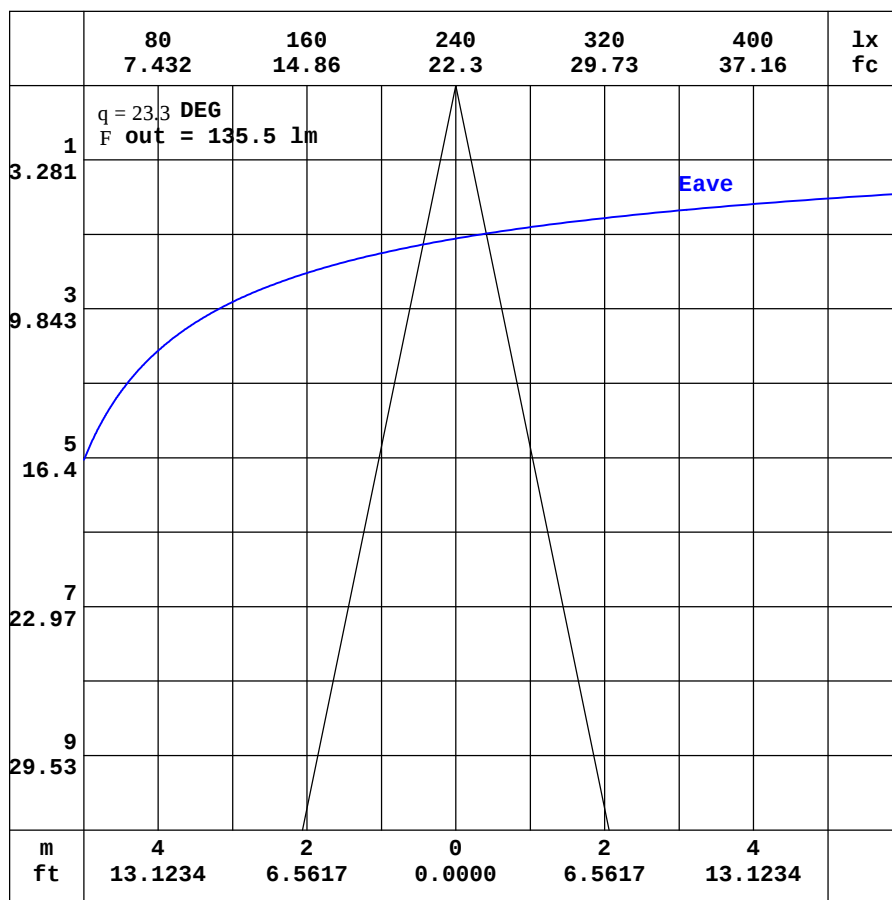

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-TW-4000K-2040D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:20x40 DEG	DIM.:600MM	SERIAL No.:IES00308
MFR.:	SUR.:1	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.01	1.86	1.83	1.85	1.97	2.18	2.46	2.80	3.16	3.52	3.81	4.04	4.18	4.20	4.19	4.14	4.08	4.02	4.11
-170	2.01	1.84	1.79	1.79	1.86	2.01	2.21	2.45	2.71	2.97	3.18	3.36	3.50	3.58	3.64	3.66	3.60	3.75	3.90
-160	2.01	1.83	1.75	1.72	1.74	1.82	1.94	2.07	2.21	2.35	2.47	2.57	2.66	2.74	2.79	3.01	3.22	3.36	3.43
-150	2.01	1.82	1.71	1.65	1.63	1.64	1.67	1.71	1.74	1.75	1.75	1.74	1.71	1.77	2.00	2.19	2.34	2.43	2.44
-140	2.01	1.81	1.68	1.60	1.53	1.49	1.45	1.41	1.36	1.27	1.17	1.03	1.04	1.15	1.27	1.37	1.44	1.47	1.47
-130	2.01	1.81	1.66	1.56	1.47	1.38	1.30	1.20	1.11	0.98	0.82	0.74	0.76	0.78	0.80	0.82	0.83	0.84	0.82
-120	2.01	1.81	1.65	1.52	1.42	1.31	1.21	1.10	0.97	0.83	0.72	0.72	0.72	0.72	0.72	0.71	0.71	0.70	0.70
-110	2.01	1.83	1.66	1.52	1.39	1.27	1.16	1.04	0.93	0.81	0.77	0.77	0.78	0.78	0.79	0.80	0.81	0.82	0.83
-100	2.01	1.84	1.69	1.54	1.40	1.27	1.14	1.02	0.90	0.78	0.77	0.77	0.78	0.78	0.79	0.80	0.80	0.81	0.82
-90	2.01	1.86	1.72	1.57	1.42	1.28	1.13	0.98	0.84	0.69	0.68	0.68	0.67	0.66	0.65	0.65	0.64	0.63	0.63
-80	2.01	1.89	1.77	1.64	1.54	1.44	1.25	1.08	0.92	0.75	0.77	0.82	0.86	0.91	0.95	0.98	1.01	1.03	1.04
-70	2.01	1.93	1.90	1.87	1.83	1.84	1.82	1.82	1.79	1.73	1.88	2.16	2.46	2.75	3.03	3.29	3.50	3.67	3.78
-60	2.01	1.97	2.07	2.18	2.39	2.63	2.87	3.12	3.39	3.66	4.02	4.84	5.70	6.55	7.34	8.05	8.63	9.06	9.33
-50	2.01	2.05	2.26	2.64	3.12	3.63	4.28	4.99	5.85	6.83	7.89	9.32	11.2	13.0	14.8	16.5	17.8	18.8	19.4
-40	2.01	2.22	2.51	3.16	3.89	4.86	5.99	7.44	9.25	11.4	13.8	16.3	19.5	23.7	28.0	32.1	35.5	37.8	38.7
-30	2.01	2.31	2.79	3.65	4.72	6.11	7.91	10.3	13.4	17.5	23.2	29.9	36.6	44.0	56.2	68.7	79.1	85.2	85.1
-20	2.01	2.35	3.01	4.09	5.51	7.32	9.84	13.3	18.2	26.6	39.3	56.4	77.9	103	129	170	215	243	236
-10	2.01	2.38	3.20	4.44	6.12	8.32	11.4	15.9	23.2	37.6	60.4	95.6	149	228	328	458	602	735	750
0	2.01	2.42	3.32	4.67	6.52	8.94	12.4	17.4	26.7	45.6	77.4	130	217	355	544	778	993	1139	1215
10	2.01	2.42	3.28	4.60	6.38	8.74	12.2	17.3	25.9	42.3	68.6	109	169	255	359	478	593	709	712
20	2.01	2.42	3.17	4.39	6.00	8.10	11.1	15.6	22.4	33.9	51.7	76.2	108	146	185	228	268	292	286
30	2.01	2.41	3.02	4.06	5.38	7.13	9.47	12.9	17.9	24.8	35.1	48.5	64.2	81.4	99.4	116	131	139	139
40	2.01	2.35	2.80	3.66	4.67	6.00	7.66	9.83	12.9	17.1	22.6	29.4	37.0	44.9	52.7	59.7	65.4	69.0	70.0
50	2.01	2.20	2.59	3.19	3.95	4.82	5.91	7.20	8.78	10.8	13.4	16.6	20.1	23.6	27.0	29.9	32.4	34.2	35.0
60	2.01	2.13	2.42	2.75	3.23	3.78	4.39	5.07	5.85	6.68	7.71	8.95	10.3	11.7	13.1	14.4	15.4	16.2	16.7
70	2.01	2.10	2.25	2.43	2.63	2.90	3.19	3.50	3.83	4.16	4.54	4.97	5.41	5.84	6.28	6.67	7.01	7.28	7.46
80	2.01	2.06	2.12	2.17	2.28	2.40	2.44	2.51	2.59	2.67	2.75	2.84	2.93	3.02	3.09	3.16	3.22	3.26	3.28
90	2.01	2.03	2.04	2.06	2.08	2.10	2.11	2.13	2.15	2.16	2.16	2.16	2.15	2.15	2.15	2.14	2.14	2.14	2.14
100	2.01	1.99	1.98	1.97	1.95	1.94	1.92	1.91	1.90	1.89	1.87	1.85	1.83	1.82	1.80	1.79	1.78	1.78	1.77
110	2.01	1.97	1.93	1.89	1.86	1.84	1.83	1.81	1.78	1.77	1.75	1.74	1.73	1.73	1.73	1.72	1.71	1.71	1.70
120	2.01	1.94	1.88	1.85	1.83	1.81	1.80	1.79	1.79	1.79	1.82	1.87	1.91	1.95	1.97	1.98	1.98	1.97	1.95
130	2.01	1.92	1.85	1.83	1.81	1.82	1.84	1.88	1.96	2.07	2.18	2.31	2.43	2.55	2.67	2.76	2.83	2.86	2.86
140	2.01	1.90	1.84	1.82	1.82	1.87	1.95	2.09	2.26	2.47	2.69	2.92	3.16	3.37	3.57	3.72	3.84	3.92	3.96
150	2.01	1.88	1.83	1.82	1.86	1.95	2.11	2.33	2.60	2.89	3.20	3.50	3.77	4.00	4.20	4.34	4.44	4.52	4.56
160	2.01	1.87	1.83	1.84	1.90	2.04	2.28	2.56	2.89	3.24	3.57	3.87	4.13	4.33	4.48	4.58	4.68	4.78	4.89
170	2.01	1.86	1.83	1.84	1.94	2.13	2.40	2.72	3.09	3.45	3.77	4.04	4.24	4.35	4.40	4.43	4.38	4.43	4.65
180	2.01	1.86	1.83	1.85	1.97	2.18	2.46	2.80	3.16	3.52	3.81	4.04	4.18	4.20	4.19	4.14	4.08	4.02	4.12

H_b Range:-90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:

Test Date:2024-09-29

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-TW-4000K-2040D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:20x40 DEG	DIM.:600MM	SERIAL No.:IES00308
MFR.:	SUR.:1	Shielding Angle:

Table--2		UNIT: cd																	
H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	3.68	3.41	3.14	2.79	2.43	2.07	1.71	1.41	1.14	0.96	0.85	0.78	0.77	0.76	0.73	0.69	0.61	0.55	
-170	3.76	3.58	3.23	2.86	2.45	2.05	1.69	1.37	1.11	0.94	0.84	0.78	0.77	0.76	0.73	0.69	0.61	0.55	
-160	3.31	3.11	2.84	2.52	2.15	1.80	1.49	1.21	1.02	0.89	0.82	0.78	0.77	0.76	0.73	0.69	0.61	0.55	
-150	2.38	2.26	2.07	1.87	1.64	1.40	1.20	1.03	0.91	0.84	0.79	0.78	0.77	0.76	0.73	0.68	0.60	0.55	
-140	1.45	1.40	1.32	1.23	1.12	1.03	0.95	0.87	0.83	0.80	0.79	0.78	0.77	0.75	0.72	0.67	0.60	0.55	
-130	0.84	0.84	0.83	0.82	0.82	0.82	0.82	0.81	0.80	0.80	0.79	0.78	0.77	0.74	0.71	0.65	0.59	0.55	
-120	0.71	0.73	0.75	0.76	0.78	0.79	0.80	0.81	0.80	0.79	0.79	0.77	0.76	0.73	0.68	0.63	0.57	0.55	
-110	0.83	0.83	0.83	0.83	0.82	0.82	0.81	0.81	0.80	0.79	0.78	0.75	0.72	0.68	0.65	0.60	0.57	0.55	
-100	0.81	0.81	0.80	0.80	0.79	0.78	0.77	0.76	0.75	0.73	0.70	0.68	0.65	0.63	0.60	0.58	0.57	0.55	
-90	0.62	0.62	0.62	0.62	0.61	0.61	0.61	0.61	0.60	0.60	0.59	0.59	0.58	0.58	0.57	0.57	0.56	0.55	
-80	1.04	1.02	1.00	0.96	0.92	0.88	0.83	0.78	0.72	0.69	0.66	0.63	0.62	0.60	0.58	0.57	0.56	0.55	
-70	3.72	3.59	3.41	3.18	2.92	2.64	2.34	2.04	1.76	1.54	1.34	1.16	1.00	0.85	0.69	0.61	0.56	0.55	
-60	9.38	9.21	8.83	8.21	7.40	6.46	5.50	4.59	3.81	3.13	2.54	2.02	1.60	1.26	0.98	0.70	0.58	0.55	
-50	20.3	20.6	20.1	18.9	17.1	14.9	12.4	9.90	7.50	5.62	4.27	3.23	2.39	1.76	1.26	0.87	0.60	0.55	
-40	42.9	44.9	44.4	41.4	36.8	31.1	25.2	19.1	13.8	9.73	6.71	4.69	3.34	2.30	1.59	1.05	0.63	0.55	
-30	99.9	106	102	92.1	77.9	63.9	49.5	35.8	24.1	15.4	9.93	6.42	4.29	2.88	1.88	1.18	0.67	0.55	
-20	281	284	252	209	171	130	92.2	62.1	39.5	23.2	13.4	8.16	5.14	3.37	2.13	1.30	0.69	0.55	
-10	805	734	601	466	339	233	152	94.0	56.5	31.5	16.6	9.45	5.79	3.72	2.30	1.39	0.72	0.55	
0	1211	1113	941	722	503	327	201	118	67.5	36.3	17.9	9.93	6.02	3.85	2.37	1.44	0.73	0.55	
10	755	663	560	445	331	230	151	94.3	57.3	32.4	17.2	9.91	6.14	3.96	2.45	1.48	0.75	0.55	
20	302	283	240	195	165	128	92.5	63.6	41.3	24.7	14.6	9.03	5.81	3.83	2.42	1.46	0.77	0.55	
30	139	131	116	97.8	78.9	65.2	52.0	38.6	26.7	17.5	11.5	7.67	5.21	3.52	2.29	1.41	0.77	0.55	
40	68.5	64.5	58.6	51.6	43.8	36.2	29.4	22.7	16.7	12.0	8.59	6.15	4.42	3.06	2.09	1.34	0.76	0.55	
50	34.1	32.3	29.8	26.9	23.5	20.0	16.6	13.3	10.4	8.08	6.24	4.76	3.55	2.58	1.82	1.21	0.75	0.55	
60	16.2	15.4	14.4	13.2	11.8	10.4	9.06	7.85	6.57	5.44	4.43	3.51	2.76	2.11	1.56	1.06	0.75	0.55	
70	7.29	7.04	6.72	6.35	5.93	5.51	5.08	4.64	4.15	3.57	3.05	2.55	2.09	1.68	1.28	0.98	0.74	0.55	
80	3.26	3.23	3.19	3.13	3.06	2.98	2.89	2.81	2.71	2.43	2.15	1.88	1.62	1.37	1.14	0.93	0.74	0.55	
90	2.14	2.14	2.14	2.14	2.14	2.15	2.15	2.15	2.15	1.97	1.80	1.62	1.44	1.26	1.09	0.91	0.73	0.55	
100	1.77	1.78	1.79	1.79	1.80	1.82	1.83	1.85	1.86	1.74	1.62	1.49	1.35	1.20	1.05	0.89	0.73	0.55	
110	1.70	1.70	1.70	1.70	1.70	1.71	1.71	1.72	1.69	1.59	1.49	1.39	1.28	1.16	1.03	0.88	0.72	0.55	
120	1.95	1.93	1.90	1.87	1.84	1.79	1.74	1.72	1.62	1.52	1.41	1.31	1.22	1.12	1.00	0.87	0.71	0.55	
130	2.83	2.75	2.64	2.51	2.37	2.23	2.09	1.89	1.67	1.48	1.35	1.26	1.16	1.07	0.97	0.85	0.70	0.55	
140	3.89	3.78	3.62	3.42	3.18	2.92	2.56	2.14	1.79	1.52	1.33	1.19	1.10	1.02	0.93	0.82	0.69	0.55	
150	4.51	4.43	4.29	4.11	3.86	3.37	2.81	2.31	1.87	1.54	1.29	1.13	1.03	0.97	0.89	0.80	0.68	0.55	
160	4.85	4.79	4.69	4.45	3.87	3.30	2.76	2.24	1.81	1.46	1.21	1.05	0.96	0.90	0.84	0.77	0.66	0.55	
170	4.69	4.74	4.28	3.83	3.34	2.85	2.37	1.93	1.55	1.26	1.06	0.93	0.87	0.83	0.78	0.73	0.64	0.55	
180	3.68	3.41	3.14	2.79	2.43	2.07	1.71	1.41	1.14	0.96	0.85	0.78	0.77	0.76	0.73	0.69	0.61	0.55	

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: