

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	3978.6 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	49.3V x 49.6H
	At 50% of Imax	20.1V x 20.6H
	At 90% of Imax	7.0V x 7.2H

Beam Flux	Total	1011.1 lumens per klm.
	To 10% of Imax	700.7 lumens per klm.
	To 50% of Imax	273.0 lumens per klm.
	To 90% of Imax	46.0 lumens per klm.

Upward LOR	2.3 %
Downward LOR	98.8 %


Luminaire Efficiency(Light Output Ratio)	101.1 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-TW-2200K-20D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:20 DEG	DIM.:600MM	SERIAL No.:IES003003
MFR.:	SUR.:1	Shielding Angle:

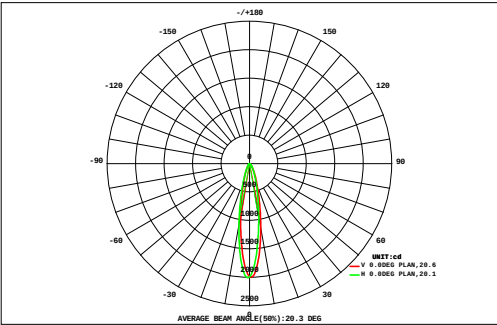

DATA OF LAMP		Eff:58.52lm/W	
MODEL		Imax(cd)	2004
NOMINAL POWER(W)	8.7	AVAILABILITY(%)	69.9
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	352.2
NOMINAL FLUX(lm)	503.6	LOR(%)	101.1
LAMPS INSIDE	1	TOTAL FLUX(lm)	509.1
TEST VOLTAGE(V)	24	q @50%(H,V)	21,20DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.08	0.10	0.13	0.16	0.21	0.25	0.30	0.34	0.38	0.40	0.42	0.41	0.38	0.34	0.29	0.23	0.17	0.12	4.71	0.00
45	0.08	0.10	0.13	0.16	0.21	0.25	0.30	0.34	0.38	0.40	0.42	0.41	0.38	0.34	0.29	0.23	0.17	0.12	4.71	0.00
40	0.09	0.12	0.16	0.21	0.27	0.34	0.42	0.49	0.54	0.58	0.61	0.59	0.55	0.48	0.40	0.31	0.22	0.15	6.54	0.00
35	0.11	0.15	0.20	0.26	0.36	0.47	0.59	0.70	0.80	0.86	0.89	0.87	0.79	0.68	0.55	0.40	0.27	0.18	9.12	0.00
30	0.13	0.18	0.25	0.34	0.47	0.64	0.84	1.04	1.20	1.30	1.33	1.26	1.12	0.94	0.71	0.49	0.33	0.21	12.8	0.55
25	0.15	0.21	0.31	0.44	0.61	0.87	1.22	1.59	1.88	2.02	1.98	1.80	1.56	1.24	0.87	0.59	0.38	0.24	18.0	10.0
20	0.17	0.25	0.37	0.55	0.82	1.21	1.80	2.51	3.09	3.27	3.03	2.57	2.06	1.50	1.03	0.68	0.43	0.27	25.6	19.4
15	0.18	0.28	0.43	0.67	1.07	1.69	2.67	4.03	5.23	5.44	4.67	3.60	2.57	1.76	1.17	0.75	0.47	0.29	36.9	31.5
10	0.20	0.31	0.48	0.79	1.31	2.24	3.86	6.28	8.66	8.84	6.98	4.90	3.15	1.98	1.26	0.78	0.48	0.29	52.8	47.9
5	0.20	0.32	0.51	0.86	1.47	2.64	4.86	8.55	12.5	12.8	9.76	6.21	3.62	2.11	1.28	0.78	0.47	0.28	69.3	64.6
0	0.20	0.32	0.52	0.87	1.51	2.75	5.14	9.23	13.6	14.0	10.4	6.35	3.57	2.03	1.21	0.73	0.45	0.27	73.2	68.5
-5	0.20	0.31	0.50	0.83	1.41	2.51	4.49	7.55	10.2	10.3	7.99	5.05	2.94	1.72	1.05	0.65	0.40	0.25	58.3	53.4
-10	0.18	0.28	0.45	0.72	1.19	2.00	3.26	4.80	5.98	6.06	4.94	3.36	2.12	1.32	0.85	0.54	0.35	0.22	38.6	33.1
-15	0.16	0.25	0.38	0.59	0.93	1.44	2.11	2.81	3.28	3.29	2.80	2.06	1.38	0.94	0.64	0.43	0.29	0.19	24.0	17.5
-20	0.14	0.21	0.31	0.47	0.69	0.98	1.31	1.63	1.83	1.82	1.60	1.25	0.91	0.64	0.47	0.33	0.23	0.15	15.0	5.73
-25	0.12	0.17	0.25	0.35	0.49	0.65	0.82	0.97	1.06	1.05	0.94	0.78	0.60	0.45	0.33	0.25	0.18	0.12	9.58	0.00
-30	0.10	0.14	0.19	0.26	0.34	0.43	0.52	0.60	0.63	0.63	0.58	0.50	0.41	0.32	0.24	0.18	0.14	0.10	6.30	0.00
-35	0.08	0.11	0.14	0.19	0.24	0.29	0.34	0.38	0.40	0.40	0.37	0.33	0.28	0.22	0.17	0.13	0.10	0.08	4.26	0.00
-40	0.06	0.08	0.11	0.14	0.17	0.20	0.23	0.25	0.26	0.26	0.25	0.22	0.19	0.16	0.13	0.10	0.08	0.06	2.94	0.00
-45	0.06	0.08	0.11	0.14	0.17	0.20	0.23	0.25	0.26	0.26	0.25	0.22	0.19	0.16	0.13	0.10	0.08	0.06	2.94	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
F t	2.56	3.79	5.68	8.69	13.5	21.6	34.8	53.8	71.5	73.4	59.5	42.1	28.2	18.8	12.6	8.36	5.43	3.46	468	---
F a	0.00	0.00	0.00	0.00	3.37	14.4	28.5	47.8	65.9	67.8	53.9	36.2	21.8	11.2	1.51	0.00	0.00	0.00	---	352


one-half-peak spread: U:9.8,D:10.5 , L:10.3,R:10.5 NEMA Beam Type: Type 4

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-TW-2200K-20D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:20 DEG	DIM.:600MM	SERIAL No.:IES003003
MFR.:	SUR.:1	Shielding Angle:

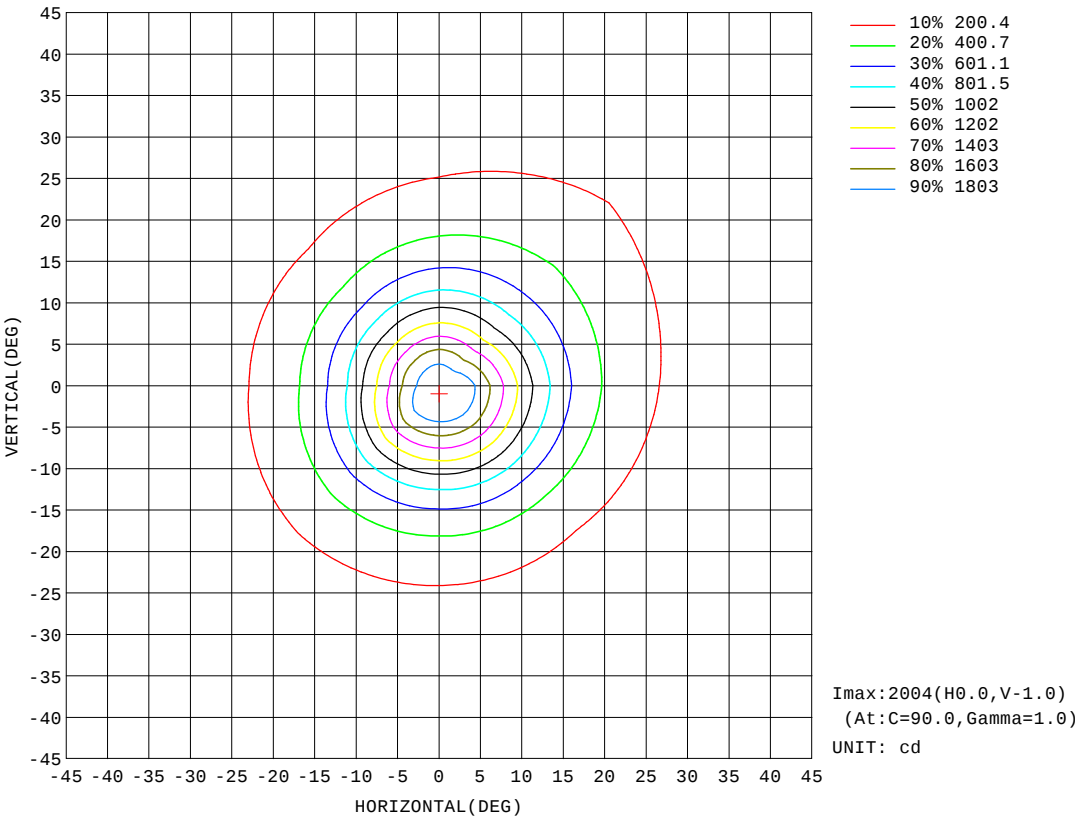


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-TW-2200K-20D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:20 DEG	DIM.:600MM	SERIAL No.:IES003003
MFR.:	SUR.:1	Shielding Angle:

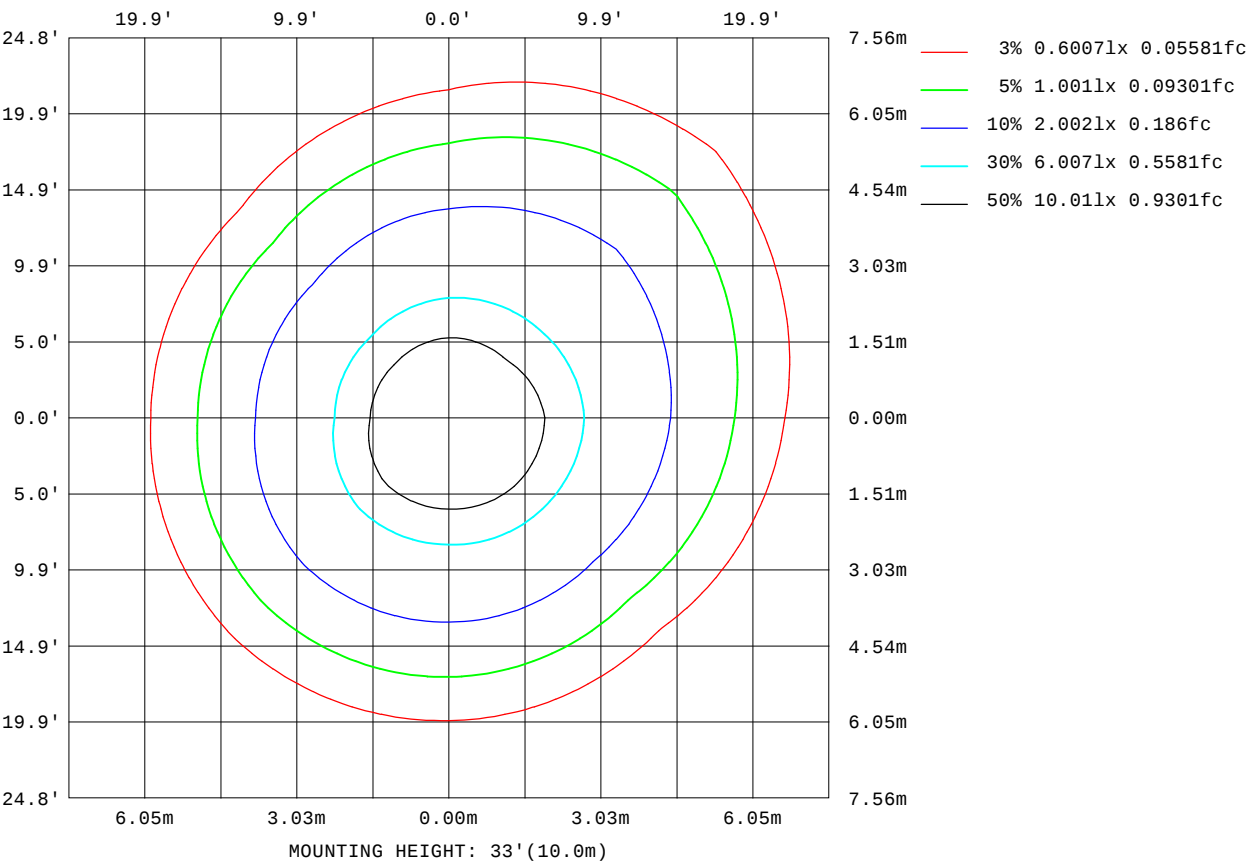

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

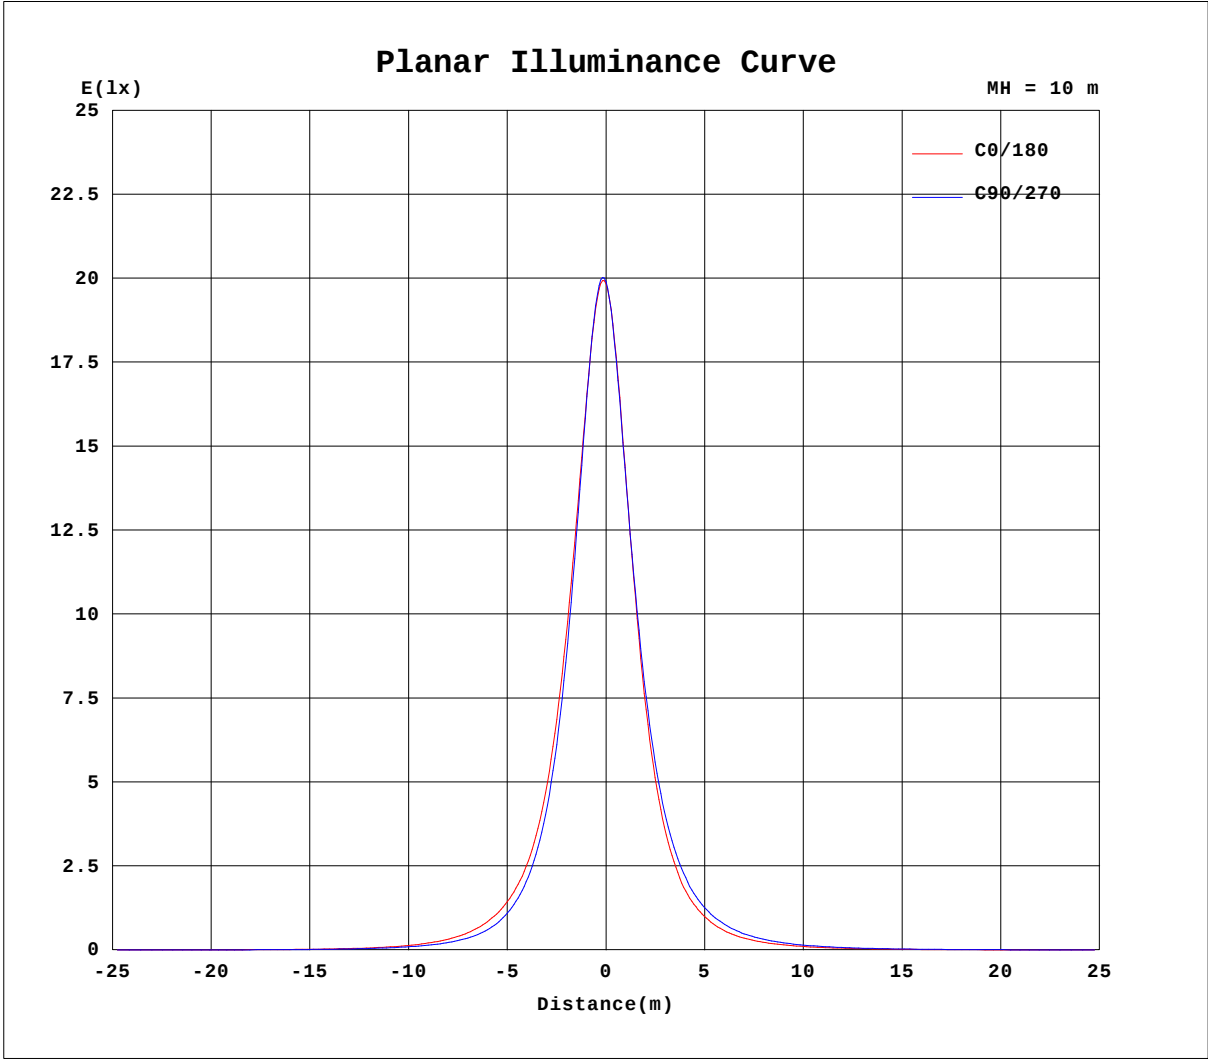


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-TW-2200K-20D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:20 DEG	DIM.:600MM	SERIAL No.:IES003003
MFR.:	SUR.:1	Shielding Angle:

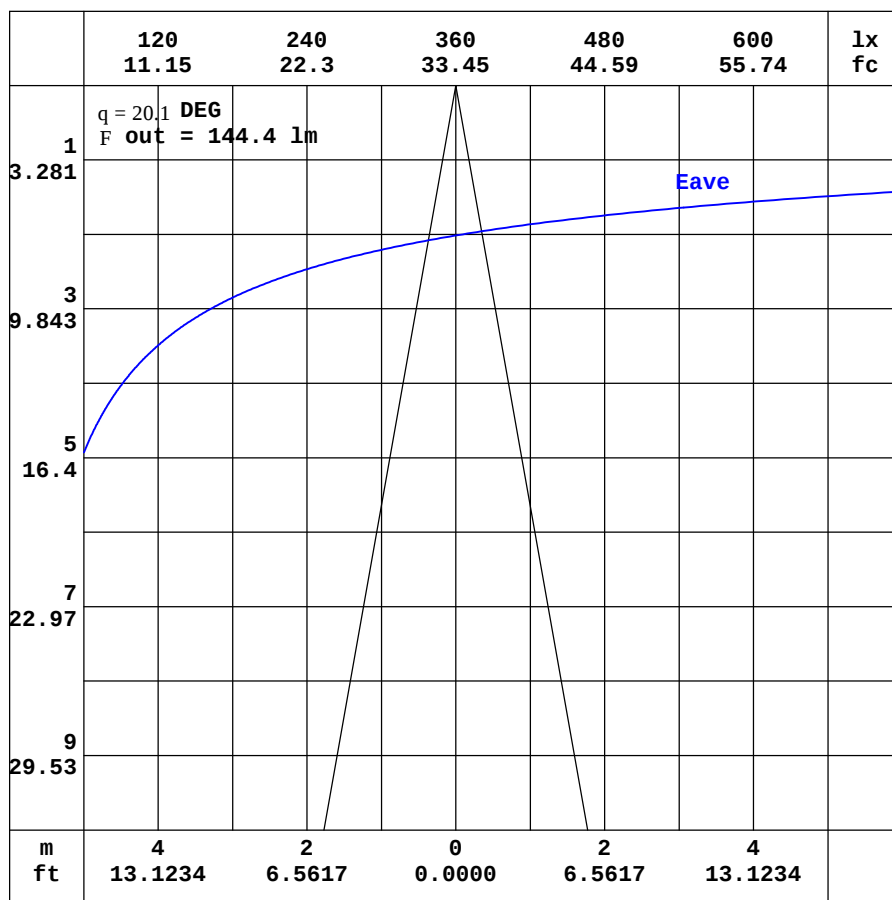

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-TW-2200K-20D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:20 DEG	DIM.:600MM	SERIAL No.:IES003003
MFR.:	SUR.:1	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.85	1.69	1.58	1.59	1.64	1.79	2.05	2.44	2.93	3.41	3.79	4.00	4.02	4.02	4.01	3.95	3.88	3.81	3.94
-170	1.85	1.67	1.55	1.54	1.56	1.66	1.85	2.13	2.49	2.85	3.13	3.30	3.37	3.42	3.49	3.54	3.54	3.66	3.74
-160	1.85	1.66	1.52	1.49	1.49	1.53	1.63	1.79	1.99	2.20	2.38	2.50	2.57	2.60	2.65	2.87	3.08	3.22	3.27
-150	1.85	1.66	1.51	1.45	1.41	1.40	1.42	1.47	1.53	1.59	1.64	1.65	1.62	1.65	1.88	2.07	2.22	2.31	2.32
-140	1.85	1.65	1.51	1.41	1.36	1.31	1.27	1.23	1.20	1.15	1.07	0.96	0.96	1.07	1.19	1.29	1.36	1.40	1.39
-130	1.85	1.65	1.50	1.38	1.31	1.24	1.18	1.10	1.01	0.91	0.80	0.72	0.73	0.74	0.75	0.77	0.79	0.79	0.78
-120	1.85	1.67	1.51	1.39	1.28	1.20	1.12	1.04	0.95	0.85	0.74	0.73	0.73	0.72	0.71	0.70	0.69	0.69	0.68
-110	1.85	1.68	1.53	1.40	1.29	1.18	1.09	1.00	0.92	0.84	0.80	0.80	0.80	0.80	0.80	0.81	0.81	0.82	0.82
-100	1.85	1.70	1.56	1.43	1.30	1.19	1.09	0.99	0.90	0.81	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80
-90	1.85	1.72	1.59	1.46	1.33	1.20	1.07	0.94	0.81	0.68	0.67	0.67	0.66	0.66	0.65	0.64	0.64	0.63	0.63
-80	1.85	1.75	1.64	1.52	1.44	1.34	1.17	0.99	0.82	0.67	0.70	0.74	0.79	0.84	0.88	0.92	0.95	0.97	0.98
-70	1.85	1.78	1.77	1.72	1.63	1.60	1.58	1.61	1.67	1.71	1.91	2.19	2.47	2.72	2.94	3.13	3.27	3.36	3.39
-60	1.85	1.82	1.92	1.92	2.04	2.27	2.56	2.93	3.36	3.80	4.30	5.06	5.81	6.53	7.17	7.73	8.15	8.42	8.52
-50	1.85	1.91	2.02	2.25	2.65	3.21	3.96	4.82	5.84	6.98	8.24	9.79	11.6	13.4	15.1	16.6	17.9	18.7	18.9
-40	1.85	2.06	2.20	2.65	3.34	4.37	5.61	7.18	9.07	11.4	14.2	17.4	21.3	25.9	30.7	35.4	39.1	41.6	42.2
-30	1.85	2.14	2.39	3.05	4.10	5.54	7.42	9.81	13.0	16.9	22.2	29.1	38.7	51.0	65.1	80.1	93.7	104	106
-20	1.85	2.17	2.55	3.42	4.80	6.63	9.07	12.4	16.9	23.0	31.8	45.0	64.5	93.7	137	191	252	303	322
-10	1.85	2.20	2.69	3.70	5.31	7.48	10.4	14.5	20.1	28.1	40.3	59.5	91.0	145	237	402	669	948	1084
0	1.85	2.23	2.79	3.88	5.61	7.96	11.1	15.5	21.7	30.5	43.7	64.6	100	163	279	497	909	1529	1983
10	1.85	2.23	2.77	3.83	5.50	7.75	10.8	15.0	20.6	28.6	40.3	58.3	86.9	134	211	341	539	796	940
20	1.85	2.23	2.70	3.66	5.16	7.15	9.79	13.3	18.0	24.1	32.6	44.6	61.4	85.0	117	167	230	291	328
30	1.85	2.23	2.59	3.39	4.60	6.25	8.39	11.1	14.5	18.7	24.0	30.6	38.9	50.2	65.9	84.2	104	121	132
40	1.85	2.17	2.45	3.06	3.96	5.22	6.74	8.66	10.9	13.6	16.7	20.1	24.6	30.4	37.0	44.1	50.9	56.7	60.8
50	1.85	2.03	2.31	2.72	3.34	4.14	5.17	6.36	7.76	9.31	11.0	13.0	15.5	18.1	20.9	23.7	26.3	28.5	30.1
60	1.85	1.96	2.23	2.43	2.76	3.22	3.78	4.44	5.18	5.97	6.83	7.92	9.06	10.2	11.3	12.4	13.4	14.2	14.7
70	1.85	1.93	2.08	2.23	2.35	2.54	2.76	3.03	3.34	3.68	4.05	4.46	4.89	5.31	5.72	6.08	6.40	6.65	6.82
80	1.85	1.90	1.95	2.00	2.10	2.20	2.23	2.27	2.33	2.39	2.47	2.55	2.64	2.73	2.81	2.89	2.95	3.01	3.04
90	1.85	1.86	1.88	1.89	1.90	1.92	1.93	1.95	1.96	1.97	1.97	1.97	1.97	1.97	1.97	1.96	1.96	1.96	1.96
100	1.85	1.83	1.81	1.79	1.77	1.76	1.74	1.73	1.72	1.70	1.68	1.66	1.64	1.63	1.62	1.61	1.60	1.60	1.59
110	1.85	1.80	1.75	1.71	1.67	1.64	1.61	1.59	1.57	1.56	1.55	1.55	1.54	1.54	1.55	1.55	1.55	1.55	1.55
120	1.85	1.77	1.70	1.65	1.60	1.58	1.57	1.56	1.56	1.55	1.56	1.60	1.65	1.70	1.74	1.79	1.81	1.83	1.83
130	1.85	1.75	1.66	1.60	1.58	1.57	1.58	1.59	1.64	1.74	1.84	1.99	2.14	2.30	2.45	2.57	2.66	2.71	2.72
140	1.85	1.73	1.63	1.58	1.58	1.59	1.63	1.74	1.90	2.12	2.38	2.67	2.97	3.23	3.43	3.58	3.69	3.74	3.75
150	1.85	1.71	1.60	1.58	1.58	1.63	1.75	1.96	2.25	2.61	3.01	3.37	3.68	3.90	4.06	4.18	4.26	4.31	4.34
160	1.85	1.70	1.59	1.58	1.61	1.70	1.88	2.18	2.59	3.05	3.47	3.80	4.03	4.19	4.31	4.41	4.50	4.60	4.69
170	1.85	1.69	1.58	1.58	1.62	1.75	1.99	2.36	2.83	3.32	3.72	3.98	4.10	4.17	4.23	4.28	4.27	4.29	4.45
180	1.85	1.69	1.58	1.59	1.64	1.79	2.05	2.44	2.93	3.41	3.79	4.00	4.02	4.02	4.01	3.95	3.88	3.81	3.95

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:

Test Date:2024-09-29

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-TW-2200K-20D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:20 DEG	DIM.:600MM	SERIAL No.:IES003003
MFR.:	SUR.:1	Shielding Angle:

Table--2

UNIT: cd

H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	3.55	3.37	3.10	2.76	2.38	1.99	1.59	1.22	0.90	0.71	0.68	0.70	0.76	0.79	0.78	0.75	0.66	0.55
-170	3.62	3.45	3.15	2.78	2.37	1.94	1.54	1.17	0.87	0.70	0.67	0.70	0.76	0.79	0.78	0.75	0.66	0.55
-160	3.17	2.99	2.73	2.40	2.02	1.64	1.29	0.98	0.78	0.68	0.67	0.70	0.77	0.79	0.78	0.75	0.65	0.55
-150	2.27	2.13	1.94	1.70	1.44	1.19	0.96	0.79	0.68	0.66	0.68	0.73	0.78	0.79	0.78	0.74	0.64	0.55
-140	1.36	1.28	1.18	1.05	0.92	0.80	0.71	0.67	0.66	0.67	0.72	0.77	0.79	0.79	0.78	0.73	0.63	0.55
-130	0.77	0.74	0.71	0.69	0.67	0.66	0.65	0.65	0.68	0.72	0.77	0.79	0.79	0.79	0.76	0.71	0.62	0.55
-120	0.68	0.68	0.68	0.68	0.69	0.71	0.72	0.74	0.77	0.78	0.79	0.80	0.79	0.77	0.74	0.68	0.60	0.55
-110	0.81	0.81	0.81	0.80	0.80	0.80	0.80	0.81	0.81	0.80	0.80	0.79	0.77	0.74	0.69	0.64	0.59	0.55
-100	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.81	0.80	0.78	0.76	0.73	0.70	0.67	0.63	0.60	0.57	0.55
-90	0.63	0.63	0.63	0.63	0.63	0.63	0.63	0.63	0.64	0.63	0.62	0.61	0.60	0.59	0.58	0.57	0.56	0.55
-80	0.96	0.94	0.90	0.86	0.81	0.76	0.71	0.65	0.61	0.58	0.57	0.56	0.56	0.56	0.55	0.55	0.55	0.55
-70	3.32	3.20	3.03	2.81	2.57	2.31	2.03	1.76	1.49	1.26	1.05	0.87	0.72	0.62	0.57	0.55	0.54	0.55
-60	8.31	7.94	7.44	6.83	6.13	5.38	4.63	3.89	3.29	2.72	2.16	1.64	1.22	0.89	0.67	0.56	0.54	0.55
-50	18.4	17.4	16.0	14.3	12.5	10.6	8.84	7.38	6.14	4.93	3.80	2.83	1.98	1.32	0.87	0.61	0.55	0.55
-40	40.9	37.9	33.8	29.1	24.2	19.7	16.0	13.2	10.5	8.01	6.00	4.27	2.94	1.86	1.13	0.69	0.55	0.55
-30	101	89.9	75.2	59.9	46.3	36.9	29.2	22.5	16.8	12.2	8.65	5.98	3.94	2.45	1.39	0.78	0.55	0.55
-20	302	245	181	128	94.4	68.9	50.1	35.8	25.1	17.3	11.7	7.66	4.89	2.98	1.62	0.86	0.56	0.55
-10	977	701	439	270	173	113	75.4	50.6	33.7	22.1	14.3	9.04	5.64	3.36	1.79	0.92	0.56	0.55
0	1736	1144	673	386	232	147	93.8	60.8	39.2	25.1	15.8	9.77	5.98	3.51	1.86	0.95	0.56	0.55
10	852	659	472	322	219	147	96.4	63.4	41.2	26.3	16.6	10.2	6.26	3.69	1.96	1.01	0.60	0.55
20	332	307	269	224	166	118	81.5	55.3	36.8	24.0	15.4	9.70	6.00	3.58	1.94	1.03	0.63	0.55
30	142	143	136	122	104	80.4	58.6	41.5	28.7	19.4	12.8	8.37	5.31	3.23	1.83	1.02	0.65	0.55
40	65.1	66.4	64.8	60.3	54.0	46.4	37.0	27.4	19.8	14.0	9.72	6.58	4.37	2.73	1.65	0.99	0.67	0.55
50	31.3	31.6	30.9	29.2	26.7	23.6	20.3	16.3	12.4	9.25	6.79	4.85	3.33	2.21	1.44	0.95	0.69	0.55
60	15.0	14.9	14.4	13.7	12.8	11.6	10.3	8.97	7.31	5.78	4.44	3.31	2.45	1.77	1.26	0.92	0.70	0.55
70	6.82	6.74	6.57	6.32	5.98	5.58	5.16	4.70	4.14	3.45	2.84	2.30	1.83	1.46	1.14	0.90	0.71	0.55
80	3.05	3.03	3.00	2.96	2.90	2.84	2.77	2.69	2.61	2.31	2.03	1.77	1.52	1.30	1.09	0.89	0.71	0.55
90	1.97	1.98	1.99	2.00	2.02	2.03	2.04	2.05	2.06	1.89	1.72	1.55	1.39	1.22	1.05	0.88	0.71	0.55
100	1.60	1.61	1.62	1.64	1.65	1.67	1.70	1.72	1.74	1.64	1.54	1.42	1.30	1.17	1.03	0.88	0.72	0.55
110	1.55	1.55	1.55	1.55	1.55	1.55	1.56	1.57	1.55	1.48	1.41	1.33	1.24	1.14	1.02	0.88	0.72	0.55
120	1.82	1.79	1.75	1.70	1.65	1.61	1.57	1.56	1.48	1.40	1.33	1.25	1.19	1.10	1.01	0.88	0.72	0.55
130	2.68	2.60	2.49	2.34	2.19	2.02	1.87	1.68	1.48	1.35	1.27	1.19	1.13	1.07	0.99	0.87	0.72	0.55
140	3.71	3.62	3.48	3.29	3.05	2.77	2.37	1.93	1.59	1.36	1.21	1.14	1.07	1.02	0.96	0.86	0.71	0.55
150	4.29	4.21	4.09	3.93	3.73	3.25	2.67	2.13	1.67	1.35	1.15	1.05	1.01	0.96	0.92	0.84	0.70	0.55
160	4.62	4.53	4.41	4.18	3.67	3.15	2.62	2.07	1.60	1.25	1.05	0.96	0.94	0.91	0.87	0.82	0.69	0.55
170	4.44	4.45	4.06	3.64	3.18	2.71	2.23	1.76	1.33	1.03	0.89	0.84	0.85	0.85	0.83	0.78	0.68	0.55
180	3.55	3.37	3.10	2.76	2.38	1.99	1.59	1.22	0.90	0.71	0.68	0.70	0.76	0.79	0.78	0.75	0.66	0.55

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:

Test Date:2024-09-29

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: