

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		3393.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	52.7V x 53.0H
	At 50% of Imax	23.5V x 23.7H
	At 90% of Imax	9.9V x 9.8H
Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	719.9 lumens per klm.
	To 50% of Imax	329.2 lumens per klm.
	To 90% of Imax	75.1 lumens per klm.
Upward LOR		2.3 %
Downward LOR		97.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-TW-4000K-20D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:20 DEG	DIM.:600MM	SERIAL No.:IES003004
MFR.:	SUR.:1	Shielding Angle:

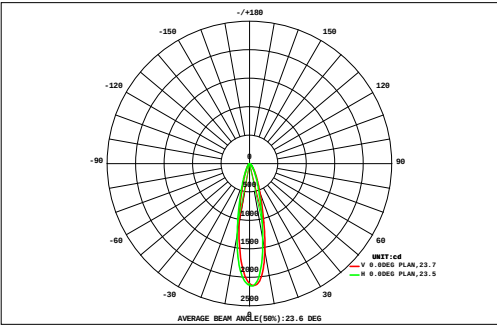

DATA OF LAMP		Eff:71.20lm/W	
MODEL		Imax(cd)	2150
NOMINAL POWER(W)	8.9	AVAILABILITY(%)	71.9
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	455.9
NOMINAL FLUX(lm)	633.7	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	633.7
TEST VOLTAGE(V)	24	q @50%(H,V)	24, 24DEG

AREA FLUX DIAGRAM																UNIT:lm			F t	F a	
VERTICAL (DEG)	45	0.11	0.15	0.20	0.26	0.32	0.38	0.44	0.49	0.52	0.52	0.49	0.44	0.38	0.32	0.26	0.20	0.15	0.11	5.75	0.00
	40	0.14	0.19	0.26	0.34	0.43	0.53	0.63	0.71	0.76	0.76	0.71	0.62	0.53	0.43	0.34	0.26	0.20	0.14	7.96	0.00
	35	0.16	0.23	0.32	0.44	0.58	0.74	0.90	1.04	1.13	1.13	1.03	0.89	0.73	0.58	0.44	0.33	0.25	0.17	11.1	0.00
	30	0.18	0.27	0.39	0.57	0.78	1.04	1.31	1.55	1.72	1.72	1.54	1.29	1.02	0.77	0.58	0.43	0.31	0.21	15.7	3.57
	25	0.21	0.31	0.47	0.70	1.03	1.44	1.90	2.36	2.70	2.70	2.37	1.89	1.42	1.05	0.77	0.55	0.38	0.25	22.5	14.4
	20	0.23	0.35	0.54	0.83	1.28	1.93	2.75	3.65	4.37	4.42	3.74	2.80	1.99	1.43	1.01	0.68	0.45	0.29	32.7	26.1
	15	0.24	0.37	0.59	0.94	1.52	2.46	3.90	5.74	7.42	7.63	6.13	4.24	2.86	1.91	1.27	0.83	0.53	0.33	48.9	43.3
	10	0.24	0.38	0.61	1.00	1.69	2.95	5.18	8.52	11.8	12.4	9.72	6.42	3.91	2.42	1.53	0.96	0.59	0.36	70.7	65.6
	5	0.24	0.37	0.59	0.98	1.71	3.16	5.98	10.5	14.7	15.7	13.0	8.50	4.84	2.83	1.73	1.06	0.64	0.38	86.9	82.0
	0	0.23	0.35	0.56	0.92	1.62	3.05	5.92	10.5	14.6	15.5	13.2	8.68	4.95	2.89	1.76	1.07	0.64	0.38	86.8	82.0
	-5	0.21	0.32	0.51	0.83	1.42	2.62	4.88	8.43	11.5	12.1	10.2	6.92	4.21	2.58	1.60	0.99	0.60	0.36	70.3	65.2
	-10	0.19	0.29	0.44	0.69	1.12	1.92	3.29	5.23	6.87	7.33	6.45	4.81	3.24	2.11	1.36	0.87	0.54	0.33	47.1	41.5
	-15	0.17	0.24	0.36	0.54	0.82	1.27	2.02	2.94	3.67	3.96	3.72	3.08	2.33	1.61	1.09	0.72	0.46	0.29	29.3	22.8
	-20	0.14	0.20	0.28	0.40	0.57	0.85	1.23	1.66	1.99	2.17	2.15	1.91	1.55	1.18	0.84	0.58	0.38	0.25	18.3	9.49
	-25	0.12	0.16	0.22	0.29	0.40	0.57	0.77	0.98	1.13	1.24	1.27	1.18	1.02	0.83	0.63	0.45	0.31	0.20	11.8	0.00
	-30	0.10	0.13	0.16	0.21	0.29	0.39	0.50	0.60	0.68	0.74	0.78	0.75	0.67	0.57	0.46	0.34	0.24	0.16	7.77	0.00
-35	0.08	0.10	0.12	0.16	0.21	0.27	0.33	0.39	0.43	0.47	0.49	0.48	0.45	0.39	0.32	0.25	0.18	0.13	5.28	0.00	
-40	0.06	0.08	0.10	0.12	0.16	0.19	0.23	0.26	0.29	0.31	0.32	0.32	0.30	0.27	0.23	0.18	0.14	0.10	3.65	0.00	
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG)				10	15	20	25	30	35	40	45	
F t	3.04	4.49	6.70	10.2	16.0	25.8	42.2	65.5	86.3	90.8	77.3	55.2	36.4	24.2	16.2	10.8	7.00	4.47	582	---	
F a	0.00	0.00	0.00	0.00	5.09	18.4	35.6	59.4	80.4	85.0	71.3	48.9	29.4	16.2	6.13	0.00	0.00	0.00	---	456	


one-half-peak spread: U:12.5,D:11.2 , L:12.1,R:11.8 NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-TW-4000K-20D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:20 DEG	DIM.:600MM	SERIAL No.:IES003004
MFR.:	SUR.:1	Shielding Angle:

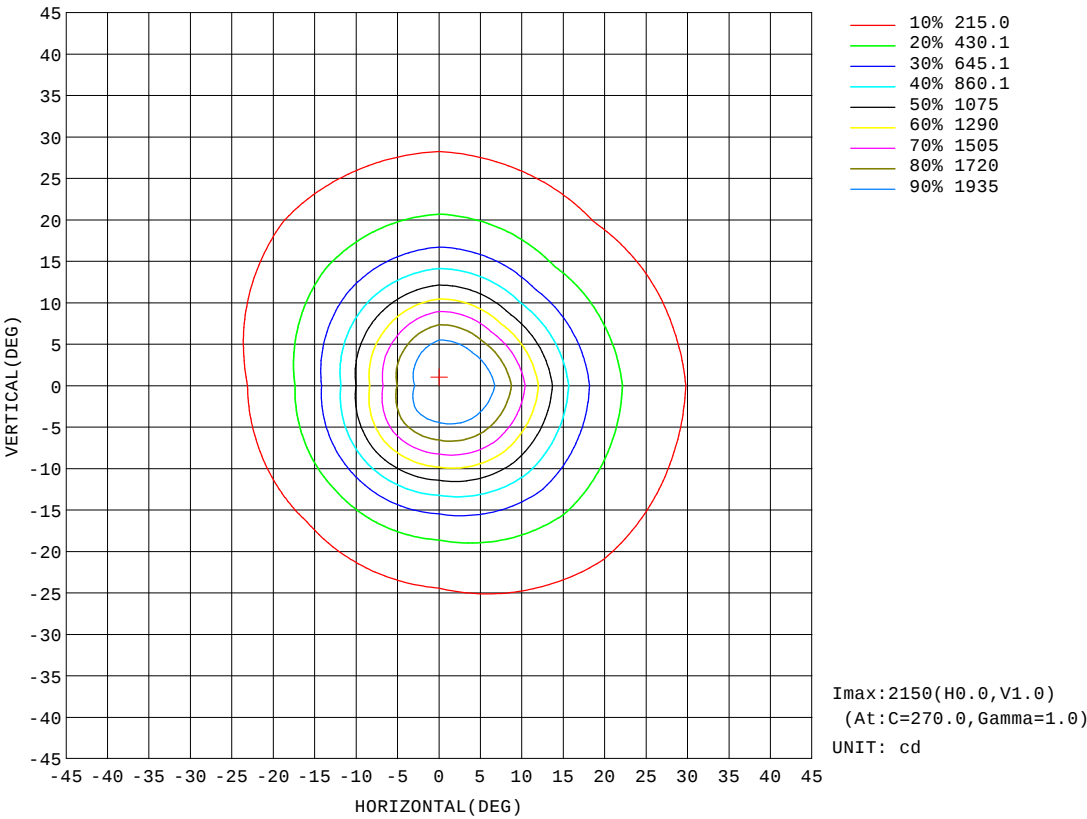


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-TW-4000K-20D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:20 DEG	DIM.:600MM	SERIAL No.:IES003004
MFR.:	SUR.:1	Shielding Angle:

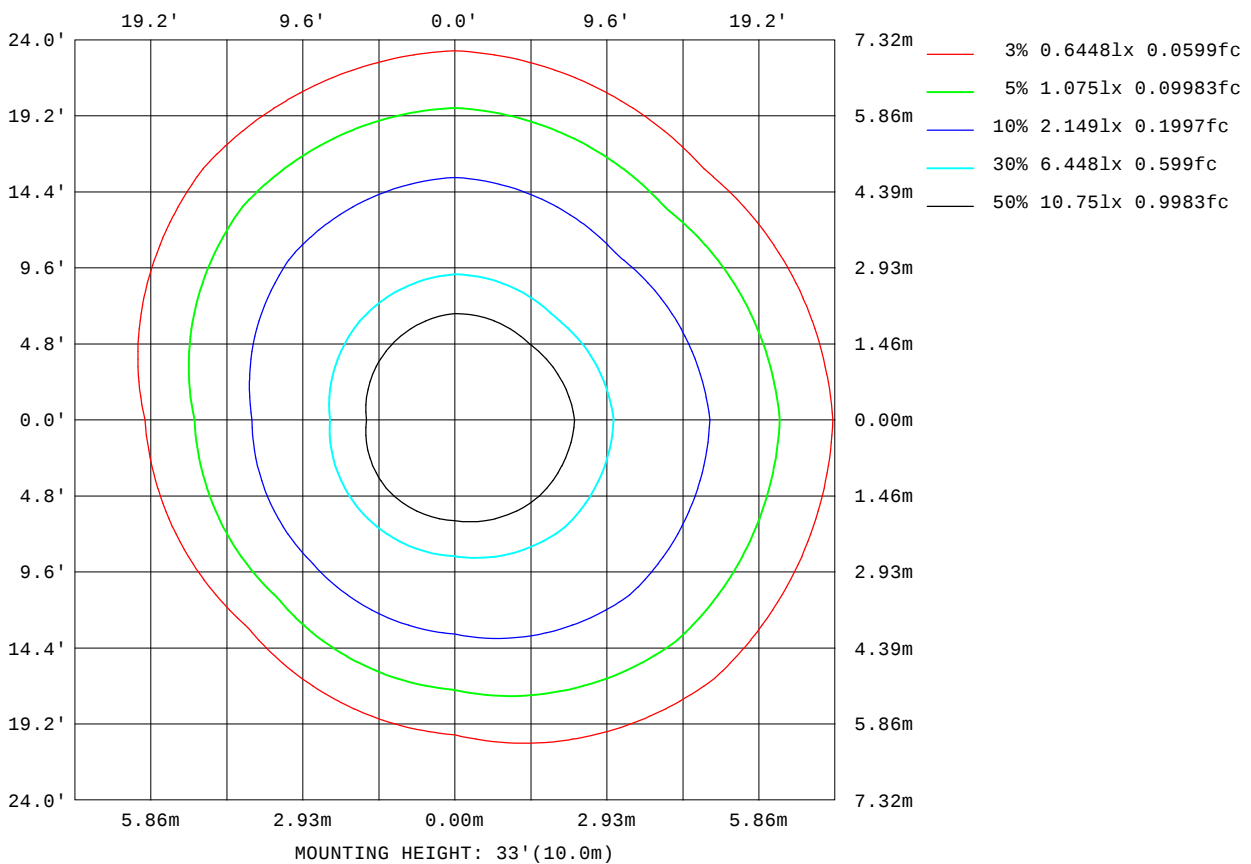

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

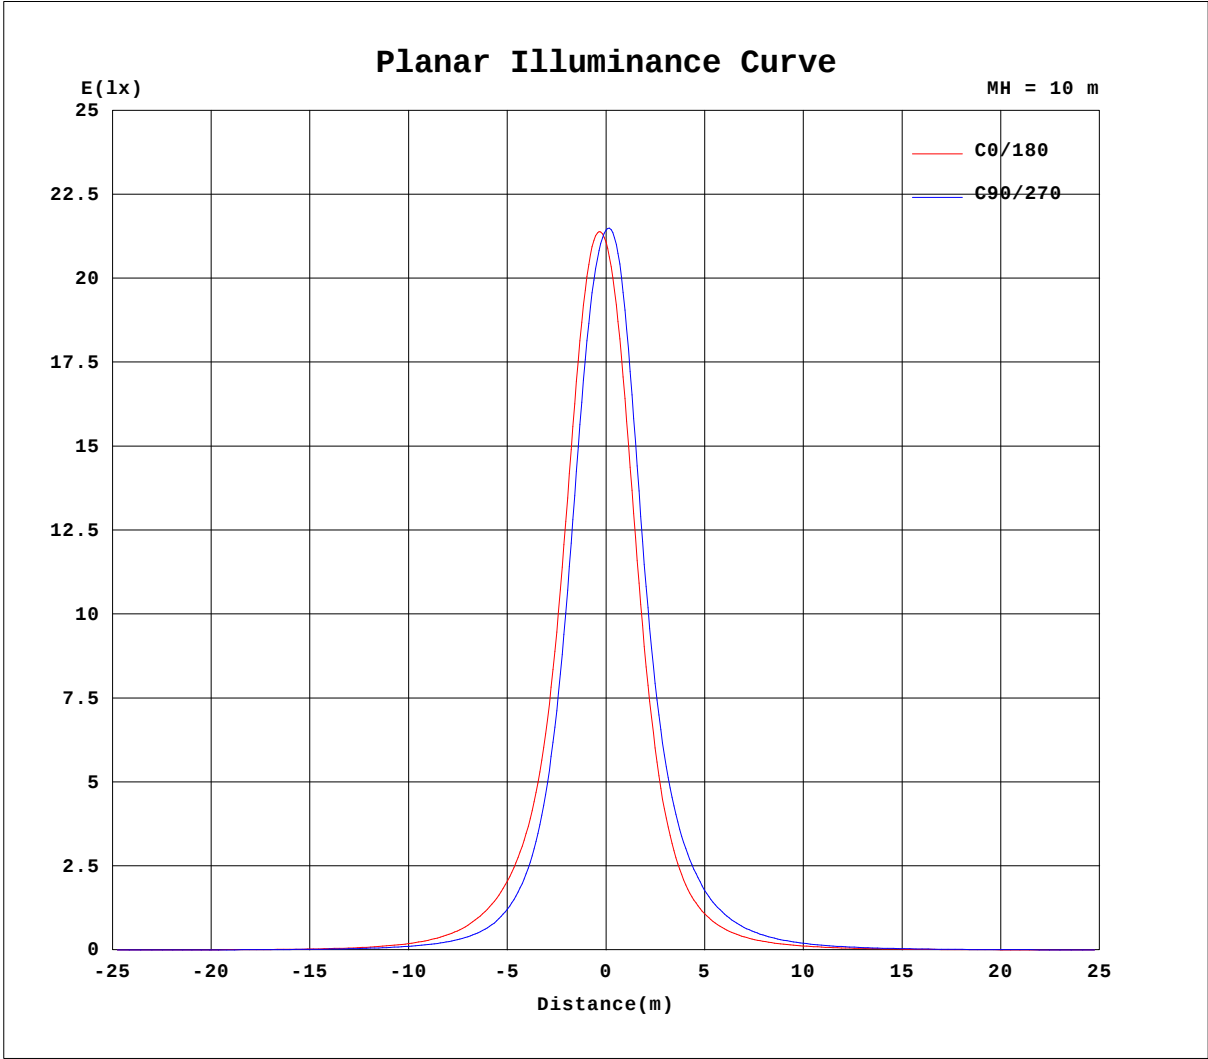


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-TW-4000K-20D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:20 DEG	DIM.:600MM	SERIAL No.:IES003004
MFR.:	SUR.:1	Shielding Angle:

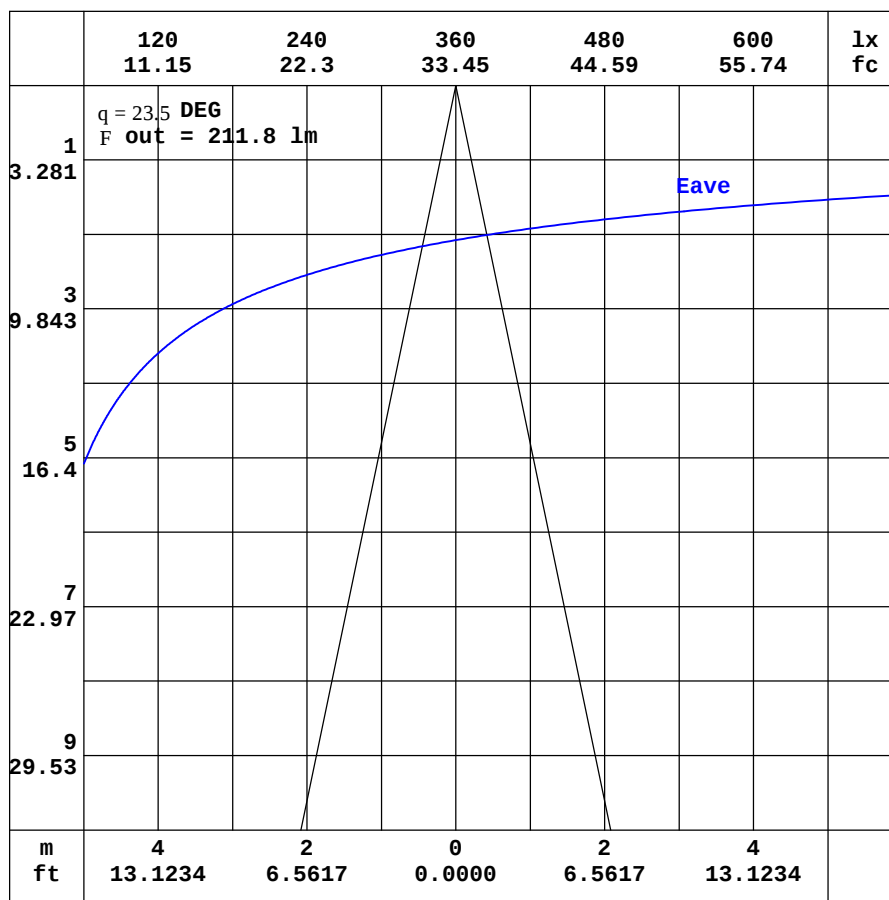

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-TW-4000K-20D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:20 DEG	DIM.:600MM	SERIAL No.:IES003004
MFR.:	SUR.:1	Shielding Angle:

Table--1																	UNIT: cd			
H(DEG)\ V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-180	2.30	2.10	2.00	2.00	2.07	2.27	2.62	3.14	3.75	4.34	4.79	5.04	5.08	5.07	5.03	4.94	4.80	4.67	4.89	
-170	2.30	2.09	1.96	1.94	1.97	2.10	2.35	2.72	3.17	3.61	3.95	4.17	4.27	4.33	4.39	4.42	4.37	4.46	4.60	
-160	2.30	2.08	1.92	1.88	1.87	1.92	2.05	2.25	2.51	2.77	2.99	3.14	3.24	3.30	3.37	3.64	3.88	4.03	4.08	
-150	2.30	2.07	1.90	1.82	1.78	1.75	1.77	1.83	1.90	1.97	2.02	2.04	2.01	2.08	2.38	2.64	2.83	2.94	2.97	
-140	2.30	2.06	1.88	1.78	1.70	1.63	1.57	1.50	1.45	1.37	1.27	1.12	1.13	1.31	1.47	1.62	1.73	1.80	1.81	
-130	2.30	2.07	1.88	1.74	1.65	1.56	1.45	1.34	1.21	1.06	0.90	0.80	0.83	0.86	0.90	0.95	0.99	1.01	1.02	
-120	2.30	2.07	1.89	1.74	1.61	1.51	1.41	1.29	1.16	1.01	0.86	0.84	0.83	0.83	0.84	0.84	0.85	0.85	0.86	
-110	2.30	2.09	1.91	1.75	1.62	1.49	1.37	1.27	1.16	1.04	0.99	1.00	0.99	0.99	0.99	0.99	1.00	1.01	1.02	
-100	2.30	2.11	1.94	1.78	1.64	1.50	1.37	1.25	1.14	1.02	1.01	1.01	1.01	1.01	1.01	1.02	1.02	1.03	1.03	
-90	2.30	2.14	1.98	1.83	1.67	1.51	1.36	1.20	1.04	0.89	0.88	0.87	0.86	0.86	0.85	0.84	0.83	0.82	0.82	
-80	2.30	2.17	2.04	1.90	1.81	1.69	1.47	1.27	1.05	0.86	0.89	0.94	1.00	1.05	1.10	1.15	1.19	1.22	1.25	
-70	2.30	2.21	2.22	2.15	2.03	1.99	1.96	1.94	1.96	1.95	2.14	2.47	2.79	3.10	3.40	3.66	3.88	4.04	4.15	
-60	2.30	2.26	2.38	2.39	2.53	2.75	3.06	3.38	3.75	4.07	4.46	5.28	6.12	6.96	7.79	8.57	9.24	9.78	10.1	
-50	2.30	2.38	2.51	2.79	3.23	3.84	4.62	5.42	6.30	7.20	8.07	9.28	11.1	13.1	15.2	17.2	19.1	20.7	21.7	
-40	2.30	2.58	2.73	3.25	4.07	5.19	6.47	7.97	9.66	11.5	13.4	15.5	18.6	23.3	28.6	34.2	39.6	44.1	47.1	
-30	2.30	2.65	2.98	3.75	4.94	6.53	8.49	10.9	13.7	17.1	21.2	26.3	32.7	41.8	56.1	73.1	91.1	107	117	
-20	2.30	2.69	3.18	4.22	5.82	7.86	10.4	13.9	18.2	23.8	31.4	42.3	58.0	80.9	115	172	247	323	364	
-10	2.30	2.72	3.35	4.58	6.46	8.87	12.2	16.6	22.4	30.5	42.2	60.3	89.7	140	232	410	713	1076	1269	
0	2.30	2.76	3.48	4.81	6.85	9.52	13.3	18.3	25.1	34.7	49.0	71.7	109	177	310	576	1078	1726	2108	
10	2.30	2.76	3.45	4.76	6.79	9.47	13.3	18.5	25.7	35.9	51.4	75.7	115	180	290	477	765	1116	1351	
20	2.30	2.76	3.37	4.57	6.45	8.96	12.3	17.1	23.6	32.5	45.5	64.9	93.4	136	195	267	346	419	459	
30	2.30	2.76	3.24	4.23	5.77	7.92	10.8	14.6	19.7	26.4	35.4	47.5	63.9	84.9	108	132	157	176	185	
40	2.30	2.72	3.06	3.81	5.00	6.68	8.78	11.5	15.0	19.4	25.0	31.7	39.4	47.8	56.9	66.0	74.1	80.2	83.5	
50	2.30	2.54	2.88	3.42	4.19	5.27	6.74	8.45	10.5	13.1	16.1	19.5	23.0	26.7	30.3	33.7	36.7	38.9	40.2	
60	2.30	2.44	2.77	3.03	3.49	4.07	4.87	5.80	6.95	8.18	9.57	11.0	12.6	14.0	15.5	16.8	17.9	18.6	19.1	
70	2.30	2.39	2.62	2.78	2.94	3.21	3.51	3.87	4.33	4.82	5.34	5.90	6.45	6.98	7.47	7.88	8.23	8.48	8.63	
80	2.30	2.35	2.42	2.49	2.64	2.76	2.80	2.87	2.95	3.05	3.15	3.26	3.38	3.48	3.58	3.67	3.75	3.81	3.85	
90	2.30	2.32	2.34	2.36	2.38	2.40	2.42	2.44	2.46	2.48	2.49	2.49	2.49	2.49	2.50	2.50	2.50	2.50	2.51	
100	2.30	2.28	2.26	2.24	2.23	2.21	2.20	2.19	2.18	2.16	2.14	2.12	2.10	2.09	2.07	2.06	2.05	2.04	2.04	
110	2.30	2.24	2.19	2.15	2.11	2.07	2.05	2.03	2.02	2.01	2.00	1.99	1.98	1.97	1.97	1.96	1.96	1.95	1.95	
120	2.30	2.21	2.13	2.07	2.03	2.01	2.00	2.00	2.01	2.01	2.04	2.08	2.13	2.17	2.22	2.25	2.26	2.26	2.25	
130	2.30	2.18	2.09	2.02	2.00	2.00	2.02	2.05	2.14	2.26	2.40	2.57	2.74	2.91	3.07	3.19	3.27	3.31	3.30	
140	2.30	2.16	2.05	2.00	2.00	2.03	2.10	2.25	2.46	2.73	3.06	3.40	3.71	4.00	4.23	4.40	4.53	4.58	4.59	
150	2.30	2.14	2.02	2.00	2.02	2.08	2.26	2.52	2.89	3.34	3.80	4.22	4.57	4.83	5.02	5.16	5.26	5.32	5.35	
160	2.30	2.13	2.00	2.00	2.03	2.16	2.42	2.81	3.32	3.86	4.37	4.76	5.02	5.21	5.34	5.45	5.56	5.66	5.76	
170	2.30	2.11	2.00	2.00	2.06	2.24	2.56	3.03	3.62	4.20	4.68	4.99	5.14	5.22	5.28	5.32	5.27	5.28	5.47	
180	2.30	2.10	2.00	2.00	2.07	2.27	2.62	3.14	3.75	4.34	4.79	5.04	5.08	5.07	5.03	4.94	4.80	4.67	4.89	

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-TW-4000K-20D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:20 DEG	DIM.:600MM	SERIAL No.:IES003004
MFR.:	SUR.:1	Shielding Angle:

Table--2																		UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	4.32	4.08	3.78	3.37	2.90	2.40	1.91	1.45	1.08	0.87	0.84	0.87	0.96	1.00	0.99	0.94	0.82	0.66	
-170	4.38	4.13	3.80	3.38	2.89	2.37	1.87	1.42	1.07	0.88	0.85	0.88	0.96	1.00	0.99	0.94	0.82	0.66	
-160	3.92	3.67	3.34	2.94	2.49	2.03	1.61	1.24	0.99	0.88	0.86	0.90	0.97	0.99	0.99	0.94	0.82	0.66	
-150	2.87	2.69	2.44	2.15	1.84	1.53	1.25	1.03	0.91	0.87	0.88	0.93	0.99	1.00	0.99	0.93	0.81	0.66	
-140	1.76	1.66	1.53	1.38	1.22	1.08	0.97	0.90	0.87	0.88	0.92	0.97	0.99	1.00	0.98	0.91	0.79	0.66	
-130	1.01	0.99	0.95	0.92	0.90	0.88	0.88	0.88	0.89	0.93	0.97	0.99	1.00	0.99	0.95	0.88	0.77	0.66	
-120	0.86	0.87	0.87	0.88	0.89	0.91	0.93	0.95	0.97	0.99	1.00	1.00	0.99	0.96	0.92	0.84	0.75	0.66	
-110	1.02	1.02	1.02	1.02	1.01	1.01	1.01	1.01	1.00	1.00	1.00	0.98	0.96	0.91	0.86	0.79	0.73	0.66	
-100	1.03	1.02	1.02	1.01	1.01	1.01	1.01	1.00	0.98	0.96	0.93	0.89	0.86	0.82	0.78	0.74	0.70	0.66	
-90	0.81	0.81	0.80	0.80	0.80	0.79	0.79	0.78	0.78	0.77	0.75	0.74	0.73	0.71	0.70	0.69	0.68	0.66	
-80	1.23	1.21	1.17	1.12	1.07	1.01	0.95	0.88	0.82	0.76	0.72	0.70	0.70	0.68	0.68	0.67	0.67	0.66	
-70	4.17	4.11	3.99	3.79	3.54	3.24	2.89	2.52	2.13	1.76	1.43	1.16	0.95	0.80	0.70	0.67	0.66	0.66	
-60	10.4	10.4	10.2	9.68	8.97	8.07	7.07	6.00	4.96	3.95	3.06	2.26	1.63	1.17	0.86	0.70	0.66	0.66	
-50	23.0	23.5	23.1	22.0	20.1	17.8	15.2	12.3	9.68	7.38	5.49	3.94	2.69	1.75	1.12	0.78	0.67	0.66	
-40	51.2	52.8	51.7	48.1	42.8	36.6	29.6	22.8	17.1	12.4	8.78	6.04	4.01	2.47	1.46	0.88	0.67	0.66	
-30	128	128	120	106	88.6	69.5	52.3	38.2	27.2	18.9	12.8	8.43	5.41	3.25	1.80	0.99	0.68	0.66	
-20	381	351	295	228	167	119	83.6	57.7	39.1	26.0	16.9	10.7	6.65	3.93	2.11	1.09	0.69	0.66	
-10	1219	950	632	410	268	178	116	76.5	49.8	31.9	20.1	12.5	7.54	4.42	2.32	1.17	0.69	0.66	
0	2064	1560	927	532	329	211	135	85.9	54.7	34.5	21.4	13.1	7.87	4.60	2.38	1.20	0.69	0.66	
10	1199	848	569	374	252	170	113	75.5	49.8	32.4	20.7	13.0	7.92	4.69	2.49	1.27	0.74	0.66	
20	423	350	266	198	151	111	80.5	57.1	39.7	27.1	18.1	11.7	7.40	4.45	2.44	1.28	0.77	0.66	
30	175	156	131	106	83.7	66.4	51.8	39.2	28.9	20.8	14.5	9.81	6.44	3.95	2.27	1.26	0.80	0.66	
40	80.1	73.9	65.9	56.9	47.8	39.3	32.1	25.6	19.8	14.9	10.9	7.68	5.22	3.32	2.03	1.22	0.82	0.66	
50	38.9	36.7	33.7	30.2	26.6	22.9	19.4	16.1	12.9	10.1	7.72	5.67	3.98	2.69	1.77	1.17	0.84	0.66	
60	18.6	17.9	16.8	15.5	14.1	12.6	11.1	9.67	8.08	6.56	5.16	3.94	2.94	2.15	1.54	1.12	0.85	0.66	
70	8.50	8.26	7.93	7.52	7.05	6.54	6.01	5.46	4.82	4.06	3.38	2.76	2.22	1.77	1.39	1.10	0.86	0.66	
80	3.82	3.78	3.72	3.64	3.56	3.46	3.35	3.25	3.13	2.79	2.45	2.15	1.86	1.59	1.33	1.09	0.87	0.66	
90	2.51	2.51	2.52	2.52	2.53	2.53	2.53	2.54	2.54	2.33	2.12	1.92	1.71	1.50	1.29	1.08	0.87	0.66	
100	2.04	2.05	2.06	2.07	2.09	2.11	2.13	2.15	2.17	2.05	1.92	1.78	1.63	1.46	1.29	1.09	0.89	0.66	
110	1.94	1.93	1.93	1.92	1.92	1.92	1.92	1.93	1.92	1.83	1.75	1.65	1.55	1.43	1.28	1.10	0.89	0.66	
120	2.22	2.18	2.13	2.07	2.01	1.95	1.90	1.89	1.81	1.72	1.63	1.56	1.48	1.38	1.26	1.10	0.90	0.66	
130	3.24	3.14	3.00	2.82	2.62	2.42	2.23	2.01	1.79	1.64	1.56	1.47	1.40	1.33	1.23	1.09	0.90	0.66	
140	4.54	4.43	4.25	4.00	3.69	3.32	2.83	2.31	1.90	1.64	1.48	1.40	1.33	1.27	1.20	1.07	0.90	0.66	
150	5.31	5.23	5.10	4.91	4.63	4.00	3.24	2.56	2.00	1.63	1.40	1.30	1.26	1.21	1.15	1.05	0.89	0.66	
160	5.72	5.64	5.53	5.27	4.61	3.92	3.21	2.51	1.93	1.52	1.28	1.18	1.16	1.14	1.10	1.02	0.87	0.66	
170	5.51	5.57	5.08	4.53	3.95	3.35	2.73	2.13	1.61	1.25	1.09	1.04	1.06	1.07	1.05	0.98	0.85	0.66	
180	4.32	4.08	3.78	3.37	2.90	2.40	1.91	1.45	1.08	0.87	0.84	0.87	0.96	1.00	0.99	0.94	0.82	0.66	

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: