

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2484.5 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	63.2V x 62.6H
	At 50% of Imax	29.1V x 28.8H
	At 90% of Imax	10.5V x 10.5H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	771.2 lumens per klm.
	To 50% of Imax	352.4 lumens per klm.
	To 90% of Imax	58.3 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-TW-2200K-30D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES003002
MFR.:	SUR.:1	Shielding Angle:

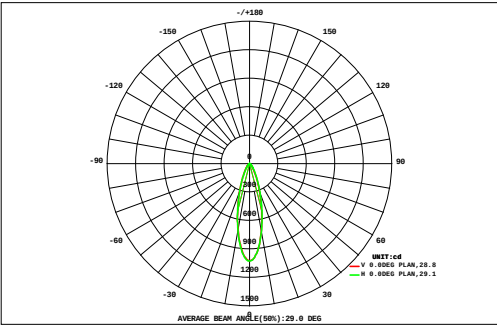

DATA OF LAMP		Eff:46.99lm/W	
MODEL		Imax(cd)	1028
NOMINAL POWER(W)	8.9	AVAILABILITY(%)	77.0
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	318.5
NOMINAL FLUX(lm)	413.8	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	413.8
TEST VOLTAGE(V)	24	q @50%(H,V)	29,29DEG


		AREA FLUX DIAGRAM																UNIT:lm			F t	F a
VERTICAL (DEG)	45	0.07	0.10	0.12	0.16	0.20	0.24	0.28	0.31	0.34	0.35	0.34	0.31	0.28	0.24	0.20	0.16	0.11	0.08	3.89	0.00	
	40	0.09	0.12	0.16	0.21	0.27	0.33	0.40	0.46	0.50	0.51	0.49	0.45	0.40	0.33	0.27	0.21	0.15	0.10	5.45	0.00	
	35	0.11	0.16	0.21	0.27	0.37	0.47	0.59	0.69	0.76	0.78	0.74	0.66	0.56	0.46	0.36	0.26	0.18	0.12	7.74	1.26	
	30	0.14	0.19	0.27	0.36	0.50	0.67	0.87	1.06	1.19	1.22	1.15	1.00	0.81	0.63	0.46	0.32	0.22	0.14	11.2	7.21	
	25	0.16	0.23	0.34	0.48	0.68	0.96	1.31	1.65	1.91	1.96	1.79	1.50	1.17	0.85	0.58	0.39	0.25	0.16	16.4	13.2	
	20	0.19	0.28	0.42	0.62	0.93	1.36	1.93	2.55	3.01	3.09	2.77	2.22	1.64	1.11	0.71	0.45	0.29	0.18	23.7	21.2	
	15	0.21	0.32	0.50	0.78	1.22	1.87	2.71	3.69	4.47	4.57	3.99	3.09	2.14	1.38	0.85	0.51	0.31	0.19	32.8	30.6	
	10	0.23	0.36	0.57	0.92	1.50	2.40	3.59	4.94	6.07	6.15	5.22	3.90	2.60	1.62	0.96	0.56	0.33	0.19	42.1	40.0	
	5	0.24	0.38	0.61	1.01	1.69	2.77	4.25	5.95	7.26	7.26	6.09	4.41	2.86	1.73	1.00	0.57	0.33	0.19	48.6	46.6	
	0	0.24	0.38	0.62	1.04	1.74	2.87	4.42	6.18	7.40	7.32	6.04	4.32	2.79	1.68	0.97	0.55	0.31	0.18	49.1	47.1	
	-5	0.23	0.37	0.61	1.00	1.65	2.68	4.06	5.51	6.26	6.05	4.99	3.63	2.39	1.46	0.86	0.50	0.29	0.17	42.7	40.7	
	-10	0.22	0.35	0.55	0.89	1.43	2.25	3.27	4.13	4.55	4.38	3.66	2.69	1.82	1.15	0.70	0.42	0.25	0.15	32.9	30.6	
	-15	0.20	0.30	0.48	0.75	1.15	1.71	2.31	2.79	3.00	2.88	2.46	1.84	1.26	0.84	0.54	0.34	0.21	0.13	23.2	20.7	
	-20	0.17	0.26	0.39	0.60	0.88	1.20	1.51	1.77	1.87	1.79	1.55	1.20	0.86	0.59	0.40	0.26	0.17	0.11	15.6	12.5	
	-25	0.14	0.21	0.31	0.45	0.63	0.80	0.97	1.09	1.13	1.08	0.95	0.77	0.58	0.41	0.29	0.20	0.13	0.09	10.2	6.21	
	-30	0.12	0.17	0.24	0.33	0.43	0.53	0.62	0.67	0.69	0.66	0.59	0.49	0.38	0.28	0.20	0.14	0.10	0.07	6.71	0.45	
-35	0.09	0.13	0.18	0.23	0.29	0.35	0.39	0.42	0.43	0.41	0.37	0.32	0.26	0.20	0.15	0.11	0.08	0.05	4.44	0.00		
-40	0.07	0.10	0.13	0.16	0.20	0.23	0.25	0.27	0.27	0.26	0.24	0.21	0.17	0.14	0.11	0.08	0.06	0.04	2.98	0.00		
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG)				10	15	20	25	30	35	40	45		
F t	2.91	4.41	6.70	10.3	15.7	23.7	33.7	44.1	51.1	50.7	43.4	33.0	23.0	15.1	9.61	6.02	3.77	2.34	380	---		
F a	0.00	0.00	0.86	6.23	12.4	20.8	31.1	41.6	48.6	48.2	40.9	30.3	20.0	11.8	5.44	0.31	0.00	0.00	---	318		

one-half-peak spread: U:13.9,D:15.5 , L:14.4,R:14.7 NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29
V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-TW-2200K-30D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES003002
MFR.:	SUR.:1	Shielding Angle:

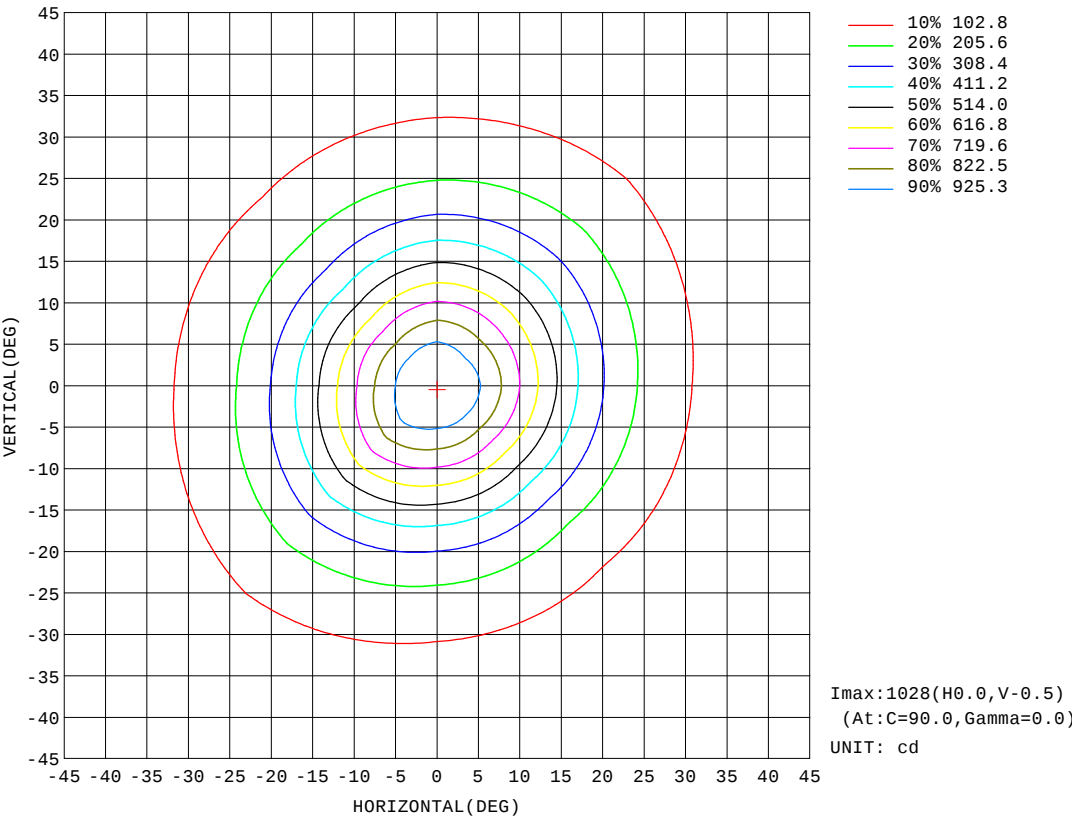


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-TW-2200K-30D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES003002
MFR.:	SUR.:1	Shielding Angle:

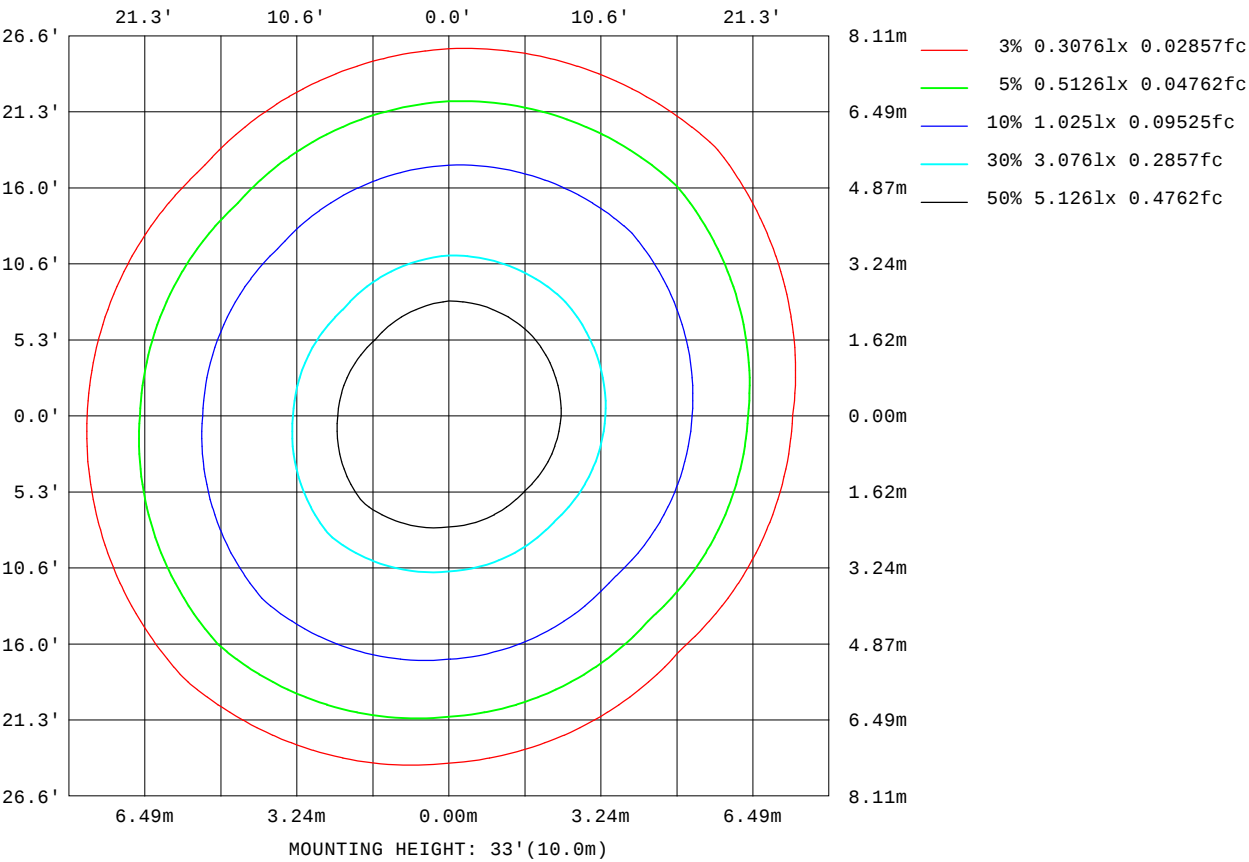

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

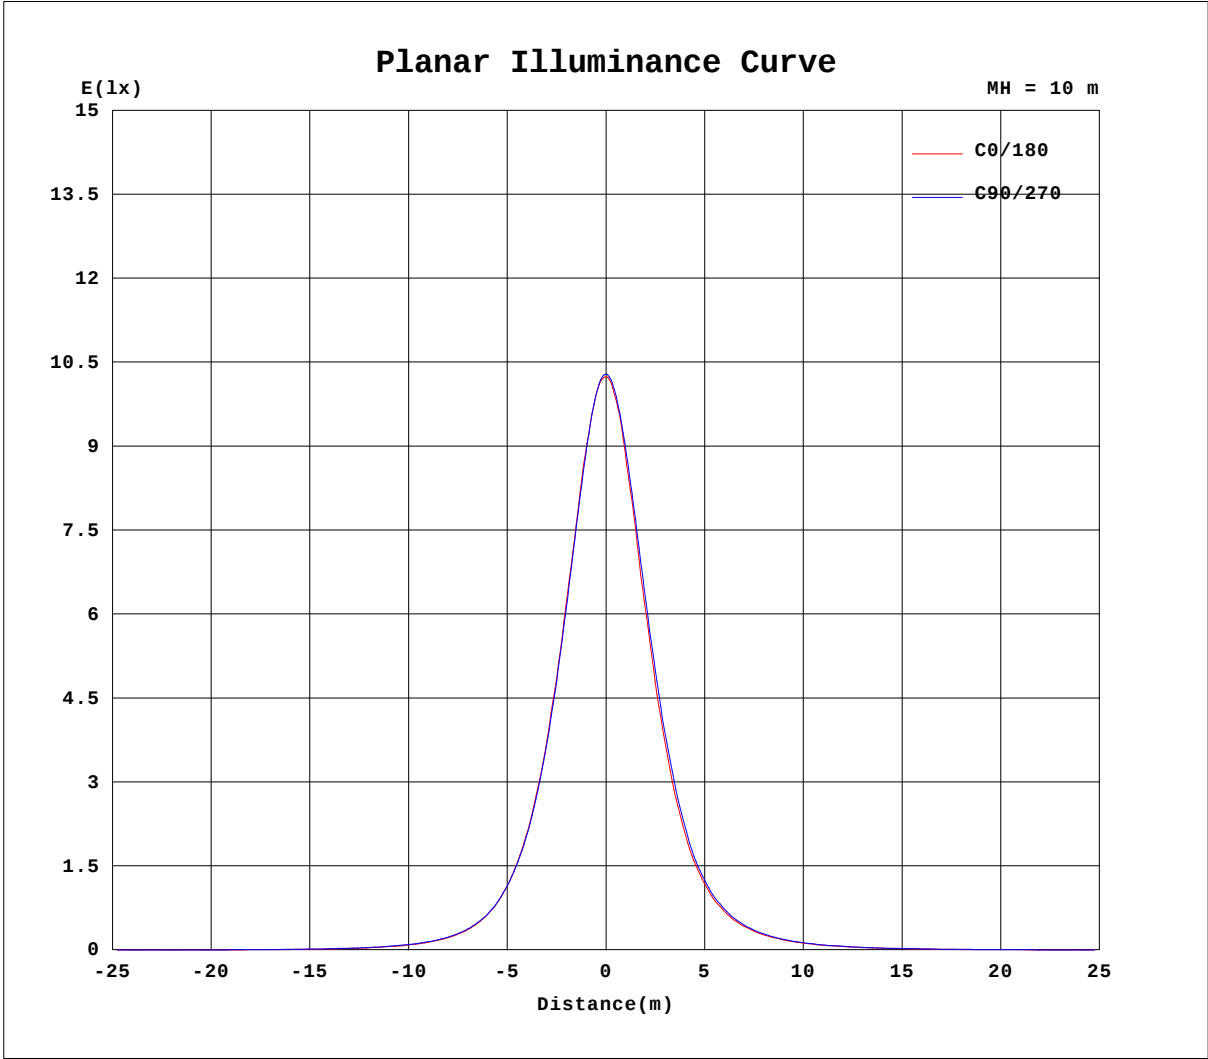


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-TW-2200K-30D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES003002
MFR.:	SUR.:1	Shielding Angle:

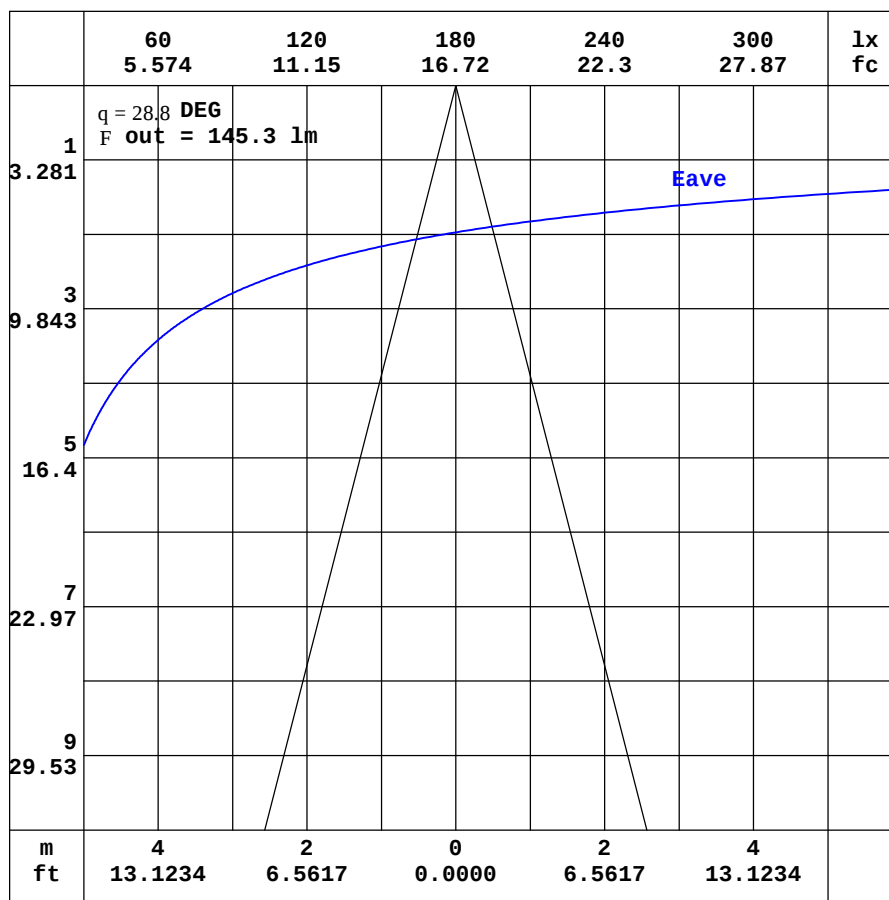

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-TW-2200K-30D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES003002
MFR.:	SUR.:1	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.58	1.44	1.34	1.34	1.37	1.48	1.67	1.94	2.28	2.63	2.94	3.16	3.29	3.35	3.35	3.34	3.30	3.27	3.36
-170	1.58	1.42	1.31	1.30	1.30	1.37	1.51	1.71	1.95	2.20	2.43	2.59	2.70	2.77	2.80	2.80	2.76	2.90	2.99
-160	1.58	1.41	1.29	1.25	1.24	1.26	1.33	1.44	1.58	1.73	1.86	1.95	2.01	2.04	2.05	2.22	2.41	2.54	2.61
-150	1.58	1.41	1.27	1.21	1.17	1.16	1.17	1.20	1.24	1.27	1.30	1.30	1.28	1.30	1.48	1.64	1.77	1.86	1.90
-140	1.58	1.40	1.27	1.17	1.12	1.08	1.04	1.01	0.98	0.94	0.87	0.79	0.79	0.88	0.97	1.06	1.13	1.17	1.18
-130	1.58	1.41	1.27	1.15	1.08	1.01	0.95	0.89	0.83	0.75	0.65	0.60	0.61	0.63	0.65	0.67	0.69	0.70	0.70
-120	1.58	1.41	1.27	1.16	1.05	0.97	0.90	0.82	0.74	0.66	0.59	0.59	0.59	0.58	0.58	0.58	0.58	0.57	0.57
-110	1.58	1.42	1.28	1.16	1.06	0.96	0.86	0.78	0.70	0.62	0.59	0.59	0.60	0.60	0.60	0.60	0.61	0.61	0.61
-100	1.58	1.44	1.31	1.18	1.07	0.96	0.86	0.77	0.68	0.59	0.59	0.58	0.58	0.58	0.59	0.59	0.59	0.59	0.59
-90	1.58	1.46	1.34	1.22	1.10	0.98	0.86	0.74	0.62	0.50	0.50	0.49	0.49	0.49	0.48	0.48	0.47	0.47	0.47
-80	1.58	1.49	1.38	1.28	1.20	1.09	0.94	0.80	0.64	0.47	0.47	0.50	0.53	0.56	0.60	0.63	0.66	0.69	0.71
-70	1.58	1.51	1.50	1.44	1.40	1.37	1.33	1.27	1.20	1.11	1.20	1.41	1.63	1.84	2.04	2.21	2.36	2.46	2.53
-60	1.58	1.56	1.61	1.69	1.83	1.96	2.19	2.43	2.58	2.72	3.13	3.97	4.82	5.67	6.40	6.97	7.34	7.49	7.44
-50	1.58	1.63	1.77	2.06	2.39	2.99	3.56	3.91	4.84	6.30	8.22	10.4	12.6	14.7	16.5	17.8	18.6	18.8	18.3
-40	1.58	1.74	1.97	2.45	3.23	4.18	4.74	6.30	8.89	12.3	16.4	21.2	26.3	31.4	36.2	40.5	43.4	44.4	43.4
-30	1.58	1.79	2.20	2.86	4.17	4.91	6.51	9.60	14.0	19.7	26.9	36.3	48.9	64.9	81.4	96.9	109	115	112
-20	1.58	1.82	2.40	3.34	4.92	5.83	8.46	13.0	19.1	27.3	38.7	55.8	81.9	119	170	225	277	308	308
-10	1.58	1.86	2.55	3.74	5.35	6.63	9.97	15.4	23.0	33.3	48.8	73.2	112	175	276	417	586	693	713
0	1.58	1.89	2.66	4.00	5.65	7.09	10.7	16.5	24.6	35.6	51.9	77.5	120	191	311	483	702	926	1024
10	1.58	1.89	2.62	3.86	5.53	6.86	10.2	15.4	22.7	32.4	46.4	67.7	101	156	239	356	493	645	726
20	1.58	1.87	2.53	3.57	5.27	6.28	8.90	13.2	18.9	26.1	35.8	49.4	68.8	95.7	133	184	244	297	326
30	1.58	1.86	2.39	3.19	4.67	5.57	7.27	10.2	14.2	19.2	25.1	32.3	41.0	52.8	68.6	86.1	104	119	127
40	1.58	1.84	2.20	2.85	3.82	5.01	5.75	7.43	9.83	12.8	16.3	19.9	24.4	29.8	35.7	41.7	47.4	52.0	54.7
50	1.58	1.74	2.03	2.50	3.04	3.89	4.74	5.33	6.43	7.91	9.63	11.7	14.0	16.6	19.1	21.4	23.5	25.2	26.2
60	1.58	1.69	1.88	2.15	2.50	2.87	3.37	3.90	4.36	4.77	5.38	6.33	7.33	8.36	9.36	10.3	11.0	11.6	12.0
70	1.58	1.64	1.78	1.89	2.05	2.24	2.43	2.61	2.80	3.00	3.26	3.58	3.91	4.24	4.56	4.86	5.12	5.33	5.48
80	1.58	1.62	1.65	1.70	1.78	1.84	1.87	1.93	1.97	2.02	2.08	2.14	2.21	2.28	2.34	2.41	2.47	2.51	2.55
90	1.58	1.59	1.60	1.60	1.61	1.61	1.62	1.63	1.63	1.64	1.63	1.63	1.62	1.61	1.61	1.60	1.60	1.59	1.58
100	1.58	1.57	1.54	1.52	1.50	1.48	1.47	1.45	1.44	1.43	1.41	1.40	1.38	1.37	1.36	1.35	1.34	1.33	1.33
110	1.58	1.53	1.49	1.45	1.42	1.39	1.36	1.35	1.34	1.32	1.31	1.31	1.31	1.31	1.31	1.32	1.32	1.33	1.33
120	1.58	1.51	1.45	1.40	1.35	1.34	1.33	1.32	1.32	1.31	1.31	1.35	1.39	1.44	1.49	1.53	1.57	1.60	1.61
130	1.58	1.49	1.42	1.35	1.34	1.33	1.33	1.34	1.38	1.44	1.52	1.63	1.76	1.89	2.01	2.11	2.19	2.25	2.27
140	1.58	1.47	1.39	1.34	1.33	1.34	1.37	1.44	1.56	1.72	1.91	2.12	2.33	2.54	2.71	2.84	2.93	3.00	3.02
150	1.58	1.46	1.36	1.34	1.34	1.37	1.45	1.60	1.81	2.06	2.35	2.62	2.87	3.07	3.24	3.35	3.44	3.50	3.53
160	1.58	1.45	1.35	1.34	1.35	1.41	1.55	1.76	2.04	2.37	2.69	2.97	3.20	3.36	3.47	3.57	3.64	3.70	3.77
170	1.58	1.44	1.34	1.34	1.36	1.45	1.63	1.88	2.21	2.56	2.88	3.13	3.31	3.42	3.47	3.51	3.54	3.54	3.63
180	1.58	1.44	1.34	1.34	1.37	1.48	1.67	1.94	2.28	2.63	2.94	3.16	3.29	3.35	3.35	3.34	3.30	3.27	3.36

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:

Test Date:2024-09-29

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-TW-2200K-30D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES003002
MFR.:	SUR.:1	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	3.06	2.90	2.68	2.40	2.08	1.75	1.42	1.12	0.84	0.68	0.58	0.58	0.58	0.58	0.58	0.57	0.50	0.46
-170	2.95	2.84	2.63	2.36	2.04	1.70	1.38	1.07	0.82	0.66	0.58	0.58	0.58	0.58	0.58	0.57	0.50	0.46
-160	2.57	2.45	2.27	2.04	1.75	1.45	1.18	0.94	0.73	0.62	0.58	0.58	0.58	0.58	0.59	0.56	0.50	0.46
-150	1.87	1.78	1.65	1.49	1.29	1.09	0.90	0.74	0.63	0.58	0.58	0.57	0.58	0.59	0.59	0.56	0.50	0.46
-140	1.17	1.12	1.04	0.95	0.85	0.75	0.67	0.60	0.58	0.57	0.57	0.57	0.58	0.59	0.59	0.56	0.50	0.46
-130	0.69	0.68	0.65	0.63	0.60	0.58	0.57	0.57	0.56	0.56	0.57	0.58	0.59	0.59	0.58	0.54	0.49	0.46
-120	0.57	0.57	0.57	0.57	0.56	0.56	0.56	0.56	0.57	0.58	0.59	0.59	0.59	0.59	0.57	0.52	0.48	0.46
-110	0.61	0.60	0.60	0.60	0.60	0.60	0.59	0.59	0.59	0.60	0.60	0.60	0.59	0.59	0.57	0.53	0.50	0.47
-100	0.59	0.59	0.60	0.60	0.60	0.61	0.61	0.61	0.62	0.61	0.59	0.57	0.55	0.52	0.50	0.48	0.46	0.46
-90	0.47	0.48	0.49	0.49	0.50	0.50	0.51	0.52	0.52	0.51	0.51	0.50	0.49	0.49	0.48	0.47	0.47	0.46
-80	0.69	0.67	0.64	0.61	0.57	0.54	0.51	0.48	0.47	0.49	0.49	0.49	0.49	0.47	0.47	0.47	0.47	0.46
-70	2.42	2.28	2.11	1.93	1.73	1.53	1.33	1.14	1.02	0.96	0.87	0.77	0.68	0.61	0.53	0.48	0.47	0.46
-60	7.08	6.57	5.93	5.19	4.42	3.67	2.99	2.40	2.09	1.97	1.88	1.56	1.20	0.89	0.69	0.54	0.47	0.46
-50	17.4	16.0	14.2	12.3	10.3	8.33	6.53	5.12	3.93	3.05	2.54	2.45	2.12	1.43	0.92	0.64	0.48	0.46
-40	40.8	36.6	31.4	25.9	20.6	15.9	12.5	9.74	7.30	5.25	3.62	2.83	2.73	2.17	1.25	0.76	0.50	0.46
-30	105	90.3	73.2	56.0	41.0	30.3	22.6	16.6	12.0	8.29	5.50	3.55	2.87	2.88	1.66	0.87	0.53	0.46
-20	282	229	170	119	83.2	56.7	38.3	26.0	17.6	11.7	7.49	4.59	3.14	3.11	2.05	0.98	0.55	0.46
-10	642	497	354	232	146	90.4	56.3	35.7	23.0	14.7	9.13	5.45	3.40	3.14	2.36	1.06	0.56	0.46
0	934	719	494	313	190	111	66.7	41.1	26.0	16.2	9.88	5.82	3.52	3.21	2.53	1.10	0.56	0.46
10	673	550	398	266	169	105	65.8	42.2	27.2	17.1	10.5	6.15	3.81	3.39	2.50	1.13	0.58	0.46
20	314	273	218	165	114	78.5	53.6	36.5	24.3	15.6	9.67	5.81	3.88	3.57	2.32	1.12	0.60	0.46
30	125	115	100	84.2	68.5	52.5	38.6	27.5	18.8	12.4	7.91	5.05	3.84	3.51	2.03	1.06	0.60	0.46
40	54.5	52.2	48.2	43.2	37.4	31.3	24.6	18.0	12.7	8.70	5.94	4.41	3.82	2.88	1.69	1.00	0.60	0.46
50	26.1	25.2	23.5	21.5	18.9	16.0	13.2	10.3	7.72	5.87	4.65	4.00	3.21	2.17	1.39	0.90	0.59	0.46
60	11.7	11.3	10.6	9.74	8.74	7.74	6.78	5.89	4.99	4.31	3.70	2.94	2.21	1.61	1.17	0.82	0.59	0.46
70	5.39	5.23	5.03	4.78	4.50	4.20	3.89	3.56	3.20	2.78	2.35	1.94	1.58	1.27	0.98	0.75	0.59	0.46
80	2.53	2.50	2.45	2.40	2.33	2.26	2.20	2.13	2.05	1.84	1.63	1.43	1.24	1.05	0.89	0.73	0.59	0.46
90	1.59	1.59	1.60	1.61	1.61	1.62	1.62	1.63	1.64	1.51	1.37	1.24	1.11	0.98	0.85	0.72	0.59	0.46
100	1.34	1.34	1.35	1.36	1.37	1.39	1.40	1.42	1.43	1.34	1.25	1.15	1.05	0.94	0.83	0.71	0.58	0.46
110	1.33	1.33	1.33	1.33	1.33	1.33	1.33	1.33	1.31	1.23	1.16	1.09	1.00	0.91	0.81	0.70	0.58	0.46
120	1.60	1.59	1.56	1.52	1.48	1.43	1.40	1.35	1.27	1.18	1.10	1.03	0.96	0.88	0.80	0.69	0.58	0.46
130	2.26	2.21	2.13	2.04	1.93	1.82	1.69	1.52	1.33	1.18	1.06	0.98	0.91	0.85	0.77	0.68	0.57	0.46
140	2.99	2.93	2.84	2.71	2.55	2.36	2.08	1.72	1.43	1.21	1.05	0.93	0.86	0.80	0.75	0.67	0.56	0.46
150	3.50	3.44	3.35	3.22	3.06	2.70	2.25	1.84	1.48	1.20	1.02	0.89	0.80	0.76	0.71	0.65	0.55	0.46
160	3.72	3.66	3.58	3.43	3.04	2.62	2.20	1.79	1.41	1.12	0.93	0.82	0.74	0.70	0.68	0.62	0.54	0.46
170	3.59	3.60	3.33	3.01	2.67	2.30	1.91	1.53	1.19	0.93	0.78	0.71	0.67	0.64	0.63	0.60	0.52	0.46
180	3.06	2.90	2.68	2.40	2.08	1.75	1.42	1.12	0.84	0.68	0.58	0.58	0.58	0.58	0.58	0.57	0.50	0.46

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: