

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2507.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	63.1V x 62.1H
	At 50% of Imax	29.1V x 28.9H
	At 90% of Imax	10.4V x 10.5H
Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	776.2 lumens per klm.
	To 50% of Imax	359.0 lumens per klm.
	To 90% of Imax	61.7 lumens per klm.
Upward LOR		2.3 %
Downward LOR		97.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-TW-4000K-30D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES003001
MFR.:	SUR.:1	Shielding Angle:

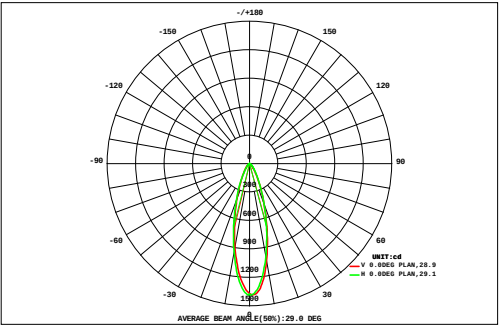

DATA OF LAMP		Eff:62.16lm/W	
MODEL		Imax(cd)	1388
NOMINAL POWER(W)	8.9	AVAILABILITY(%)	77.5
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	428.8
NOMINAL FLUX(lm)	553.3	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	553.3
TEST VOLTAGE(V)	24	q @50%(H,V)	29,29DEG

AREA FLUX DIAGRAM																	UNIT:lm			F t	F a
VERTICAL (DEG)	45	0.11	0.16	0.22	0.27	0.33	0.38	0.43	0.46	0.47	0.45	0.41	0.36	0.30	0.24	0.19	0.15	0.11	0.08	5.13	0.00
	40	0.14	0.21	0.29	0.37	0.46	0.55	0.63	0.68	0.70	0.67	0.61	0.52	0.43	0.33	0.25	0.19	0.14	0.10	7.26	0.00
	35	0.18	0.26	0.37	0.51	0.65	0.80	0.94	1.03	1.07	1.02	0.92	0.77	0.61	0.46	0.33	0.24	0.17	0.12	10.4	1.98
	30	0.21	0.31	0.46	0.67	0.92	1.17	1.41	1.60	1.68	1.61	1.41	1.15	0.87	0.63	0.44	0.31	0.22	0.14	15.2	10.1
	25	0.24	0.37	0.56	0.84	1.24	1.69	2.13	2.51	2.71	2.60	2.22	1.72	1.24	0.87	0.60	0.40	0.26	0.17	22.4	18.5
	20	0.27	0.42	0.66	1.03	1.58	2.34	3.14	3.85	4.25	4.09	3.40	2.52	1.75	1.21	0.80	0.51	0.32	0.20	32.3	29.0
	15	0.29	0.46	0.74	1.18	1.90	2.97	4.32	5.54	6.29	6.08	4.95	3.58	2.49	1.63	1.03	0.62	0.37	0.22	44.6	41.7
	10	0.30	0.48	0.78	1.29	2.14	3.46	5.25	7.19	8.44	8.23	6.67	4.94	3.31	2.07	1.24	0.72	0.41	0.24	57.2	54.5
	5	0.30	0.48	0.78	1.30	2.20	3.64	5.63	7.95	9.80	9.88	8.40	6.14	3.98	2.40	1.40	0.79	0.44	0.25	65.7	63.1
	0	0.29	0.46	0.74	1.24	2.11	3.49	5.43	7.69	9.61	10.1	8.76	6.40	4.14	2.49	1.43	0.81	0.45	0.26	65.9	63.2
	-5	0.27	0.42	0.68	1.12	1.88	3.06	4.67	6.49	8.00	8.43	7.54	5.64	3.73	2.29	1.34	0.77	0.43	0.25	57.0	54.3
	-10	0.24	0.37	0.59	0.94	1.52	2.40	3.54	4.83	5.80	6.09	5.57	4.41	3.03	1.91	1.16	0.68	0.40	0.23	43.7	40.7
	-15	0.21	0.32	0.48	0.74	1.13	1.71	2.48	3.27	3.83	4.01	3.72	3.06	2.24	1.48	0.93	0.57	0.35	0.21	30.7	27.3
	-20	0.17	0.26	0.38	0.55	0.81	1.17	1.62	2.07	2.39	2.48	2.34	1.97	1.52	1.08	0.72	0.46	0.29	0.18	20.5	16.4
	-25	0.14	0.20	0.29	0.40	0.56	0.78	1.04	1.28	1.44	1.49	1.42	1.24	1.00	0.76	0.53	0.36	0.24	0.15	13.3	7.72
	-30	0.11	0.16	0.21	0.28	0.39	0.52	0.66	0.78	0.87	0.90	0.86	0.77	0.65	0.51	0.39	0.28	0.19	0.12	8.64	0.43
-35	0.09	0.12	0.15	0.21	0.27	0.35	0.42	0.49	0.53	0.55	0.53	0.49	0.42	0.35	0.28	0.21	0.14	0.09	5.68	0.00	
-40	0.07	0.09	0.11	0.15	0.19	0.23	0.28	0.31	0.34	0.35	0.34	0.32	0.28	0.24	0.19	0.15	0.11	0.07	3.79	0.00	
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG)				10	15	20	25	30	35	40	45	
F t	3.62	5.53	8.47	13.1	20.3	30.7	44.0	58.0	68.2	69.0	60.1	46.0	32.0	21.0	13.3	8.20	5.04	3.10	510	---	
F a	0.00	0.00	0.45	7.52	16.0	26.8	40.5	54.6	64.9	65.8	56.7	42.4	28.0	16.6	7.80	0.77	0.00	0.00	---	429	


one-half-peak spread: U:14.8,D:14.6 , L:15.1,R:14.0 NEMA Beam Type: Type 4

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-TW-4000K-30D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES003001
MFR.:	SUR.:1	Shielding Angle:

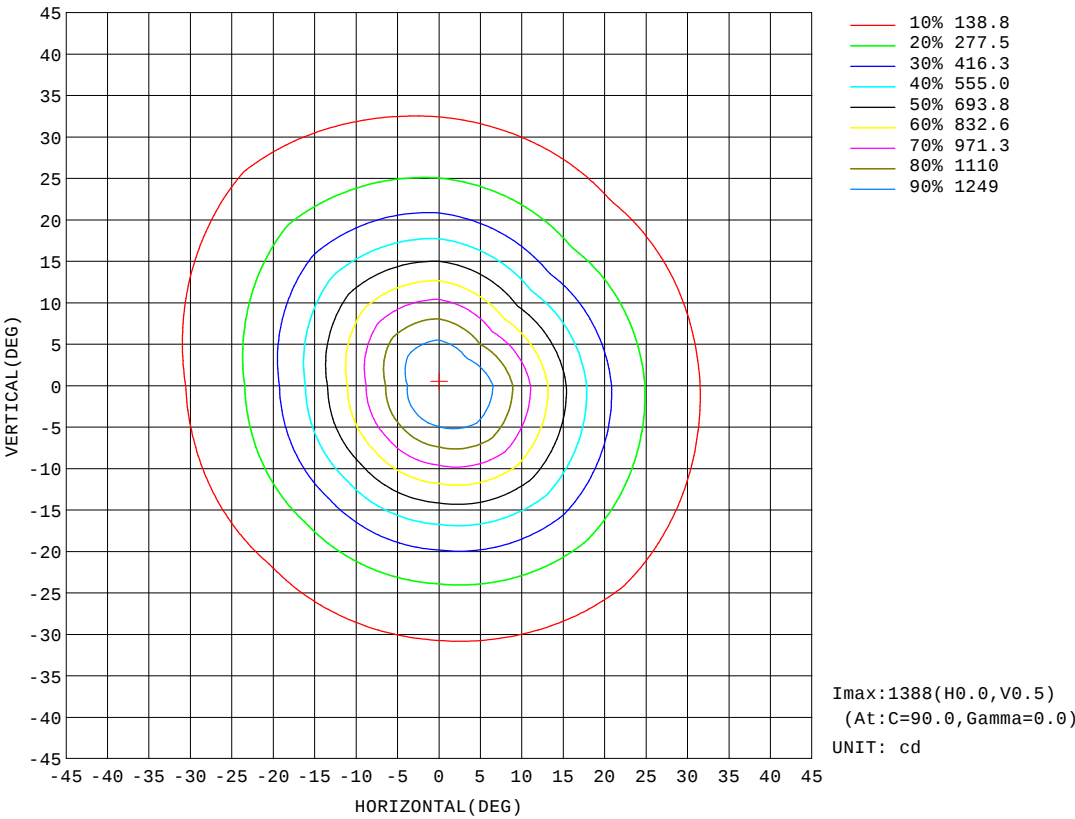


H(b) Range:-90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-TW-4000K-30D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES003001
MFR.:	SUR.:1	Shielding Angle:

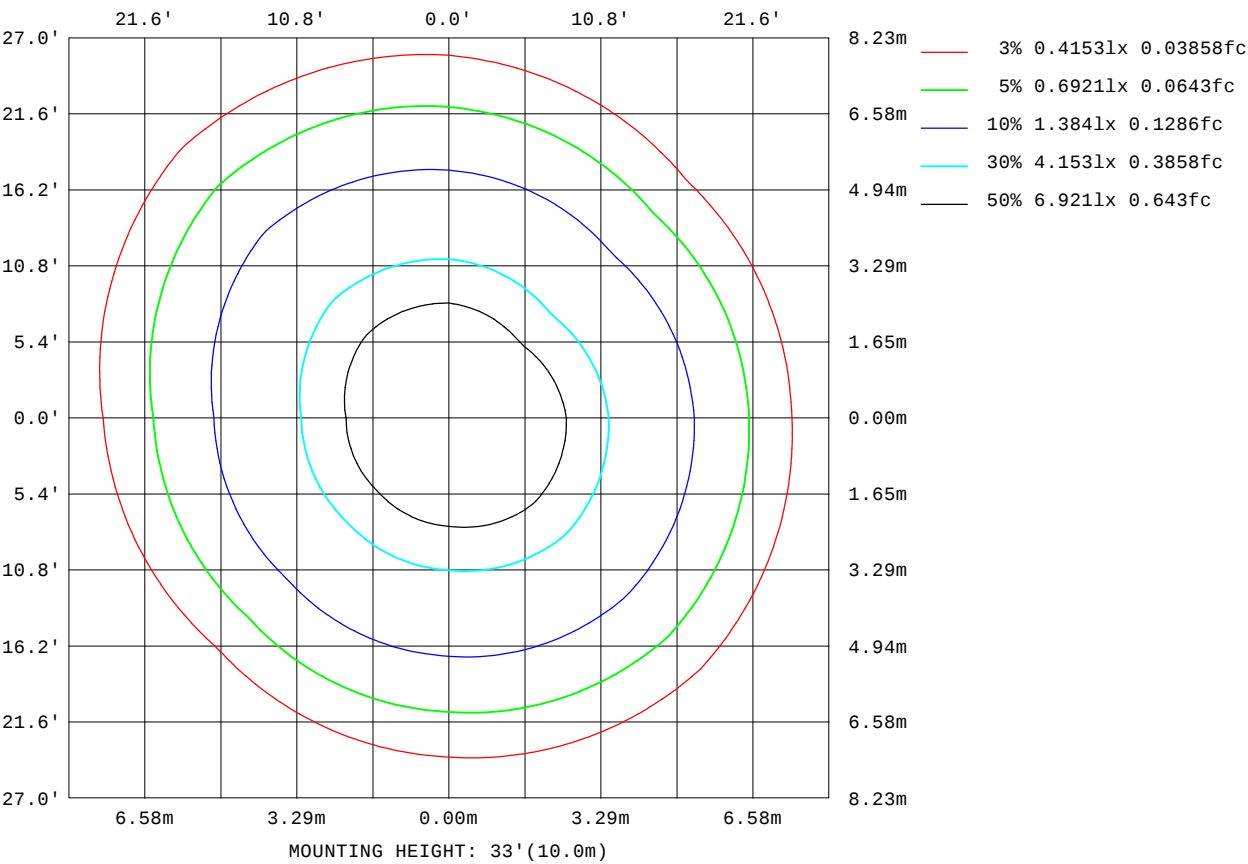

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

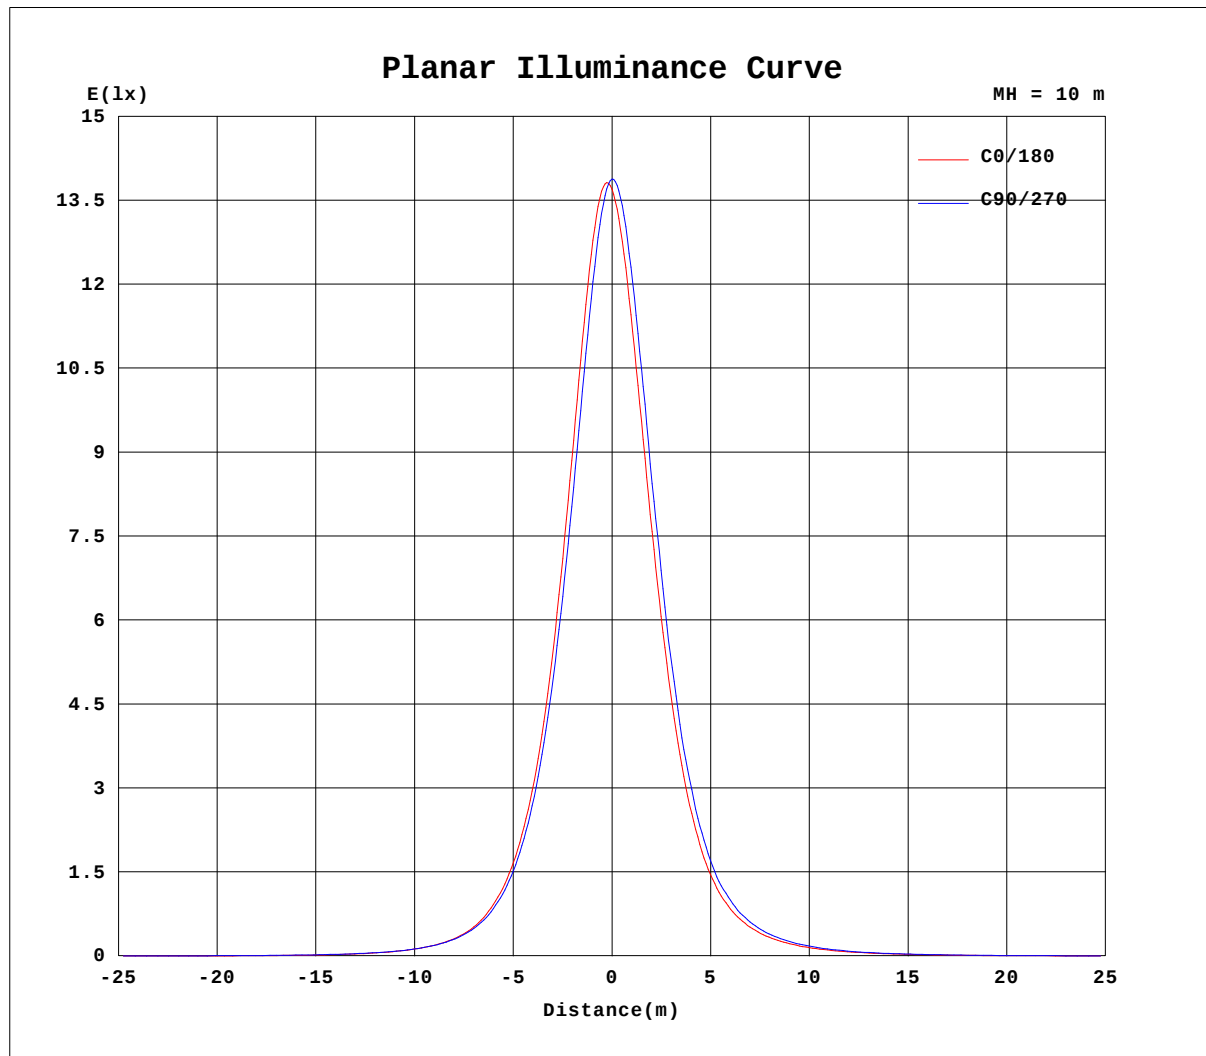


$H(b)$ Range: -90 - 90DEG
 $H(b)$ Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-29

$V(B)$ Range: -180 - 180DEG
 $V(B)$ Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-TW-4000K-30D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES003001
MFR.:	SUR.:1	Shielding Angle:

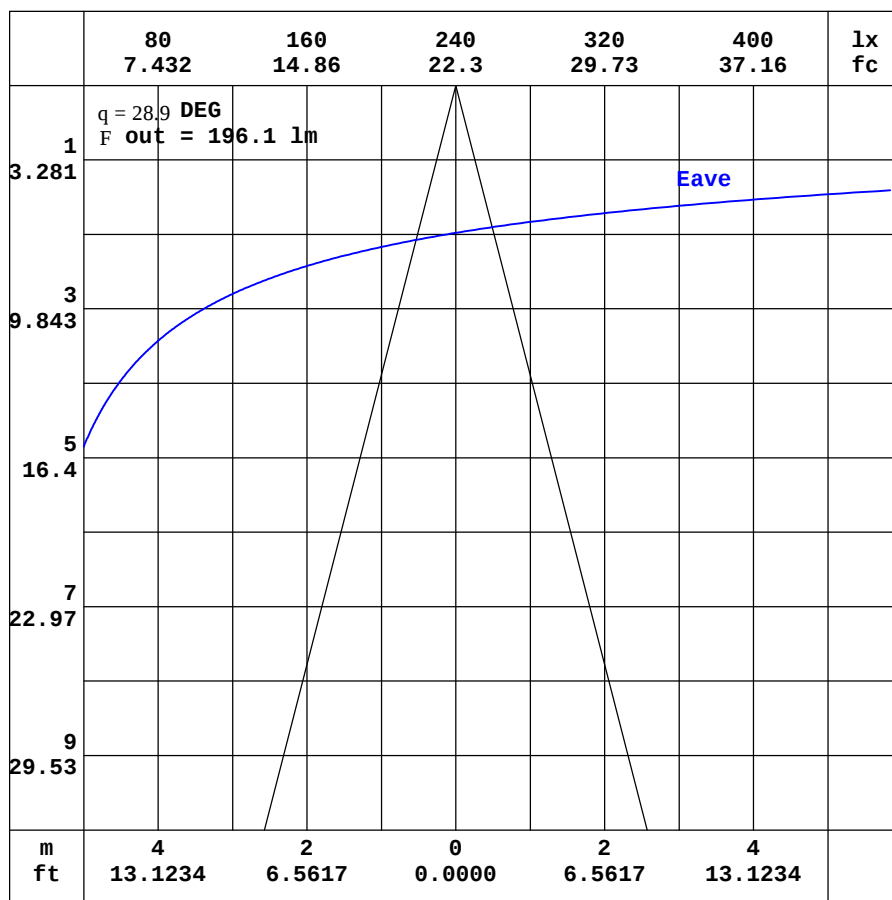

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-TW-4000K-30D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES003001
MFR.:	SUR.:1	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.06	1.88	1.77	1.76	1.81	1.97	2.24	2.64	3.10	3.58	3.97	4.25	4.42	4.49	4.49	4.46	4.38	4.31	4.40
-170	2.06	1.86	1.73	1.71	1.72	1.82	2.02	2.30	2.64	2.98	3.26	3.48	3.63	3.72	3.76	3.75	3.67	3.81	3.94
-160	2.06	1.85	1.70	1.65	1.63	1.67	1.77	1.92	2.11	2.31	2.47	2.60	2.68	2.74	2.76	2.99	3.23	3.39	3.47
-150	2.06	1.84	1.68	1.60	1.55	1.52	1.54	1.58	1.62	1.67	1.69	1.69	1.66	1.70	1.97	2.20	2.38	2.50	2.56
-140	2.06	1.84	1.66	1.55	1.48	1.41	1.36	1.31	1.26	1.19	1.10	0.97	0.98	1.13	1.27	1.40	1.51	1.58	1.62
-130	2.06	1.84	1.66	1.52	1.43	1.34	1.25	1.15	1.05	0.93	0.79	0.71	0.74	0.78	0.83	0.87	0.92	0.95	0.98
-120	2.06	1.85	1.67	1.52	1.39	1.29	1.19	1.09	0.97	0.84	0.73	0.72	0.73	0.73	0.74	0.75	0.76	0.77	0.78
-110	2.06	1.87	1.69	1.54	1.40	1.27	1.16	1.05	0.94	0.84	0.80	0.80	0.80	0.80	0.81	0.81	0.82	0.83	0.83
-100	2.06	1.88	1.72	1.56	1.42	1.29	1.16	1.04	0.93	0.81	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.81	0.81
-90	2.06	1.91	1.76	1.61	1.45	1.30	1.15	1.00	0.85	0.69	0.69	0.68	0.67	0.67	0.66	0.65	0.65	0.64	0.64
-80	2.06	1.95	1.81	1.68	1.58	1.44	1.24	1.06	0.85	0.63	0.61	0.64	0.67	0.71	0.76	0.80	0.84	0.87	0.89
-70	2.06	1.98	1.97	1.88	1.84	1.76	1.67	1.56	1.43	1.27	1.35	1.61	1.87	2.14	2.39	2.63	2.84	3.01	3.13
-60	2.06	2.03	2.10	2.20	2.31	2.43	2.62	2.82	2.94	2.99	3.26	4.13	5.08	6.01	6.97	7.85	8.58	9.13	9.46
-50	2.06	2.13	2.32	2.62	2.97	3.56	4.18	4.56	5.31	6.37	7.70	9.48	11.9	14.3	16.8	19.2	21.2	22.7	23.6
-40	2.06	2.28	2.56	3.08	3.90	4.96	5.63	7.05	9.28	12.1	15.1	18.4	22.9	28.7	35.3	42.2	48.4	53.3	55.9
-30	2.06	2.34	2.83	3.58	4.96	6.01	7.60	10.6	14.7	19.8	25.9	33.5	43.3	56.8	76.3	98.4	121	140	150
-20	2.06	2.38	3.06	4.11	5.89	7.10	9.78	14.5	20.7	28.8	39.8	55.8	79.2	113	161	230	310	377	410
-10	2.06	2.42	3.24	4.57	6.54	8.13	11.8	17.9	26.2	37.4	54.1	80.2	122	191	304	461	651	845	948
0	2.06	2.46	3.37	4.88	7.00	8.79	13.0	19.9	29.4	42.7	62.7	94.1	146	236	387	611	896	1188	1370
10	2.06	2.46	3.33	4.75	6.84	8.62	12.8	19.7	29.4	42.9	63.2	95.1	146	229	360	544	765	927	996
20	2.06	2.45	3.24	4.45	6.46	7.99	11.4	17.4	26.0	37.6	53.8	78.1	114	166	238	312	384	435	445
30	2.06	2.44	3.08	4.04	5.73	7.19	9.46	13.8	20.3	28.9	40.2	54.8	74.2	98.3	121	144	163	173	173
40	2.06	2.41	2.88	3.64	4.79	6.29	7.54	9.95	13.9	19.4	26.3	34.6	43.2	51.3	59.2	66.1	71.7	74.4	74.0
50	2.06	2.28	2.67	3.24	3.91	4.93	6.07	7.11	8.74	11.3	14.6	18.5	22.3	25.9	29.1	31.6	33.5	34.4	34.3
60	2.06	2.20	2.47	2.83	3.26	3.74	4.37	5.09	5.78	6.50	7.48	8.77	10.2	11.6	12.9	14.0	14.8	15.2	15.4
70	2.06	2.15	2.34	2.49	2.71	2.95	3.20	3.46	3.75	4.05	4.42	4.82	5.22	5.61	5.99	6.33	6.61	6.82	6.97
80	2.06	2.12	2.17	2.24	2.36	2.45	2.50	2.58	2.65	2.73	2.80	2.87	2.96	3.04	3.12	3.19	3.25	3.29	3.32
90	2.06	2.08	2.10	2.11	2.13	2.14	2.16	2.18	2.19	2.21	2.20	2.19	2.18	2.17	2.17	2.16	2.15	2.14	2.13
100	2.06	2.04	2.03	2.00	1.98	1.97	1.95	1.93	1.92	1.91	1.89	1.87	1.85	1.83	1.81	1.80	1.79	1.78	1.77
110	2.06	2.01	1.96	1.91	1.87	1.84	1.82	1.80	1.79	1.78	1.77	1.76	1.75	1.75	1.74	1.74	1.74	1.74	1.74
120	2.06	1.98	1.90	1.84	1.80	1.78	1.77	1.76	1.77	1.77	1.81	1.86	1.90	1.96	2.01	2.05	2.08	2.09	2.10
130	2.06	1.95	1.86	1.79	1.77	1.77	1.78	1.81	1.89	2.00	2.12	2.26	2.42	2.56	2.70	2.81	2.89	2.94	2.95
140	2.06	1.93	1.82	1.77	1.77	1.78	1.85	1.97	2.15	2.37	2.63	2.89	3.15	3.38	3.58	3.74	3.86	3.93	3.96
150	2.06	1.91	1.80	1.77	1.77	1.82	1.97	2.19	2.48	2.83	3.18	3.51	3.80	4.04	4.25	4.40	4.52	4.59	4.64
160	2.06	1.89	1.78	1.76	1.79	1.89	2.10	2.40	2.79	3.22	3.62	3.96	4.23	4.43	4.56	4.67	4.78	4.86	4.95
170	2.06	1.88	1.77	1.76	1.80	1.94	2.20	2.57	3.01	3.48	3.88	4.19	4.40	4.54	4.59	4.62	4.61	4.62	4.73
180	2.06	1.88	1.77	1.76	1.81	1.97	2.24	2.64	3.10	3.58	3.97	4.25	4.42	4.49	4.49	4.46	4.38	4.31	4.40

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:

Test Date:2024-09-29

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-TW-4000K-30D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES003001
MFR.:	SUR.:1	Shielding Angle:

Table--2		UNIT: cd																	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	3.96	3.72	3.46	3.10	2.69	2.26	1.83	1.43	1.08	0.87	0.77	0.78	0.80	0.80	0.80	0.77	0.69	0.60	
-170	3.82	3.63	3.37	3.04	2.64	2.21	1.78	1.40	1.08	0.87	0.79	0.78	0.80	0.80	0.80	0.77	0.69	0.60	
-160	3.37	3.20	2.95	2.65	2.29	1.91	1.56	1.23	0.99	0.84	0.79	0.79	0.80	0.80	0.80	0.77	0.69	0.60	
-150	2.50	2.38	2.20	1.98	1.74	1.48	1.23	1.03	0.88	0.81	0.80	0.80	0.80	0.80	0.80	0.77	0.68	0.60	
-140	1.59	1.53	1.43	1.32	1.20	1.08	0.97	0.88	0.82	0.80	0.80	0.81	0.81	0.80	0.79	0.75	0.67	0.60	
-130	0.97	0.95	0.93	0.90	0.87	0.84	0.83	0.81	0.81	0.81	0.81	0.81	0.81	0.80	0.78	0.73	0.66	0.60	
-120	0.78	0.79	0.79	0.80	0.80	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.80	0.80	0.79	0.76	0.71	0.64	0.60
-110	0.83	0.83	0.83	0.83	0.82	0.82	0.82	0.81	0.81	0.81	0.81	0.80	0.80	0.79	0.76	0.72	0.67	0.63	0.60
-100	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.79	0.77	0.75	0.73	0.70	0.67	0.64	0.61	0.60	
-90	0.64	0.64	0.65	0.65	0.66	0.66	0.67	0.67	0.68	0.67	0.66	0.65	0.64	0.64	0.63	0.62	0.61	0.60	
-80	0.88	0.86	0.83	0.79	0.75	0.72	0.68	0.65	0.63	0.64	0.65	0.65	0.65	0.63	0.62	0.61	0.61	0.60	
-70	3.03	2.88	2.69	2.47	2.24	2.00	1.75	1.51	1.34	1.22	1.09	0.96	0.86	0.77	0.70	0.63	0.61	0.60	
-60	9.25	8.78	8.09	7.18	6.17	5.12	4.17	3.32	2.79	2.53	2.30	1.85	1.41	1.08	0.87	0.71	0.61	0.60	
-50	23.7	23.0	21.6	19.5	16.9	14.0	11.0	8.15	5.75	4.16	3.28	2.98	2.44	1.64	1.10	0.80	0.63	0.60	
-40	56.4	54.2	49.8	44.0	37.5	30.8	23.8	17.2	11.9	7.76	4.90	3.59	3.26	2.45	1.44	0.94	0.65	0.60	
-30	150	139	120	98.7	77.5	57.6	41.7	29.4	19.9	12.8	7.79	4.62	3.52	3.29	1.86	1.06	0.69	0.60	
-20	409	364	295	216	148	98.1	64.5	42.8	28.1	17.9	10.7	6.07	3.88	3.60	2.26	1.16	0.71	0.60	
-10	936	796	571	376	234	144	87.0	54.1	34.2	21.3	12.7	7.14	4.19	3.67	2.59	1.25	0.73	0.60	
0	1316	1040	716	451	273	163	94.9	57.3	35.7	21.9	13.2	7.43	4.28	3.74	2.76	1.29	0.74	0.60	
10	870	655	481	325	210	132	81.4	51.4	33.1	21.1	13.0	7.51	4.54	3.91	2.74	1.33	0.76	0.60	
20	401	323	239	171	122	84.6	57.7	39.5	26.8	17.9	11.4	6.87	4.54	4.07	2.55	1.32	0.78	0.60	
30	160	138	112	87.0	64.8	48.9	36.9	27.3	19.8	13.7	9.04	5.84	4.45	3.93	2.26	1.29	0.79	0.60	
40	69.3	62.1	53.4	44.6	36.2	28.8	22.9	17.9	13.4	9.62	6.73	5.07	4.36	3.21	1.94	1.23	0.78	0.60	
50	32.5	29.9	26.8	23.5	20.1	16.8	13.7	10.9	8.51	6.60	5.29	4.55	3.60	2.47	1.66	1.13	0.77	0.60	
60	14.8	13.8	12.7	11.5	10.2	8.87	7.67	6.60	5.64	4.89	4.20	3.34	2.56	1.92	1.45	1.06	0.77	0.60	
70	6.76	6.49	6.16	5.79	5.38	4.97	4.56	4.15	3.72	3.26	2.78	2.34	1.95	1.59	1.26	0.98	0.77	0.60	
80	3.28	3.21	3.14	3.05	2.95	2.86	2.76	2.67	2.58	2.32	2.07	1.83	1.60	1.36	1.15	0.95	0.77	0.60	
90	2.13	2.13	2.13	2.13	2.12	2.12	2.12	2.12	2.12	1.95	1.78	1.61	1.45	1.28	1.11	0.94	0.77	0.60	
100	1.77	1.77	1.78	1.78	1.79	1.81	1.82	1.84	1.84	1.73	1.62	1.50	1.37	1.23	1.09	0.93	0.77	0.60	
110	1.73	1.73	1.72	1.71	1.71	1.71	1.70	1.71	1.68	1.59	1.50	1.41	1.32	1.20	1.08	0.93	0.77	0.60	
120	2.08	2.04	2.00	1.94	1.88	1.82	1.76	1.71	1.62	1.52	1.42	1.34	1.26	1.16	1.06	0.93	0.77	0.60	
130	2.92	2.86	2.75	2.62	2.47	2.30	2.13	1.92	1.67	1.50	1.37	1.28	1.19	1.12	1.03	0.91	0.76	0.60	
140	3.93	3.86	3.73	3.56	3.34	3.06	2.66	2.18	1.81	1.54	1.34	1.21	1.13	1.06	1.00	0.90	0.76	0.60	
150	4.62	4.55	4.45	4.30	4.08	3.58	2.95	2.38	1.89	1.53	1.30	1.15	1.06	1.01	0.95	0.88	0.75	0.60	
160	4.91	4.86	4.79	4.60	4.06	3.49	2.91	2.32	1.82	1.43	1.20	1.06	0.99	0.94	0.91	0.85	0.73	0.60	
170	4.73	4.78	4.41	3.99	3.53	3.03	2.50	2.00	1.54	1.21	1.01	0.93	0.90	0.87	0.85	0.81	0.71	0.60	
180	3.96	3.72	3.46	3.10	2.69	2.26	1.83	1.43	1.08	0.87	0.77	0.78	0.80	0.80	0.80	0.77	0.69	0.60	

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2024-09-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: