

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	9390.6 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	28.2V x 29.0H
	At 50% of Imax	14.3V x 14.7H
	At 90% of Imax	5.4V x 5.2H

Beam Flux	Total	1001.3 lumens per klm.
	To 10% of Imax	632.2 lumens per klm.
	To 50% of Imax	322.2 lumens per klm.
	To 90% of Imax	51.4 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Mini-600mm-TW-1800K-15D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:15 DEG	DIM.:600MM	SERIAL No.:IES002514
MFR.:	SUR.:	Shielding Angle:

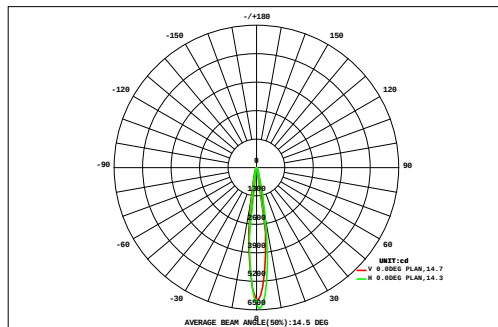

DATA OF LAMP		Eff:61.58lm/W	
MODEL		Imax(cd)	6419
NOMINAL POWER(W)	11.2	AVAILABILITY(%)	63.6
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	434.6
NOMINAL FLUX(lm)	683.6	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	683.6
TEST VOLTAGE(V)	220	q @50%(H,V)	15,14DEG

		AREA FLUX DIAGRAM																UNIT:lm				F t	F a
		0.16	0.19	0.23	0.27	0.32	0.37	0.42	0.46	0.49	0.50	0.49	0.47	0.43	0.38	0.33	0.27	0.22	0.18	6.17	0.00		
VERTICAL (DEG)	27	0.18	0.23	0.28	0.33	0.40	0.47	0.54	0.61	0.66	0.68	0.66	0.62	0.56	0.49	0.41	0.33	0.26	0.21	7.92	0.00		
	24	0.21	0.27	0.33	0.41	0.50	0.62	0.74	0.85	0.93	0.95	0.92	0.85	0.75	0.62	0.50	0.40	0.31	0.24	10.4	0.00		
	21	0.24	0.31	0.40	0.51	0.66	0.84	1.06	1.28	1.44	1.45	1.34	1.17	0.98	0.78	0.61	0.47	0.36	0.28	14.2	0.00		
	18	0.27	0.36	0.47	0.63	0.85	1.19	1.73	2.33	2.73	2.67	2.23	1.72	1.28	0.96	0.73	0.55	0.41	0.30	21.4	11.3		
	15	0.31	0.41	0.55	0.75	1.11	1.81	3.15	4.72	5.59	5.33	4.12	2.75	1.73	1.17	0.84	0.62	0.45	0.32	35.7	27.7		
	12	0.35	0.46	0.64	0.91	1.42	2.78	5.19	8.33	10.1	9.63	7.25	4.37	2.40	1.41	0.95	0.67	0.47	0.33	57.6	50.4		
	9	0.37	0.51	0.71	1.05	1.78	3.59	6.94	11.2	14.5	13.9	10.2	6.15	3.37	1.79	1.06	0.71	0.48	0.33	78.7	72.1		
	6	0.39	0.54	0.76	1.13	1.92	3.84	7.48	12.0	16.2	15.8	12.1	8.10	4.46	2.19	1.13	0.71	0.48	0.32	89.6	83.1		
	3	0.40	0.55	0.79	1.17	1.94	3.79	7.43	12.0	15.3	14.7	11.8	7.95	4.35	2.12	1.08	0.67	0.45	0.30	86.8	80.4		
	0	0.39	0.55	0.79	1.16	1.87	3.49	6.49	9.50	11.1	10.4	8.28	5.57	3.05	1.58	0.91	0.59	0.40	0.27	66.3	59.6		
	-3	0.37	0.52	0.75	1.08	1.62	2.58	4.01	5.43	6.31	5.93	4.58	3.18	1.84	1.10	0.72	0.49	0.34	0.24	41.1	33.8		
	-6	0.33	0.47	0.67	0.93	1.25	1.68	2.29	2.89	3.11	2.92	2.33	1.63	1.13	0.79	0.54	0.39	0.28	0.20	23.8	14.5		
-9	0.29	0.41	0.55	0.74	0.94	1.16	1.38	1.55	1.60	1.48	1.24	0.95	0.75	0.57	0.42	0.31	0.23	0.17	14.7	1.65			
-12	0.25	0.33	0.43	0.56	0.70	0.83	0.93	0.98	0.97	0.90	0.79	0.64	0.52	0.41	0.32	0.24	0.18	0.14	10.1	0.00			
-15	0.20	0.26	0.34	0.42	0.51	0.59	0.64	0.66	0.64	0.60	0.53	0.45	0.37	0.30	0.24	0.19	0.15	0.12	7.21	0.00			
-18	0.16	0.21	0.26	0.31	0.37	0.42	0.45	0.46	0.44	0.41	0.37	0.32	0.27	0.22	0.18	0.15	0.12	0.10	5.21	0.00			
-21	0.13	0.16	0.20	0.23	0.27	0.30	0.32	0.32	0.30	0.29	0.26	0.23	0.20	0.17	0.14	0.12	0.10	0.08	3.82	0.00			
-24	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27			
F t	5.01	6.72	9.15	12.6	18.4	30.3	51.2	75.6	92.4	88.5	69.5	47.1	28.4	17.0	11.1	7.87	5.70	4.13	581	---			
F a	0.00	0.00	0.00	0.00	5.95	21.9	43.7	68.8	85.6	81.7	62.5	39.6	19.9	5.02	0.00	0.00	0.00	0.00	---	435			


one-half-peak spread: U:6.9,D:7.4 , L:6.8,R:8.8NEMA Beam Type: Type 3 x 2 (H x V)

H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-06-26

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Mini-600mm-TW-1800K-15D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:15 DEG	DIM.:600MM	SERIAL No.:IES002514
MFR.:	SUR.:	Shielding Angle:

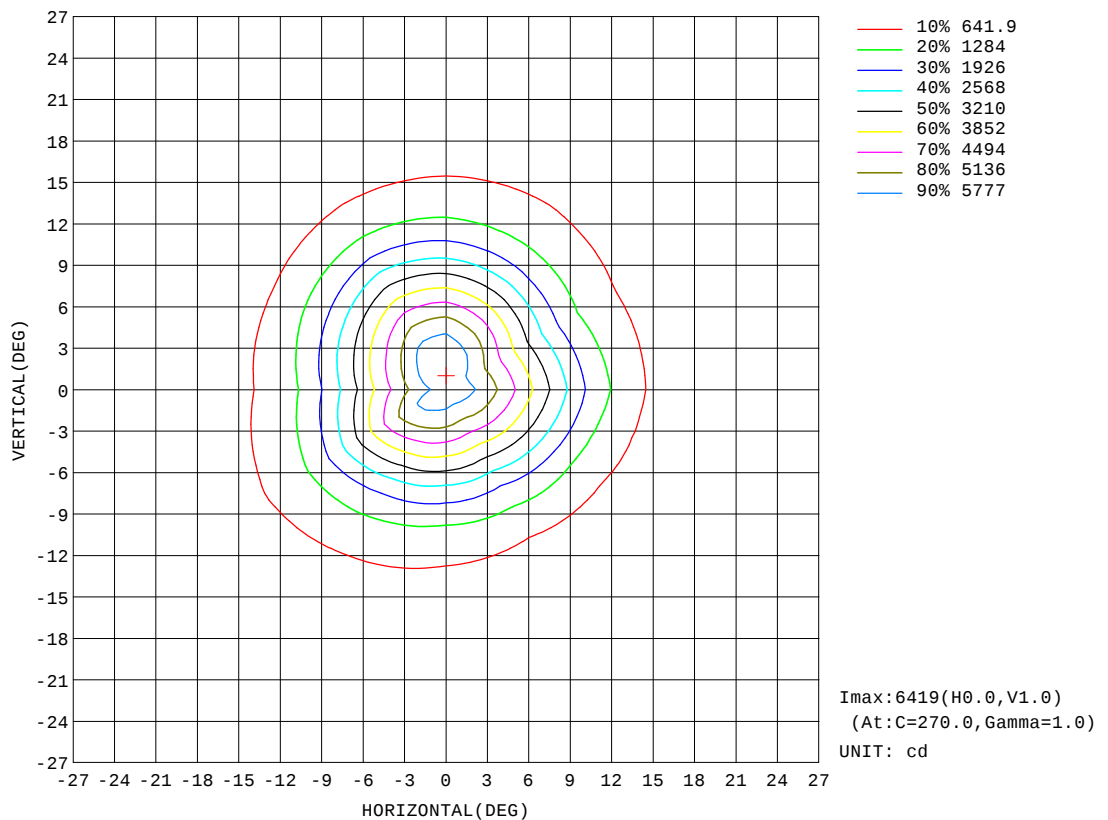


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-06-26

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Mini-600mm-TW-1800K-15D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:15 DEG	DIM.:600MM	SERIAL No.:IES002514
MFR.:	SUR.:	Shielding Angle:

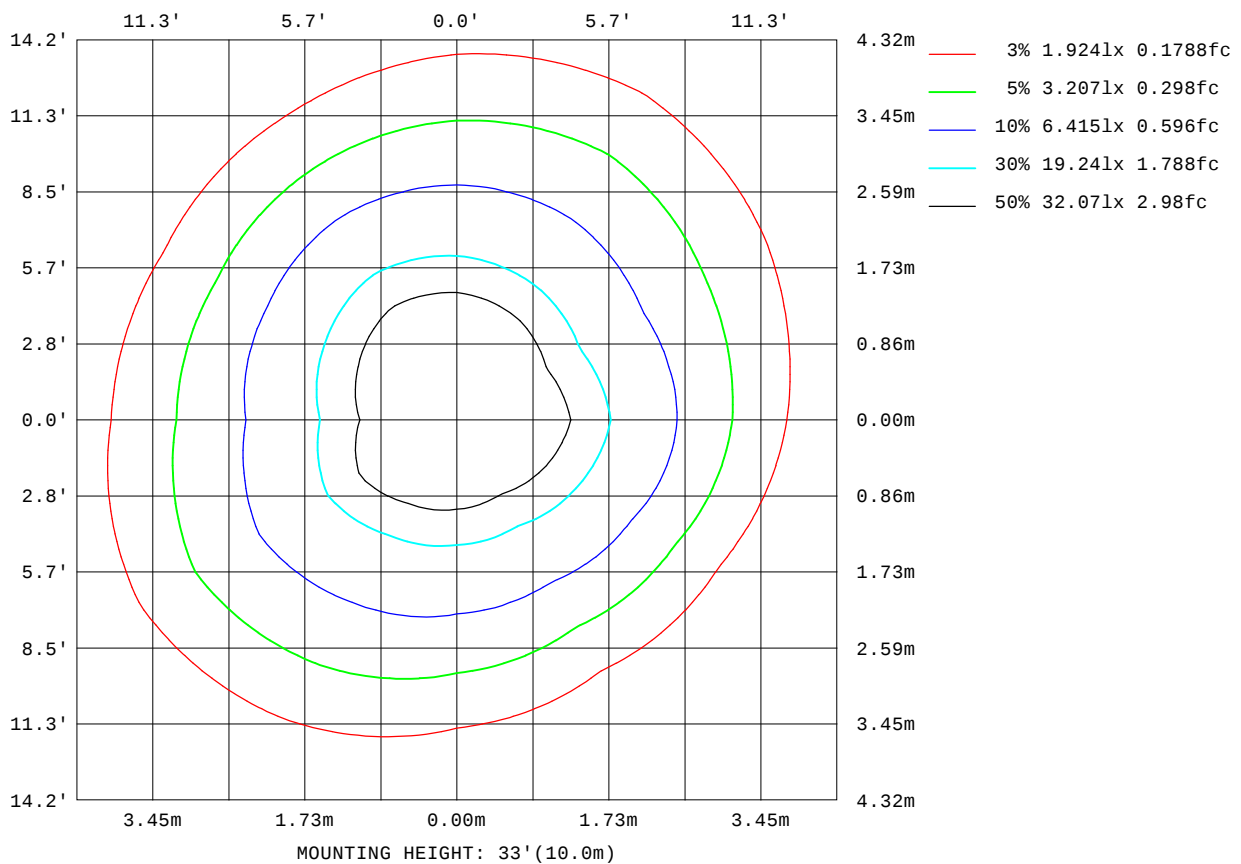

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-06-26

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

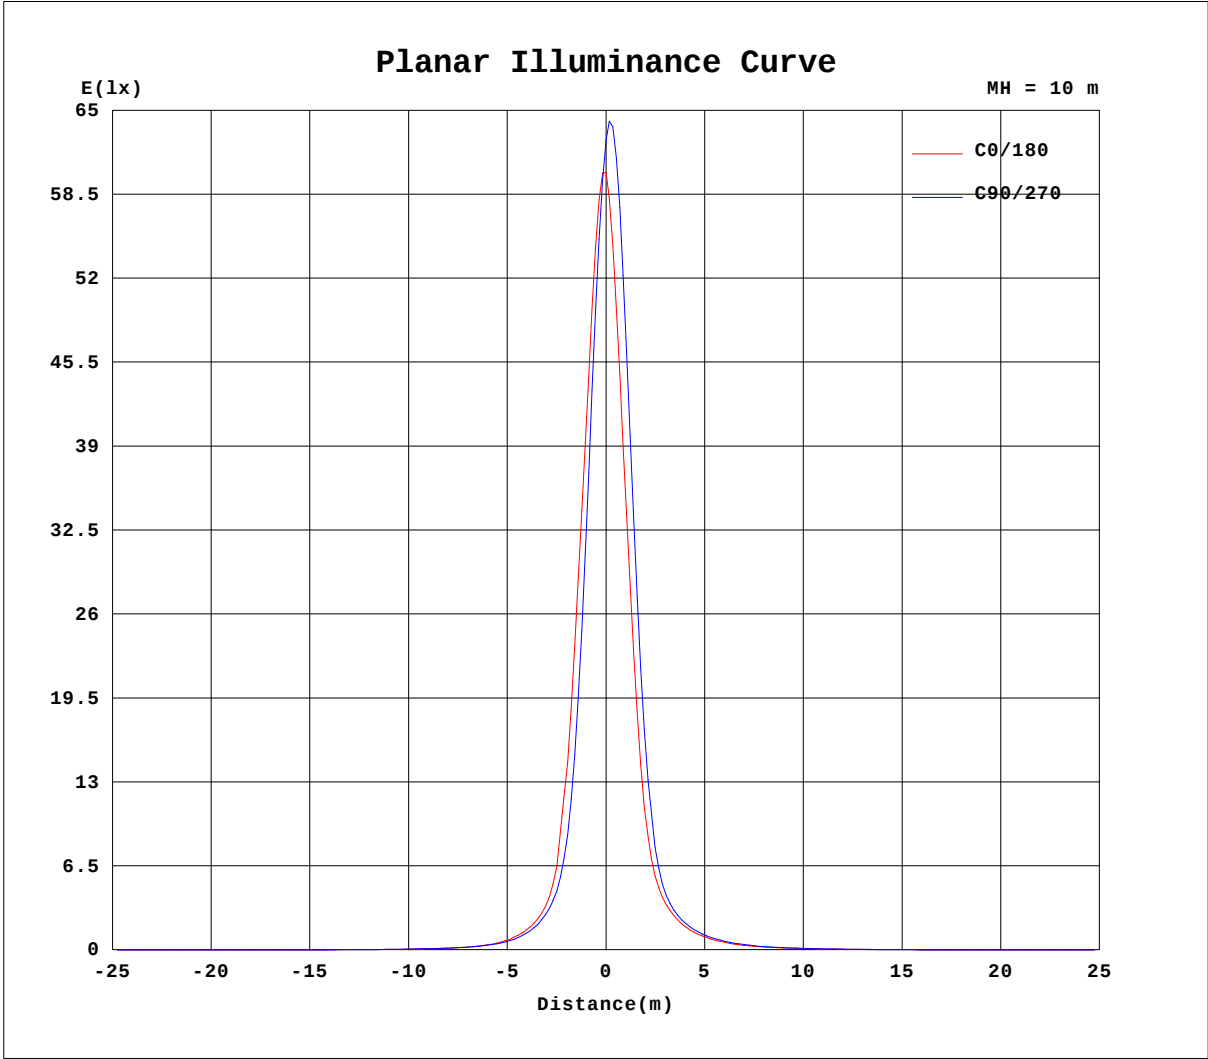


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-06-26

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Mini-600mm-TW-1800K-15D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:15 DEG	DIM.:600MM	SERIAL No.:IES002514
MFR.:	SUR.:	Shielding Angle:

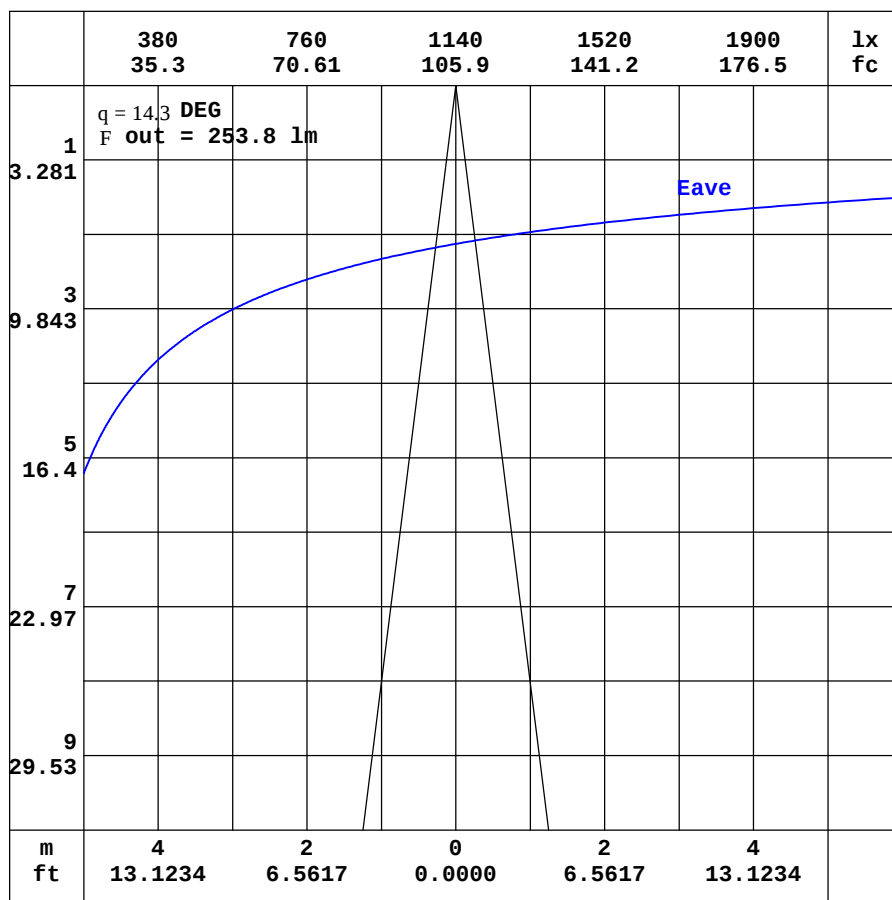

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(b) Range:-90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Mini-600mm-TW-1800K-15D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:15 DEG	DIM.:600MM	SERIAL No.:IES002514
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.51	2.23	1.99	1.82	1.81	1.88	2.11	2.68	3.59	4.58	5.35	5.71	5.67	5.53	5.34	5.19	4.90	4.63	4.80
-170	2.51	2.20	1.96	1.78	1.74	1.74	1.84	2.16	2.71	3.34	3.83	4.10	4.17	4.27	4.37	4.55	4.83	5.18	5.31
-160	2.51	2.19	1.94	1.76	1.69	1.62	1.57	1.62	1.81	2.04	2.22	2.30	2.38	2.97	3.57	4.08	4.51	4.78	4.92
-150	2.51	2.18	1.93	1.74	1.64	1.54	1.41	1.26	1.14	1.02	0.93	1.23	1.63	2.05	2.47	2.86	3.18	3.40	3.51
-140	2.51	2.18	1.94	1.74	1.61	1.52	1.37	1.16	0.88	0.71	0.69	0.76	0.92	1.12	1.34	1.56	1.75	1.87	1.93
-130	2.51	2.19	1.94	1.75	1.61	1.50	1.40	1.22	1.05	0.91	0.79	0.70	0.66	0.65	0.66	0.72	0.77	0.81	0.83
-120	2.51	2.20	1.95	1.77	1.62	1.49	1.40	1.32	1.30	1.22	1.15	1.05	0.96	0.88	0.79	0.73	0.67	0.63	0.60
-110	2.51	2.20	1.97	1.77	1.62	1.50	1.38	1.35	1.35	1.35	1.35	1.35	1.35	1.33	1.30	1.27	1.24	1.21	1.20
-100	2.51	2.23	1.98	1.78	1.59	1.42	1.27	1.29	1.31	1.32	1.34	1.35	1.35	1.35	1.36	1.36	1.36	1.37	1.37
-90	2.51	2.27	2.02	1.78	1.53	1.29	1.05	1.06	1.07	1.09	1.10	1.12	1.13	1.15	1.16	1.18	1.19	1.21	1.22
-80	2.51	2.30	2.07	1.82	1.56	1.27	0.93	0.91	0.91	0.91	0.91	0.92	0.92	0.93	0.94	0.94	0.94	0.94	0.94
-70	2.51	2.35	2.19	2.02	1.76	1.47	1.15	1.12	1.26	1.41	1.58	1.74	1.91	2.08	2.26	2.41	2.52	2.59	2.62
-60	2.51	2.42	2.39	2.28	2.19	2.07	1.96	2.02	2.51	3.09	3.71	4.34	4.97	5.62	6.22	6.68	7.01	7.18	7.18
-50	2.51	2.51	2.59	2.70	2.83	2.98	3.31	3.80	4.71	5.95	7.36	8.92	10.6	12.3	13.8	15.0	15.8	16.1	16.0
-40	2.51	2.62	2.85	3.20	3.57	4.23	5.22	6.44	7.77	9.87	12.8	16.3	20.1	23.9	27.5	29.8	31.2	31.3	30.2
-30	2.51	2.74	3.15	3.73	4.44	5.68	7.48	9.68	12.4	15.8	20.3	26.3	33.5	42.2	52.2	62.4	68.7	70.1	65.4
-20	2.51	2.84	3.43	4.21	5.34	7.21	9.91	13.3	17.6	23.3	30.2	39.9	55.4	81.3	119	166	210	227	209
-10	2.51	2.93	3.67	4.64	6.13	8.53	12.0	16.5	22.2	29.9	40.1	56.9	87.4	144	251	422	693	1143	1221
0	2.51	3.00	3.86	4.99	6.70	9.47	13.6	18.8	25.4	34.3	46.5	67.1	104	166	283	532	1502	3946	6021
10	2.51	2.99	3.82	4.91	6.56	9.20	13.0	17.9	24.0	32.2	42.6	59.6	88.2	134	207	349	768	1833	2285
20	2.51	2.96	3.73	4.73	6.17	8.46	11.7	15.8	20.9	27.6	35.3	45.4	61.4	86.2	120	165	222	289	324
30	2.51	2.91	3.58	4.47	5.57	7.36	9.90	13.0	16.9	21.4	27.2	33.7	41.3	51.9	65.5	80.9	96.9	111	119
40	2.51	2.85	3.38	4.11	4.92	6.17	7.95	10.2	12.7	15.7	19.4	23.7	28.3	32.7	37.1	41.8	46.2	49.9	51.9
50	2.51	2.76	3.19	3.72	4.33	5.03	6.08	7.45	9.06	10.9	13.0	15.2	17.6	19.9	22.2	24.4	26.2	27.4	28.1
60	2.51	2.69	3.02	3.34	3.74	4.15	4.62	5.25	6.05	6.97	7.97	9.03	10.1	11.2	12.2	13.0	13.7	14.2	14.4
70	2.51	2.64	2.82	3.04	3.23	3.45	3.68	3.91	4.18	4.46	4.78	5.11	5.46	5.79	6.10	6.37	6.59	6.74	6.81
80	2.51	2.59	2.68	2.77	2.88	2.99	3.07	3.14	3.21	3.28	3.36	3.43	3.49	3.56	3.63	3.68	3.73	3.76	3.78
90	2.51	2.54	2.58	2.62	2.65	2.69	2.72	2.72	2.72	2.72	2.72	2.72	2.72	2.71	2.70	2.69	2.69	2.68	2.67
100	2.51	2.49	2.48	2.47	2.46	2.44	2.42	2.36	2.29	2.23	2.18	2.12	2.07	2.03	2.00	1.98	1.96	1.95	1.95
110	2.51	2.44	2.39	2.31	2.24	2.16	2.08	1.97	1.89	1.83	1.79	1.77	1.75	1.75	1.76	1.77	1.77	1.78	1.79
120	2.51	2.40	2.28	2.17	2.05	1.93	1.86	1.81	1.77	1.76	1.75	1.76	1.78	1.80	1.82	1.84	1.86	1.87	1.87
130	2.51	2.36	2.20	2.05	1.90	1.83	1.78	1.76	1.76	1.81	1.89	2.02	2.17	2.34	2.54	2.75	2.93	3.05	3.09
140	2.51	2.32	2.13	1.94	1.83	1.79	1.78	1.81	1.92	2.16	2.51	2.98	3.51	4.03	4.48	4.86	5.11	5.25	5.30
150	2.51	2.28	2.07	1.88	1.81	1.79	1.83	1.99	2.33	2.91	3.64	4.40	5.05	5.49	5.76	5.91	6.00	6.03	6.03
160	2.51	2.26	2.03	1.85	1.80	1.82	1.94	2.27	2.89	3.76	4.65	5.33	5.75	5.96	6.12	6.24	6.38	6.44	6.48
170	2.51	2.24	2.00	1.83	1.81	1.85	2.05	2.54	3.37	4.35	5.19	5.68	5.84	5.95	6.04	6.17	6.16	6.23	6.52
180	2.51	2.23	1.99	1.82	1.81	1.88	2.11	2.68	3.59	4.58	5.35	5.71	5.67	5.53	5.34	5.19	4.90	4.63	4.84

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2024-06-26

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Mini-600mm-TW-1800K-15D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:15 DEG	DIM.:600MM	SERIAL No.:IES002514
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	4.19	4.19	4.07	3.74	3.35	2.88	2.31	1.70	1.16	0.80	0.73	0.83	1.05	1.26	1.35	1.32	1.18	0.96
-170	5.13	4.78	4.46	4.10	3.60	2.98	2.30	1.65	1.12	0.78	0.72	0.83	1.05	1.26	1.35	1.32	1.18	0.96
-160	4.80	4.58	4.19	3.72	3.17	2.56	1.93	1.37	0.95	0.73	0.72	0.86	1.09	1.28	1.35	1.32	1.18	0.96
-150	3.45	3.27	2.99	2.61	2.18	1.73	1.31	0.97	0.75	0.69	0.76	0.95	1.16	1.31	1.35	1.30	1.16	0.96
-140	1.90	1.79	1.62	1.40	1.17	0.95	0.78	0.68	0.67	0.73	0.89	1.09	1.25	1.33	1.34	1.29	1.15	0.96
-130	0.81	0.77	0.72	0.65	0.62	0.63	0.64	0.70	0.81	0.95	1.10	1.23	1.32	1.35	1.33	1.26	1.12	0.96
-120	0.62	0.64	0.67	0.72	0.78	0.86	0.95	1.05	1.14	1.23	1.28	1.33	1.35	1.34	1.30	1.22	1.09	0.96
-110	1.20	1.21	1.23	1.26	1.29	1.32	1.33	1.34	1.35	1.35	1.35	1.35	1.33	1.31	1.24	1.15	1.06	0.96
-100	1.37	1.37	1.37	1.36	1.36	1.35	1.35	1.35	1.34	1.33	1.32	1.30	1.25	1.20	1.14	1.09	1.03	0.96
-90	1.21	1.19	1.18	1.17	1.15	1.14	1.13	1.13	1.12	1.11	1.11	1.10	1.08	1.05	1.03	1.01	0.99	0.96
-80	0.94	0.93	0.93	0.93	0.92	0.91	0.92	0.92	0.93	0.94	0.96	0.96	0.98	1.00	1.01	1.00	0.97	0.96
-70	2.54	2.42	2.26	2.08	1.87	1.69	1.58	1.46	1.34	1.23	1.12	1.06	1.04	1.03	1.01	1.00	0.99	0.96
-60	6.96	6.60	6.10	5.51	4.88	4.38	3.94	3.46	2.95	2.44	1.98	1.60	1.36	1.23	1.11	1.02	1.00	0.96
-50	15.4	14.5	13.2	11.8	10.2	8.88	7.61	6.45	5.42	4.50	3.54	2.62	1.94	1.53	1.30	1.10	1.00	0.96
-40	28.6	26.4	23.8	21.0	18.5	15.8	13.1	10.5	8.35	6.73	5.33	3.95	2.74	1.92	1.50	1.19	1.01	0.96
-30	59.3	50.2	40.7	33.7	28.0	23.2	19.1	15.5	12.2	9.41	7.21	5.32	3.62	2.38	1.68	1.31	1.02	0.96
-20	179	133	96.2	67.8	47.2	33.5	25.8	20.5	16.2	12.3	9.11	6.58	4.43	2.81	1.87	1.41	1.03	0.96
-10	902	475	262	148	88.1	54.0	35.5	25.4	19.3	14.6	10.7	7.57	5.03	3.12	2.01	1.48	1.04	0.96
0	4506	1969	568	252	133	72.0	43.2	28.8	21.1	15.7	11.5	8.10	5.29	3.25	2.08	1.53	1.04	0.96
10	1557	718	380	230	137	81.4	50.3	33.6	24.1	17.6	12.5	8.71	5.71	3.55	2.29	1.64	1.10	0.96
20	313	270	202	144	98.9	67.6	46.1	32.9	24.1	17.4	12.3	8.60	5.69	3.64	2.40	1.71	1.14	0.96
30	118	109	94.2	75.0	58.0	45.1	35.5	28.1	20.9	15.3	11.1	7.85	5.29	3.53	2.43	1.73	1.18	0.96
40	51.4	49.1	45.6	41.0	35.4	29.9	24.6	19.8	15.8	12.3	9.24	6.67	4.69	3.31	2.41	1.70	1.21	0.96
50	27.8	26.8	25.2	23.1	20.6	17.9	15.3	13.0	10.9	8.97	7.15	5.39	4.04	3.04	2.31	1.66	1.24	0.96
60	14.2	13.8	13.1	12.2	11.3	10.1	8.98	7.91	6.89	6.03	5.28	4.34	3.46	2.77	2.13	1.60	1.25	0.96
70	6.73	6.58	6.36	6.09	5.76	5.41	5.10	4.80	4.48	4.18	3.91	3.56	2.97	2.45	1.97	1.58	1.24	0.96
80	3.75	3.71	3.66	3.60	3.53	3.45	3.39	3.32	3.24	3.17	3.08	2.96	2.58	2.21	1.86	1.53	1.22	0.96
90	2.65	2.63	2.61	2.59	2.57	2.55	2.55	2.54	2.53	2.53	2.52	2.51	2.25	2.00	1.74	1.48	1.22	0.96
100	1.93	1.92	1.92	1.92	1.91	1.92	1.94	1.98	2.01	2.06	2.10	2.13	2.01	1.86	1.69	1.48	1.24	0.96
110	1.79	1.79	1.80	1.80	1.80	1.80	1.80	1.80	1.81	1.82	1.86	1.88	1.82	1.75	1.63	1.47	1.25	0.96
120	1.89	1.90	1.90	1.90	1.88	1.86	1.84	1.80	1.80	1.80	1.80	1.76	1.71	1.67	1.59	1.46	1.25	0.96
130	3.11	3.04	2.90	2.73	2.54	2.35	2.18	2.03	1.91	1.84	1.76	1.70	1.65	1.60	1.55	1.45	1.25	0.96
140	5.28	5.19	5.00	4.70	4.29	3.78	3.25	2.75	2.35	1.99	1.71	1.59	1.58	1.55	1.51	1.43	1.25	0.96
150	6.03	6.00	5.93	5.80	5.58	5.22	4.65	3.93	2.86	2.07	1.64	1.48	1.46	1.50	1.47	1.40	1.24	0.96
160	6.46	6.40	6.27	6.14	6.01	5.81	4.97	3.91	2.82	1.96	1.47	1.31	1.33	1.42	1.43	1.38	1.23	0.96
170	6.42	6.28	6.26	5.84	5.22	4.56	3.84	3.02	2.20	1.51	1.16	1.08	1.19	1.34	1.39	1.36	1.21	0.96
180	4.19	4.19	4.07	3.74	3.35	2.88	2.31	1.70	1.16	0.80	0.73	0.83	1.05	1.26	1.35	1.32	1.18	0.96

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: