

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		9769.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	27.8V x 28.5H
	At 50% of Imax	14.2V x 14.5H
	At 90% of Imax	4.7V x 5.5H
Beam Flux	Total	1001.4 lumens per klm.
	To 10% of Imax	645.2 lumens per klm.
	To 50% of Imax	331.2 lumens per klm.
	To 90% of Imax	44.7 lumens per klm.
Upward LOR		2.3 %
Downward LOR		97.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Mini-600mm-TW-6000K-15D-Rev2	TYPE:6000K	WEIGHT:
SPEC.:15 DEG	DIM.:600MM	SERIAL No.:IES002515
MFR.:	SUR.:	Shielding Angle:

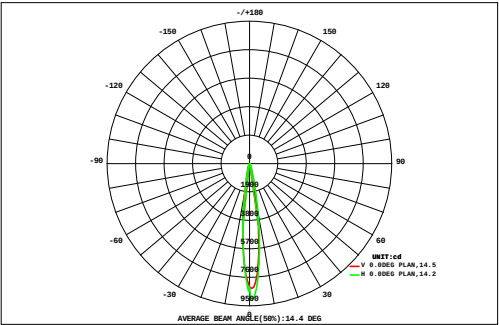

DATA OF LAMP		Eff:82.73lm/W	
MODEL		Imax(cd)	9052
NOMINAL POWER(W)	11.2	AVAILABILITY(%)	64.1
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	593.8
NOMINAL FLUX(lm)	926.6	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	926.6
TEST VOLTAGE(V)	220	q @50%(H,V)	15,14DEG


18 16 14 12 10 8 6 4 2 0 -2 -4 -6 -8 -10 -12 -14 -16 -18		AREA FLUX DIAGRAM																UNIT:lm			F t	F a
		0.37	0.44	0.51	0.59	0.67	0.72	0.76	0.78	0.78	0.74	0.68	0.61	0.53	0.45	0.39	0.33	0.29	0.24	9.87	0.00	
VERTICAL (DEG)		0.42	0.50	0.59	0.71	0.84	0.96	1.07	1.16	1.21	1.16	1.02	0.85	0.69	0.57	0.47	0.39	0.33	0.28	13.2	2.88	
		0.47	0.57	0.69	0.85	1.08	1.36	1.62	1.81	1.91	1.83	1.60	1.30	0.99	0.75	0.59	0.47	0.38	0.32	18.6	11.7	
		0.51	0.64	0.80	1.05	1.45	1.98	2.55	2.98	3.19	3.07	2.64	2.08	1.50	1.06	0.76	0.56	0.44	0.35	27.6	22.1	
		0.55	0.71	0.93	1.34	1.92	2.85	3.95	4.60	4.91	4.77	4.17	3.28	2.29	1.51	0.98	0.68	0.51	0.40	40.3	35.9	
		0.58	0.76	1.08	1.61	2.43	3.72	5.20	6.32	6.75	6.54	5.76	4.57	3.21	2.03	1.28	0.84	0.61	0.47	53.8	49.8	
		0.59	0.79	1.19	1.79	2.84	4.41	6.25	8.01	8.63	8.31	7.24	5.68	4.00	2.60	1.68	1.10	0.74	0.54	66.4	63.0	
		0.58	0.80	1.21	1.88	3.09	4.83	6.91	8.99	10.3	9.86	8.40	6.58	4.91	3.39	2.16	1.37	0.88	0.61	76.7	73.8	
		0.56	0.76	1.14	1.83	3.04	4.76	6.76	8.77	10.4	10.4	9.20	7.70	5.86	4.04	2.56	1.58	1.00	0.67	81.1	78.1	
		0.53	0.73	1.09	1.79	3.01	4.69	6.61	8.54	9.81	9.67	9.00	7.63	5.83	4.04	2.57	1.59	1.01	0.68	78.8	76.0	
		0.51	0.70	1.06	1.75	2.98	4.66	6.41	7.62	8.17	7.98	7.36	6.27	4.86	3.38	2.18	1.40	0.93	0.65	68.9	65.6	
		0.47	0.64	0.95	1.55	2.59	3.88	5.02	5.86	6.31	6.16	5.48	4.68	3.68	2.55	1.73	1.18	0.82	0.60	54.2	50.7	
		0.42	0.56	0.80	1.22	1.85	2.64	3.44	4.11	4.47	4.35	3.79	3.14	2.48	1.83	1.31	0.96	0.72	0.55	38.6	34.7	
		0.37	0.48	0.64	0.88	1.23	1.66	2.10	2.53	2.76	2.70	2.39	1.96	1.63	1.29	1.00	0.78	0.62	0.49	25.5	20.3	
		0.31	0.40	0.50	0.64	0.82	1.03	1.29	1.49	1.60	1.59	1.47	1.29	1.09	0.92	0.77	0.63	0.52	0.43	16.8	9.36	
		0.26	0.33	0.40	0.49	0.58	0.69	0.82	0.92	0.98	0.99	0.95	0.88	0.78	0.69	0.60	0.52	0.44	0.37	11.7	0.00	
		0.22	0.27	0.32	0.38	0.44	0.51	0.58	0.64	0.67	0.69	0.68	0.64	0.60	0.54	0.48	0.42	0.36	0.31	8.75	0.00	
		0.19	0.22	0.26	0.30	0.34	0.39	0.44	0.47	0.50	0.51	0.51	0.49	0.46	0.43	0.39	0.34	0.30	0.26	6.79	0.00	
				-18	-16	-14	-12	-10	-8	-6	-4	HORIZONTAL (DEG)				4	6	8	10	12	14	16
F t	7.92	10.3	14.2	20.6	31.2	45.7	61.8	75.6	83.3	81.4	72.3	59.6	45.4	32.1	21.9	15.2	10.9	8.24	698	---		
F a	0.00	0.00	4.84	14.8	26.5	41.7	58.4	72.3	79.8	77.9	68.8	55.9	41.1	27.0	15.8	7.75	1.12	0.00	---	594		

one-half-peak spread: U:6.9,D:7.4 , L:7.4,R:7.2 NEMA Beam Type: Type 2

H _b Range:-90 - 90DEG	V(B) Range:-180 - 180DEG
H _b Interval: 0.5DEG	V(B) Interval: 0.5DEG
Test Speed: HIGH	Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Temperature:25.3DEG	Humidity:65.0%
Operators:	Test Distance:8.630m [K=1.0000]
Test Date:2024-06-26	Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Mini-600mm-TW-6000K-15D-Rev2	TYPE:6000K	WEIGHT:
SPEC.:15 DEG	DIM.:600MM	SERIAL No.:IES002515
MFR.:	SUR.:	Shielding Angle:

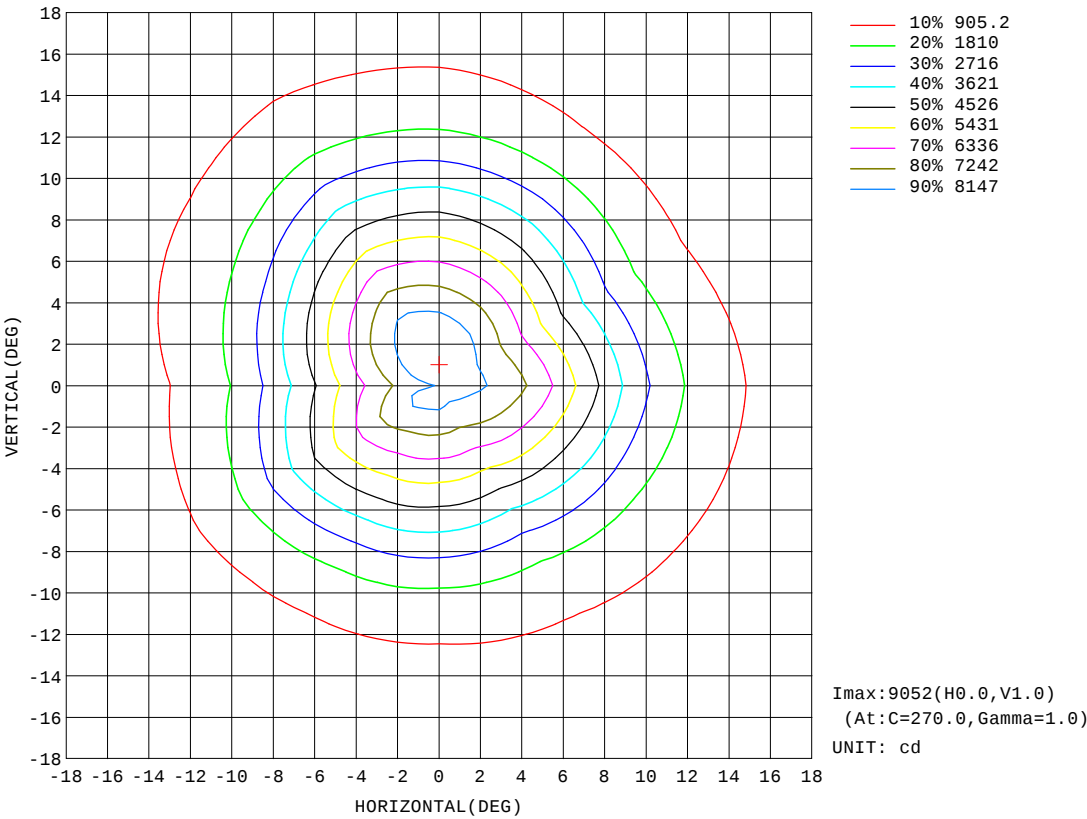


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Mini-600mm-TW-6000K-15D-Rev2	TYPE:6000K	WEIGHT:
SPEC.:15 DEG	DIM.:600MM	SERIAL No.:IES002515
MFR.:	SUR.:	Shielding Angle:

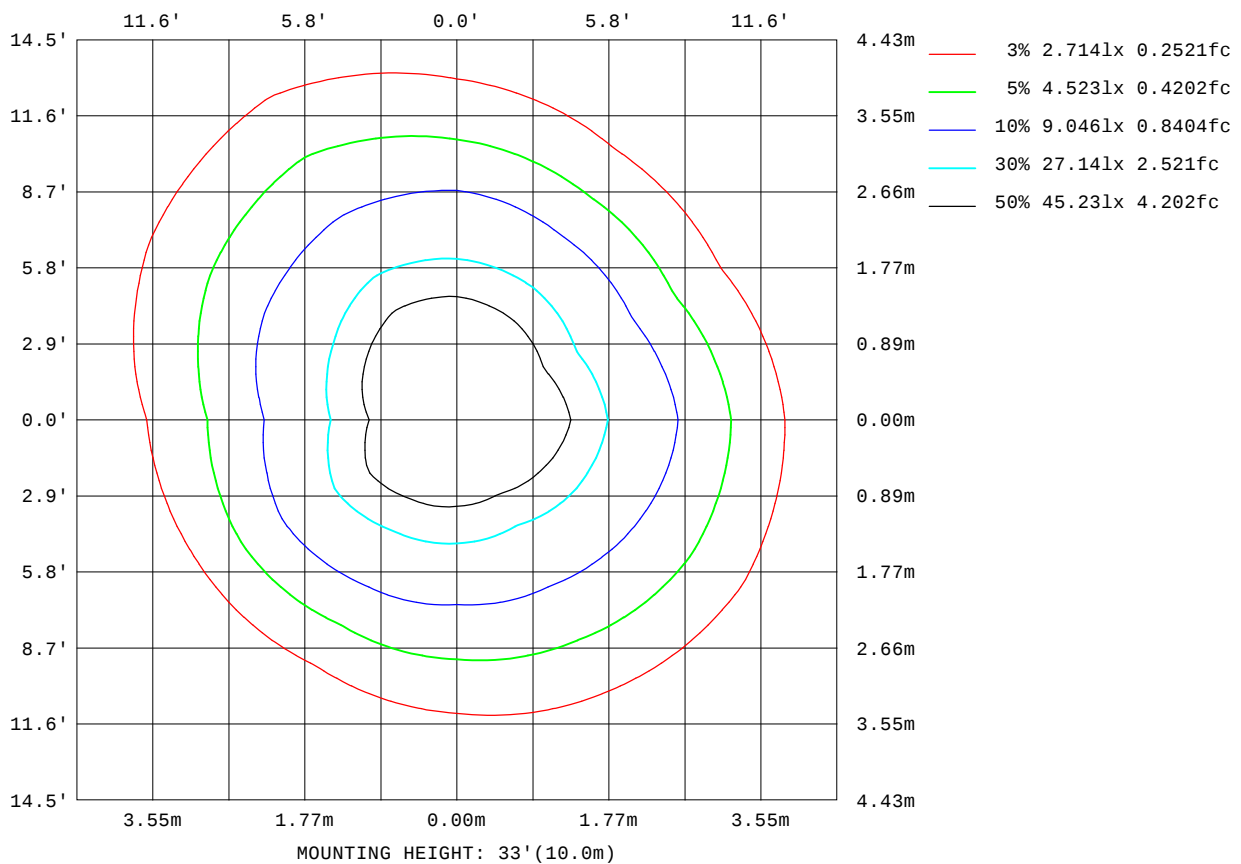

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-06-26

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

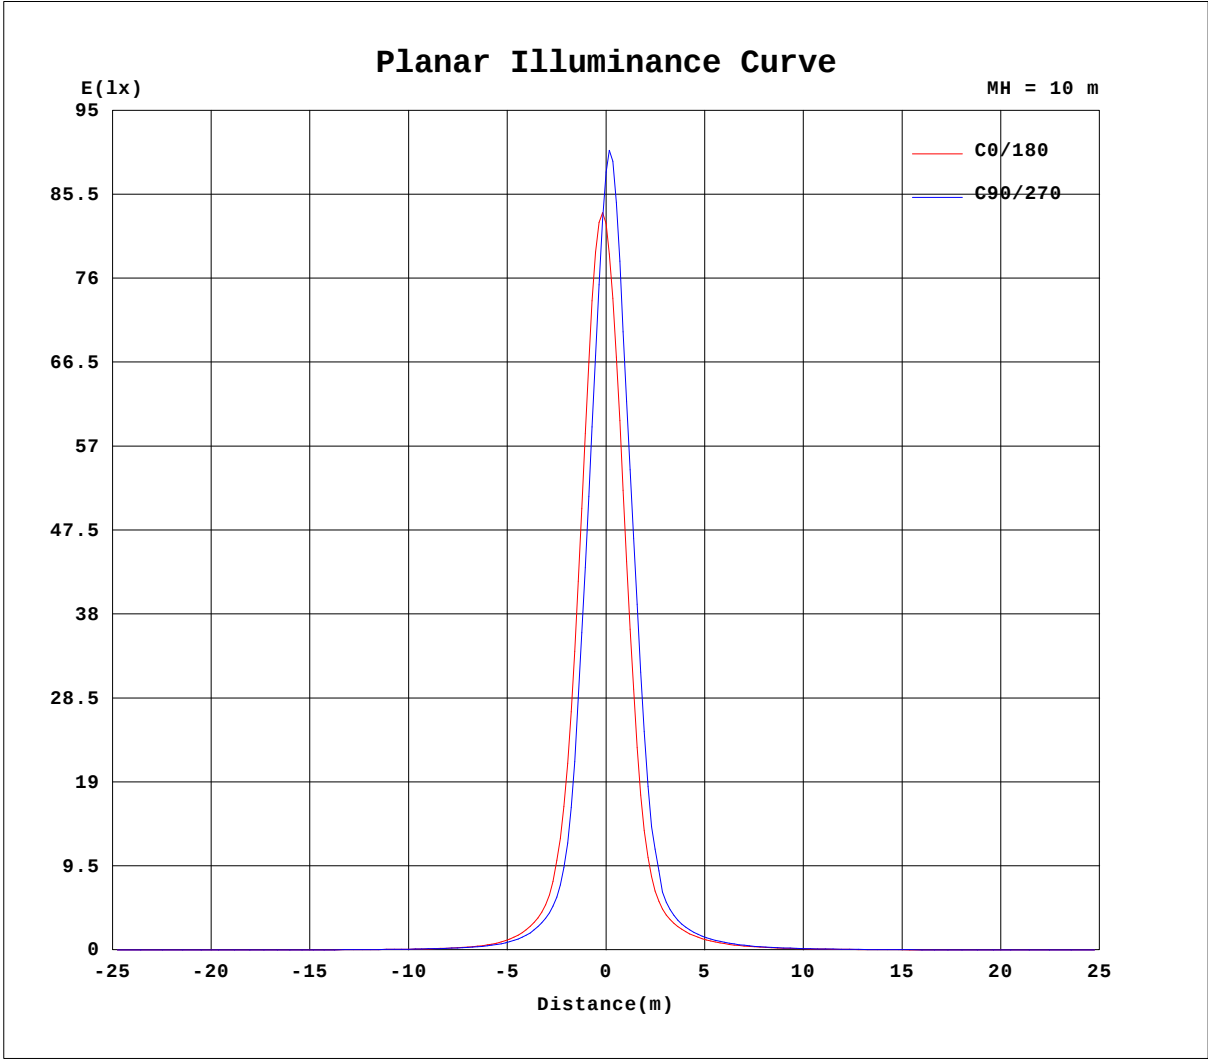


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-06-26

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Mini-600mm-TW-6000K-15D-Rev2	TYPE:6000K	WEIGHT:
SPEC.:15 DEG	DIM.:600MM	SERIAL No.:IES002515
MFR.:	SUR.:	Shielding Angle:

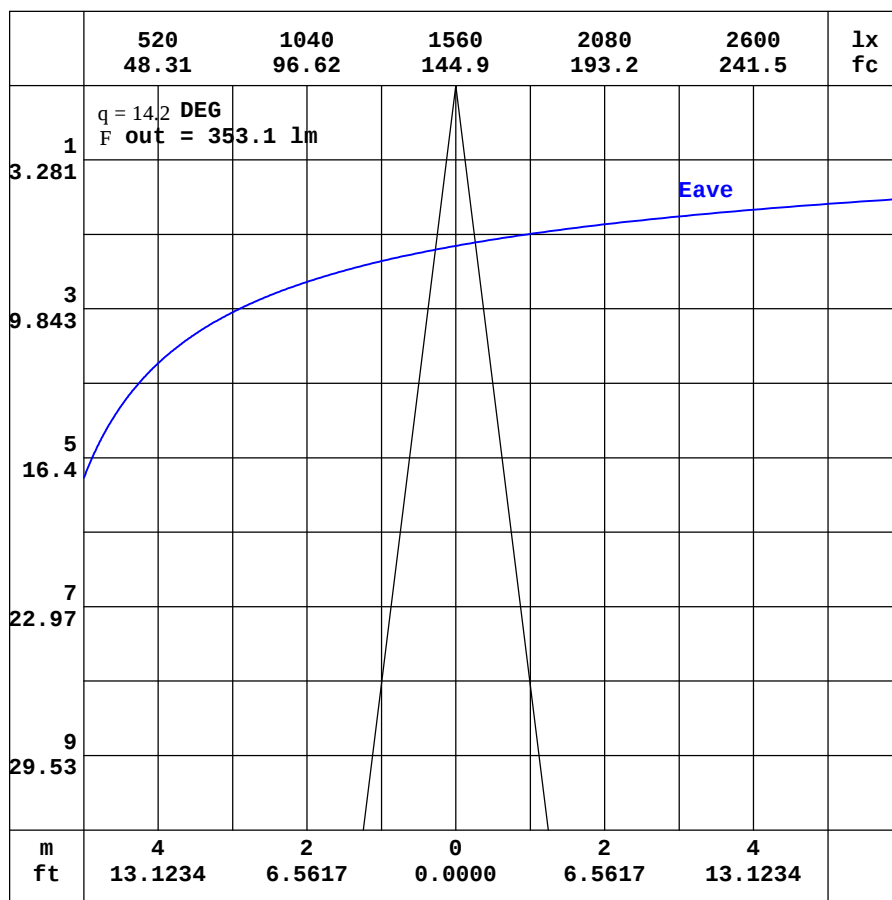

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Mini-600mm-TW-6000K-15D-Rev2	TYPE:6000K	WEIGHT:
SPEC.:15 DEG	DIM.:600MM	SERIAL No.:IES002515
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	3.43	3.04	2.71	2.47	2.47	2.56	2.90	3.70	4.95	6.33	7.35	7.78	7.72	7.50	7.27	7.08	6.68	6.30	6.47
-170	3.43	3.01	2.66	2.42	2.37	2.36	2.50	2.95	3.71	4.59	5.25	5.60	5.71	5.86	6.02	6.25	6.62	7.05	7.23
-160	3.43	2.99	2.63	2.39	2.29	2.20	2.13	2.18	2.43	2.76	3.01	3.13	3.27	4.09	4.92	5.63	6.21	6.54	6.70
-150	3.43	2.97	2.62	2.37	2.23	2.09	1.89	1.67	1.49	1.31	1.20	1.63	2.19	2.80	3.39	3.92	4.35	4.64	4.77
-140	3.43	2.97	2.62	2.37	2.18	2.05	1.83	1.52	1.12	0.86	0.85	0.96	1.19	1.48	1.80	2.12	2.38	2.56	2.65
-130	3.43	2.97	2.63	2.38	2.18	2.03	1.87	1.63	1.38	1.17	0.99	0.86	0.81	0.80	0.84	0.93	1.03	1.09	1.13
-120	3.43	2.99	2.66	2.40	2.20	2.03	1.90	1.79	1.72	1.62	1.51	1.38	1.24	1.12	1.02	0.94	0.89	0.86	0.84
-110	3.43	3.01	2.68	2.41	2.20	2.03	1.88	1.83	1.84	1.84	1.84	1.83	1.82	1.78	1.74	1.70	1.66	1.64	1.62
-100	3.43	3.05	2.71	2.42	2.16	1.93	1.73	1.75	1.77	1.80	1.81	1.82	1.84	1.85	1.86	1.86	1.86	1.86	1.86
-90	3.43	3.09	2.76	2.43	2.09	1.76	1.42	1.44	1.46	1.48	1.50	1.52	1.54	1.56	1.58	1.60	1.62	1.64	1.66
-80	3.43	3.15	2.83	2.48	2.12	1.72	1.27	1.24	1.23	1.23	1.22	1.23	1.22	1.23	1.24	1.25	1.26	1.26	1.27
-70	3.43	3.21	2.97	2.73	2.38	1.99	1.57	1.52	1.68	1.86	2.06	2.26	2.45	2.70	2.96	3.18	3.36	3.49	3.55
-60	3.43	3.29	3.24	3.08	2.96	2.80	2.64	2.73	3.37	4.08	4.81	5.55	6.28	7.02	7.82	8.54	9.10	9.49	9.67
-50	3.43	3.40	3.50	3.65	3.83	4.02	4.46	5.07	6.13	7.50	9.12	10.9	12.8	14.7	16.7	18.6	20.1	21.1	21.6
-40	3.43	3.56	3.85	4.33	4.82	5.66	6.87	8.30	9.73	11.9	15.1	18.9	22.8	26.4	29.6	32.9	36.0	38.5	40.0
-30	3.43	3.71	4.24	5.04	5.94	7.49	9.70	12.3	15.2	18.7	22.6	27.4	32.9	39.6	47.5	57.0	68.8	79.2	85.1
-20	3.43	3.84	4.63	5.69	7.11	9.43	12.8	16.9	21.8	27.6	33.2	39.2	47.9	67.3	96.7	139	188	244	277
-10	3.43	3.96	4.96	6.27	8.12	11.2	15.5	21.1	28.0	36.6	46.6	61.8	87.9	131	210	368	709	1322	1689
0	3.43	4.05	5.22	6.74	8.86	12.4	17.5	24.4	32.7	44.1	59.0	83.6	126	195	322	613	1839	5262	8219
10	3.43	4.04	5.17	6.64	8.70	12.1	17.1	23.7	32.2	43.7	59.0	84.3	130	206	337	567	1175	2673	3292
20	3.43	4.01	5.03	6.40	8.20	11.1	15.5	21.3	28.8	38.8	51.7	70.1	99.8	146	210	299	393	428	410
30	3.43	3.95	4.82	6.04	7.45	9.73	13.1	17.6	23.3	30.7	40.3	51.5	65.4	84.2	109	136	152	158	153
40	3.43	3.86	4.56	5.56	6.65	8.24	10.5	13.6	17.3	22.0	27.9	34.8	42.3	50.2	57.9	63.4	67.1	68.7	67.5
50	3.43	3.75	4.31	5.03	5.85	6.78	8.13	9.90	12.1	14.9	18.0	21.5	25.2	29.1	32.2	34.7	36.4	37.3	37.2
60	3.43	3.66	4.09	4.51	5.05	5.62	6.26	7.08	8.14	9.36	10.8	12.4	13.9	15.6	16.9	17.8	18.6	19.1	19.2
70	3.43	3.60	3.83	4.12	4.38	4.67	4.97	5.31	5.68	6.10	6.54	6.99	7.47	7.91	8.30	8.63	8.88	9.03	9.09
80	3.43	3.54	3.64	3.77	3.92	4.06	4.18	4.28	4.38	4.48	4.59	4.70	4.80	4.88	4.96	5.02	5.06	5.09	5.10
90	3.43	3.48	3.52	3.57	3.62	3.67	3.71	3.72	3.73	3.73	3.74	3.74	3.75	3.74	3.73	3.72	3.70	3.69	3.68
100	3.43	3.40	3.38	3.36	3.34	3.32	3.29	3.22	3.14	3.06	2.99	2.92	2.86	2.80	2.75	2.72	2.69	2.67	2.65
110	3.43	3.33	3.25	3.15	3.05	2.94	2.85	2.70	2.61	2.52	2.48	2.44	2.41	2.40	2.41	2.41	2.41	2.42	2.42
120	3.43	3.27	3.12	2.95	2.80	2.64	2.55	2.49	2.44	2.43	2.43	2.44	2.47	2.50	2.51	2.53	2.54	2.54	2.53
130	3.43	3.21	2.99	2.79	2.60	2.51	2.46	2.45	2.46	2.54	2.67	2.83	3.03	3.24	3.50	3.76	3.99	4.13	4.17
140	3.43	3.16	2.89	2.65	2.50	2.46	2.46	2.53	2.72	3.04	3.52	4.14	4.83	5.51	6.09	6.59	6.93	7.12	7.20
150	3.43	3.11	2.81	2.57	2.47	2.47	2.54	2.78	3.28	4.05	5.05	6.04	6.86	7.42	7.77	7.98	8.11	8.18	8.20
160	3.43	3.08	2.76	2.52	2.47	2.50	2.68	3.15	4.02	5.21	6.38	7.26	7.78	8.05	8.26	8.44	8.62	8.73	8.80
170	3.43	3.05	2.72	2.49	2.47	2.53	2.83	3.51	4.65	6.01	7.10	7.72	7.92	8.05	8.16	8.34	8.35	8.44	8.83
180	3.43	3.04	2.71	2.47	2.47	2.56	2.90	3.70	4.95	6.33	7.35	7.78	7.72	7.50	7.27	7.08	6.68	6.30	6.50

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2024-06-26

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Mini-600mm-TW-6000K-15D-Rev2	TYPE:6000K	WEIGHT:
SPEC.:15 DEG	DIM.:600MM	SERIAL No.:IES002515
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	5.64	5.65	5.48	5.05	4.52	3.89	3.10	2.25	1.51	1.05	0.96	1.13	1.42	1.71	1.81	1.77	1.58	1.29
-170	6.92	6.42	5.93	5.46	4.81	3.98	3.08	2.21	1.50	1.06	0.98	1.13	1.43	1.71	1.81	1.77	1.58	1.29
-160	6.51	6.19	5.64	4.99	4.24	3.43	2.60	1.86	1.30	1.01	1.00	1.19	1.48	1.73	1.81	1.76	1.57	1.29
-150	4.68	4.44	4.06	3.55	2.97	2.37	1.82	1.37	1.07	0.98	1.07	1.31	1.58	1.77	1.80	1.75	1.55	1.29
-140	2.61	2.48	2.26	1.99	1.66	1.36	1.13	0.99	0.98	1.05	1.25	1.49	1.70	1.79	1.79	1.72	1.53	1.29
-130	1.13	1.10	1.03	0.97	0.92	0.92	0.94	1.01	1.16	1.34	1.52	1.68	1.77	1.80	1.77	1.68	1.50	1.29
-120	0.87	0.90	0.95	1.02	1.10	1.20	1.33	1.44	1.57	1.67	1.73	1.78	1.80	1.78	1.73	1.62	1.46	1.29
-110	1.63	1.64	1.67	1.70	1.73	1.77	1.79	1.81	1.81	1.81	1.80	1.79	1.78	1.73	1.64	1.53	1.42	1.29
-100	1.85	1.85	1.84	1.83	1.82	1.81	1.80	1.79	1.78	1.76	1.73	1.70	1.65	1.59	1.52	1.45	1.36	1.29
-90	1.64	1.62	1.60	1.58	1.55	1.53	1.52	1.50	1.49	1.48	1.46	1.45	1.42	1.39	1.37	1.34	1.31	1.29
-80	1.27	1.27	1.26	1.26	1.25	1.25	1.25	1.25	1.25	1.26	1.27	1.28	1.31	1.32	1.33	1.32	1.29	1.29
-70	3.46	3.31	3.10	2.85	2.58	2.34	2.17	1.99	1.81	1.65	1.51	1.42	1.38	1.36	1.33	1.32	1.30	1.29
-60	9.48	9.09	8.51	7.78	6.95	6.16	5.39	4.60	3.85	3.17	2.59	2.13	1.83	1.65	1.47	1.34	1.32	1.29
-50	21.3	20.4	19.0	17.2	15.1	13.0	10.9	9.02	7.32	5.86	4.52	3.38	2.55	2.03	1.74	1.44	1.32	1.29
-40	40.2	39.0	36.6	33.2	28.9	24.3	19.7	15.5	12.0	9.22	7.01	5.10	3.55	2.53	2.01	1.57	1.33	1.29
-30	86.8	82.0	72.5	60.5	49.1	39.1	31.0	24.1	18.1	13.4	9.81	7.01	4.69	3.12	2.23	1.73	1.34	1.29
-20	277	242	187	134	91.1	62.7	44.0	32.3	24.0	17.5	12.6	8.76	5.81	3.66	2.47	1.88	1.35	1.29
-10	1282	803	482	288	160	91.2	56.5	38.6	28.0	20.4	14.6	10.1	6.64	4.07	2.65	1.98	1.36	1.29
0	6722	2825	862	377	196	104	61.1	40.5	29.3	21.4	15.5	10.8	7.02	4.25	2.74	2.04	1.36	1.29
10	2152	851	399	246	157	97.1	62.2	42.9	31.6	23.2	16.6	11.5	7.57	4.67	3.02	2.19	1.44	1.29
20	348	262	193	145	105	75.2	53.9	40.4	30.7	22.5	16.2	11.3	7.54	4.80	3.18	2.28	1.51	1.29
30	139	120	97.9	79.7	63.8	51.5	42.4	34.8	26.6	19.7	14.5	10.4	7.03	4.67	3.24	2.30	1.56	1.29
40	64.1	58.9	53.1	47.0	41.8	36.2	30.5	24.9	20.2	16.0	12.1	8.86	6.25	4.38	3.23	2.27	1.61	1.29
50	36.1	34.2	31.7	28.7	25.5	22.5	19.4	16.7	14.1	11.9	9.57	7.21	5.36	4.06	3.10	2.21	1.64	1.29
60	18.7	18.0	16.9	15.8	14.5	13.0	11.7	10.4	9.16	8.05	7.02	5.77	4.64	3.72	2.86	2.15	1.66	1.29
70	8.96	8.73	8.42	8.03	7.57	7.10	6.71	6.34	5.96	5.59	5.26	4.79	4.01	3.30	2.65	2.12	1.66	1.29
80	5.06	5.01	4.93	4.85	4.75	4.65	4.57	4.49	4.39	4.30	4.19	4.04	3.51	3.00	2.51	2.06	1.64	1.29
90	3.66	3.63	3.60	3.58	3.55	3.52	3.51	3.50	3.49	3.48	3.46	3.45	3.09	2.73	2.37	2.01	1.65	1.29
100	2.63	2.62	2.62	2.61	2.62	2.63	2.66	2.71	2.76	2.81	2.88	2.92	2.75	2.54	2.30	2.01	1.67	1.29
110	2.41	2.41	2.40	2.40	2.39	2.39	2.39	2.40	2.43	2.47	2.52	2.55	2.48	2.38	2.22	1.99	1.69	1.29
120	2.53	2.53	2.50	2.48	2.46	2.43	2.40	2.39	2.39	2.39	2.40	2.36	2.31	2.25	2.15	1.97	1.69	1.29
130	4.16	4.05	3.84	3.57	3.29	3.04	2.81	2.63	2.50	2.41	2.34	2.26	2.20	2.16	2.09	1.95	1.69	1.29
140	7.18	7.05	6.79	6.36	5.76	5.04	4.28	3.59	3.04	2.59	2.25	2.13	2.11	2.08	2.03	1.92	1.68	1.29
150	8.20	8.16	8.08	7.92	7.62	7.10	6.30	5.26	3.77	2.69	2.14	1.95	1.96	2.00	1.98	1.89	1.66	1.29
160	8.78	8.70	8.54	8.40	8.23	7.96	6.78	5.28	3.77	2.57	1.92	1.73	1.78	1.91	1.92	1.85	1.64	1.29
170	8.78	8.58	8.59	8.00	7.13	6.23	5.22	4.09	2.94	2.00	1.52	1.44	1.60	1.80	1.86	1.81	1.62	1.29
180	5.64	5.65	5.48	5.05	4.52	3.89	3.10	2.25	1.51	1.05	0.96	1.13	1.42	1.71	1.81	1.77	1.58	1.29

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: