

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	2545.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	48.4V x 74.9H
	At 50% of Imax	20.7V x 42.7H
	At 90% of Imax	7.7V x 18.4H

Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	774.4 lumens per klm.
	To 50% of Imax	391.3 lumens per klm.
	To 90% of Imax	75.7 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Mini-600mm-TW-1800K-2040D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:20X40 DEG	DIM.:600mm	SERIAL No.:IES002540
MFR.:	SUR.:	Shielding Angle:

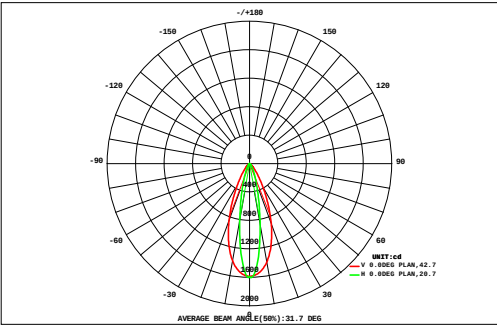

DATA OF LAMP		Eff:56.78lm/W	
MODEL		Imax(cd)	1605
NOMINAL POWER(W)	11.1	AVAILABILITY(%)	77.3
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	487.3
NOMINAL FLUX(lm)	630.3	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	630.3
TEST VOLTAGE(V)	220	q @50%(H,V)	43,21DEG

		AREA FLUX DIAGRAM																UNIT:lm			F t	F a
VERTICAL (DEG)	72	0.03	0.04	0.06	0.08	0.10	0.12	0.14	0.15	0.15	0.15	0.15	0.14	0.13	0.11	0.09	0.07	0.04	0.02	1.79	0.00	
	64	0.03	0.06	0.09	0.13	0.16	0.19	0.22	0.24	0.24	0.25	0.25	0.23	0.21	0.18	0.14	0.10	0.06	0.03	2.82	0.00	
	56	0.04	0.08	0.13	0.19	0.25	0.31	0.35	0.39	0.39	0.40	0.41	0.38	0.33	0.28	0.21	0.14	0.08	0.04	4.39	0.00	
	48	0.05	0.10	0.18	0.27	0.38	0.48	0.57	0.64	0.67	0.68	0.68	0.62	0.54	0.43	0.31	0.20	0.10	0.04	6.95	0.00	
	40	0.06	0.13	0.23	0.38	0.57	0.79	0.98	1.15	1.22	1.25	1.23	1.09	0.91	0.67	0.44	0.25	0.13	0.05	11.5	0.00	
	32	0.07	0.16	0.31	0.53	0.87	1.34	1.86	2.24	2.47	2.55	2.43	2.13	1.61	1.04	0.60	0.32	0.15	0.06	20.8	2.01	
	24	0.08	0.19	0.38	0.72	1.32	2.35	3.83	4.95	5.64	5.84	5.44	4.45	2.87	1.57	0.79	0.38	0.18	0.07	41.1	32.1	
	16	0.09	0.22	0.46	0.94	1.97	4.16	7.79	11.8	13.8	14.2	12.7	8.81	4.86	2.26	0.98	0.44	0.19	0.07	85.8	79.3	
	8	0.10	0.24	0.52	1.13	2.65	6.44	13.3	21.3	26.7	27.1	22.1	14.2	7.15	2.93	1.14	0.48	0.20	0.08	148	142	
	0	0.10	0.24	0.52	1.13	2.65	6.46	13.2	20.6	25.5	25.8	20.9	13.6	6.87	2.81	1.10	0.46	0.20	0.07	142	137	
	-8	0.09	0.21	0.44	0.92	1.97	4.22	7.71	11.0	12.6	12.6	10.9	7.46	4.14	1.95	0.86	0.39	0.17	0.07	77.7	71.0	
	-16	0.08	0.18	0.36	0.69	1.31	2.36	3.72	4.48	4.97	4.90	4.29	3.44	2.12	1.19	0.62	0.31	0.15	0.06	35.2	24.3	
-24	0.06	0.14	0.27	0.47	0.80	1.25	1.64	1.87	2.02	1.98	1.77	1.50	1.11	0.70	0.42	0.23	0.12	0.05	16.4	0.00		
-32	0.05	0.11	0.19	0.31	0.48	0.66	0.76	0.87	0.89	0.88	0.82	0.70	0.59	0.43	0.27	0.17	0.09	0.04	8.31	0.00		
-40	0.04	0.08	0.13	0.20	0.29	0.35	0.39	0.44	0.44	0.44	0.42	0.37	0.33	0.26	0.18	0.12	0.07	0.03	4.57	0.00		
-48	0.03	0.05	0.08	0.13	0.17	0.20	0.22	0.24	0.23	0.23	0.23	0.21	0.18	0.15	0.12	0.08	0.05	0.02	2.62	0.00		
-56	0.02	0.03	0.05	0.08	0.10	0.11	0.12	0.13	0.13	0.13	0.13	0.12	0.10	0.09	0.07	0.05	0.03	0.01	1.49	0.00		
-64	0.02	0.02	0.03	0.04	0.05	0.06	0.06	0.07	0.07	0.07	0.07	0.06	0.05	0.05	0.04	0.03	0.02	0.01	0.80	0.00		
-72	0.02	0.02	0.03	0.04	0.05	0.06	0.06	0.07	0.07	0.07	0.07	0.06	0.05	0.05	0.04	0.03	0.02	0.01	0.80	0.00		
		-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72	
F t	1.05	2.29	4.44	8.34	16.1	31.9	56.8	82.7	98.2	99.4	84.9	59.5	34.1	17.1	8.38	4.20	2.03	0.84	612	---		
F a	0.00	0.00	0.00	0.00	4.03	22.4	48.4	74.1	89.6	91.0	76.4	51.1	24.9	5.29	0.00	0.00	0.00	0.00	---	487		


one-half-peak spread: U:10.6,D:10.2 , L:21.1,NEPA. Beam Type: Type 5 x 4 (H x V)

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Mini-600mm-TW-1800K-2040D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:20X40 DEG	DIM.:600mm	SERIAL No.:IES002540
MFR.:	SUR.:	Shielding Angle:

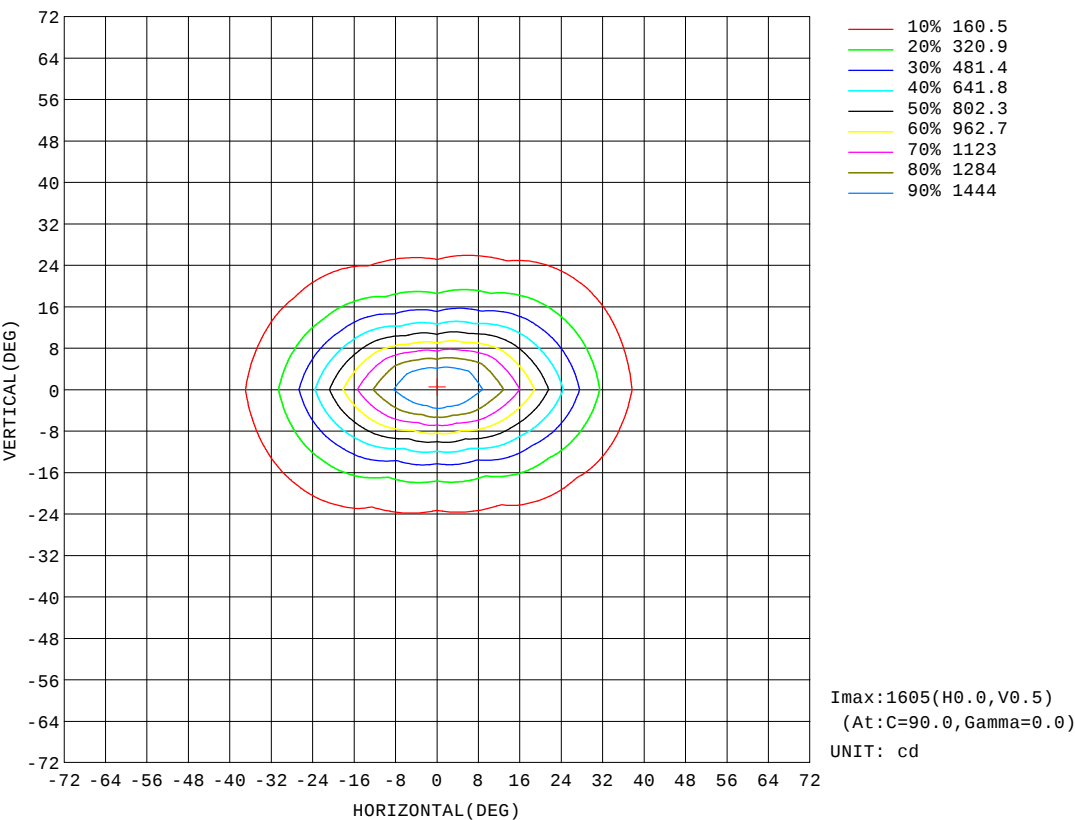


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Mini-600mm-TW-1800K-2040D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:20X40 DEG	DIM.:600mm	SERIAL No.:IES002540
MFR.:	SUR.:	Shielding Angle:

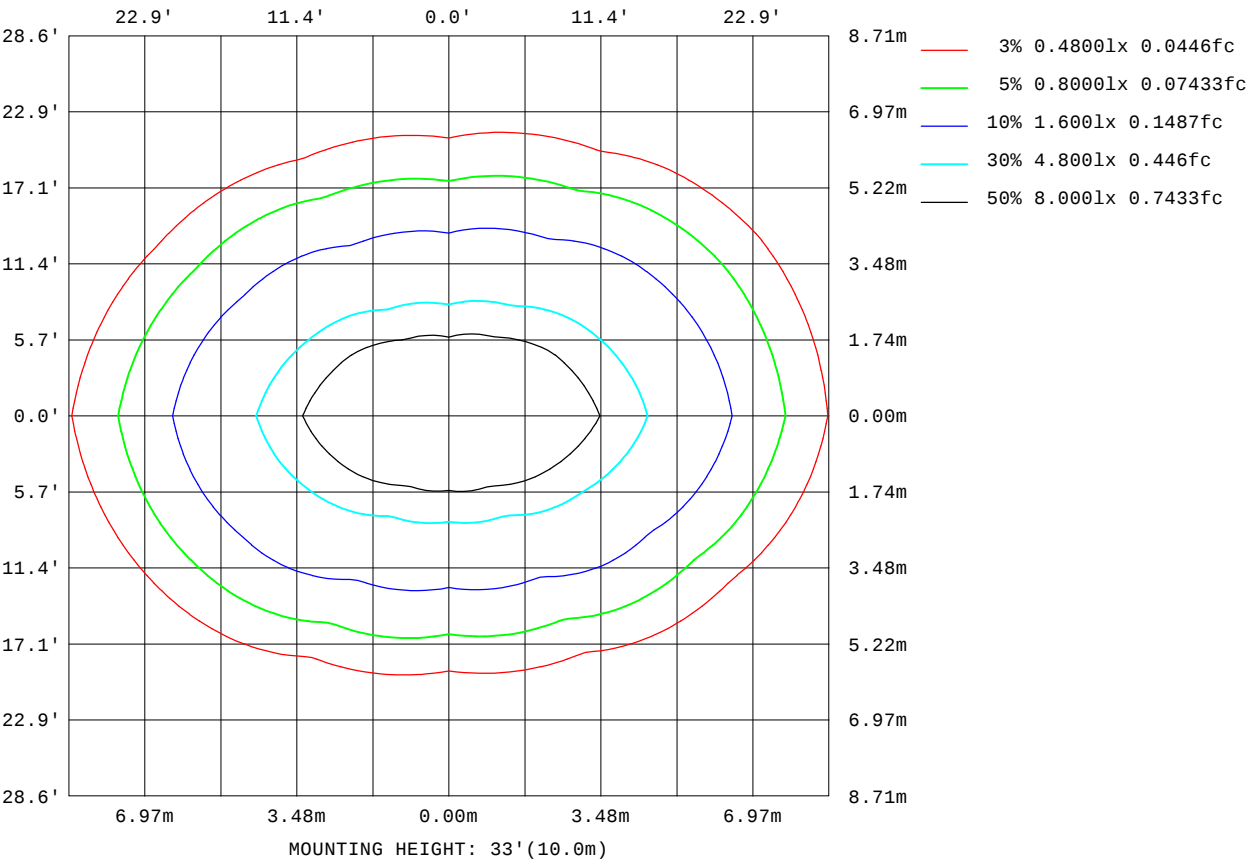

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

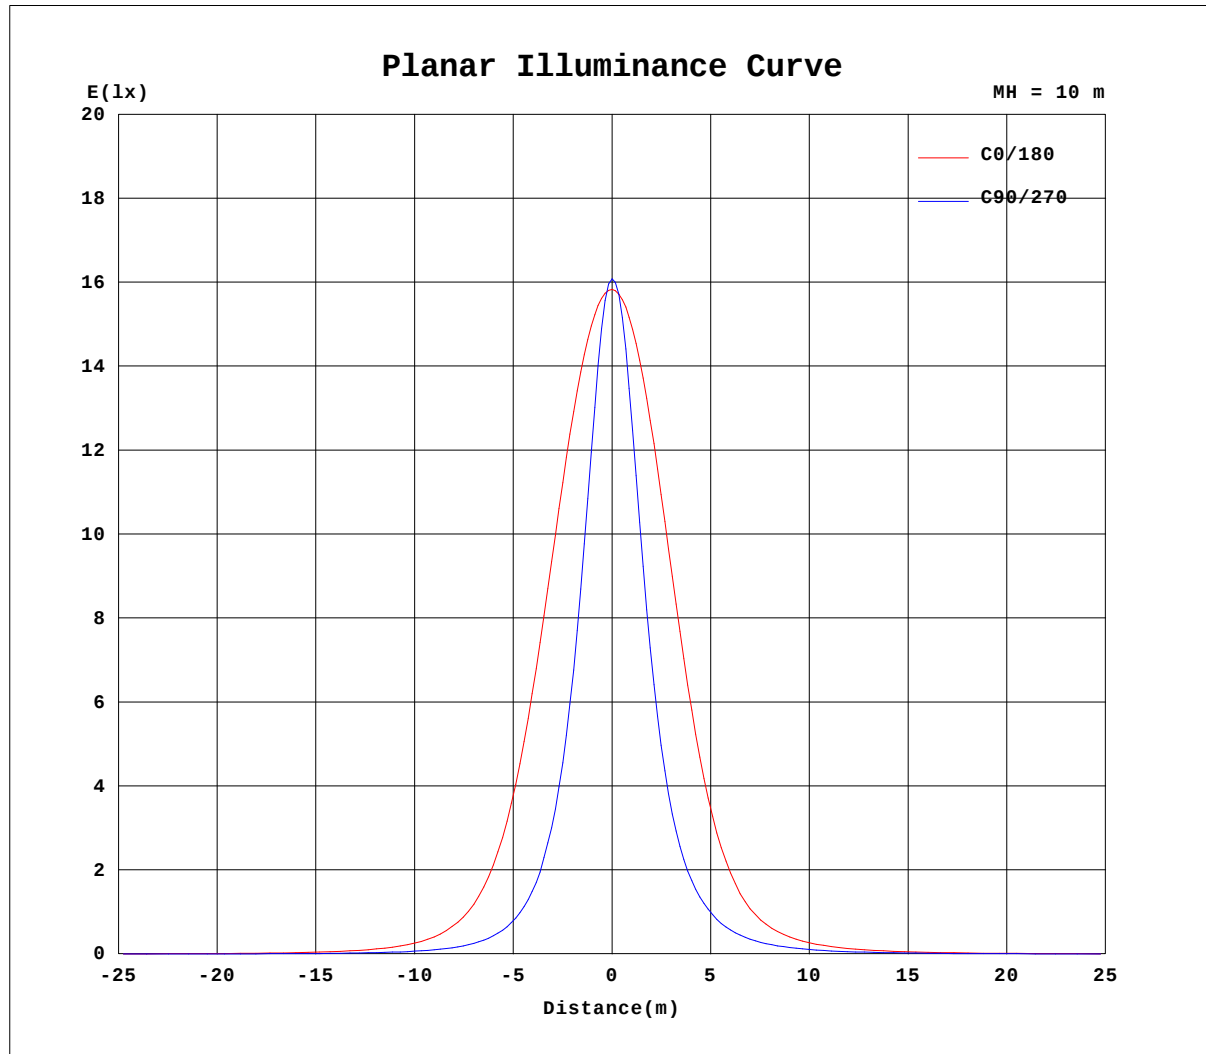


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-06-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Mini-600mm-TW-1800K-2040D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:20X40 DEG	DIM.:600mm	SERIAL No.:IES002540
MFR.:	SUR.:	Shielding Angle:

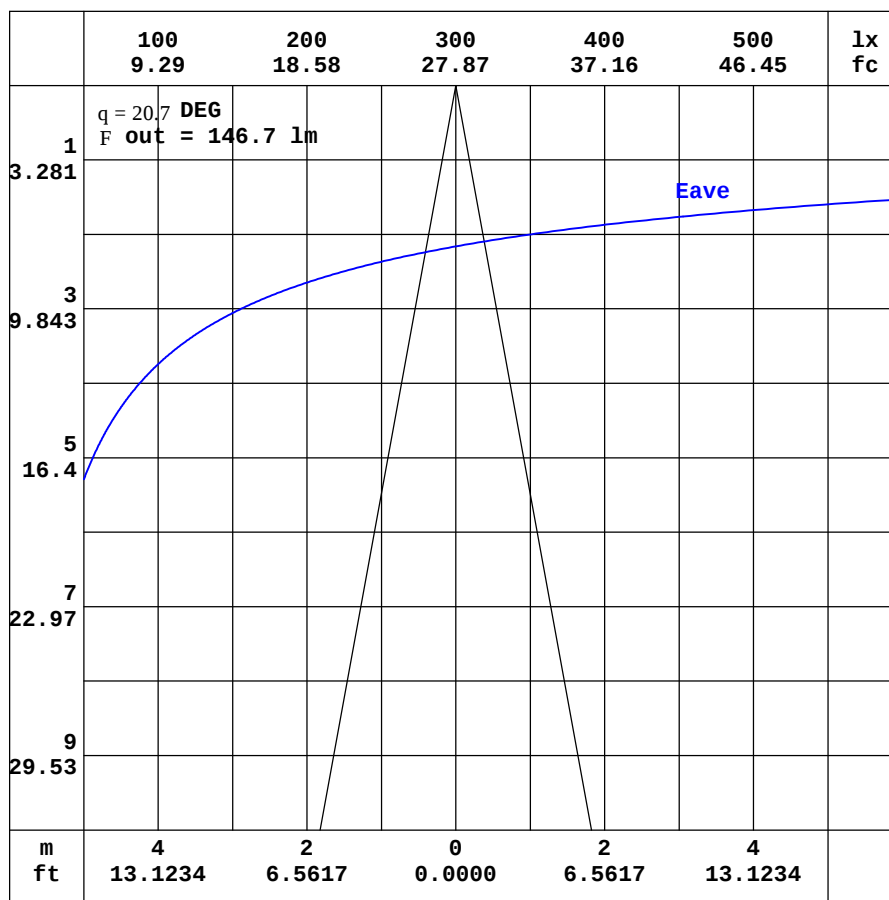

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Mini-600mm-TW-1800K-2040D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:20X40 DEG	DIM.:600mm	SERIAL No.:IES002540
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.53	2.30	2.16	2.15	2.22	2.40	2.68	3.06	3.48	3.88	4.25	4.54	4.74	4.78	4.74	4.61	4.48	4.38	4.46
-170	2.53	2.26	2.10	2.05	2.06	2.17	2.34	2.56	2.80	3.03	3.24	3.41	3.54	3.59	3.58	3.64	3.90	4.12	4.37
-160	2.53	2.24	2.04	1.95	1.90	1.92	1.97	2.04	2.11	2.16	2.18	2.20	2.24	2.61	2.97	3.31	3.61	3.81	3.92
-150	2.53	2.22	1.99	1.85	1.77	1.70	1.65	1.59	1.50	1.39	1.29	1.45	1.67	1.91	2.17	2.41	2.63	2.77	2.83
-140	2.53	2.20	1.95	1.77	1.64	1.52	1.40	1.26	1.08	1.00	1.01	1.05	1.12	1.20	1.31	1.44	1.55	1.61	1.63
-130	2.53	2.19	1.93	1.71	1.54	1.38	1.23	1.05	0.97	0.94	0.91	0.87	0.83	0.79	0.79	0.82	0.83	0.84	0.83
-120	2.53	2.19	1.91	1.68	1.47	1.29	1.11	0.98	0.98	0.97	0.94	0.91	0.86	0.81	0.77	0.73	0.70	0.68	0.65
-110	2.53	2.21	1.92	1.66	1.44	1.23	1.04	0.98	0.99	1.00	1.00	1.01	1.00	0.98	0.96	0.95	0.93	0.92	0.91
-100	2.53	2.23	1.94	1.68	1.43	1.20	0.97	0.97	0.98	0.99	0.99	1.00	1.01	1.02	1.02	1.02	1.02	1.02	1.02
-90	2.53	2.26	1.99	1.71	1.44	1.17	0.89	0.89	0.89	0.88	0.88	0.88	0.87	0.87	0.87	0.87	0.87	0.87	0.87
-80	2.53	2.30	2.05	1.81	1.55	1.26	0.93	0.95	0.99	1.03	1.05	1.07	1.08	1.09	1.10	1.10	1.09	1.07	1.05
-70	2.53	2.35	2.24	2.13	1.96	1.81	1.69	1.84	2.09	2.32	2.51	2.63	2.67	2.76	2.87	2.93	2.95	2.91	2.82
-60	2.53	2.44	2.54	2.57	2.75	3.02	3.34	3.78	4.56	5.20	5.73	6.08	6.22	6.31	6.61	6.76	6.75	6.58	6.27
-50	2.53	2.57	2.83	3.24	3.94	4.86	5.98	7.05	8.39	9.89	11.2	12.3	12.9	13.0	13.6	14.2	14.3	14.0	13.3
-40	2.53	2.74	3.18	4.05	5.45	7.29	9.41	11.7	14.2	17.2	20.5	23.9	26.7	28.3	28.3	30.8	31.9	31.7	29.8
-30	2.53	2.89	3.57	4.98	7.14	10.0	13.6	17.7	22.6	28.8	36.5	46.3	56.8	66.3	71.8	73.1	80.5	82.1	76.7
-20	2.53	3.02	3.95	5.88	8.80	12.8	17.9	24.4	33.0	45.1	62.2	86.8	119	159	201	224	227	248	236
-10	2.53	3.13	4.27	6.61	10.2	15.4	21.9	30.8	43.6	63.0	94.0	145	230	350	489	630	738	775	807
0	2.53	3.22	4.50	7.10	11.1	17.1	24.8	35.5	51.4	76.5	119	197	341	562	849	1144	1386	1535	1583
10	2.53	3.20	4.42	6.87	10.6	15.9	22.7	31.9	44.9	64.3	94.7	144	227	345	493	662	798	855	859
20	2.53	3.15	4.24	6.38	9.54	13.9	19.5	26.4	35.5	47.8	64.6	87.7	117	160	205	240	258	284	272
30	2.53	3.07	3.98	5.69	8.19	11.5	15.7	20.4	26.0	32.8	41.0	51.1	62.5	74.2	84.1	91.0	100	104	99.6
40	2.53	2.97	3.69	4.91	6.72	9.04	11.8	14.9	18.2	21.8	25.8	30.0	33.9	37.1	39.2	42.6	44.8	45.3	43.9
50	2.53	2.83	3.41	4.21	5.37	6.79	8.48	10.3	12.3	14.2	16.1	17.8	19.3	20.3	21.5	22.4	23.0	22.9	22.3
60	2.53	2.73	3.18	3.60	4.22	5.01	5.88	6.82	7.83	8.82	9.75	10.5	11.1	11.5	12.1	12.4	12.5	12.5	12.2
70	2.53	2.65	2.89	3.18	3.41	3.73	4.08	4.49	4.90	5.28	5.64	5.95	6.20	6.42	6.62	6.74	6.78	6.75	6.65
80	2.53	2.60	2.68	2.78	2.91	3.02	3.11	3.18	3.25	3.33	3.41	3.47	3.53	3.59	3.65	3.68	3.70	3.70	3.68
90	2.53	2.55	2.58	2.60	2.62	2.65	2.67	2.64	2.61	2.58	2.55	2.52	2.50	2.48	2.46	2.44	2.42	2.40	2.38
100	2.53	2.51	2.49	2.46	2.45	2.43	2.41	2.35	2.28	2.21	2.14	2.08	2.01	1.99	1.97	1.96	1.95	1.94	1.94
110	2.53	2.46	2.40	2.35	2.30	2.25	2.21	2.13	2.04	1.98	1.93	1.89	1.85	1.84	1.83	1.83	1.82	1.81	1.80
120	2.53	2.42	2.33	2.26	2.20	2.13	2.08	2.04	2.01	1.98	1.98	1.99	2.02	2.03	2.05	2.06	2.06	2.04	2.01
130	2.53	2.39	2.28	2.19	2.13	2.09	2.08	2.07	2.13	2.22	2.32	2.44	2.56	2.69	2.82	2.95	3.05	3.11	3.13
140	2.53	2.37	2.24	2.16	2.12	2.11	2.15	2.27	2.44	2.65	2.89	3.15	3.43	3.71	3.97	4.21	4.40	4.52	4.59
150	2.53	2.34	2.20	2.14	2.13	2.17	2.31	2.53	2.81	3.14	3.49	3.85	4.22	4.55	4.83	5.05	5.18	5.26	5.30
160	2.53	2.32	2.18	2.14	2.16	2.27	2.48	2.78	3.14	3.54	3.94	4.33	4.68	4.97	5.18	5.33	5.43	5.50	5.58
170	2.53	2.30	2.17	2.15	2.19	2.35	2.61	2.96	3.37	3.79	4.19	4.55	4.82	4.99	5.06	5.05	5.01	5.04	5.27
180	2.53	2.30	2.16	2.15	2.22	2.40	2.68	3.06	3.48	3.88	4.25	4.54	4.74	4.78	4.74	4.61	4.48	4.38	4.50

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2024-06-29

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Mini-600mm-TW-1800K-2040D-Rev1	TYPE:1800K	WEIGHT:
SPEC.:20X40 DEG	DIM.:600mm	SERIAL No.:IES002540
MFR.:	SUR.:	Shielding Angle:

Table--2		UNIT: cd																	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	3.98	3.73	3.47	3.22	2.89	2.54	2.17	1.83	1.54	1.31	1.14	1.03	1.00	0.98	0.95	0.91	0.84	0.79	
-170	4.24	4.03	3.77	3.41	3.04	2.62	2.21	1.83	1.51	1.28	1.11	1.02	0.99	0.98	0.95	0.91	0.84	0.79	
-160	3.84	3.67	3.40	3.08	2.75	2.40	2.01	1.65	1.38	1.19	1.07	1.00	0.99	0.97	0.95	0.92	0.84	0.79	
-150	2.80	2.69	2.50	2.28	2.03	1.79	1.56	1.38	1.21	1.08	1.01	0.99	0.98	0.97	0.95	0.91	0.84	0.79	
-140	1.64	1.59	1.51	1.39	1.29	1.20	1.12	1.06	1.03	1.01	0.99	0.98	0.98	0.96	0.94	0.90	0.83	0.79	
-130	0.86	0.87	0.86	0.84	0.84	0.86	0.90	0.92	0.95	0.97	0.98	0.98	0.97	0.96	0.94	0.89	0.82	0.79	
-120	0.68	0.71	0.74	0.78	0.83	0.87	0.91	0.95	0.97	0.98	0.98	0.98	0.97	0.96	0.92	0.87	0.81	0.79	
-110	0.92	0.94	0.96	0.98	1.00	1.01	1.01	1.00	1.00	0.99	0.99	0.98	0.97	0.93	0.89	0.84	0.80	0.79	
-100	1.02	1.01	1.01	1.01	1.00	0.99	0.99	0.98	0.98	0.97	0.95	0.94	0.91	0.88	0.85	0.82	0.80	0.79	
-90	0.86	0.85	0.84	0.83	0.82	0.81	0.81	0.82	0.82	0.83	0.84	0.84	0.83	0.82	0.82	0.81	0.80	0.79	
-80	1.06	1.07	1.07	1.05	1.03	1.02	1.01	1.00	0.98	0.95	0.92	0.88	0.87	0.87	0.86	0.83	0.80	0.79	
-70	2.88	2.90	2.88	2.80	2.67	2.56	2.50	2.38	2.19	1.97	1.74	1.51	1.32	1.14	1.00	0.93	0.83	0.79	
-60	6.52	6.64	6.61	6.42	6.08	5.92	5.70	5.32	4.83	4.23	3.53	2.88	2.29	1.76	1.32	1.03	0.88	0.79	
-50	13.8	14.0	13.7	13.0	12.4	12.0	11.3	10.2	8.92	7.56	6.30	5.09	3.82	2.70	1.81	1.22	0.94	0.79	
-40	31.0	30.7	29.2	26.6	26.0	24.1	21.3	18.2	15.2	12.5	10.1	7.90	5.80	3.91	2.46	1.45	0.99	0.79	
-30	80.1	76.9	68.6	65.7	59.5	50.2	40.6	31.8	25.1	19.6	15.1	11.2	8.04	5.24	3.11	1.69	1.03	0.79	
-20	244	219	212	183	143	105	78.6	56.4	40.4	28.9	20.8	14.8	10.2	6.54	3.76	1.93	1.07	0.79	
-10	776	736	619	479	349	232	147	91.6	58.8	38.9	26.4	18.1	12.1	7.60	4.26	2.11	1.09	0.79	
0	1541	1405	1178	895	609	375	216	125	73.8	46.5	30.5	20.3	13.4	8.23	4.53	2.19	1.10	0.79	
10	887	843	721	553	395	262	165	102	65.5	43.1	29.0	19.7	13.1	8.18	4.58	2.27	1.15	0.79	
20	296	281	269	240	193	147	105	73.4	51.3	36.0	25.3	17.7	12.1	7.61	4.36	2.23	1.19	0.79	
30	108	107	99.5	96.1	86.9	74.4	61.1	49.0	37.3	27.9	20.6	15.0	10.4	6.67	3.94	2.13	1.21	0.79	
40	46.6	47.3	46.0	43.1	41.8	38.8	34.6	29.9	25.3	20.5	15.8	11.8	8.36	5.53	3.44	1.98	1.21	0.79	
50	23.4	23.9	23.8	23.0	22.0	21.3	19.9	18.1	16.1	13.9	11.4	8.71	6.31	4.37	2.86	1.81	1.19	0.79	
60	12.6	12.9	12.9	12.7	12.2	11.9	11.4	10.7	9.78	8.71	7.53	6.03	4.58	3.35	2.38	1.66	1.16	0.79	
70	6.82	6.91	6.91	6.83	6.66	6.46	6.26	5.96	5.58	5.15	4.71	4.11	3.32	2.62	2.03	1.56	1.12	0.79	
80	3.70	3.70	3.68	3.64	3.59	3.52	3.46	3.40	3.32	3.23	3.14	3.02	2.60	2.20	1.81	1.44	1.09	0.79	
90	2.38	2.38	2.38	2.38	2.38	2.38	2.41	2.44	2.47	2.50	2.52	2.55	2.26	1.96	1.67	1.38	1.08	0.79	
100	1.95	1.95	1.96	1.97	1.98	2.00	2.05	2.09	2.14	2.19	2.24	2.28	2.06	1.83	1.59	1.34	1.07	0.79	
110	1.82	1.84	1.86	1.88	1.90	1.91	1.94	1.97	2.00	2.04	2.09	2.08	1.91	1.72	1.53	1.30	1.05	0.79	
120	2.06	2.09	2.11	2.12	2.11	2.09	2.07	2.05	2.04	2.04	2.07	1.95	1.79	1.63	1.46	1.26	1.03	0.79	
130	3.14	3.11	3.03	2.93	2.82	2.69	2.55	2.43	2.31	2.22	2.07	1.85	1.69	1.53	1.39	1.21	1.01	0.79	
140	4.55	4.46	4.30	4.09	3.84	3.57	3.29	3.02	2.77	2.45	2.07	1.78	1.58	1.44	1.31	1.17	0.98	0.79	
150	5.29	5.24	5.13	4.93	4.66	4.34	3.98	3.63	3.02	2.46	2.01	1.70	1.49	1.34	1.23	1.11	0.95	0.79	
160	5.56	5.55	5.45	5.28	5.08	4.80	4.12	3.42	2.80	2.26	1.84	1.54	1.36	1.23	1.14	1.05	0.92	0.79	
170	5.26	5.27	5.28	4.94	4.44	3.89	3.32	2.78	2.28	1.87	1.54	1.31	1.19	1.11	1.05	0.98	0.88	0.79	
180	3.98	3.73	3.47	3.22	2.89	2.54	2.17	1.83	1.54	1.31	1.14	1.03	1.00	0.98	0.95	0.91	0.84	0.79	

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: