

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2455.0 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	62.1V x 60.6H
	At 50% of Imax	31.4V x 31.5H
	At 90% of Imax	13.8V x 12.7H

Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	781.5 lumens per klm.
	To 50% of Imax	418.2 lumens per klm.
	To 90% of Imax	90.4 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Mini-600mm-TW-6000K-30D-Rev2	TYPE:6000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES002518
MFR.:	SUR.:	Shielding Angle:

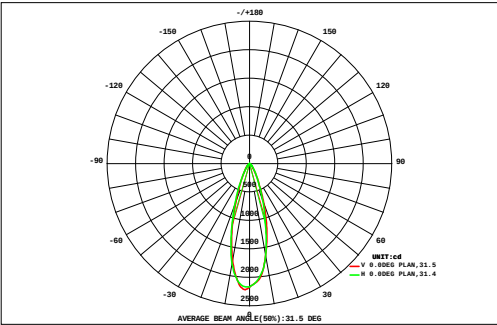

DATA OF LAMP		Eff:82.80lm/W	
MODEL		Imax(cd)	2216
NOMINAL POWER(W)	11	AVAILABILITY(%)	78.1
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	705.4
NOMINAL FLUX(lm)	902.6	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	902.6
TEST VOLTAGE(V)	220	q @50%(H,V)	32,31DEG

		AREA FLUX DIAGRAM																UNIT:lm				F t	F a
VERTICAL (DEG)	45	0.15	0.21	0.29	0.39	0.49	0.57	0.63	0.66	0.66	0.63	0.58	0.51	0.44	0.36	0.30	0.24	0.18	0.14	7.41	0.00		
	40	0.19	0.28	0.40	0.53	0.68	0.81	0.90	0.96	0.97	0.93	0.85	0.73	0.60	0.49	0.40	0.31	0.23	0.17	10.4	0.00		
	35	0.24	0.37	0.52	0.70	0.91	1.13	1.30	1.43	1.49	1.45	1.30	1.10	0.87	0.67	0.52	0.39	0.29	0.21	14.9	0.83		
	30	0.30	0.45	0.65	0.90	1.21	1.56	1.94	2.22	2.36	2.29	2.03	1.65	1.27	0.95	0.68	0.49	0.35	0.25	21.6	12.1		
	25	0.35	0.54	0.79	1.14	1.60	2.23	2.98	3.63	3.97	3.88	3.37	2.62	1.87	1.29	0.89	0.61	0.42	0.29	32.5	25.2		
	20	0.39	0.61	0.93	1.41	2.12	3.18	4.63	6.02	6.62	6.37	5.46	4.15	2.78	1.75	1.12	0.74	0.49	0.32	49.1	43.2		
	15	0.43	0.67	1.05	1.67	2.72	4.44	6.96	9.50	10.5	9.80	8.00	6.00	3.96	2.36	1.43	0.89	0.56	0.36	71.3	66.1		
	10	0.45	0.71	1.14	1.89	3.29	5.79	9.45	12.6	14.0	13.6	10.9	7.84	5.29	3.12	1.76	1.03	0.62	0.38	93.8	89.1		
	5	0.45	0.72	1.17	2.01	3.65	6.65	10.7	14.2	16.1	15.6	13.3	9.77	6.49	3.72	2.02	1.14	0.66	0.40	109	104		
	0	0.43	0.69	1.13	2.01	3.73	6.81	10.9	14.9	16.6	15.7	13.6	10.4	6.80	3.83	2.08	1.16	0.67	0.40	112	107		
	-5	0.40	0.63	1.04	1.85	3.47	6.28	9.80	13.2	15.0	14.1	12.1	9.35	6.01	3.43	1.93	1.11	0.66	0.40	101	96.3		
	-10	0.35	0.55	0.88	1.54	2.82	4.95	7.47	9.69	11.3	11.1	9.47	7.06	4.58	2.78	1.65	1.00	0.61	0.38	78.2	73.4		
	-15	0.29	0.45	0.71	1.16	2.02	3.36	5.04	6.52	7.39	7.28	6.15	4.62	3.19	2.10	1.34	0.86	0.55	0.34	53.4	47.9		
	-20	0.24	0.36	0.54	0.84	1.34	2.09	3.03	3.90	4.41	4.33	3.72	2.90	2.15	1.51	1.04	0.71	0.47	0.30	33.9	27.3		
	-25	0.19	0.28	0.41	0.60	0.88	1.25	1.71	2.16	2.44	2.44	2.19	1.82	1.44	1.09	0.79	0.56	0.39	0.25	20.9	12.0		
	-30	0.14	0.21	0.31	0.43	0.59	0.77	1.01	1.23	1.38	1.41	1.33	1.17	0.98	0.77	0.59	0.43	0.30	0.20	13.3	0.41		
-35	0.11	0.16	0.23	0.31	0.40	0.51	0.63	0.74	0.82	0.85	0.82	0.75	0.66	0.54	0.43	0.32	0.23	0.15	8.64	0.00			
-40	0.08	0.11	0.16	0.21	0.27	0.34	0.41	0.47	0.52	0.54	0.53	0.50	0.44	0.37	0.30	0.23	0.16	0.11	5.75	0.00			
-45		-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG)				10	15	20	25	30	35	40	45		
F t	5.17	8.00	12.3	19.6	32.2	52.7	79.5	104	116	112	95.6	72.9	49.8	31.1	19.2	12.2	7.85	5.06	836	---			
F a	0.00	0.00	0.00	10.3	24.8	46.4	73.9	98.7	111	107	89.9	66.9	43.2	23.4	9.59	0.00	0.00	0.00	---	705			


one-half-peak spread: U:16.6,D:15.1 , L:13.9,R:17.9 NEMA Beam Type: Type 4

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Mini-600mm-TW-6000K-30D-Rev2	TYPE:6000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES002518
MFR.:	SUR.:	Shielding Angle:

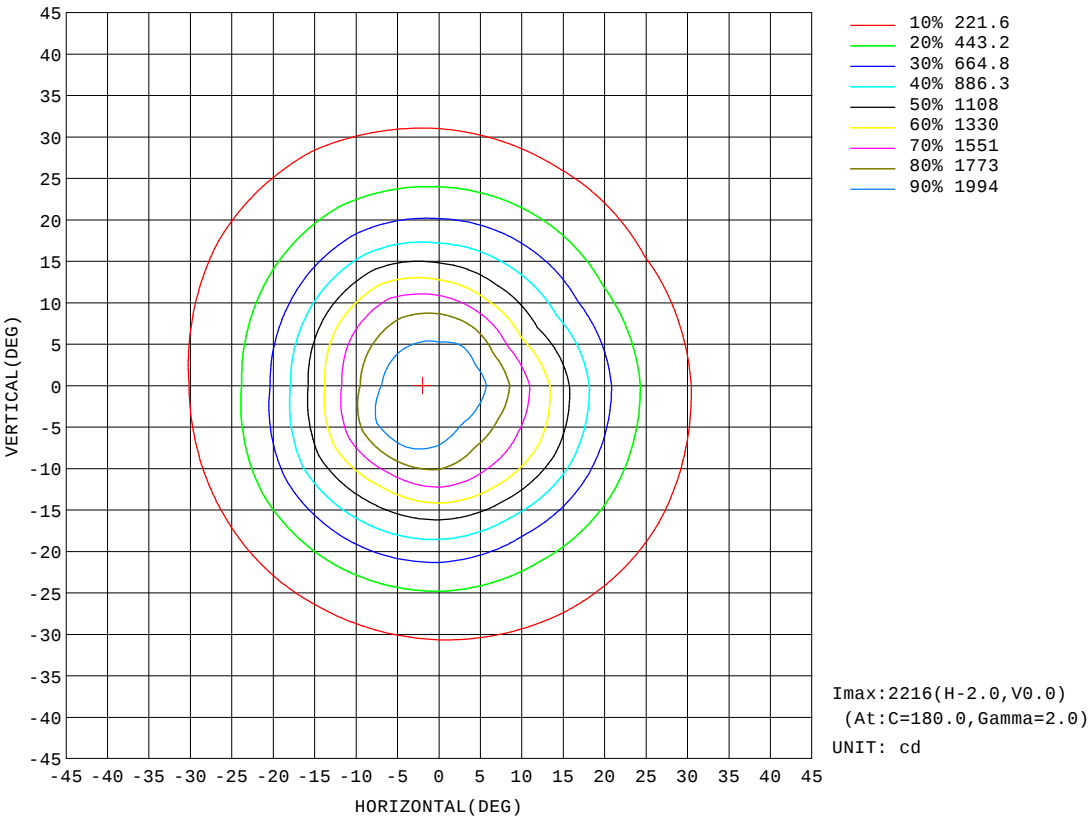


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Mini-600mm-TW-6000K-30D-Rev2	TYPE:6000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES002518
MFR.:	SUR.:	Shielding Angle:

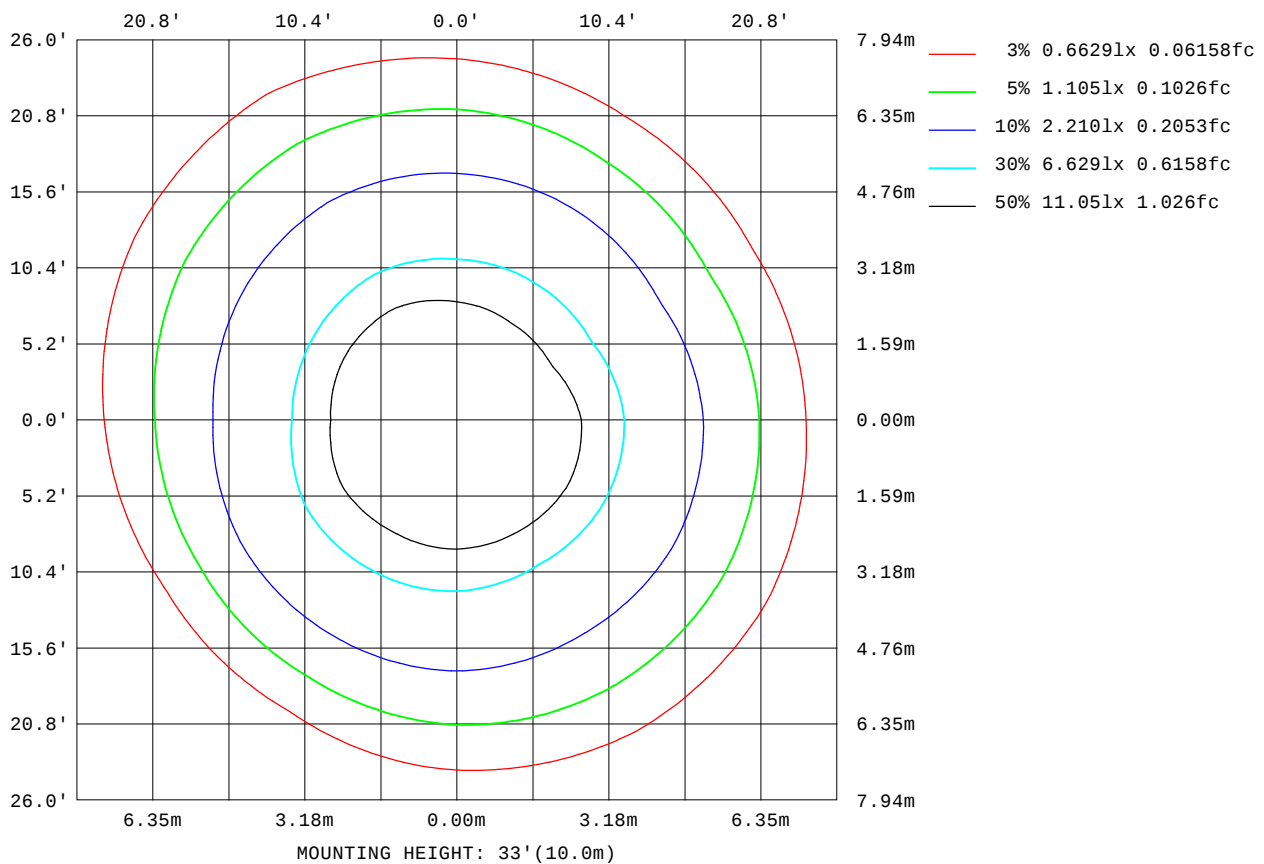

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

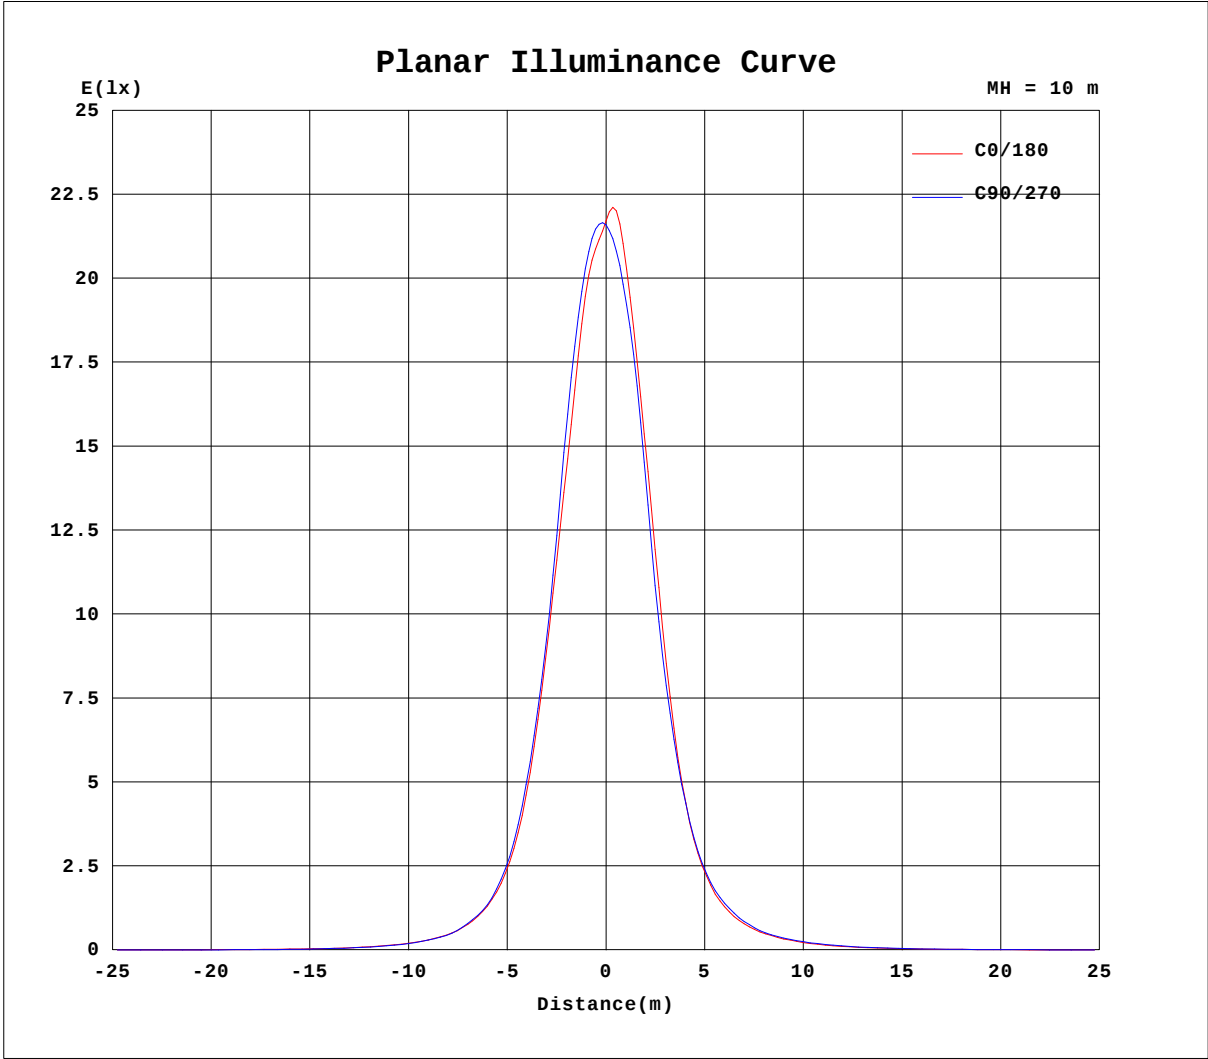


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-06-26

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Mini-600mm-TW-6000K-30D-Rev2	TYPE:6000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES002518
MFR.:	SUR.:	Shielding Angle:

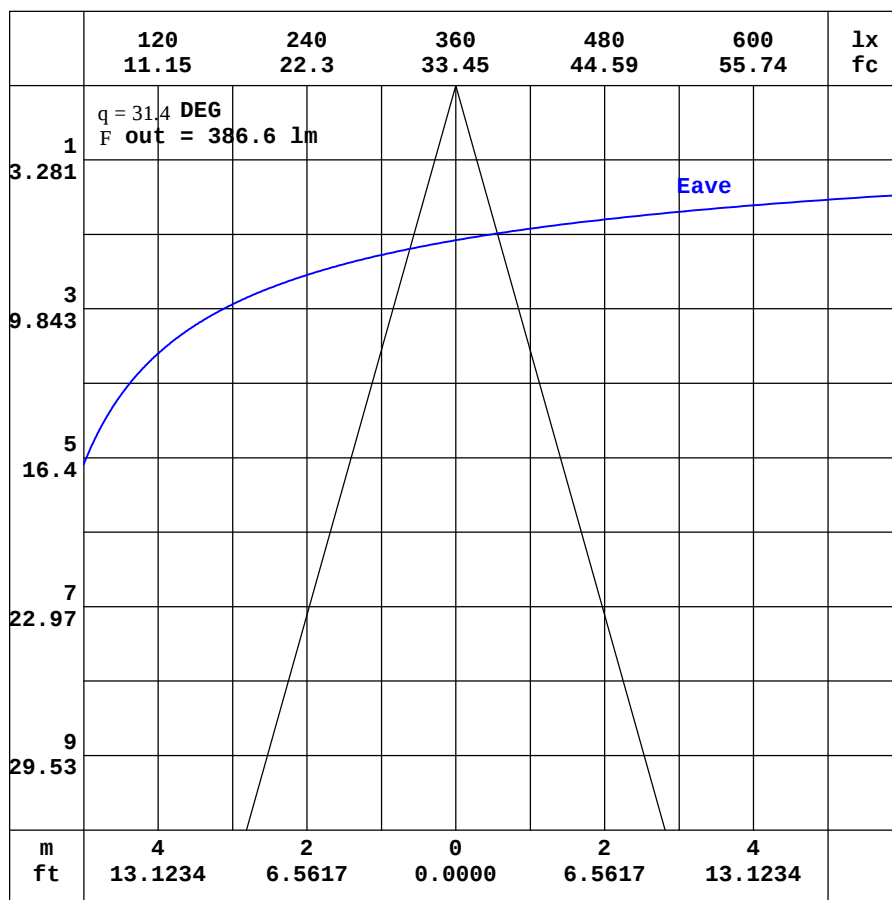

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Mini-600mm-TW-6000K-30D-Rev2	TYPE:6000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES002518
MFR.:	SUR.:	Shielding Angle:

Table--1		UNIT: cd																	
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	3.38	3.07	2.86	2.79	2.84	3.07	3.50	4.13	4.93	5.75	6.46	6.98	7.26	7.30	7.25	7.07	6.84	6.64	6.82
-170	3.38	3.03	2.78	2.67	2.66	2.77	3.02	3.40	3.87	4.35	4.76	5.05	5.21	5.27	5.25	5.35	5.74	6.03	6.24
-160	3.38	2.99	2.71	2.55	2.48	2.46	2.53	2.65	2.79	2.92	3.00	3.02	3.06	3.63	4.22	4.72	5.12	5.37	5.49
-150	3.38	2.96	2.66	2.44	2.32	2.21	2.11	2.03	1.90	1.71	1.56	1.88	2.26	2.67	3.09	3.47	3.77	3.97	4.05
-140	3.38	2.94	2.61	2.36	2.19	2.02	1.83	1.61	1.36	1.24	1.27	1.37	1.54	1.73	1.94	2.16	2.34	2.46	2.52
-130	3.38	2.93	2.58	2.31	2.08	1.89	1.67	1.43	1.28	1.24	1.23	1.22	1.22	1.23	1.29	1.36	1.42	1.47	1.50
-120	3.38	2.93	2.57	2.28	2.02	1.78	1.57	1.40	1.39	1.37	1.33	1.31	1.28	1.26	1.24	1.23	1.23	1.23	1.23
-110	3.38	2.95	2.57	2.25	1.97	1.73	1.49	1.42	1.42	1.42	1.43	1.43	1.43	1.43	1.42	1.40	1.39	1.38	1.37
-100	3.38	2.97	2.60	2.25	1.93	1.63	1.36	1.35	1.37	1.38	1.39	1.39	1.41	1.42	1.42	1.43	1.43	1.44	1.44
-90	3.38	3.01	2.64	2.28	1.91	1.54	1.18	1.17	1.17	1.16	1.16	1.15	1.15	1.15	1.16	1.16	1.16	1.16	1.17
-80	3.38	3.07	2.73	2.38	2.03	1.63	1.17	1.17	1.20	1.23	1.26	1.29	1.31	1.36	1.41	1.47	1.52	1.57	1.60
-70	3.38	3.13	2.93	2.70	2.39	2.07	1.69	1.65	1.83	2.01	2.19	2.37	2.52	2.79	3.15	3.49	3.82	4.10	4.32
-60	3.38	3.23	3.22	3.12	3.08	2.90	2.71	2.70	3.23	3.80	4.43	5.17	5.95	6.90	8.19	9.44	10.6	11.5	12.1
-50	3.38	3.37	3.52	3.76	3.90	4.06	4.34	4.69	5.62	7.19	9.38	12.1	15.2	18.5	22.5	26.6	30.4	33.4	35.4
-40	3.38	3.56	3.89	4.42	4.88	5.58	6.55	7.88	9.97	13.7	19.2	25.9	33.8	42.4	51.5	62.5	72.5	80.5	85.3
-30	3.38	3.72	4.31	5.08	5.99	7.31	9.37	12.8	18.0	24.6	33.7	47.3	64.8	87.2	115	152	193	224	238
-20	3.38	3.86	4.71	5.73	7.11	9.24	12.8	19.1	27.6	39.5	56.1	79.1	116	182	295	444	609	729	769
-10	3.38	3.98	5.06	6.32	8.10	11.0	16.2	25.0	36.6	54.3	79.8	119	190	333	599	985	1351	1677	1784
0	3.38	4.08	5.33	6.79	8.86	12.2	18.6	29.1	42.8	64.5	95.4	143	225	388	692	1198	1725	2128	2171
10	3.38	4.06	5.27	6.70	8.71	11.9	17.8	28.0	42.1	63.6	94.0	139	210	332	545	895	1331	1621	1644
20	3.38	4.03	5.12	6.46	8.27	11.0	15.7	24.1	36.4	54.5	79.4	112	159	220	307	427	564	656	673
30	3.38	3.96	4.89	6.11	7.59	9.72	13.0	18.5	27.3	40.0	57.4	78.4	103	133	165	197	223	240	241
40	3.38	3.87	4.61	5.67	6.78	8.32	10.4	13.4	18.1	25.2	34.8	46.7	60.2	74.6	89.0	97.7	103	104	101
50	3.38	3.72	4.33	5.12	5.98	6.95	8.24	9.89	11.9	14.8	18.7	23.8	29.7	36.0	41.3	45.1	47.6	48.5	47.8
60	3.38	3.61	4.08	4.55	5.16	5.79	6.46	7.28	8.26	9.37	10.6	12.0	13.6	15.3	17.0	18.4	19.5	20.2	20.4
70	3.38	3.53	3.79	4.11	4.39	4.73	5.09	5.48	5.89	6.32	6.76	7.20	7.65	8.09	8.50	8.86	9.14	9.35	9.47
80	3.38	3.47	3.57	3.69	3.85	3.99	4.11	4.23	4.35	4.47	4.59	4.72	4.84	4.93	5.01	5.07	5.12	5.14	5.15
90	3.38	3.41	3.44	3.47	3.49	3.52	3.55	3.55	3.54	3.53	3.53	3.52	3.51	3.50	3.48	3.47	3.46	3.44	3.43
100	3.38	3.35	3.32	3.29	3.26	3.24	3.21	3.16	3.11	3.07	3.02	2.97	2.94	2.91	2.89	2.88	2.87	2.86	2.86
110	3.38	3.29	3.21	3.13	3.07	3.01	2.94	2.88	2.83	2.81	2.79	2.77	2.77	2.76	2.76	2.75	2.74	2.73	2.72
120	3.38	3.24	3.11	3.01	2.91	2.84	2.83	2.81	2.80	2.81	2.86	2.94	3.02	3.11	3.19	3.26	3.31	3.34	3.34
130	3.38	3.19	3.04	2.91	2.82	2.81	2.81	2.85	2.97	3.15	3.37	3.61	3.86	4.11	4.34	4.55	4.71	4.82	4.86
140	3.38	3.16	2.97	2.84	2.81	2.81	2.89	3.09	3.39	3.76	4.19	4.65	5.10	5.51	5.86	6.14	6.36	6.50	6.56
150	3.38	3.12	2.93	2.80	2.80	2.87	3.08	3.44	3.92	4.50	5.12	5.72	6.24	6.69	7.03	7.29	7.46	7.56	7.61
160	3.38	3.10	2.89	2.80	2.81	2.95	3.28	3.78	4.43	5.16	5.88	6.49	6.96	7.26	7.50	7.63	7.73	7.82	7.94
170	3.38	3.08	2.87	2.79	2.83	3.03	3.43	4.03	4.78	5.59	6.32	6.88	7.21	7.37	7.39	7.32	7.22	7.17	7.34
180	3.38	3.07	2.86	2.79	2.84	3.07	3.50	4.13	4.93	5.75	6.46	6.98	7.26	7.30	7.25	7.07	6.84	6.64	6.86

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Mini-600mm-TW-6000K-30D-Rev2	TYPE:6000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES002518
MFR.:	SUR.:	Shielding Angle:

Table--2		UNIT: cd																	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	6.02	5.70	5.34	4.88	4.30	3.66	3.00	2.38	1.84	1.45	1.25	1.24	1.30	1.40	1.41	1.37	1.25	1.08	
-170	5.91	5.67	5.29	4.85	4.27	3.61	2.94	2.32	1.80	1.44	1.26	1.25	1.30	1.40	1.41	1.37	1.25	1.08	
-160	5.34	5.09	4.72	4.25	3.72	3.15	2.56	2.04	1.64	1.37	1.26	1.26	1.32	1.40	1.41	1.37	1.24	1.08	
-150	3.98	3.80	3.53	3.17	2.77	2.36	1.98	1.67	1.43	1.30	1.26	1.28	1.35	1.40	1.41	1.36	1.23	1.08	
-140	2.49	2.39	2.24	2.05	1.84	1.64	1.47	1.35	1.29	1.27	1.28	1.32	1.39	1.41	1.39	1.34	1.21	1.08	
-130	1.49	1.46	1.42	1.36	1.31	1.27	1.26	1.27	1.27	1.29	1.33	1.38	1.40	1.41	1.38	1.31	1.19	1.08	
-120	1.23	1.24	1.25	1.26	1.27	1.29	1.31	1.33	1.36	1.38	1.39	1.41	1.41	1.39	1.35	1.27	1.17	1.08	
-110	1.38	1.39	1.40	1.41	1.42	1.42	1.42	1.42	1.42	1.41	1.41	1.41	1.41	1.39	1.34	1.29	1.21	1.14	1.08
-100	1.44	1.43	1.42	1.41	1.40	1.39	1.38	1.37	1.36	1.35	1.34	1.32	1.28	1.24	1.20	1.15	1.11	1.08	
-90	1.16	1.15	1.14	1.14	1.13	1.12	1.13	1.13	1.14	1.14	1.14	1.15	1.14	1.13	1.11	1.10	1.09	1.08	
-80	1.58	1.54	1.50	1.45	1.40	1.35	1.33	1.31	1.27	1.23	1.19	1.15	1.15	1.15	1.14	1.12	1.08	1.08	
-70	4.17	3.96	3.70	3.40	3.09	2.82	2.66	2.46	2.26	2.05	1.84	1.67	1.54	1.38	1.24	1.18	1.12	1.08	
-60	12.0	11.5	10.6	9.45	8.13	7.00	6.00	5.10	4.31	3.65	3.08	2.56	2.15	1.86	1.55	1.26	1.15	1.08	
-50	35.7	34.7	32.4	29.0	24.8	20.4	16.1	12.3	9.02	6.64	5.03	3.86	3.00	2.36	1.92	1.44	1.18	1.08	
-40	86.7	84.1	78.2	69.8	58.5	47.3	36.7	27.2	19.3	13.0	8.49	5.71	4.02	2.95	2.23	1.67	1.21	1.08	
-30	231	209	179	146	114	88.0	66.3	48.5	33.5	22.2	14.2	8.44	5.30	3.56	2.54	1.87	1.24	1.08	
-20	698	561	422	302	208	146	101	69.2	47.1	31.0	20.0	11.8	6.62	4.13	2.81	2.03	1.27	1.08	
-10	1595	1313	926	567	339	205	130	84.4	56.2	37.0	23.9	14.7	7.82	4.58	3.02	2.13	1.29	1.08	
0	2033	1638	1180	729	407	232	140	87.3	57.8	38.5	25.2	16.1	8.40	4.78	3.11	2.18	1.30	1.08	
10	1415	1085	777	498	298	185	120	79.7	54.6	37.1	24.7	15.8	8.74	5.20	3.39	2.33	1.38	1.08	
20	623	511	374	257	176	123	88.1	63.8	45.9	32.1	22.1	14.0	8.40	5.31	3.53	2.42	1.43	1.08	
30	225	197	163	129	98.8	77.3	60.4	46.7	34.9	25.3	17.8	11.7	7.72	5.15	3.54	2.43	1.47	1.08	
40	95.7	86.8	75.9	64.3	55.3	46.5	38.1	30.6	24.0	18.4	13.4	9.60	6.81	4.82	3.44	2.35	1.50	1.08	
50	45.7	42.5	38.4	33.9	29.4	25.6	21.8	18.3	15.2	12.6	10.3	7.82	5.85	4.38	3.24	2.22	1.52	1.08	
60	19.8	18.9	17.6	16.1	14.6	13.2	12.0	10.8	9.68	8.63	7.60	6.24	4.95	3.88	2.92	2.08	1.52	1.08	
70	9.31	9.07	8.75	8.35	7.91	7.49	7.14	6.75	6.35	5.94	5.53	4.96	4.09	3.30	2.58	2.01	1.50	1.08	
80	5.12	5.06	4.98	4.89	4.78	4.67	4.57	4.47	4.35	4.24	4.12	3.96	3.41	2.89	2.39	1.92	1.47	1.08	
90	3.41	3.40	3.39	3.38	3.37	3.36	3.37	3.38	3.38	3.39	3.40	3.41	3.02	2.63	2.24	1.86	1.47	1.08	
100	2.85	2.84	2.83	2.83	2.84	2.85	2.88	2.91	2.95	3.00	3.04	3.06	2.79	2.50	2.18	1.83	1.46	1.08	
110	2.72	2.72	2.72	2.71	2.70	2.70	2.71	2.72	2.73	2.76	2.81	2.79	2.59	2.37	2.11	1.81	1.46	1.08	
120	3.33	3.30	3.25	3.17	3.08	2.99	2.90	2.82	2.76	2.73	2.74	2.60	2.42	2.24	2.04	1.78	1.46	1.08	
130	4.84	4.76	4.61	4.42	4.17	3.90	3.63	3.36	3.12	2.93	2.71	2.46	2.28	2.12	1.95	1.74	1.44	1.08	
140	6.54	6.44	6.26	5.99	5.65	5.23	4.76	4.27	3.80	3.26	2.71	2.35	2.15	2.00	1.85	1.68	1.41	1.08	
150	7.61	7.54	7.42	7.19	6.86	6.43	5.89	5.26	4.22	3.30	2.64	2.22	1.99	1.86	1.75	1.61	1.38	1.08	
160	7.89	7.87	7.82	7.72	7.50	7.16	6.12	4.97	3.90	3.01	2.38	1.99	1.79	1.72	1.65	1.54	1.35	1.08	
170	7.26	7.43	7.55	7.24	6.53	5.71	4.82	3.91	3.06	2.37	1.89	1.66	1.56	1.57	1.53	1.46	1.30	1.08	
180	6.02	5.70	5.34	4.88	4.30	3.66	3.00	2.38	1.84	1.45	1.25	1.24	1.30	1.40	1.41	1.37	1.25	1.08	

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: