

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	9827.5 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	27.7V x 28.3H
	At 50% of Imax	13.9V x 14.3H
	At 90% of Imax	5.1V x 5.1H

Beam Flux	Total	1001.4 lumens per klm.
	To 10% of Imax	632.6 lumens per klm.
	To 50% of Imax	323.6 lumens per klm.
	To 90% of Imax	38.5 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Mini-600mm-TW-2200K-15D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES002546
MFR.:	SUR.:	Shielding Angle:

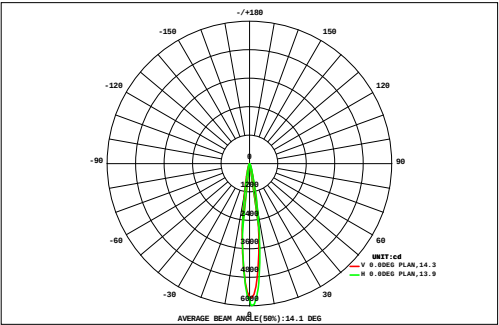

DATA OF LAMP				Eff:53.94lm/W	
MODEL				Imax(cd)	5990
NOMINAL POWER(W)	11.3	AVAILABILITY(%)	63.2		
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	385.1		
NOMINAL FLUX(lm)	609.5	LOR(%)	100.0		
LAMPS INSIDE	1	TOTAL FLUX(lm)	609.5		
TEST VOLTAGE(V)	220	q @50%(H,V)	14,14DEG		


		AREA FLUX DIAGRAM														UNIT:lm				F t	F a
		0.17	0.20	0.24	0.28	0.33	0.38	0.43	0.48	0.51	0.53	0.52	0.50	0.47	0.43	0.38	0.32	0.27	0.23	6.68	0.00
VERTICAL (DEG)	16	0.20	0.24	0.28	0.34	0.41	0.50	0.59	0.67	0.73	0.75	0.73	0.68	0.61	0.54	0.45	0.38	0.32	0.26	8.69	1.59
	14	0.22	0.27	0.34	0.43	0.54	0.70	0.88	1.06	1.20	1.22	1.13	0.99	0.84	0.68	0.54	0.44	0.36	0.29	12.2	7.73
	12	0.25	0.32	0.41	0.54	0.74	1.05	1.41	1.71	1.90	1.92	1.77	1.51	1.19	0.89	0.66	0.51	0.40	0.32	17.5	14.1
	10	0.29	0.36	0.48	0.68	1.05	1.58	2.18	2.68	2.96	2.98	2.72	2.27	1.68	1.17	0.81	0.59	0.45	0.35	25.3	22.1
	8	0.32	0.41	0.57	0.87	1.44	2.16	3.09	3.86	4.28	4.31	3.93	3.17	2.26	1.52	0.99	0.68	0.50	0.38	34.7	32.1
	6	0.35	0.47	0.66	1.09	1.74	2.69	3.83	4.93	5.61	5.66	5.05	3.94	2.80	1.87	1.26	0.81	0.55	0.40	43.7	41.3
	4	0.38	0.51	0.74	1.22	1.96	3.04	4.27	5.61	6.66	6.67	5.68	4.43	3.35	2.34	1.52	0.95	0.60	0.42	50.3	48.1
	2	0.40	0.53	0.77	1.23	2.02	3.11	4.38	5.69	6.89	6.80	5.99	5.01	3.85	2.70	1.72	1.07	0.63	0.43	53.2	50.9
	0	0.41	0.54	0.78	1.21	1.98	3.07	4.34	5.61	6.43	6.57	5.97	4.95	3.80	2.65	1.68	1.04	0.61	0.41	52.0	49.7
	-2	0.41	0.54	0.76	1.17	1.87	2.89	4.04	4.92	5.46	5.44	4.92	4.16	3.20	2.20	1.39	0.86	0.54	0.38	45.1	42.8
	-4	0.40	0.52	0.72	1.06	1.61	2.32	3.07	3.67	4.15	4.14	3.67	3.12	2.39	1.63	1.05	0.67	0.46	0.33	35.0	32.4
	-6	0.38	0.49	0.65	0.88	1.22	1.66	2.08	2.50	2.82	2.82	2.49	2.05	1.60	1.11	0.74	0.51	0.38	0.28	24.7	22.0
	-8	0.35	0.45	0.55	0.69	0.88	1.14	1.41	1.62	1.77	1.75	1.56	1.26	0.99	0.74	0.54	0.40	0.31	0.24	16.7	13.0
	-10	0.31	0.38	0.46	0.55	0.65	0.77	0.91	1.03	1.08	1.05	0.94	0.78	0.63	0.51	0.41	0.32	0.25	0.20	11.2	6.59
	-12	0.26	0.32	0.38	0.44	0.50	0.56	0.63	0.67	0.69	0.66	0.61	0.53	0.44	0.37	0.31	0.25	0.21	0.17	7.99	0.75
	-14	0.22	0.26	0.31	0.35	0.39	0.43	0.46	0.48	0.48	0.46	0.43	0.38	0.33	0.28	0.24	0.20	0.17	0.14	6.02	0.00
	-16	0.18	0.21	0.25	0.28	0.31	0.33	0.35	0.36	0.35	0.34	0.32	0.29	0.25	0.22	0.19	0.17	0.14	0.12	4.66	0.00
	-18	0.17	0.20	0.24	0.28	0.33	0.38	0.43	0.48	0.51	0.53	0.52	0.50	0.47	0.43	0.38	0.32	0.27	0.23	6.68	0.00
		-18	-16	-14	-12	-10	-8	-6	-4	HORIZONTAL (DEG)				4	6	8	10	12	14	16	18
F t		5.51	7.03	9.34	13.3	19.6	28.4	38.3	47.5	54.0	54.1	48.4	40.0	30.7	21.8	14.9	10.2	7.13	5.35	456	---
F a		0.00	0.00	2.44	9.14	16.5	25.5	35.9	45.3	52.0	51.9	46.2	37.7	28.1	18.7	11.0	4.77	0.00	0.00	---	385

one-half-peak spread: U:6.9,D:7.1 , L:7.4,R:7.0 NEMA Beam Type: Type 2

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29
V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Mini-600mm-TW-2200K-15D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES002546
MFR.:	SUR.:	Shielding Angle:

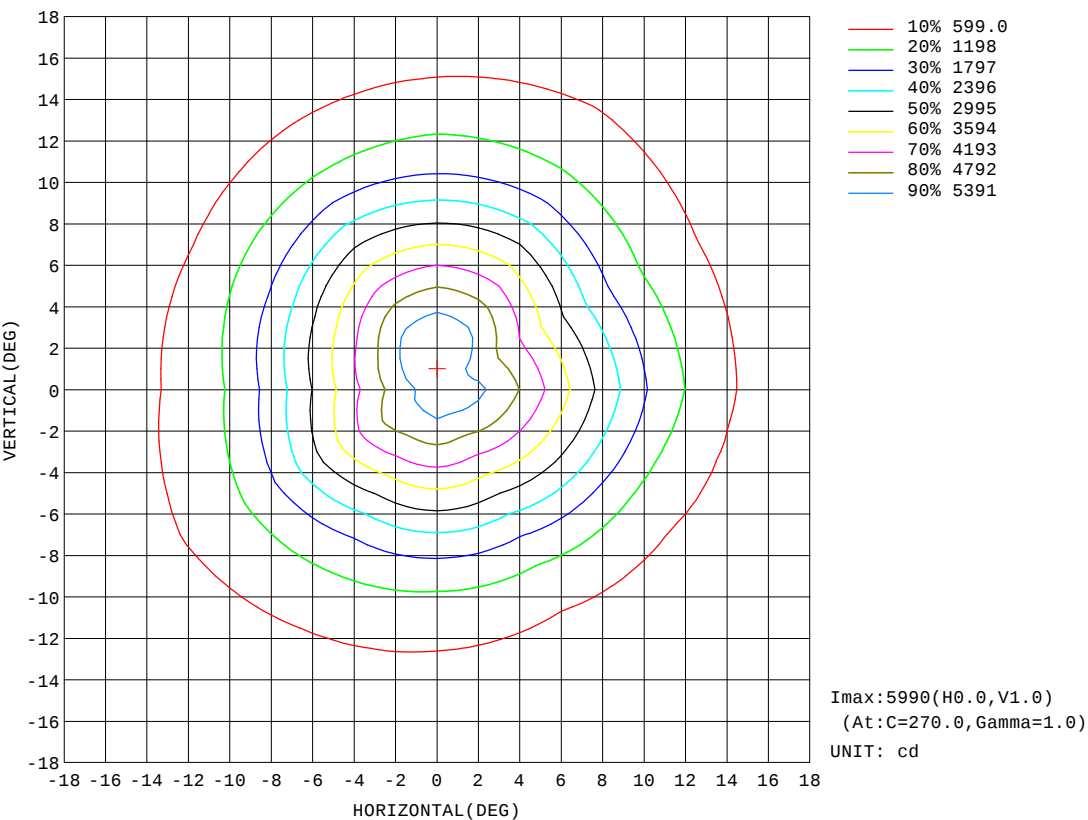


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Mini-600mm-TW-2200K-15D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES002546
MFR.:	SUR.:	Shielding Angle:

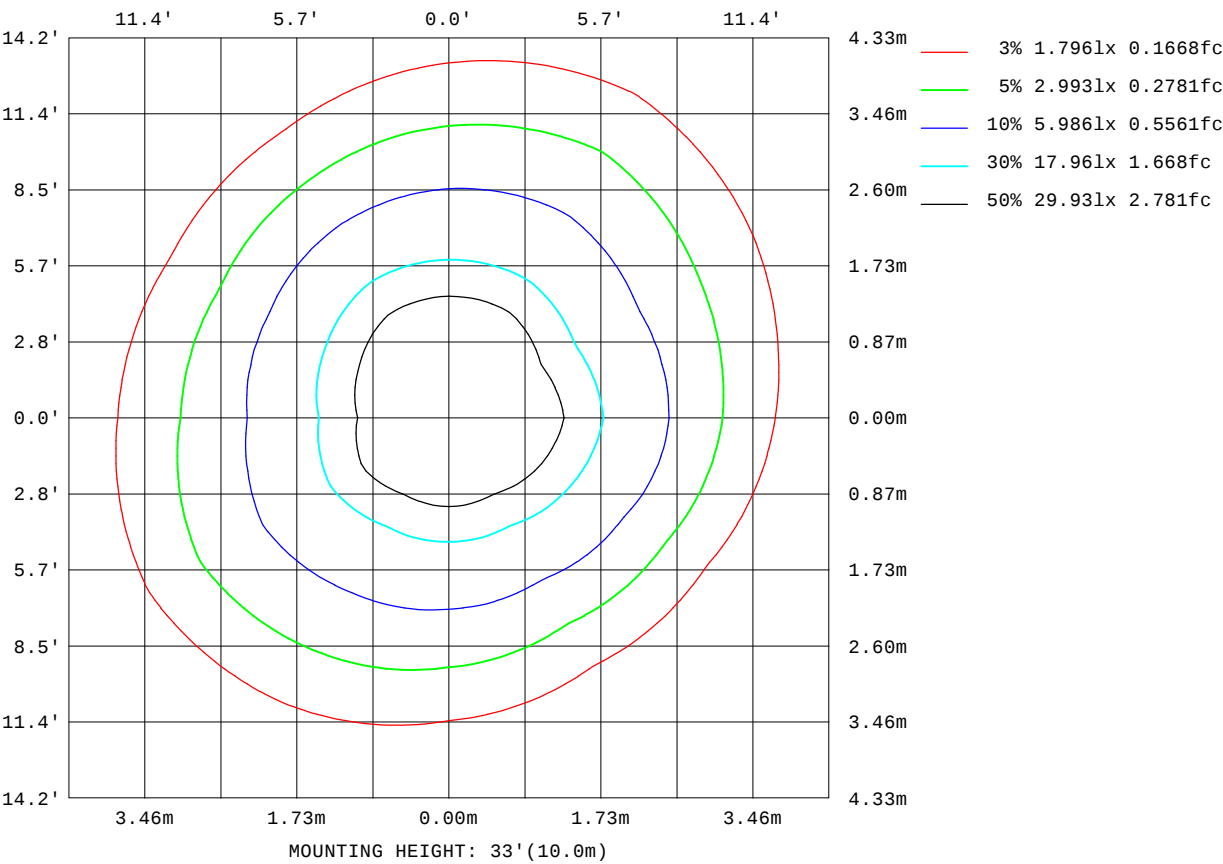

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-06-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

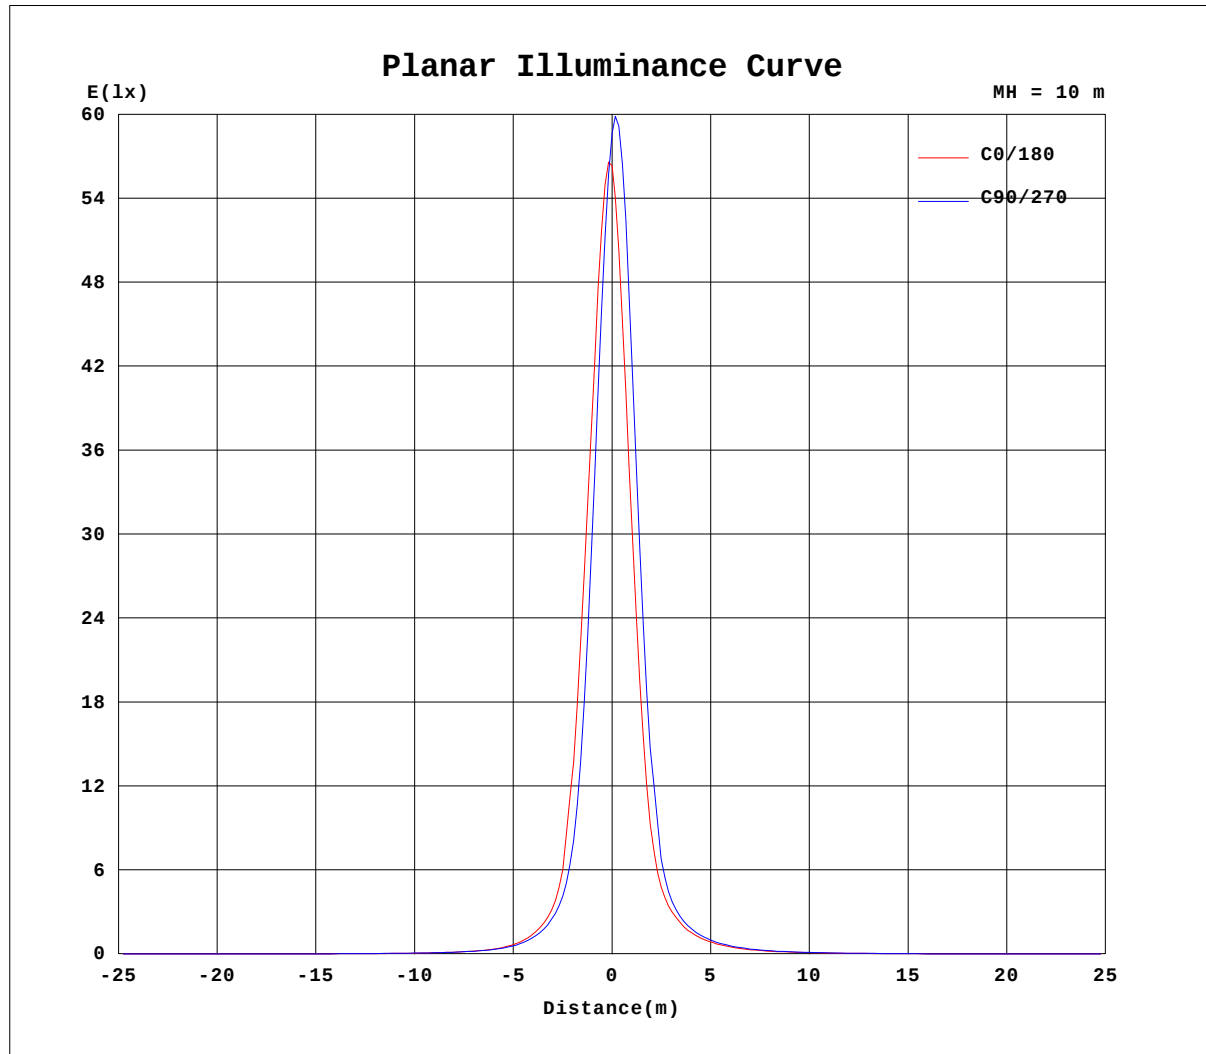


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-06-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Mini-600mm-TW-2200K-15D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES002546
MFR.:	SUR.:	Shielding Angle:

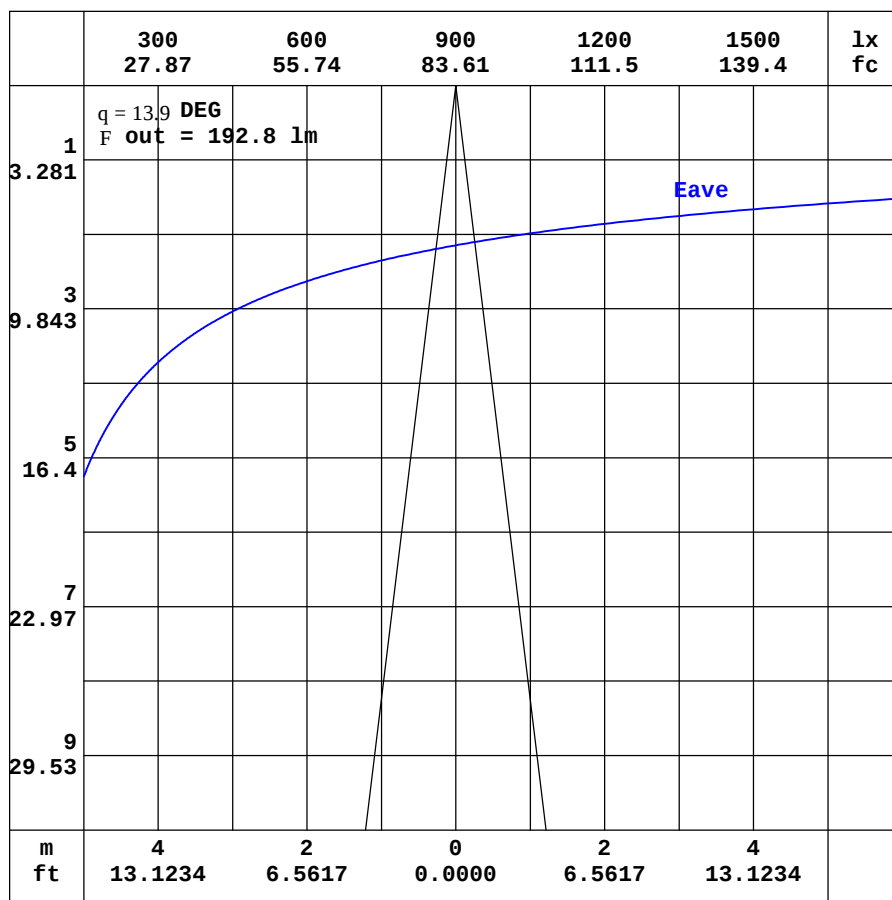

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Mini-600mm-TW-2200K-15D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES002546
MFR.:	SUR.:	Shielding Angle:

Table--1																	UNIT: cd		
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.23	1.97	1.74	1.60	1.60	1.65	1.87	2.39	3.23	4.12	4.78	5.05	5.01	4.83	4.63	4.46	4.17	3.91	4.21
-170	2.23	1.95	1.72	1.56	1.53	1.52	1.62	1.92	2.44	3.00	3.43	3.66	3.73	3.80	3.87	4.00	4.24	4.56	4.70
-160	2.23	1.94	1.70	1.54	1.47	1.41	1.37	1.43	1.61	1.84	2.00	2.07	2.17	2.71	3.22	3.67	4.04	4.25	4.36
-150	2.23	1.93	1.70	1.52	1.43	1.34	1.22	1.08	1.00	0.91	0.84	1.12	1.47	1.86	2.24	2.58	2.85	3.02	3.09
-140	2.23	1.93	1.70	1.53	1.41	1.31	1.17	0.98	0.74	0.61	0.60	0.67	0.82	1.01	1.21	1.41	1.55	1.65	1.69
-130	2.23	1.94	1.71	1.54	1.40	1.31	1.20	1.04	0.89	0.76	0.66	0.59	0.58	0.57	0.58	0.63	0.67	0.70	0.71
-120	2.23	1.95	1.74	1.56	1.42	1.31	1.22	1.15	1.11	1.06	0.98	0.90	0.82	0.75	0.68	0.62	0.58	0.54	0.52
-110	2.23	1.96	1.75	1.59	1.44	1.32	1.21	1.19	1.19	1.19	1.20	1.20	1.19	1.17	1.14	1.11	1.09	1.07	1.05
-100	2.23	1.98	1.78	1.60	1.43	1.29	1.16	1.16	1.18	1.19	1.20	1.20	1.20	1.21	1.21	1.21	1.21	1.21	1.21
-90	2.23	2.02	1.82	1.62	1.41	1.21	1.01	1.01	1.01	1.02	1.02	1.03	1.03	1.04	1.04	1.05	1.05	1.06	1.06
-80	2.23	2.05	1.86	1.65	1.46	1.22	0.90	0.87	0.87	0.87	0.87	0.87	0.88	0.89	0.89	0.89	0.89	0.88	0.87
-70	2.23	2.09	2.03	1.91	1.66	1.38	1.09	1.08	1.23	1.41	1.62	1.83	2.04	2.24	2.44	2.62	2.75	2.84	2.88
-60	2.23	2.16	2.26	2.13	2.01	1.91	1.89	2.05	2.58	3.15	3.74	4.36	4.98	5.62	6.25	6.78	7.17	7.42	7.51
-50	2.23	2.28	2.44	2.47	2.58	2.84	3.26	3.74	4.58	5.77	7.14	8.66	10.2	11.7	12.9	14.0	14.8	15.2	15.4
-40	2.23	2.49	2.65	2.88	3.32	4.05	5.00	6.14	7.43	9.43	12.0	14.5	17.2	19.9	22.7	24.9	26.5	27.1	26.8
-30	2.23	2.61	2.88	3.35	4.18	5.40	7.06	9.13	11.7	14.3	17.3	21.9	27.7	34.7	42.7	51.0	56.9	59.4	57.1
-20	2.23	2.70	3.11	3.82	5.01	6.78	9.23	12.4	16.1	20.2	25.6	33.3	45.2	65.0	94.3	134	173	195	187
-10	2.23	2.77	3.31	4.23	5.71	8.00	11.2	15.3	20.1	26.0	34.4	48.1	72.1	116	201	350	565	943	1112
0	2.23	2.83	3.48	4.54	6.21	8.85	12.6	17.4	22.9	30.1	40.5	58.1	88.8	141	235	448	1264	3519	5632
10	2.23	2.83	3.45	4.47	6.09	8.60	12.1	16.7	22.0	28.5	37.3	51.6	75.3	112	172	287	595	1442	1965
20	2.23	2.80	3.38	4.29	5.72	7.90	10.9	14.8	19.6	24.9	31.2	39.7	52.8	73.2	101	138	185	244	284
30	2.23	2.77	3.26	4.01	5.17	6.88	9.25	12.2	15.9	20.2	24.7	29.9	36.3	44.6	55.5	68.2	82.2	94.5	102
40	2.23	2.69	3.12	3.68	4.52	5.75	7.42	9.49	11.9	14.9	18.3	22.0	25.6	29.1	32.8	36.7	40.4	43.6	45.5
50	2.23	2.50	2.97	3.37	3.91	4.65	5.68	6.95	8.48	10.2	12.2	14.3	16.5	18.7	20.7	22.5	24.0	25.0	25.6
60	2.23	2.40	2.82	3.07	3.38	3.77	4.26	4.90	5.68	6.55	7.51	8.48	9.49	10.5	11.4	12.2	12.8	13.2	13.4
70	2.23	2.35	2.58	2.82	2.97	3.14	3.33	3.56	3.84	4.14	4.48	4.82	5.16	5.48	5.79	6.04	6.24	6.37	6.43
80	2.23	2.31	2.39	2.49	2.63	2.74	2.79	2.84	2.90	2.96	3.03	3.09	3.15	3.21	3.27	3.32	3.36	3.39	3.40
90	2.23	2.27	2.31	2.35	2.39	2.43	2.47	2.46	2.46	2.45	2.45	2.44	2.44	2.43	2.42	2.42	2.41	2.40	2.40
100	2.23	2.21	2.21	2.20	2.19	2.18	2.17	2.09	2.03	1.98	1.92	1.86	1.80	1.77	1.75	1.74	1.73	1.73	1.73
110	2.23	2.17	2.12	2.06	1.99	1.92	1.84	1.76	1.69	1.63	1.59	1.56	1.55	1.55	1.56	1.57	1.58	1.59	1.60
120	2.23	2.13	2.03	1.92	1.80	1.71	1.65	1.59	1.56	1.56	1.56	1.56	1.58	1.61	1.62	1.63	1.65	1.65	1.65
130	2.23	2.09	1.94	1.80	1.68	1.61	1.57	1.56	1.56	1.60	1.68	1.79	1.93	2.09	2.28	2.46	2.62	2.72	2.75
140	2.23	2.05	1.88	1.72	1.61	1.58	1.58	1.59	1.70	1.91	2.25	2.69	3.18	3.66	4.06	4.38	4.58	4.69	4.72
150	2.23	2.02	1.82	1.66	1.59	1.58	1.61	1.76	2.08	2.61	3.30	3.98	4.54	4.91	5.14	5.28	5.34	5.37	5.36
160	2.23	2.00	1.78	1.62	1.59	1.60	1.71	2.02	2.60	3.40	4.19	4.77	5.11	5.31	5.44	5.55	5.68	5.74	5.77
170	2.23	1.98	1.76	1.60	1.59	1.63	1.81	2.26	3.03	3.91	4.64	5.05	5.18	5.26	5.35	5.44	5.44	5.55	5.77
180	2.23	1.97	1.74	1.60	1.60	1.65	1.87	2.39	3.23	4.12	4.78	5.05	5.01	4.83	4.63	4.46	4.17	3.91	4.25

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Mini-600mm-TW-2200K-15D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES002546
MFR.:	SUR.:	Shielding Angle:

Table--2		UNIT: cd																	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	3.69	3.69	3.57	3.28	2.93	2.52	2.01	1.45	0.98	0.68	0.64	0.74	0.94	1.13	1.19	1.15	1.04	0.84	
-170	4.55	4.24	3.97	3.61	3.14	2.58	1.99	1.41	0.95	0.66	0.62	0.73	0.94	1.13	1.19	1.15	1.04	0.84	
-160	4.24	4.02	3.67	3.24	2.75	2.21	1.65	1.16	0.79	0.62	0.63	0.77	0.97	1.14	1.19	1.15	1.03	0.84	
-150	3.02	2.85	2.59	2.25	1.86	1.47	1.10	0.81	0.63	0.59	0.67	0.85	1.04	1.16	1.19	1.15	1.02	0.84	
-140	1.65	1.55	1.39	1.19	0.98	0.79	0.64	0.57	0.57	0.64	0.80	0.97	1.11	1.18	1.18	1.13	1.00	0.84	
-130	0.69	0.66	0.60	0.54	0.52	0.53	0.55	0.61	0.72	0.85	0.98	1.10	1.17	1.19	1.17	1.10	0.98	0.84	
-120	0.53	0.56	0.59	0.64	0.69	0.77	0.85	0.94	1.02	1.09	1.14	1.18	1.19	1.18	1.14	1.06	0.95	0.84	
-110	1.06	1.08	1.10	1.12	1.15	1.18	1.19	1.19	1.19	1.19	1.20	1.19	1.18	1.14	1.09	1.01	0.92	0.84	
-100	1.21	1.21	1.21	1.20	1.20	1.19	1.19	1.18	1.18	1.17	1.16	1.13	1.09	1.05	0.99	0.94	0.89	0.84	
-90	1.05	1.04	1.03	1.01	1.00	0.99	0.98	0.98	0.97	0.97	0.96	0.96	0.94	0.92	0.90	0.88	0.86	0.84	
-80	0.87	0.86	0.85	0.84	0.83	0.82	0.82	0.82	0.82	0.82	0.83	0.84	0.86	0.89	0.91	0.91	0.85	0.84	
-70	2.80	2.66	2.49	2.29	2.06	1.86	1.69	1.52	1.34	1.18	1.03	0.94	0.90	0.91	0.90	0.91	0.90	0.84	
-60	7.27	6.89	6.38	5.77	5.11	4.53	3.99	3.46	2.94	2.44	1.96	1.55	1.24	1.05	0.97	0.93	0.93	0.84	
-50	14.8	13.9	12.8	11.5	10.2	8.94	7.69	6.45	5.29	4.27	3.37	2.56	1.87	1.38	1.09	0.97	0.93	0.84	
-40	25.4	23.4	21.1	18.7	16.6	14.5	12.3	10.3	8.30	6.55	5.06	3.77	2.66	1.83	1.29	1.02	0.93	0.84	
-30	52.2	44.5	36.4	30.2	25.1	20.8	17.3	14.2	11.6	9.16	6.96	5.07	3.50	2.30	1.50	1.09	0.94	0.84	
-20	162	121	86.5	60.3	41.9	30.1	23.3	18.5	14.8	11.6	8.76	6.26	4.27	2.72	1.71	1.16	0.95	0.84	
-10	794	439	233	134	77.9	47.7	31.8	22.9	17.4	13.4	10.1	7.20	4.84	3.02	1.86	1.21	0.96	0.84	
0	4296	1862	528	230	116	63.2	38.4	25.8	18.9	14.3	10.7	7.65	5.11	3.15	1.94	1.24	0.96	0.84	
10	1521	711	360	210	123	72.9	45.4	30.3	21.8	16.1	11.7	8.22	5.49	3.42	2.11	1.35	1.01	0.84	
20	285	251	185	129	89.3	61.5	42.0	29.8	22.0	16.2	11.6	8.11	5.45	3.48	2.18	1.43	1.06	0.84	
30	103	96.5	84.7	67.6	52.4	40.7	32.1	25.6	19.5	14.4	10.5	7.45	5.07	3.33	2.17	1.47	1.09	0.84	
40	45.4	43.6	40.5	36.6	31.7	27.1	22.7	18.6	14.8	11.6	8.72	6.32	4.45	3.05	2.11	1.49	1.12	0.84	
50	25.3	24.5	23.2	21.4	19.3	16.8	14.4	12.2	10.2	8.49	6.77	5.09	3.73	2.73	2.00	1.49	1.14	0.84	
60	13.3	12.9	12.3	11.5	10.6	9.62	8.56	7.55	6.59	5.70	4.90	3.96	3.13	2.44	1.90	1.47	1.16	0.84	
70	6.38	6.25	6.06	5.80	5.50	5.16	4.81	4.45	4.12	3.82	3.55	3.20	2.67	2.20	1.79	1.45	1.14	0.84	
80	3.38	3.35	3.30	3.25	3.18	3.11	3.05	2.99	2.92	2.86	2.79	2.69	2.34	2.01	1.70	1.40	1.08	0.84	
90	2.38	2.37	2.35	2.33	2.32	2.30	2.30	2.29	2.29	2.29	2.28	2.28	2.04	1.80	1.56	1.32	1.08	0.84	
100	1.72	1.71	1.71	1.71	1.71	1.72	1.75	1.78	1.81	1.86	1.90	1.94	1.82	1.68	1.51	1.31	1.09	0.84	
110	1.60	1.60	1.60	1.60	1.60	1.59	1.59	1.60	1.60	1.62	1.66	1.68	1.63	1.57	1.47	1.31	1.10	0.84	
120	1.67	1.68	1.68	1.67	1.66	1.64	1.61	1.59	1.59	1.58	1.58	1.56	1.52	1.48	1.41	1.30	1.10	0.84	
130	2.74	2.66	2.53	2.37	2.19	2.03	1.89	1.76	1.67	1.60	1.55	1.50	1.45	1.42	1.37	1.28	1.10	0.84	
140	4.69	4.58	4.39	4.10	3.71	3.25	2.78	2.35	2.01	1.72	1.49	1.41	1.39	1.37	1.33	1.26	1.10	0.84	
150	5.36	5.32	5.25	5.12	4.90	4.55	4.01	3.36	2.44	1.77	1.42	1.29	1.30	1.32	1.30	1.24	1.09	0.84	
160	5.74	5.67	5.54	5.41	5.28	5.09	4.33	3.37	2.41	1.67	1.27	1.15	1.18	1.26	1.26	1.21	1.08	0.84	
170	5.72	5.61	5.55	5.14	4.57	3.99	3.35	2.62	1.88	1.28	1.00	0.95	1.05	1.19	1.23	1.18	1.06	0.84	
180	3.69	3.69	3.57	3.28	2.93	2.52	2.01	1.45	0.98	0.68	0.64	0.74	0.94	1.13	1.19	1.15	1.04	0.84	

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: