

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	10188.8 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	27.1V x 27.9H
	At 50% of Imax	13.7V x 14.0H
	At 90% of Imax	4.7V x 5.3H

Beam Flux	Total	1001.5 lumens per klm.
	To 10% of Imax	636.7 lumens per klm.
	To 50% of Imax	326.9 lumens per klm.
	To 90% of Imax	40.6 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Mini-600mm-TW-4000K-15D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES002547
MFR.:	SUR.:	Shielding Angle:

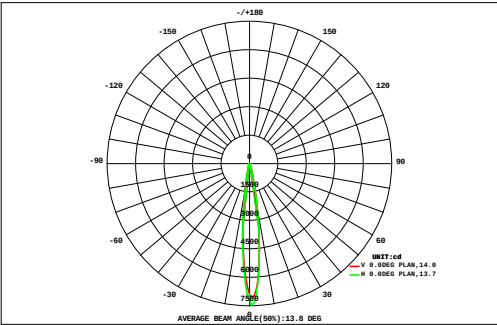

DATA OF LAMP		Eff:65.90lm/W	
MODEL		Imax(cd)	7453
NOMINAL POWER(W)	11.3	AVAILABILITY(%)	63.4
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	463.9
NOMINAL FLUX(lm)	731.5	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	731.5
TEST VOLTAGE(V)	220	q @50%(H,V)	14,14DEG

		AREA FLUX DIAGRAM																UNIT:lm			F t	F a
		0.27	0.33	0.38	0.45	0.51	0.55	0.58	0.60	0.60	0.58	0.55	0.49	0.44	0.38	0.32	0.27	0.24	0.20	7.73	0.00	
VERTICAL (DEG)	16	0.31	0.37	0.45	0.53	0.63	0.72	0.79	0.84	0.86	0.84	0.77	0.68	0.58	0.48	0.40	0.33	0.28	0.23	10.1	1.17	
	14	0.35	0.42	0.52	0.64	0.79	0.98	1.15	1.30	1.39	1.36	1.23	1.03	0.82	0.64	0.50	0.40	0.32	0.26	14.1	8.24	
	12	0.38	0.48	0.60	0.78	1.03	1.40	1.78	2.08	2.28	2.26	2.02	1.66	1.25	0.90	0.65	0.49	0.38	0.30	20.7	15.8	
	10	0.41	0.53	0.69	0.95	1.36	1.96	2.70	3.28	3.60	3.59	3.24	2.63	1.90	1.30	0.85	0.59	0.44	0.34	30.4	26.6	
	8	0.44	0.57	0.78	1.14	1.73	2.61	3.74	4.67	5.13	5.12	4.65	3.75	2.64	1.75	1.15	0.72	0.53	0.40	41.5	38.1	
	6	0.45	0.60	0.85	1.31	2.04	3.18	4.62	6.05	6.76	6.73	6.01	4.72	3.34	2.19	1.48	0.94	0.63	0.46	52.4	49.4	
	4	0.44	0.60	0.88	1.39	2.25	3.56	5.21	6.96	8.19	8.16	7.05	5.51	4.10	2.82	1.82	1.16	0.73	0.51	61.4	58.7	
	2	0.43	0.58	0.86	1.37	2.26	3.61	5.23	6.96	8.49	8.61	7.74	6.48	4.89	3.34	2.11	1.31	0.81	0.55	65.6	63.3	
	0	0.41	0.55	0.82	1.32	2.19	3.51	5.05	6.63	7.85	8.21	7.68	6.47	4.88	3.33	2.11	1.31	0.82	0.56	63.7	61.5	
	-2	0.39	0.52	0.77	1.23	2.06	3.30	4.68	5.80	6.60	6.78	6.31	5.37	4.09	2.80	1.80	1.16	0.76	0.54	55.0	52.0	
	-4	0.36	0.47	0.68	1.05	1.72	2.64	3.61	4.43	5.07	5.16	4.68	4.01	3.08	2.15	1.45	0.97	0.68	0.50	42.7	39.6	
	-6	0.32	0.42	0.57	0.82	1.24	1.79	2.42	3.05	3.53	3.59	3.21	2.67	2.11	1.57	1.10	0.80	0.59	0.45	30.2	26.7	
	-8	0.27	0.36	0.46	0.62	0.84	1.16	1.50	1.88	2.17	2.21	2.01	1.71	1.44	1.10	0.83	0.65	0.51	0.40	20.1	15.6	
	-10	0.23	0.30	0.38	0.47	0.59	0.74	0.93	1.13	1.27	1.31	1.26	1.13	0.93	0.77	0.64	0.53	0.43	0.35	13.4	7.14	
	-12	0.19	0.24	0.30	0.37	0.44	0.52	0.62	0.72	0.79	0.82	0.79	0.74	0.66	0.58	0.50	0.43	0.36	0.30	9.38	0.00	
	-14	0.16	0.20	0.24	0.29	0.34	0.39	0.46	0.51	0.55	0.57	0.56	0.54	0.50	0.45	0.40	0.35	0.30	0.24	7.05	0.00	
	-16	0.14	0.16	0.19	0.23	0.26	0.31	0.35	0.38	0.41	0.42	0.42	0.41	0.39	0.35	0.32	0.28	0.24	0.20	5.47	0.00	
	-18																					
		-18	-16	-14	-12	-10	-8	-6	-4	HORIZONTAL (DEG)				4	6	8	10	12	14	16	18	
F t		5.95	7.71	10.4	15.0	22.3	32.9	45.4	57.3	65.5	66.3	60.2	50.0	38.0	26.9	18.4	12.7	9.04	6.80	551	---	
F a		0.00	0.00	1.88	9.58	17.9	29.5	42.2	54.5	62.8	63.5	57.1	46.9	34.5	22.6	13.5	6.46	0.90	0.00	---	464	


one-half-peak spread: U:6.9,D:6.9 , L:7.0,R:7.1 NEMA Beam Type: Type 2

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Mini-600mm-TW-4000K-15D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES002547
MFR.:	SUR.:	Shielding Angle:

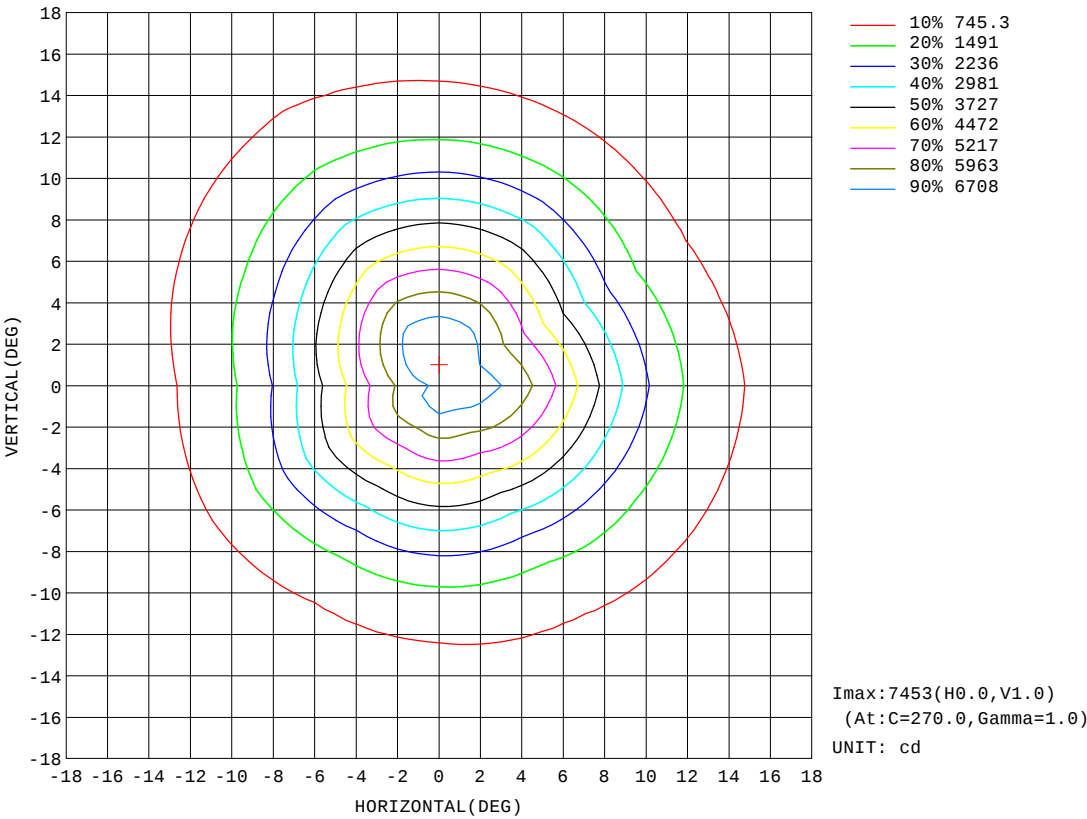


H(b) Range:-90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Mini-600mm-TW-4000K-15D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES002547
MFR.:	SUR.:	Shielding Angle:

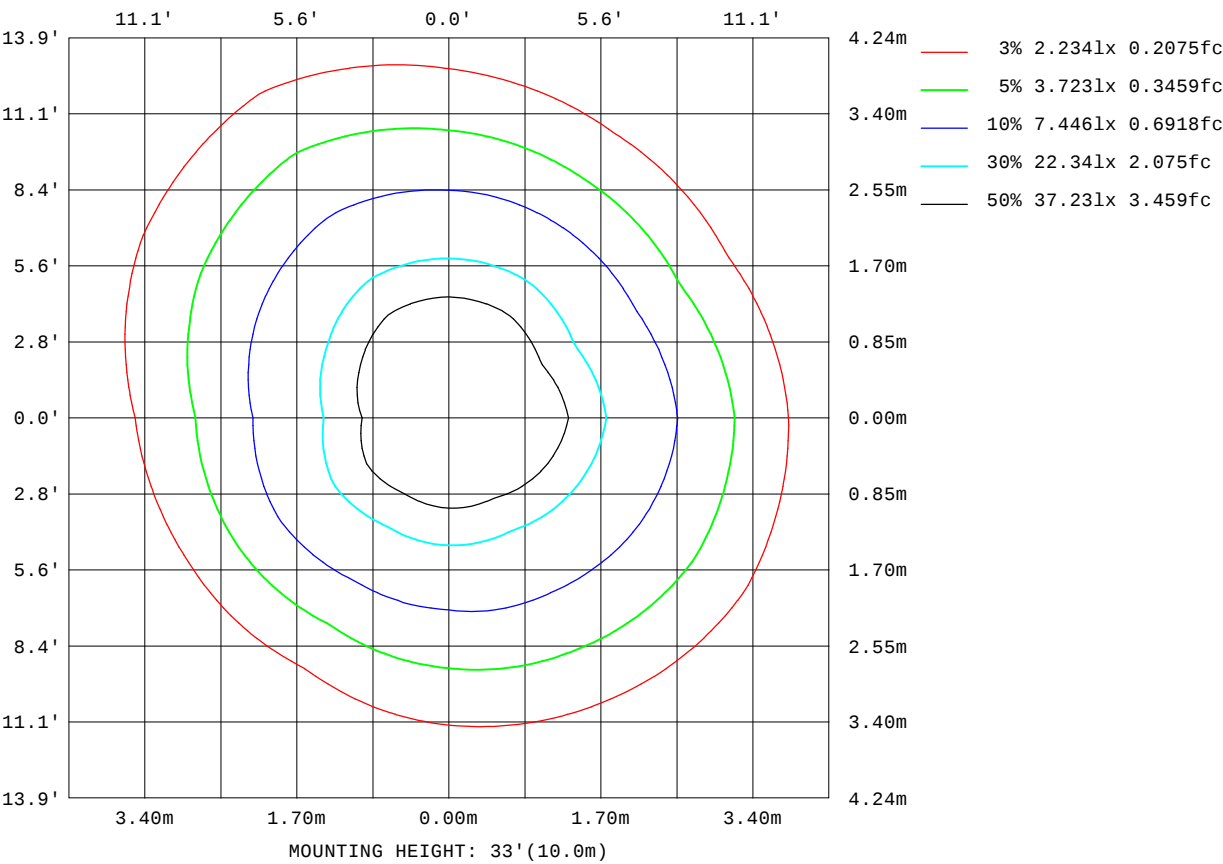

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

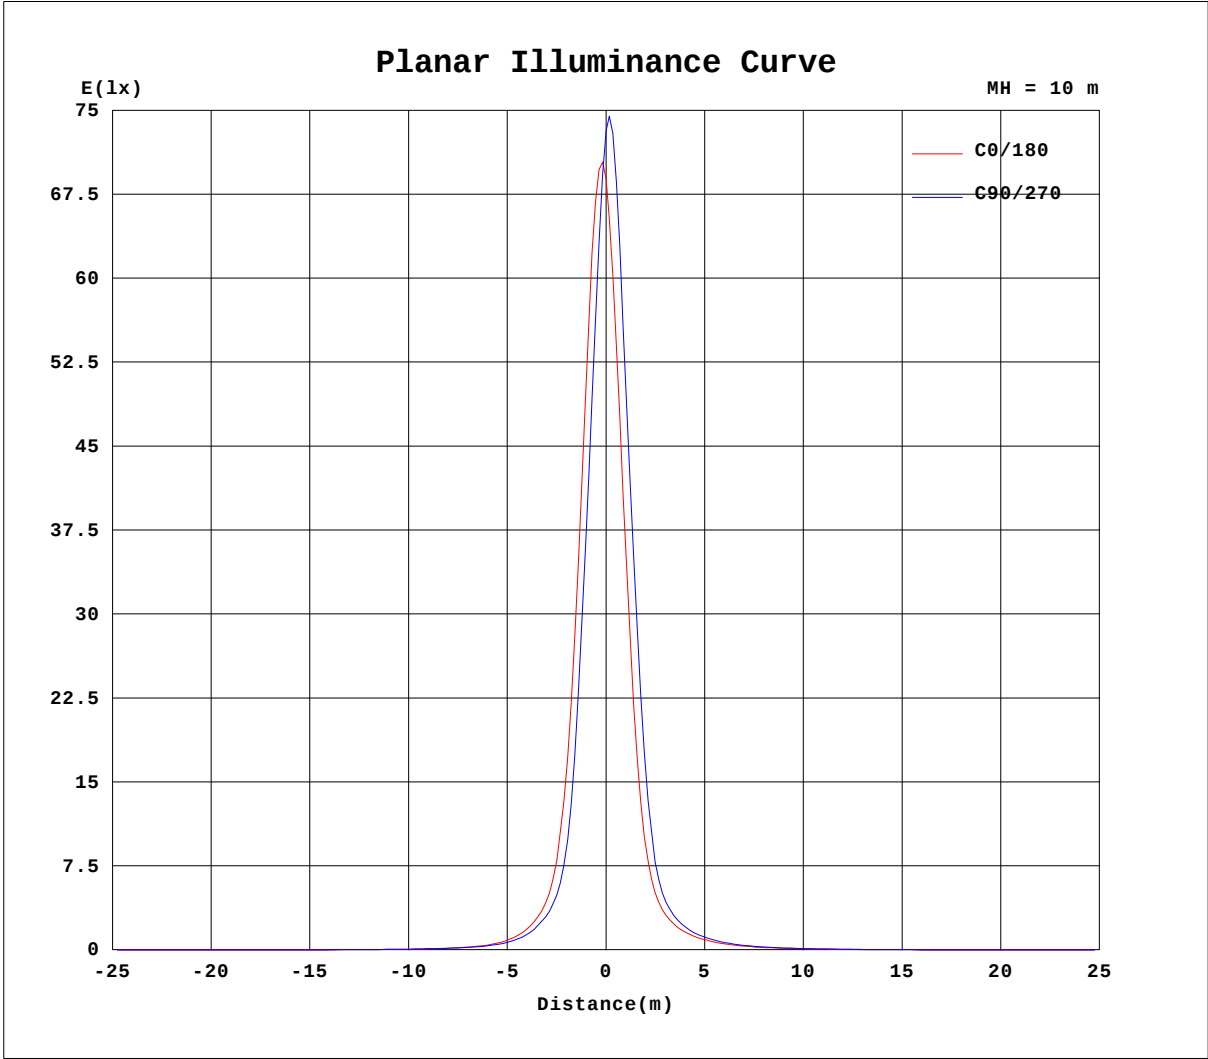


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-06-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Mini-600mm-TW-4000K-15D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES002547
MFR.:	SUR.:	Shielding Angle:

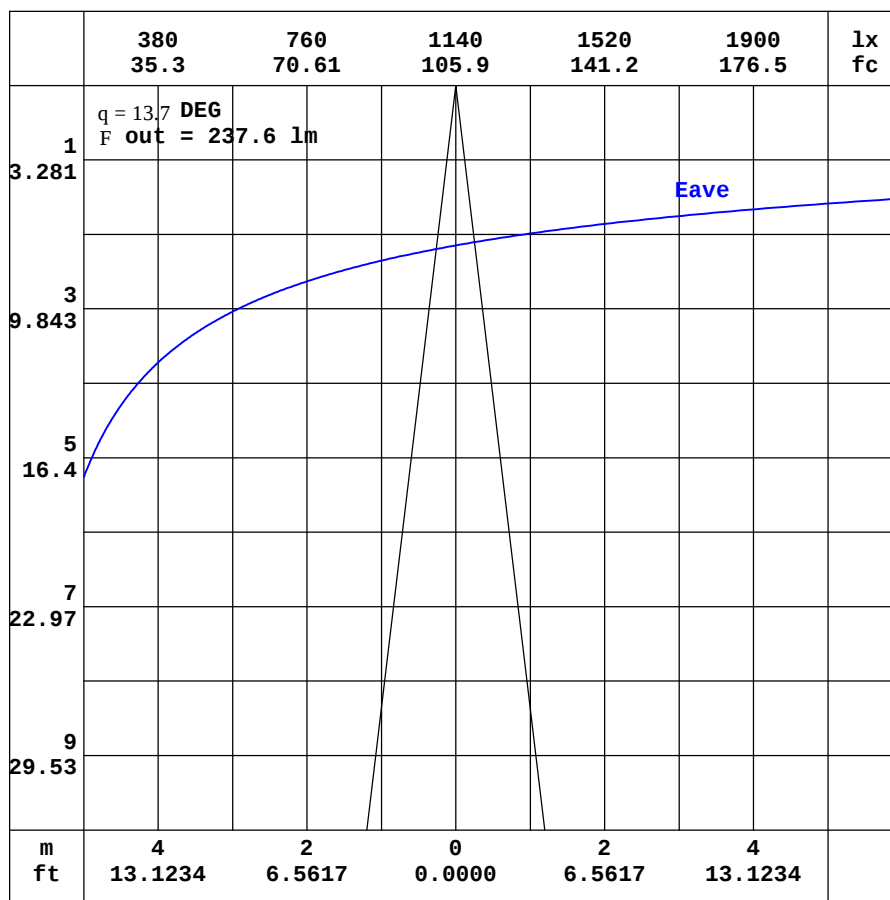

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-06-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Mini-600mm-TW-4000K-15D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES002547
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.66	2.37	2.10	1.92	1.93	2.00	2.27	2.92	3.92	5.00	5.77	6.07	6.01	5.80	5.58	5.42	5.08	4.74	5.03
-170	2.66	2.34	2.06	1.88	1.85	1.84	1.95	2.32	2.94	3.63	4.14	4.41	4.50	4.59	4.70	4.86	5.14	5.51	5.67
-160	2.66	2.33	2.05	1.86	1.78	1.70	1.64	1.70	1.92	2.18	2.38	2.48	2.61	3.28	3.90	4.44	4.89	5.14	5.25
-150	2.66	2.32	2.04	1.84	1.73	1.61	1.46	1.28	1.16	1.03	0.94	1.30	1.74	2.22	2.69	3.11	3.43	3.64	3.72
-140	2.66	2.32	2.05	1.84	1.70	1.59	1.41	1.15	0.84	0.66	0.66	0.75	0.93	1.17	1.42	1.67	1.86	1.99	2.04
-130	2.66	2.32	2.06	1.85	1.70	1.58	1.44	1.24	1.04	0.88	0.74	0.65	0.63	0.62	0.65	0.72	0.79	0.84	0.86
-120	2.66	2.34	2.08	1.88	1.71	1.58	1.47	1.38	1.33	1.25	1.16	1.05	0.95	0.85	0.78	0.72	0.68	0.66	0.64
-110	2.66	2.36	2.11	1.90	1.74	1.58	1.46	1.43	1.43	1.43	1.44	1.44	1.43	1.39	1.36	1.33	1.30	1.29	1.27
-100	2.66	2.39	2.14	1.91	1.72	1.55	1.39	1.40	1.42	1.43	1.44	1.44	1.45	1.45	1.45	1.45	1.44	1.44	1.44
-90	2.66	2.42	2.17	1.93	1.69	1.44	1.20	1.21	1.21	1.22	1.23	1.24	1.24	1.25	1.25	1.25	1.26	1.26	1.27
-80	2.66	2.46	2.23	1.98	1.74	1.44	1.07	1.03	1.02	1.02	1.02	1.02	1.03	1.03	1.04	1.05	1.05	1.06	1.06
-70	2.66	2.51	2.41	2.28	1.98	1.63	1.28	1.27	1.43	1.64	1.86	2.09	2.30	2.55	2.80	3.03	3.21	3.35	3.43
-60	2.66	2.59	2.70	2.53	2.36	2.25	2.20	2.35	2.94	3.55	4.21	4.89	5.60	6.33	7.08	7.77	8.32	8.72	8.94
-50	2.66	2.72	2.91	2.91	3.03	3.31	3.75	4.25	5.16	6.46	7.92	9.51	11.1	12.6	14.2	15.6	16.8	17.8	18.3
-40	2.66	2.94	3.14	3.40	3.89	4.70	5.74	6.98	8.27	10.2	12.8	15.4	18.1	20.6	23.1	25.8	28.3	30.4	31.7
-30	2.66	3.09	3.41	3.95	4.87	6.26	8.14	10.4	12.9	15.3	17.8	21.5	25.7	30.7	36.6	43.9	53.2	61.8	67.2
-20	2.66	3.20	3.67	4.49	5.84	7.85	10.7	14.1	17.9	21.9	26.0	30.4	36.3	50.0	71.5	103	144	192	222
-10	2.66	3.30	3.91	4.97	6.68	9.32	13.0	17.6	22.8	28.7	36.3	47.6	66.1	97.3	154	278	507	977	1368
0	2.66	3.37	4.11	5.33	7.30	10.4	14.6	20.1	26.4	34.5	45.7	64.3	96.7	149	243	472	1390	4109	6888
10	2.66	3.36	4.08	5.26	7.16	10.1	14.2	19.6	26.0	34.0	45.5	64.3	97.1	153	250	427	828	1806	2392
20	2.66	3.33	4.00	5.06	6.74	9.30	12.9	17.7	23.5	30.5	39.7	53.3	74.9	107	155	219	296	329	322
30	2.66	3.28	3.87	4.75	6.10	8.17	11.0	14.7	19.4	24.9	31.4	39.3	49.6	63.2	80.7	100	113	119	117
40	2.66	3.18	3.71	4.38	5.36	6.82	8.86	11.4	14.5	18.4	22.8	27.6	32.9	38.4	44.1	48.4	51.6	53.3	53.0
50	2.66	2.99	3.54	4.00	4.65	5.54	6.77	8.40	10.3	12.4	14.9	17.7	20.5	23.5	25.9	27.8	29.2	30.0	30.2
60	2.66	2.88	3.36	3.66	4.02	4.50	5.09	5.87	6.83	7.94	9.13	10.4	11.7	12.9	13.9	14.8	15.4	15.8	15.9
70	2.66	2.81	3.08	3.37	3.55	3.75	3.98	4.28	4.62	4.99	5.41	5.85	6.28	6.67	7.00	7.28	7.48	7.60	7.63
80	2.66	2.76	2.87	2.98	3.14	3.27	3.34	3.41	3.49	3.57	3.65	3.73	3.81	3.88	3.94	3.99	4.03	4.05	4.06
90	2.66	2.71	2.76	2.81	2.86	2.91	2.96	2.96	2.96	2.96	2.95	2.95	2.95	2.94	2.93	2.92	2.92	2.91	2.90
100	2.66	2.66	2.66	2.65	2.63	2.62	2.60	2.54	2.47	2.39	2.31	2.25	2.19	2.15	2.13	2.11	2.09	2.08	2.08
110	2.66	2.61	2.54	2.47	2.40	2.30	2.23	2.12	2.04	1.97	1.93	1.90	1.89	1.89	1.90	1.90	1.90	1.91	1.91
120	2.66	2.55	2.44	2.30	2.18	2.07	1.99	1.93	1.91	1.90	1.90	1.91	1.94	1.97	1.98	1.99	2.00	2.00	1.98
130	2.66	2.50	2.34	2.17	2.03	1.94	1.92	1.91	1.91	1.98	2.09	2.22	2.39	2.58	2.79	2.99	3.17	3.28	3.30
140	2.66	2.46	2.25	2.07	1.94	1.92	1.92	1.97	2.12	2.39	2.79	3.30	3.87	4.41	4.88	5.25	5.50	5.63	5.68
150	2.66	2.43	2.19	2.00	1.92	1.92	1.98	2.17	2.57	3.22	4.01	4.80	5.44	5.87	6.13	6.29	6.38	6.43	6.44
160	2.66	2.40	2.14	1.96	1.92	1.95	2.09	2.47	3.19	4.13	5.05	5.72	6.10	6.33	6.49	6.64	6.80	6.87	6.91
170	2.66	2.38	2.11	1.93	1.93	1.98	2.21	2.77	3.69	4.75	5.60	6.06	6.20	6.28	6.35	6.47	6.50	6.62	6.90
180	2.66	2.37	2.10	1.92	1.93	2.00	2.27	2.92	3.92	5.00	5.77	6.07	6.01	5.80	5.58	5.42	5.08	4.74	5.07

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2024-06-29

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Mini-600mm-TW-4000K-15D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:15 DEG	DIM.:600mm	SERIAL No.:IES002547
MFR.:	SUR.:	Shielding Angle:

Table--2																		UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	4.38	4.38	4.25	3.91	3.51	3.01	2.40	1.73	1.16	0.81	0.76	0.89	1.13	1.35	1.42	1.38	1.23	0.99	
-170	5.46	5.06	4.69	4.27	3.72	3.07	2.37	1.69	1.14	0.80	0.76	0.89	1.13	1.35	1.42	1.38	1.23	0.99	
-160	5.09	4.81	4.37	3.85	3.26	2.63	1.98	1.40	0.97	0.77	0.77	0.94	1.17	1.36	1.42	1.38	1.23	0.99	
-150	3.63	3.43	3.12	2.71	2.26	1.79	1.36	1.01	0.80	0.75	0.83	1.04	1.25	1.40	1.42	1.37	1.21	0.99	
-140	2.00	1.88	1.71	1.48	1.24	1.01	0.83	0.74	0.74	0.81	0.99	1.18	1.34	1.41	1.41	1.35	1.19	0.99	
-130	0.85	0.82	0.77	0.72	0.69	0.70	0.72	0.79	0.90	1.05	1.19	1.32	1.39	1.42	1.39	1.32	1.16	0.99	
-120	0.67	0.70	0.75	0.80	0.87	0.95	1.05	1.15	1.24	1.31	1.36	1.40	1.42	1.40	1.36	1.26	1.13	0.99	
-110	1.28	1.30	1.32	1.34	1.37	1.40	1.41	1.41	1.41	1.42	1.42	1.41	1.40	1.36	1.29	1.19	1.09	0.99	
-100	1.44	1.43	1.43	1.42	1.42	1.41	1.41	1.40	1.39	1.38	1.36	1.34	1.29	1.23	1.18	1.12	1.05	0.99	
-90	1.25	1.23	1.22	1.20	1.19	1.17	1.16	1.16	1.15	1.14	1.13	1.13	1.10	1.08	1.06	1.03	1.01	0.99	
-80	1.05	1.05	1.03	1.02	1.00	0.99	0.98	0.98	0.98	0.98	0.99	0.99	1.02	1.05	1.07	1.06	1.00	0.99	
-70	3.36	3.23	3.04	2.82	2.56	2.31	2.09	1.86	1.64	1.44	1.26	1.14	1.07	1.07	1.07	1.08	1.06	0.99	
-60	8.77	8.42	7.90	7.24	6.49	5.76	5.02	4.32	3.64	3.00	2.40	1.88	1.51	1.26	1.14	1.10	1.09	0.99	
-50	18.0	17.3	16.2	14.8	13.3	11.6	9.88	8.18	6.65	5.32	4.15	3.13	2.28	1.67	1.31	1.15	1.09	0.99	
-40	31.7	30.6	28.5	25.7	22.6	19.4	16.3	13.4	10.7	8.22	6.29	4.62	3.25	2.21	1.55	1.21	1.10	0.99	
-30	68.3	64.3	56.8	47.2	38.2	30.4	24.2	19.2	15.1	11.7	8.63	6.25	4.26	2.79	1.82	1.29	1.11	0.99	
-20	225	195	149	103	70.1	48.7	34.4	25.4	19.3	14.7	10.9	7.69	5.19	3.30	2.06	1.38	1.12	0.99	
-10	1157	673	399	225	123	70.6	44.4	30.5	22.3	16.7	12.5	8.77	5.90	3.65	2.25	1.45	1.13	0.99	
0	5662	2312	704	304	152	80.8	48.3	32.2	23.4	17.5	13.1	9.25	6.21	3.80	2.33	1.48	1.14	0.99	
10	1728	726	344	204	125	78.3	50.4	34.7	25.6	19.2	14.1	9.83	6.60	4.11	2.53	1.61	1.20	0.99	
20	279	212	159	118	86.0	61.8	44.2	33.1	25.3	18.9	13.7	9.64	6.51	4.16	2.62	1.70	1.25	0.99	
30	109	95.2	79.3	64.7	52.0	42.1	34.8	28.8	22.4	16.8	12.2	8.80	6.03	3.98	2.60	1.74	1.30	0.99	
40	50.8	47.1	42.7	38.1	34.0	29.8	25.5	21.2	17.1	13.5	10.2	7.49	5.28	3.65	2.52	1.77	1.33	0.99	
50	29.4	28.1	26.3	24.1	21.7	19.0	16.4	14.0	11.8	9.89	7.98	6.02	4.45	3.26	2.39	1.77	1.36	0.99	
60	15.6	15.0	14.2	13.2	12.1	11.0	9.85	8.74	7.69	6.70	5.81	4.72	3.72	2.91	2.26	1.75	1.37	0.99	
70	7.53	7.35	7.08	6.76	6.39	6.00	5.63	5.25	4.87	4.54	4.23	3.82	3.19	2.63	2.14	1.73	1.35	0.99	
80	4.03	3.98	3.92	3.85	3.77	3.70	3.64	3.57	3.50	3.42	3.34	3.23	2.81	2.42	2.04	1.67	1.29	0.99	
90	2.88	2.86	2.85	2.83	2.81	2.80	2.79	2.79	2.78	2.77	2.77	2.76	2.47	2.17	1.88	1.58	1.28	0.99	
100	2.06	2.06	2.05	2.05	2.05	2.07	2.10	2.14	2.19	2.24	2.29	2.34	2.19	2.02	1.82	1.58	1.30	0.99	
110	1.90	1.90	1.89	1.89	1.88	1.87	1.88	1.88	1.90	1.93	1.98	2.01	1.96	1.88	1.76	1.57	1.31	0.99	
120	1.99	1.98	1.96	1.94	1.93	1.91	1.88	1.87	1.87	1.87	1.88	1.85	1.82	1.77	1.70	1.56	1.32	0.99	
130	3.27	3.16	2.98	2.76	2.54	2.34	2.17	2.03	1.93	1.87	1.83	1.77	1.73	1.69	1.64	1.54	1.32	0.99	
140	5.64	5.53	5.30	4.93	4.44	3.85	3.26	2.73	2.32	1.99	1.74	1.66	1.65	1.63	1.60	1.51	1.32	0.99	
150	6.43	6.40	6.33	6.18	5.93	5.49	4.83	3.99	2.86	2.05	1.65	1.52	1.54	1.58	1.55	1.48	1.30	0.99	
160	6.89	6.81	6.67	6.53	6.38	6.16	5.24	4.05	2.86	1.96	1.48	1.35	1.40	1.50	1.51	1.45	1.29	0.99	
170	6.89	6.78	6.72	6.21	5.52	4.82	4.04	3.15	2.24	1.51	1.18	1.13	1.26	1.42	1.47	1.42	1.26	0.99	
180	4.38	4.38	4.25	3.91	3.51	3.01	2.40	1.73	1.16	0.81	0.76	0.89	1.13	1.35	1.42	1.38	1.23	0.99	

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: