

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2699.2 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	58.4V x 58.0H
	At 50% of Imax	29.2V x 30.0H
	At 90% of Imax	12.2V x 12.1H

Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	774.9 lumens per klm.
	To 50% of Imax	406.5 lumens per klm.
	To 90% of Imax	87.5 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Mini-600mm-TW-4000K-30D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:30 DEG	DIM.: 600mm	SERIAL No.:IES002550
MFR.:	SUR.:	Shielding Angle:

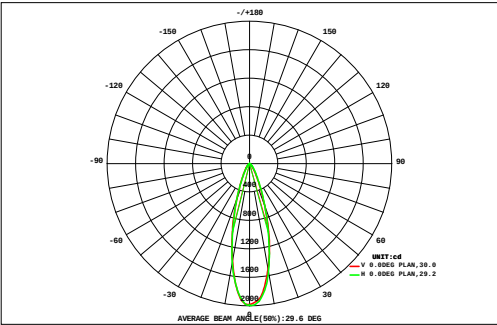

DATA OF LAMP		Eff:66.76lm/W	
MODEL		Imax(cd)	2000
NOMINAL POWER(W)	11.2	AVAILABILITY(%)	77.3
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	573.2
NOMINAL FLUX(lm)	741	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	741.0
TEST VOLTAGE(V)	220	q @50%(H,V)	30,29DEG

AREA FLUX DIAGRAM																UNIT:lm				F t	F a	
VERTICAL (DEG)	45	0.12	0.17	0.24	0.32	0.40	0.47	0.52	0.56	0.57	0.55	0.51	0.45	0.38	0.31	0.25	0.19	0.15	0.10	6.25	0.00	
	40	0.16	0.23	0.32	0.43	0.55	0.66	0.75	0.82	0.84	0.82	0.74	0.64	0.53	0.42	0.34	0.26	0.19	0.13	8.83	0.00	
	35	0.20	0.30	0.42	0.57	0.74	0.93	1.09	1.22	1.28	1.25	1.12	0.94	0.75	0.58	0.44	0.33	0.24	0.16	12.6	0.24	
	30	0.24	0.36	0.52	0.73	0.99	1.30	1.63	1.92	2.08	2.05	1.81	1.46	1.10	0.81	0.58	0.41	0.29	0.20	18.5	9.68	
	25	0.28	0.43	0.63	0.92	1.31	1.86	2.57	3.23	3.64	3.62	3.16	2.44	1.69	1.14	0.76	0.51	0.35	0.23	28.8	22.3	
	20	0.31	0.49	0.74	1.13	1.72	2.66	4.02	5.42	6.16	6.06	5.26	3.95	2.58	1.59	0.99	0.63	0.40	0.26	44.4	39.1	
	15	0.34	0.53	0.83	1.32	2.17	3.65	5.98	8.47	9.66	9.41	7.80	5.76	3.68	2.14	1.25	0.74	0.46	0.28	64.4	59.8	
	10	0.35	0.55	0.89	1.47	2.57	4.65	7.88	10.8	12.8	13.0	10.7	7.54	4.86	2.74	1.51	0.85	0.50	0.30	84.0	79.6	
	5	0.35	0.56	0.90	1.53	2.77	5.17	8.63	12.1	14.7	14.6	12.4	9.14	5.81	3.17	1.69	0.92	0.52	0.31	95.2	91.1	
	0	0.33	0.53	0.86	1.48	2.74	5.11	8.43	12.3	14.6	14.2	12.2	9.28	5.81	3.15	1.68	0.92	0.52	0.30	94.4	90.2	
	-5	0.30	0.48	0.77	1.32	2.45	4.55	7.29	10.2	12.1	11.9	10.3	7.79	4.77	2.69	1.49	0.85	0.49	0.29	80.1	75.8	
	-10	0.27	0.41	0.65	1.07	1.92	3.42	5.35	7.10	8.42	8.54	7.28	5.36	3.44	2.08	1.23	0.74	0.45	0.27	58.0	53.3	
	-15	0.22	0.34	0.51	0.81	1.34	2.23	3.39	4.53	5.23	5.19	4.41	3.33	2.32	1.51	0.97	0.62	0.39	0.24	37.6	32.2	
	-20	0.18	0.26	0.39	0.60	0.91	1.36	1.94	2.54	2.93	2.92	2.55	2.03	1.51	1.07	0.74	0.50	0.33	0.21	23.0	16.3	
	-25	0.14	0.20	0.30	0.43	0.61	0.85	1.13	1.40	1.58	1.60	1.47	1.25	1.00	0.75	0.55	0.38	0.26	0.17	14.1	3.59	
	-30	0.11	0.16	0.23	0.31	0.42	0.54	0.69	0.83	0.92	0.95	0.90	0.79	0.66	0.52	0.40	0.29	0.20	0.14	9.06	0.00	
-35	0.08	0.12	0.17	0.22	0.29	0.36	0.45	0.52	0.58	0.59	0.57	0.52	0.44	0.36	0.28	0.21	0.15	0.10	6.02	0.00		
-40	0.06	0.09	0.12	0.16	0.20	0.25	0.30	0.34	0.37	0.38	0.37	0.34	0.30	0.25	0.20	0.15	0.11	0.07	4.04	0.00		
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG)				10	15	20	25	30	35	40	45		
F t	4.04	6.21	9.49	14.8	24.1	40.0	62.0	84.2	98.4	97.7	83.6	63.0	41.6	25.3	15.3	9.51	5.98	3.77	689	---		
F a	0.00	0.00	0.00	4.65	17.1	34.0	56.6	79.0	93.4	92.6	78.3	57.5	35.6	18.3	5.91	0.00	0.00	0.00	---	573		


one-half-peak spread: U:14.5,D:14.9 , L:13.3,R:16.9 NEMA Beam Type: Type 4

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM


NAME:Blazeline Mini-600mm-TW-4000K-30D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:30 DEG	DIM.: 600mm	SERIAL No.:IES002550
MFR.:	SUR.:	Shielding Angle:

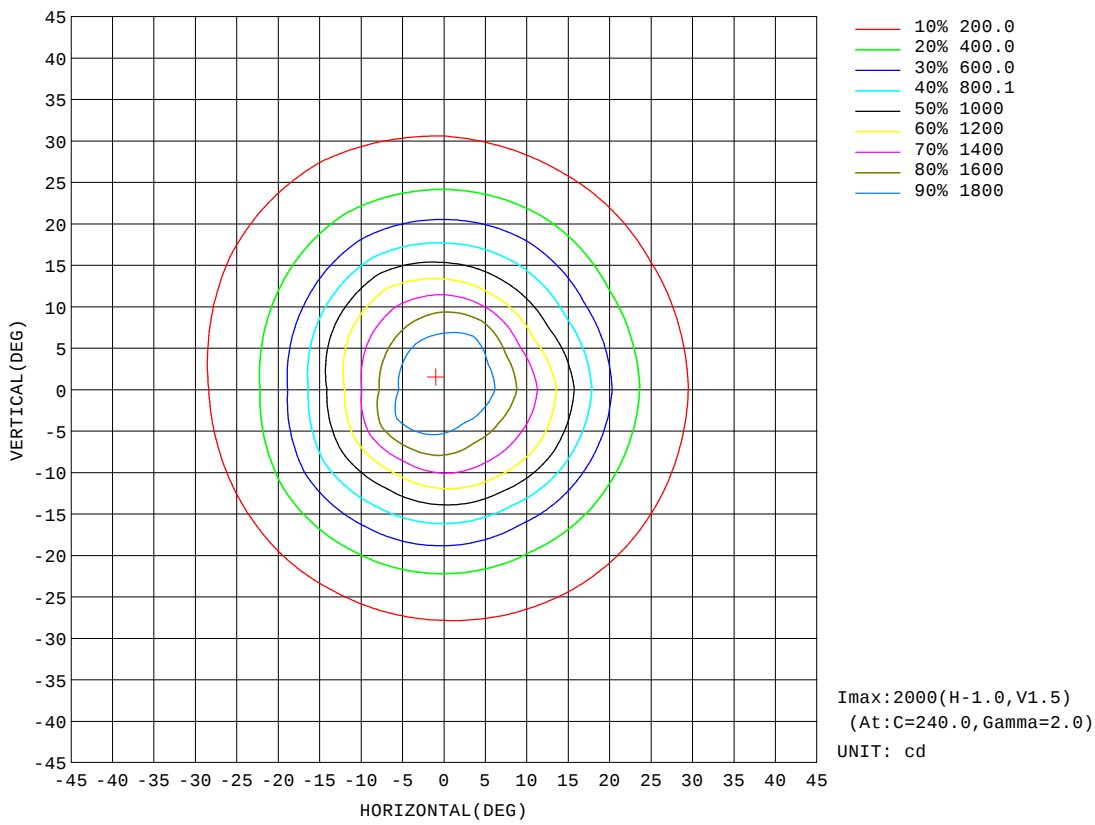

H _(b) Range:-90 - 90DEG	V(B) Range:-180 - 180DEG
H _(b) Interval: 0.5DEG	V(B) Interval: 0.5DEG
Test Speed: HIGH	Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Temperature:25.3DEG	Humidity:65.0%
Operators:	Test Distance:8.630m [K=1.0000]
Test Date:2024-06-29	Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Mini-600mm-TW-4000K-30D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:30 DEG	DIM.: 600mm	SERIAL No.:IES002550
MFR.:	SUR.:	Shielding Angle:

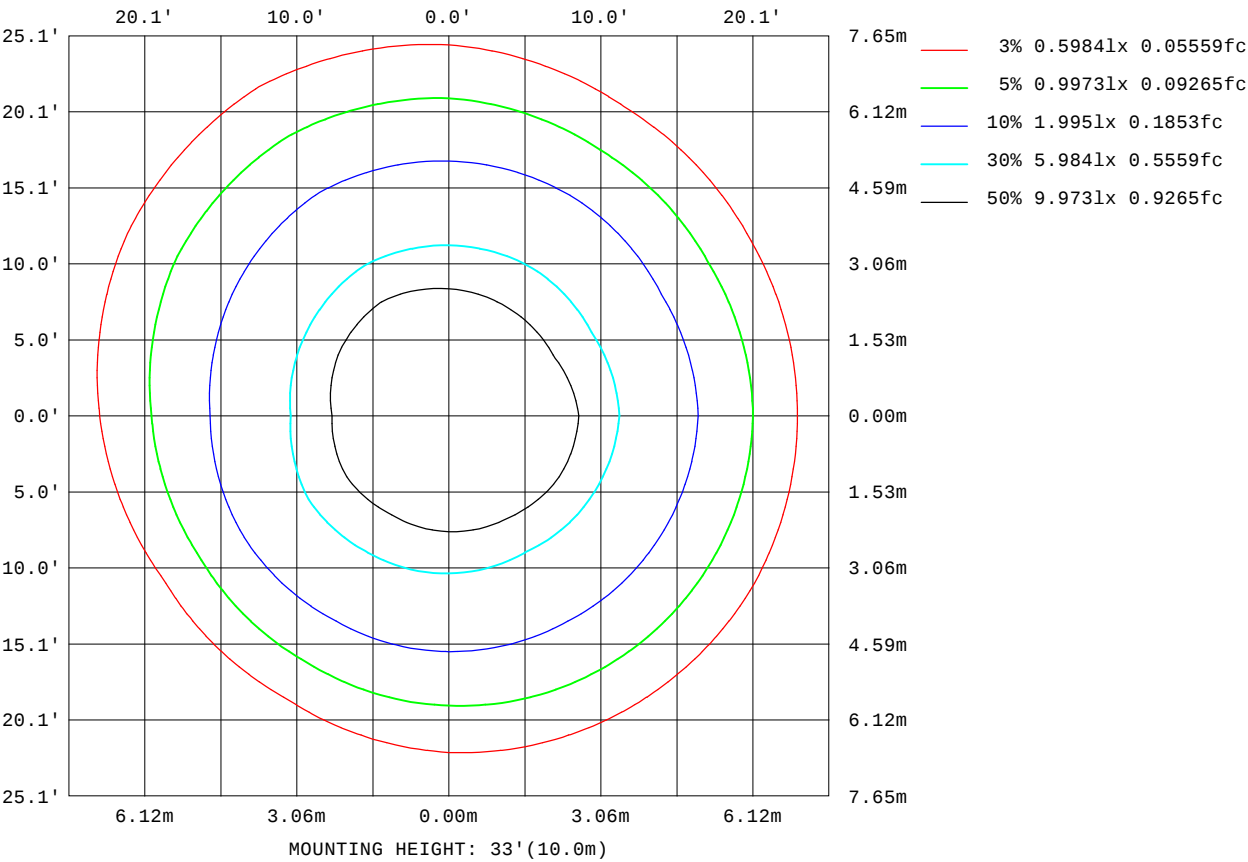

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-06-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

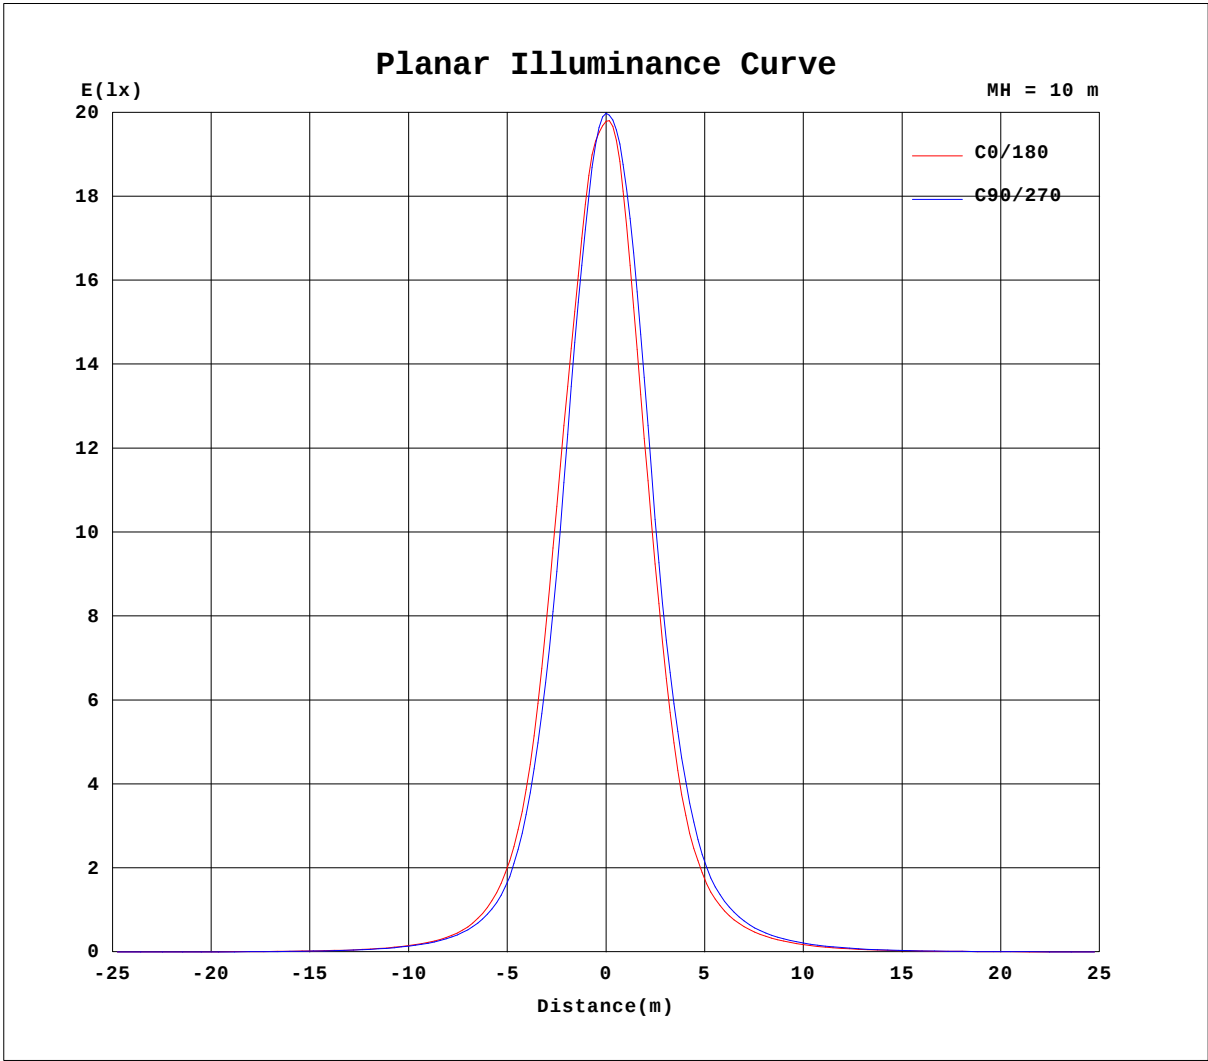


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-06-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Mini-600mm-TW-4000K-30D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:30 DEG	DIM.: 600mm	SERIAL No.:IES002550
MFR.:	SUR.:	Shielding Angle:

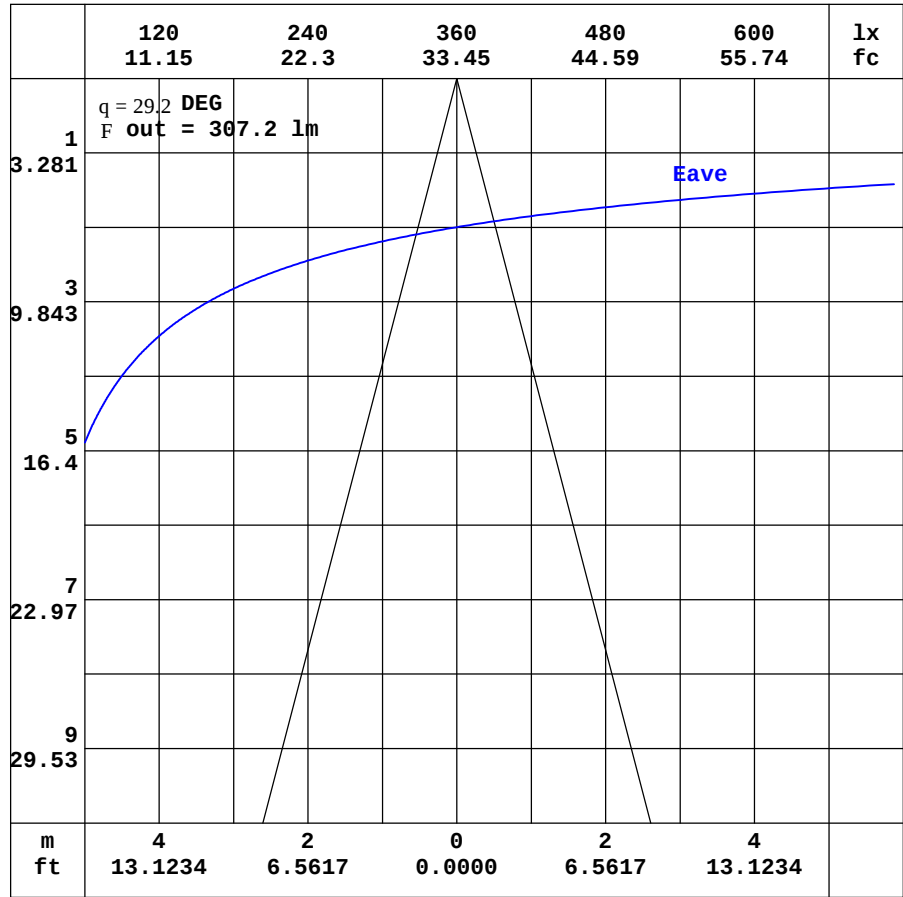

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Mini-600mm-TW-4000K-30D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:30 DEG	DIM.: 600mm	SERIAL No.:IES002550
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°)\V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.72	2.47	2.28	2.23	2.25	2.44	2.81	3.36	4.04	4.74	5.35	5.76	5.99	6.00	5.93	5.76	5.55	5.36	5.67
-170	2.72	2.43	2.22	2.13	2.11	2.20	2.43	2.76	3.17	3.59	3.95	4.20	4.34	4.38	4.37	4.47	4.78	5.00	5.16
-160	2.72	2.41	2.17	2.04	1.97	1.96	2.02	2.14	2.27	2.40	2.48	2.52	2.58	3.09	3.58	4.01	4.35	4.55	4.65
-150	2.72	2.38	2.13	1.95	1.85	1.76	1.68	1.63	1.54	1.40	1.29	1.57	1.91	2.28	2.65	2.99	3.25	3.43	3.50
-140	2.72	2.37	2.10	1.89	1.75	1.62	1.46	1.28	1.08	0.98	1.03	1.13	1.28	1.47	1.66	1.86	2.01	2.12	2.17
-130	2.72	2.37	2.09	1.86	1.67	1.52	1.35	1.14	1.01	0.98	0.97	0.97	0.97	0.98	1.04	1.11	1.17	1.21	1.24
-120	2.72	2.37	2.08	1.84	1.63	1.45	1.28	1.14	1.12	1.09	1.07	1.03	1.01	0.99	0.97	0.97	0.96	0.96	0.96
-110	2.72	2.38	2.09	1.84	1.62	1.41	1.22	1.16	1.17	1.18	1.18	1.18	1.18	1.16	1.14	1.12	1.11	1.10	1.09
-100	2.72	2.41	2.11	1.85	1.60	1.36	1.15	1.15	1.15	1.16	1.17	1.18	1.19	1.19	1.19	1.20	1.20	1.20	1.20
-90	2.72	2.44	2.16	1.88	1.60	1.31	1.03	1.03	1.02	1.02	1.02	1.01	1.01	1.01	1.01	1.01	1.01	1.01	1.01
-80	2.72	2.48	2.22	1.95	1.69	1.38	1.00	0.98	0.99	1.00	1.02	1.04	1.06	1.07	1.09	1.11	1.12	1.13	1.14
-70	2.72	2.53	2.40	2.24	1.96	1.66	1.33	1.28	1.39	1.52	1.65	1.78	1.90	2.06	2.24	2.41	2.56	2.67	2.75
-60	2.72	2.61	2.66	2.54	2.43	2.26	2.05	1.98	2.37	2.82	3.33	3.92	4.60	5.36	6.21	7.03	7.73	8.26	8.57
-50	2.72	2.74	2.89	2.99	3.05	3.11	3.26	3.47	4.20	5.51	7.23	9.30	11.6	14.0	16.7	19.5	22.0	23.9	25.1
-40	2.72	2.93	3.16	3.48	3.80	4.27	5.01	6.10	7.68	10.5	14.5	19.4	24.9	30.9	37.0	44.7	51.9	58.0	61.7
-30	2.72	3.06	3.47	4.00	4.65	5.69	7.37	10.1	14.0	18.7	25.1	34.7	46.7	62.2	81.2	103	129	149	158
-20	2.72	3.18	3.77	4.51	5.53	7.23	10.2	15.3	21.5	30.3	41.9	58.0	83.1	126	191	289	399	494	526
-10	2.72	3.28	4.02	4.98	6.34	8.70	13.1	20.1	28.8	42.1	60.7	89.2	138	229	416	710	999	1258	1411
0	2.72	3.36	4.23	5.36	6.98	9.79	15.2	23.4	34.1	50.4	73.9	110	171	292	522	921	1391	1833	1979
10	2.72	3.34	4.19	5.29	6.86	9.54	14.6	22.8	33.7	50.4	74.0	109	165	261	435	742	1150	1427	1541
20	2.72	3.31	4.10	5.12	6.51	8.78	12.8	19.8	29.5	43.6	63.2	89.8	127	178	254	362	498	598	633
30	2.72	3.26	3.94	4.85	5.99	7.72	10.5	15.2	22.5	32.5	46.3	63.1	83.2	107	136	165	189	206	211
40	2.72	3.17	3.74	4.51	5.39	6.58	8.34	10.9	14.9	20.8	28.6	38.1	48.9	60.6	72.3	80.6	86.7	90.0	89.7
50	2.72	3.02	3.55	4.11	4.77	5.54	6.55	7.89	9.66	12.1	15.5	19.8	24.6	30.0	34.0	37.3	39.6	40.6	40.3
60	2.72	2.92	3.36	3.70	4.15	4.64	5.18	5.83	6.62	7.53	8.61	9.87	11.2	12.8	14.0	15.0	15.8	16.2	16.2
70	2.72	2.85	3.10	3.37	3.59	3.84	4.12	4.43	4.76	5.10	5.46	5.82	6.20	6.55	6.83	7.06	7.22	7.31	7.33
80	2.72	2.81	2.90	3.01	3.15	3.28	3.37	3.46	3.56	3.65	3.74	3.83	3.93	4.00	4.06	4.10	4.13	4.14	4.14
90	2.72	2.76	2.79	2.83	2.86	2.90	2.93	2.93	2.93	2.92	2.92	2.91	2.91	2.90	2.89	2.88	2.87	2.86	2.85
100	2.72	2.71	2.69	2.68	2.66	2.65	2.64	2.59	2.55	2.50	2.46	2.42	2.37	2.35	2.34	2.33	2.33	2.33	2.33
110	2.72	2.66	2.60	2.54	2.50	2.45	2.41	2.35	2.29	2.25	2.22	2.21	2.20	2.20	2.19	2.19	2.18	2.17	2.17
120	2.72	2.62	2.52	2.44	2.36	2.30	2.27	2.24	2.23	2.23	2.25	2.30	2.36	2.41	2.47	2.50	2.54	2.55	2.55
130	2.72	2.58	2.45	2.35	2.27	2.25	2.24	2.25	2.32	2.45	2.62	2.81	3.00	3.20	3.38	3.54	3.66	3.72	3.74
140	2.72	2.54	2.40	2.28	2.24	2.24	2.28	2.42	2.65	2.95	3.31	3.68	4.05	4.39	4.69	4.93	5.10	5.21	5.24
150	2.72	2.51	2.35	2.24	2.23	2.27	2.43	2.71	3.11	3.59	4.11	4.62	5.08	5.45	5.74	5.97	6.10	6.18	6.21
160	2.72	2.49	2.32	2.24	2.24	2.34	2.60	3.02	3.56	4.18	4.79	5.31	5.71	6.01	6.21	6.35	6.43	6.49	6.57
170	2.72	2.48	2.30	2.23	2.25	2.41	2.74	3.25	3.89	4.58	5.20	5.67	5.97	6.10	6.14	6.11	6.04	6.05	6.21
180	2.72	2.47	2.28	2.23	2.25	2.44	2.81	3.36	4.04	4.74	5.35	5.76	5.99	6.00	5.93	5.76	5.55	5.36	5.70

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Mini-600mm-TW-4000K-30D-Rev1	TYPE:4000K	WEIGHT:
SPEC.:30 DEG	DIM.: 600mm	SERIAL No.:IES002550
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	4.89	4.63	4.36	4.00	3.53	2.99	2.44	1.91	1.47	1.15	1.00	1.01	1.06	1.16	1.16	1.14	1.04	0.89	
-170	4.89	4.69	4.40	3.98	3.52	2.98	2.41	1.89	1.45	1.15	1.01	1.01	1.07	1.15	1.16	1.14	1.04	0.89	
-160	4.52	4.30	3.97	3.57	3.11	2.63	2.12	1.66	1.31	1.09	1.02	1.02	1.08	1.16	1.16	1.14	1.03	0.89	
-150	3.43	3.26	3.01	2.70	2.34	1.97	1.63	1.35	1.14	1.03	1.01	1.03	1.11	1.16	1.17	1.13	1.02	0.89	
-140	2.14	2.04	1.91	1.72	1.53	1.35	1.19	1.08	1.03	1.00	1.01	1.08	1.14	1.16	1.16	1.12	1.01	0.89	
-130	1.23	1.20	1.15	1.09	1.04	1.00	1.00	1.00	1.00	1.02	1.08	1.14	1.16	1.17	1.15	1.09	0.99	0.89	
-120	0.97	0.98	0.98	0.99	1.01	1.03	1.05	1.07	1.10	1.14	1.15	1.16	1.17	1.15	1.13	1.06	0.97	0.89	
-110	1.10	1.11	1.13	1.15	1.17	1.18	1.18	1.17	1.17	1.17	1.17	1.17	1.16	1.13	1.08	1.01	0.95	0.89	
-100	1.20	1.19	1.19	1.18	1.17	1.16	1.16	1.16	1.15	1.15	1.14	1.12	1.08	1.04	1.01	0.96	0.92	0.89	
-90	1.00	0.99	0.98	0.98	0.97	0.96	0.96	0.97	0.97	0.97	0.98	0.98	0.96	0.95	0.94	0.92	0.91	0.89	
-80	1.13	1.11	1.09	1.06	1.03	1.01	1.00	0.98	0.97	0.95	0.94	0.93	0.95	0.96	0.97	0.96	0.91	0.89	
-70	2.68	2.58	2.44	2.27	2.08	1.92	1.78	1.64	1.49	1.36	1.24	1.15	1.09	1.04	1.00	0.99	0.97	0.89	
-60	8.45	8.09	7.48	6.70	5.81	4.97	4.16	3.46	2.88	2.38	1.96	1.63	1.40	1.26	1.13	1.02	0.99	0.89	
-50	25.0	24.0	22.2	19.7	16.9	13.9	11.0	8.40	6.17	4.50	3.31	2.47	1.88	1.52	1.31	1.11	1.00	0.89	
-40	61.4	58.3	53.1	46.4	38.9	31.5	24.4	18.1	12.8	8.70	5.68	3.76	2.56	1.85	1.47	1.21	1.01	0.89	
-30	156	142	121	99.4	78.5	60.0	44.8	32.5	22.3	14.8	9.44	5.61	3.41	2.22	1.62	1.30	1.02	0.89	
-20	485	394	300	214	150	104	71.1	48.4	32.5	21.0	13.3	7.84	4.35	2.59	1.77	1.38	1.04	0.89	
-10	1305	1056	713	434	258	156	96.9	62.1	40.4	25.7	16.1	9.75	5.14	2.88	1.88	1.43	1.05	0.89	
0	1871	1506	1068	621	337	188	109	67.6	43.2	27.4	17.1	10.6	5.48	3.00	1.93	1.46	1.06	0.89	
10	1393	1057	736	450	263	158	97.6	63.4	41.9	27.1	17.3	10.7	5.88	3.38	2.19	1.60	1.12	0.89	
20	592	488	349	231	155	105	73.5	51.4	35.5	23.7	15.7	9.75	5.78	3.55	2.37	1.70	1.17	0.89	
30	197	171	139	110	85.6	65.6	50.0	37.5	26.9	18.8	12.8	8.28	5.36	3.54	2.46	1.76	1.21	0.89	
40	84.4	76.1	66.2	55.7	47.0	38.6	30.9	24.0	18.2	13.6	9.74	6.89	4.83	3.42	2.48	1.77	1.24	0.89	
50	38.6	35.7	32.2	28.3	24.3	20.7	17.2	14.1	11.5	9.38	7.52	5.70	4.27	3.22	2.41	1.74	1.27	0.89	
60	15.8	15.1	14.1	13.0	11.8	10.5	9.33	8.29	7.34	6.48	5.73	4.72	3.75	2.94	2.26	1.69	1.29	0.89	
70	7.24	7.08	6.86	6.57	6.26	5.93	5.61	5.27	4.94	4.63	4.32	3.88	3.22	2.62	2.09	1.66	1.27	0.89	
80	4.11	4.06	4.01	3.93	3.85	3.76	3.68	3.60	3.51	3.42	3.33	3.21	2.78	2.37	1.98	1.61	1.22	0.89	
90	2.84	2.83	2.81	2.80	2.79	2.78	2.78	2.78	2.78	2.78	2.78	2.78	2.47	2.15	1.84	1.52	1.21	0.89	
100	2.32	2.31	2.30	2.30	2.30	2.31	2.34	2.37	2.40	2.43	2.47	2.48	2.27	2.03	1.78	1.51	1.21	0.89	
110	2.17	2.17	2.16	2.16	2.16	2.16	2.16	2.17	2.18	2.21	2.26	2.25	2.10	1.93	1.73	1.49	1.21	0.89	
120	2.55	2.53	2.50	2.45	2.39	2.33	2.27	2.21	2.18	2.17	2.18	2.08	1.95	1.82	1.66	1.46	1.20	0.89	
130	3.73	3.67	3.56	3.40	3.21	3.01	2.80	2.60	2.42	2.28	2.13	1.97	1.83	1.72	1.59	1.42	1.19	0.89	
140	5.22	5.13	4.97	4.73	4.43	4.09	3.71	3.31	2.95	2.53	2.12	1.86	1.73	1.61	1.51	1.38	1.17	0.89	
150	6.20	6.13	6.01	5.80	5.51	5.13	4.67	4.14	3.31	2.57	2.06	1.75	1.59	1.51	1.44	1.33	1.14	0.89	
160	6.53	6.50	6.43	6.28	6.08	5.78	4.91	3.96	3.08	2.36	1.87	1.58	1.44	1.41	1.34	1.27	1.11	0.89	
170	6.13	6.21	6.27	5.91	5.32	4.64	3.89	3.13	2.43	1.86	1.50	1.32	1.26	1.28	1.25	1.21	1.08	0.89	
180	4.89	4.63	4.36	4.00	3.53	2.99	2.44	1.91	1.47	1.15	1.00	1.01	1.06	1.16	1.16	1.14	1.04	0.89	

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: