

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	857.2 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	104.5V x 103.7H
	At 50% of Imax	64.4V x 63.2H
	At 90% of Imax	30.3V x 27.0H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	886.1 lumens per klm.
	To 50% of Imax	579.2 lumens per klm.
	To 90% of Imax	141.7 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Mini-600mm-TW-2200K-60D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:60 DEG	DIM.: 600mm	SERIAL No.:IES002552
MFR.:	SUR.:	Shielding Angle:

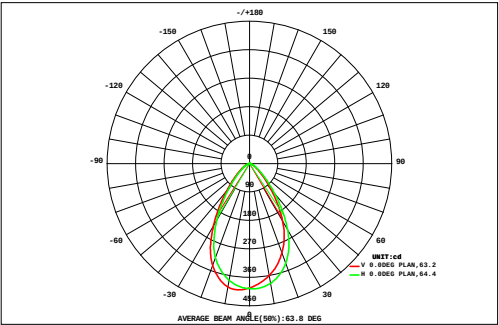

DATA OF LAMP		Eff:43.00lm/W	
MODEL		Imax(cd)	416.5
NOMINAL POWER(W)	11.3	AVAILABILITY(%)	88.7
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	430.9
NOMINAL FLUX(lm)	485.9	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	485.9
TEST VOLTAGE(V)	220	q @50%(H,V)	63,64DEG

AREA FLUX DIAGRAM																	UNIT:lm		F t	F a
90	0.01	0.02	0.03	0.04	0.06	0.07	0.07	0.08	0.08	0.08	0.08	0.07	0.06	0.05	0.04	0.03	0.01	0.00	0.89	0.00
80	0.01	0.02	0.04	0.06	0.09	0.13	0.16	0.19	0.21	0.21	0.19	0.16	0.13	0.09	0.06	0.03	0.01	0.00	1.79	0.00
70	0.01	0.02	0.05	0.10	0.17	0.26	0.36	0.44	0.50	0.50	0.45	0.36	0.27	0.17	0.10	0.05	0.02	0.00	3.84	0.00
60	0.01	0.03	0.08	0.16	0.30	0.49	0.71	0.94	1.10	1.11	0.98	0.76	0.51	0.31	0.16	0.07	0.02	0.00	7.74	1.22
50	0.01	0.04	0.11	0.25	0.48	0.87	1.41	2.02	2.47	2.54	2.17	1.54	0.93	0.50	0.24	0.09	0.02	0.00	15.7	12.3
40	0.01	0.04	0.14	0.34	0.74	1.51	2.71	4.11	5.22	5.45	4.60	3.01	1.62	0.77	0.33	0.12	0.03	0.00	30.7	28.5
30	0.01	0.05	0.17	0.45	1.07	2.41	4.56	6.66	8.32	9.05	7.95	5.11	2.56	1.09	0.42	0.14	0.03	0.00	50.1	48.3
20	0.01	0.05	0.19	0.55	1.42	3.41	6.24	8.55	10.3	11.4	10.3	6.95	3.48	1.38	0.49	0.16	0.04	0.00	64.9	63.4
10	0.01	0.06	0.21	0.61	1.66	4.09	7.57	10.1	11.6	11.8	10.4	7.41	3.91	1.52	0.52	0.17	0.04	0.00	71.7	70.3
0	0.01	0.05	0.21	0.61	1.67	4.21	8.20	11.4	12.2	11.0	9.15	6.71	3.68	1.45	0.50	0.16	0.04	0.00	71.3	69.9
-10	0.01	0.05	0.19	0.54	1.45	3.65	7.40	10.7	11.3	9.71	7.75	5.43	2.91	1.20	0.44	0.15	0.03	0.00	62.8	61.3
-20	0.01	0.04	0.15	0.43	1.09	2.57	5.01	7.60	8.41	7.52	5.84	3.80	1.95	0.86	0.35	0.12	0.03	0.00	45.8	44.0
-30	0.01	0.04	0.12	0.31	0.71	1.49	2.69	4.01	4.64	4.33	3.31	2.12	1.16	0.56	0.26	0.10	0.02	0.00	25.9	23.5
-40	0.01	0.03	0.08	0.20	0.42	0.79	1.27	1.75	2.02	1.93	1.52	1.03	0.64	0.35	0.17	0.07	0.02	0.00	12.3	8.16
-50	0.01	0.02	0.05	0.12	0.23	0.39	0.58	0.75	0.85	0.82	0.68	0.50	0.34	0.20	0.11	0.04	0.01	0.00	5.71	0.00
-60	0.01	0.02	0.03	0.06	0.11	0.18	0.25	0.31	0.35	0.34	0.29	0.22	0.16	0.10	0.05	0.02	0.01	0.00	2.52	0.00
-70	0.00	0.01	0.02	0.02	0.04	0.06	0.08	0.10	0.12	0.11	0.10	0.08	0.06	0.04	0.02	0.01	0.00	0.00	0.88	0.00
-80	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.23	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL(DEG) 20 30 40 50 60 70 80 90																				
F t	0.12	0.60	1.88	4.86	11.7	26.6	49.3	69.8	79.6	78.0	65.7	45.3	24.4	10.7	4.27	1.54	0.39	0.05	475	---
F a	0.00	0.00	0.00	0.43	8.22	23.5	46.4	67.0	76.8	75.2	62.9	42.3	21.2	6.88	0.06	0.00	0.00	0.00	---	431


one-half-peak spread: U:33.0,D:31.7 , L:26.5,R:37.0 NEMA Beam Type: Type 6

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Mini-600mm-TW-2200K-60D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:60 DEG	DIM.: 600mm	SERIAL No.:IES002552
MFR.:	SUR.:	Shielding Angle:

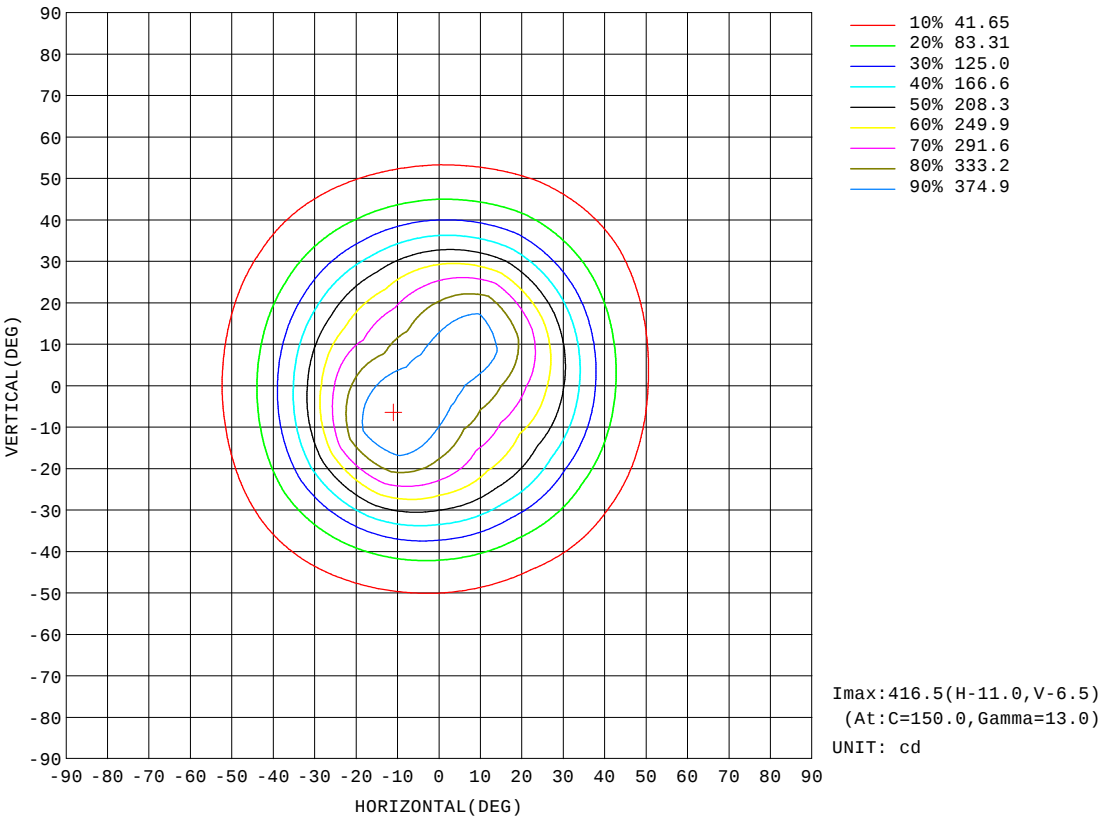


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-06-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Mini-600mm-TW-2200K-60D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:60 DEG	DIM.: 600mm	SERIAL No.:IES002552
MFR.:	SUR.:	Shielding Angle:

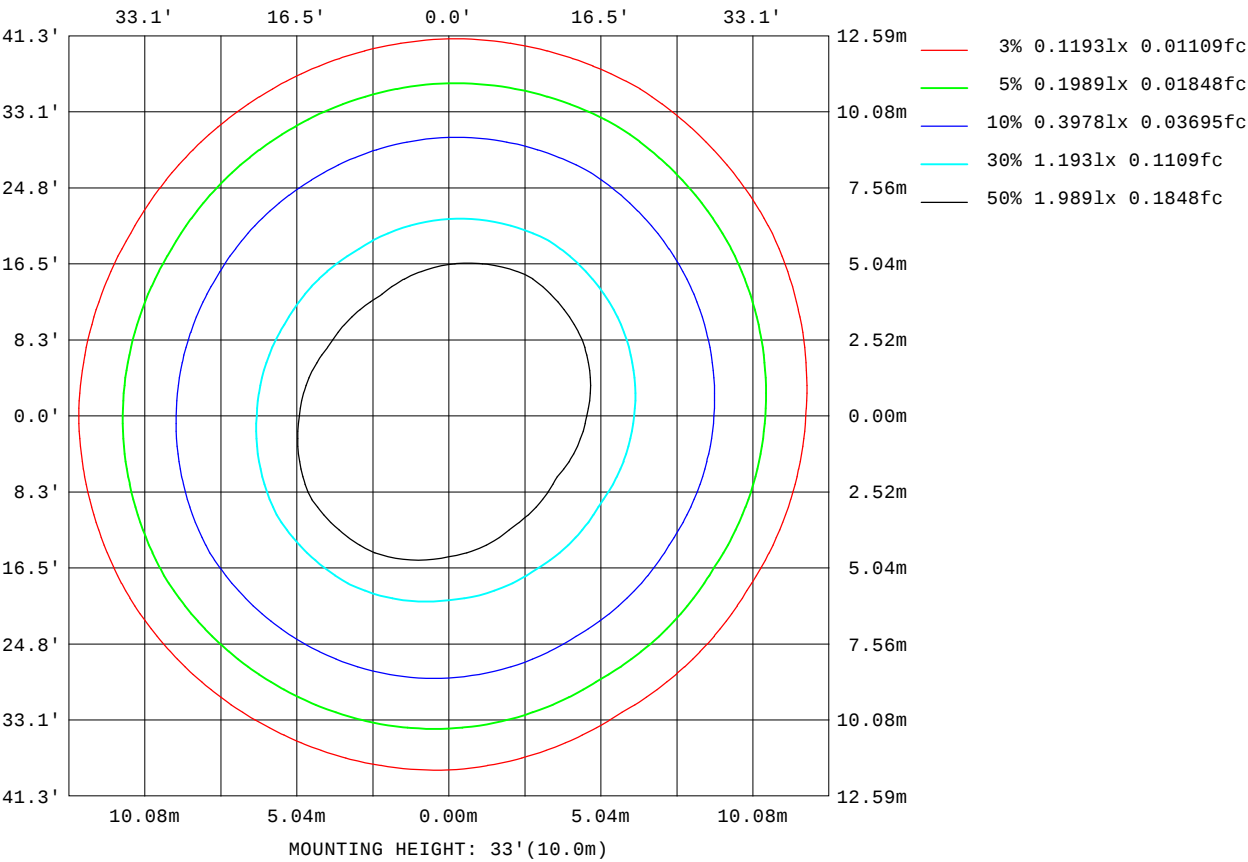

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

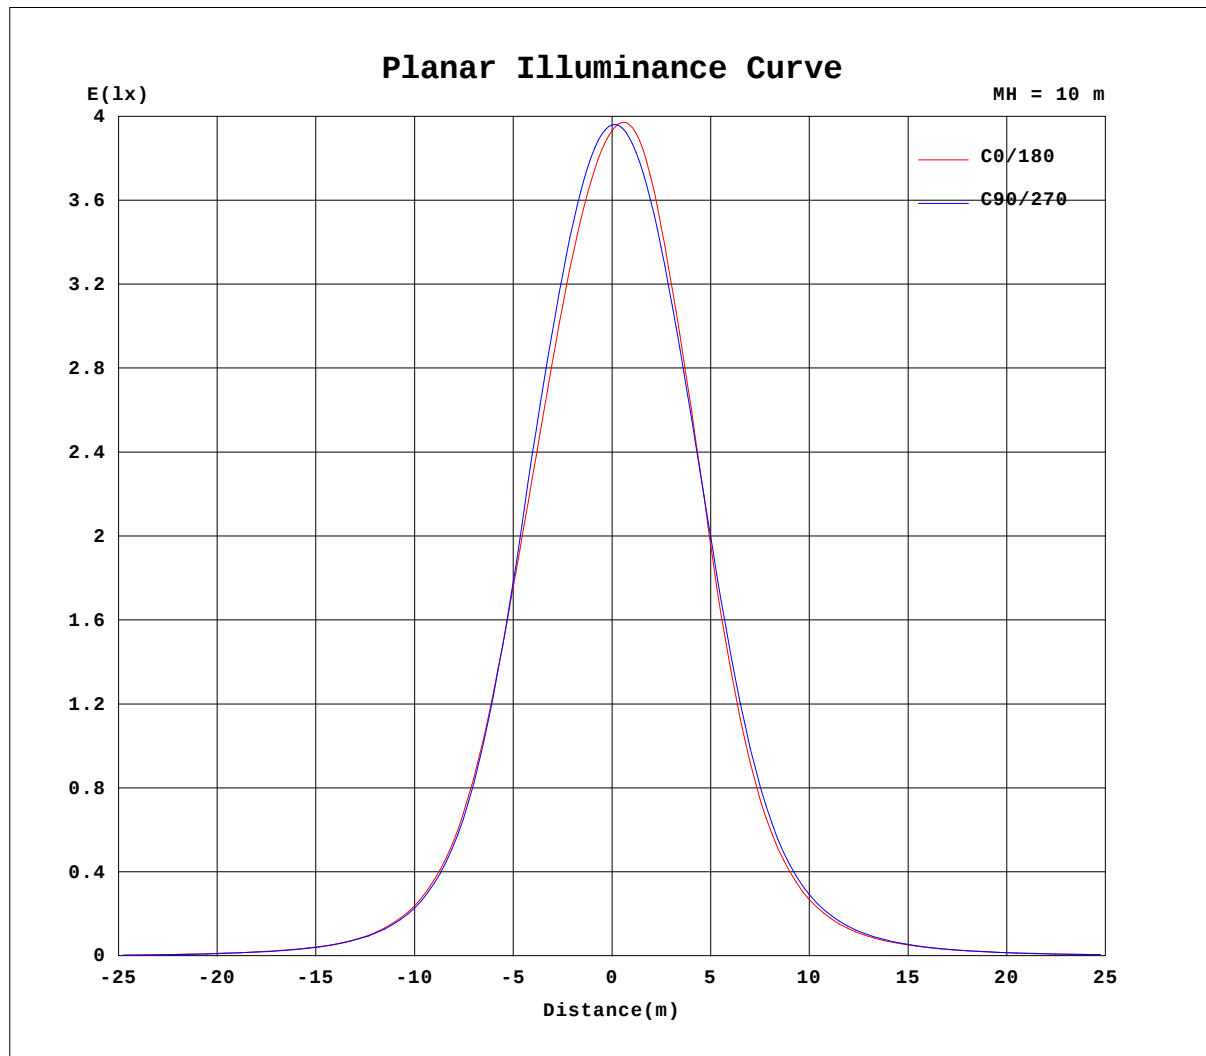


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-06-29

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Mini-600mm-TW-2200K-60D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:60 DEG	DIM.: 600mm	SERIAL No.:IES002552
MFR.:	SUR.:	Shielding Angle:

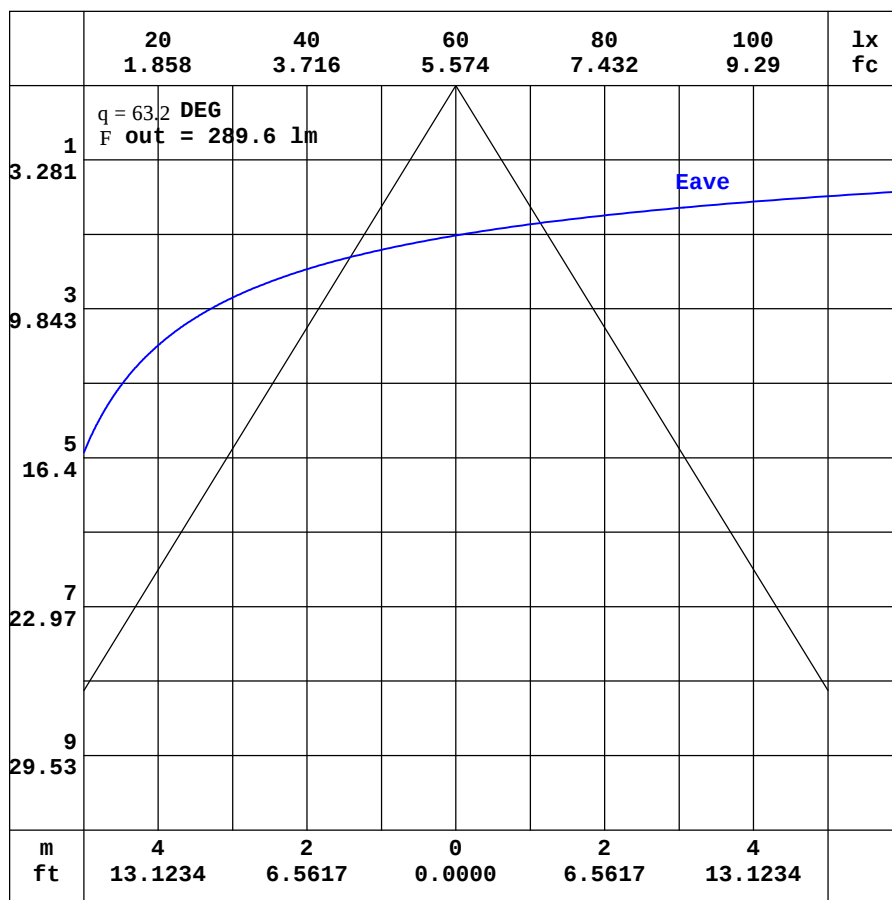

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Mini-600mm-TW-2200K-60D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:60 DEG	DIM.: 600mm	SERIAL No.:IES002552
MFR.:	SUR.:	Shielding Angle:

Table--1																		UNIT: cd	
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.12	1.94	1.87	1.87	1.93	2.04	2.20	2.38	2.60	2.82	3.03	3.22	3.38	3.48	3.49	3.47	3.44	3.39	3.51
-170	2.12	1.90	1.79	1.76	1.77	1.83	1.92	2.03	2.16	2.27	2.37	2.45	2.50	2.50	2.46	2.51	2.71	2.86	2.99
-160	2.12	1.87	1.72	1.64	1.60	1.60	1.63	1.67	1.70	1.72	1.71	1.68	1.64	1.82	1.99	2.14	2.27	2.37	2.42
-150	2.12	1.84	1.65	1.54	1.45	1.39	1.35	1.32	1.27	1.21	1.15	1.28	1.41	1.53	1.65	1.76	1.85	1.92	1.96
-140	2.12	1.83	1.59	1.44	1.31	1.20	1.10	1.00	0.90	0.91	0.98	1.07	1.15	1.23	1.32	1.39	1.45	1.49	1.51
-130	2.12	1.81	1.55	1.35	1.18	1.03	0.89	0.75	0.71	0.76	0.81	0.86	0.91	0.96	1.00	1.05	1.09	1.11	1.12
-120	2.12	1.80	1.53	1.29	1.09	0.90	0.72	0.60	0.62	0.65	0.66	0.69	0.71	0.73	0.77	0.79	0.80	0.81	0.82
-110	2.12	1.81	1.53	1.27	1.03	0.81	0.60	0.54	0.55	0.56	0.57	0.57	0.57	0.58	0.60	0.61	0.63	0.64	0.64
-100	2.12	1.83	1.55	1.28	1.02	0.78	0.54	0.52	0.52	0.52	0.52	0.52	0.51	0.52	0.52	0.53	0.53	0.54	0.55
-90	2.12	1.85	1.58	1.32	1.05	0.78	0.52	0.52	0.52	0.52	0.52	0.51	0.51	0.50	0.50	0.49	0.48	0.47	0.46
-80	2.12	1.89	1.64	1.41	1.19	0.95	0.68	0.73	0.81	0.88	0.97	1.06	1.15	1.25	1.35	1.44	1.51	1.55	1.58
-70	2.12	1.93	1.83	1.78	1.69	1.67	1.74	2.09	2.60	3.15	3.70	4.27	4.78	5.30	5.80	6.22	6.55	6.77	6.87
-60	2.12	2.01	2.15	2.27	2.64	3.16	3.82	4.71	6.06	7.52	9.03	10.6	12.2	13.7	15.1	16.3	17.2	17.7	17.9
-50	2.12	2.13	2.46	3.02	3.97	5.17	6.76	8.72	11.3	14.4	18.0	22.0	26.2	30.5	34.5	38.0	40.6	42.0	42.0
-40	2.12	2.31	2.81	3.91	5.47	7.60	10.5	14.1	18.7	25.0	33.1	42.7	53.9	65.8	78.0	89.1	96.9	101	100
-30	2.12	2.46	3.21	4.82	6.94	10.2	14.6	20.5	28.6	40.2	56.8	78.0	104	135	167	195	212	216	209
-20	2.12	2.58	3.61	5.62	8.45	12.8	18.7	26.9	38.8	57.4	84.9	124	174	228	283	323	344	337	317
-10	2.12	2.68	3.92	6.23	9.60	14.7	22.0	32.0	47.1	71.4	108	159	223	295	358	399	408	400	374
0	2.12	2.76	4.13	6.61	10.2	15.7	23.8	34.2	50.3	76.1	115	168	230	294	342	375	396	401	393
10	2.12	2.74	4.05	6.45	9.93	15.1	22.5	32.3	47.1	70.4	105	152	205	254	290	314	341	362	384
20	2.12	2.70	3.86	6.05	9.09	13.7	19.7	27.8	39.2	56.5	81.4	115	157	199	236	263	288	315	335
30	2.12	2.63	3.58	5.43	7.84	11.5	16.2	22.2	29.9	40.6	55.6	75.8	101	130	159	185	210	229	241
40	2.12	2.52	3.27	4.66	6.57	9.10	12.4	16.4	21.1	27.2	35.2	45.3	56.9	70.2	83.9	98.1	110	119	124
50	2.12	2.38	3.00	3.87	5.20	6.84	8.90	11.4	14.3	17.6	21.4	25.7	30.6	35.6	40.7	45.8	49.9	52.9	54.4
60	2.12	2.29	2.74	3.20	3.92	4.87	6.02	7.33	8.91	10.6	12.5	14.4	16.2	18.2	19.9	21.5	22.9	23.8	24.3
70	2.12	2.23	2.45	2.75	3.02	3.37	3.82	4.41	5.09	5.83	6.56	7.27	7.99	8.72	9.37	9.90	10.3	10.6	10.8
80	2.12	2.19	2.26	2.36	2.49	2.61	2.70	2.81	2.92	3.04	3.19	3.35	3.52	3.65	3.78	3.88	3.96	4.00	4.01
90	2.12	2.15	2.18	2.21	2.24	2.28	2.31	2.29	2.28	2.27	2.26	2.24	2.23	2.22	2.21	2.20	2.19	2.18	2.17
100	2.12	2.11	2.11	2.11	2.10	2.10	2.09	2.05	2.02	1.98	1.94	1.90	1.86	1.85	1.85	1.85	1.86	1.86	1.87
110	2.12	2.08	2.05	2.01	1.99	1.97	1.95	1.89	1.87	1.85	1.85	1.84	1.84	1.84	1.84	1.85	1.85	1.85	1.85
120	2.12	2.05	1.98	1.95	1.92	1.89	1.87	1.87	1.86	1.87	1.89	1.93	1.98	2.02	2.06	2.08	2.11	2.12	2.13
130	2.12	2.02	1.95	1.91	1.88	1.88	1.87	1.87	1.93	2.00	2.08	2.17	2.26	2.34	2.41	2.47	2.52	2.55	2.56
140	2.12	2.00	1.92	1.88	1.88	1.89	1.91	1.98	2.07	2.20	2.33	2.47	2.61	2.74	2.86	2.94	2.99	3.03	3.04
150	2.12	1.98	1.90	1.87	1.89	1.91	2.00	2.12	2.26	2.42	2.59	2.77	2.94	3.09	3.22	3.32	3.37	3.40	3.40
160	2.12	1.96	1.88	1.87	1.90	1.97	2.09	2.25	2.43	2.62	2.82	3.00	3.16	3.32	3.43	3.51	3.56	3.56	3.56
170	2.12	1.95	1.88	1.87	1.92	2.01	2.16	2.34	2.54	2.76	2.96	3.16	3.32	3.43	3.49	3.52	3.54	3.55	3.59
180	2.12	1.94	1.87	1.87	1.93	2.04	2.20	2.38	2.60	2.82	3.03	3.22	3.38	3.48	3.49	3.47	3.44	3.39	3.53

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Mini-600mm-TW-2200K-60D-Rev1	TYPE:2200K	WEIGHT:
SPEC.:60 DEG	DIM.: 600mm	SERIAL No.:IES002552
MFR.:	SUR.:	Shielding Angle:

Table--2		UNIT: cd																	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	3.08	2.84	2.60	2.37	2.13	1.88	1.65	1.42	1.22	1.05	0.89	0.77	0.66	0.59	0.54	0.48	0.45	0.46	
-170	2.83	2.70	2.53	2.32	2.11	1.89	1.65	1.41	1.21	1.03	0.88	0.76	0.66	0.59	0.54	0.49	0.45	0.46	
-160	2.37	2.27	2.17	2.06	1.92	1.75	1.52	1.31	1.13	0.97	0.84	0.73	0.65	0.58	0.53	0.49	0.45	0.46	
-150	1.93	1.86	1.76	1.67	1.56	1.42	1.28	1.14	1.00	0.87	0.78	0.69	0.63	0.58	0.52	0.49	0.46	0.46	
-140	1.48	1.43	1.36	1.28	1.20	1.12	1.03	0.94	0.85	0.78	0.71	0.65	0.60	0.56	0.52	0.49	0.46	0.46	
-130	1.10	1.07	1.02	0.96	0.91	0.86	0.81	0.76	0.72	0.69	0.65	0.61	0.58	0.54	0.51	0.47	0.46	0.46	
-120	0.80	0.78	0.75	0.72	0.68	0.67	0.65	0.64	0.62	0.61	0.60	0.58	0.55	0.52	0.50	0.47	0.46	0.46	
-110	0.63	0.62	0.60	0.59	0.57	0.56	0.56	0.57	0.56	0.56	0.56	0.55	0.53	0.50	0.48	0.47	0.46	0.46	
-100	0.54	0.53	0.52	0.51	0.51	0.50	0.50	0.50	0.51	0.51	0.51	0.51	0.50	0.49	0.47	0.46	0.46	0.46	
-90	0.46	0.46	0.46	0.46	0.46	0.46	0.47	0.47	0.48	0.48	0.48	0.49	0.48	0.48	0.47	0.47	0.46	0.46	
-80	1.53	1.46	1.37	1.26	1.14	1.03	0.97	0.90	0.83	0.76	0.69	0.62	0.58	0.55	0.52	0.50	0.46	0.46	
-70	6.65	6.31	5.88	5.38	4.84	4.31	3.87	3.39	2.92	2.45	2.00	1.61	1.25	0.96	0.73	0.59	0.50	0.46	
-60	17.2	16.3	15.0	13.6	12.0	10.6	9.31	8.02	6.78	5.57	4.41	3.35	2.48	1.79	1.17	0.76	0.54	0.46	
-50	40.3	37.3	33.6	29.4	25.2	21.7	18.3	15.2	12.4	9.86	7.73	5.83	4.12	2.78	1.80	1.00	0.60	0.46	
-40	95.4	86.8	75.9	63.5	52.8	42.8	33.9	26.4	20.3	15.6	11.9	8.75	6.10	3.93	2.44	1.30	0.66	0.46	
-30	198	179	155	130	104	80.4	59.8	43.5	31.7	23.0	16.8	12.0	8.18	5.15	3.00	1.61	0.72	0.46	
-20	293	264	238	207	170	130	95.5	67.3	46.3	31.6	21.8	15.2	10.1	6.24	3.52	1.87	0.77	0.46	
-10	343	317	288	257	225	181	133	91.0	60.4	39.3	25.9	17.7	11.6	7.05	3.90	2.05	0.80	0.46	
0	379	360	334	300	260	210	155	104	68.1	43.4	28.1	19.0	12.3	7.40	4.06	2.13	0.82	0.46	
10	399	391	368	325	270	209	150	101	66.3	42.9	28.0	18.9	12.3	7.46	4.14	2.18	0.86	0.46	
20	349	353	324	278	223	169	120	82.6	55.8	37.4	25.3	17.3	11.4	7.01	3.98	2.11	0.88	0.46	
30	242	234	215	181	144	110	81.0	58.7	41.8	29.5	20.9	14.6	9.84	6.17	3.63	1.96	0.88	0.46	
40	123	118	107	94.0	77.2	61.7	48.4	37.3	28.5	21.5	15.9	11.5	7.93	5.11	3.20	1.74	0.87	0.46	
50	53.9	51.8	48.3	43.5	38.4	32.6	27.1	22.3	18.1	14.5	11.3	8.42	5.92	4.04	2.63	1.51	0.84	0.46	
60	24.0	23.3	22.0	20.6	18.9	16.7	14.7	12.7	10.8	9.01	7.31	5.68	4.23	3.05	2.06	1.32	0.81	0.46	
70	10.6	10.4	9.95	9.42	8.77	8.03	7.27	6.53	5.78	5.04	4.36	3.66	2.89	2.22	1.65	1.18	0.77	0.46	
80	3.99	3.94	3.85	3.74	3.59	3.44	3.26	3.10	2.94	2.80	2.67	2.53	2.15	1.78	1.42	1.07	0.74	0.46	
90	2.16	2.16	2.15	2.14	2.14	2.13	2.13	2.14	2.14	2.14	2.15	2.15	1.87	1.59	1.30	1.02	0.74	0.46	
100	1.87	1.87	1.87	1.87	1.87	1.87	1.88	1.89	1.91	1.94	1.96	1.96	1.73	1.49	1.24	0.99	0.72	0.46	
110	1.87	1.88	1.89	1.89	1.89	1.89	1.88	1.88	1.88	1.88	1.89	1.83	1.61	1.40	1.17	0.94	0.71	0.46	
120	2.15	2.16	2.15	2.15	2.13	2.09	2.04	1.99	1.94	1.91	1.89	1.73	1.52	1.31	1.11	0.89	0.68	0.46	
130	2.58	2.58	2.57	2.54	2.49	2.41	2.32	2.23	2.13	2.04	1.88	1.64	1.43	1.23	1.03	0.84	0.65	0.46	
140	3.04	3.02	2.98	2.93	2.83	2.74	2.62	2.49	2.35	2.14	1.83	1.55	1.32	1.13	0.96	0.79	0.62	0.46	
150	3.40	3.38	3.34	3.26	3.15	3.02	2.87	2.73	2.38	2.02	1.71	1.43	1.20	1.02	0.86	0.72	0.58	0.46	
160	3.54	3.52	3.50	3.44	3.34	3.22	2.86	2.48	2.13	1.80	1.51	1.26	1.05	0.89	0.76	0.64	0.54	0.46	
170	3.50	3.52	3.51	3.29	2.99	2.66	2.34	2.02	1.73	1.47	1.23	1.03	0.87	0.75	0.65	0.56	0.50	0.46	
180	3.08	2.84	2.60	2.37	2.13	1.88	1.65	1.42	1.22	1.05	0.89	0.77	0.66	0.59	0.54	0.48	0.45	0.46	

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: