

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.00V I:0.1760A P:35.000W PF:0.9040 Freq:50.00Hz Lamp Flux:1000x1 lm

NAME:Lumino Guard-1223mm-3000K-30D-Rev1

TYPE:3000K

WEIGHT:

SPEC.:30 DEG

DIM.:1223mm

SERIAL No.:


MFR.: EVERFINE

SUR.:


Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 55.82 lm/W
MODEL	CA71D100.11	I _{max} (cd)	4919	S/MH(C0/180)	0.29	
NOMINAL POWER(W)	36	LOR(%)	195.4	S/MH(C90/270)	0.52	
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1953.9	η UP,DN(C0-180)	0.6,123.7	
NOMINAL FLUX(lm)	1000	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.8,70.3	
LAMPS INSIDE	1	η up(%)	1.4	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)	220	η down(%)	194.0	CIBSE SHR MAX	0.50	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

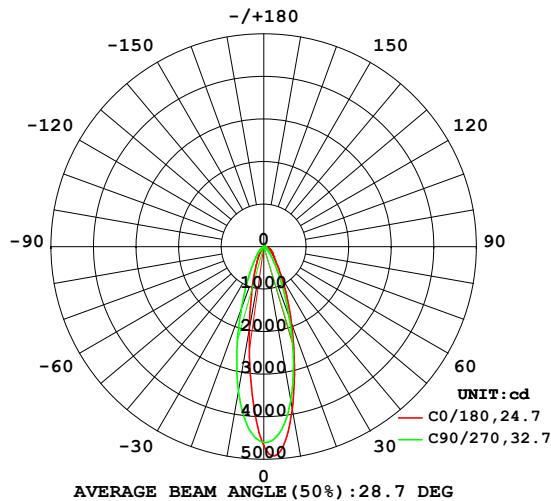

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

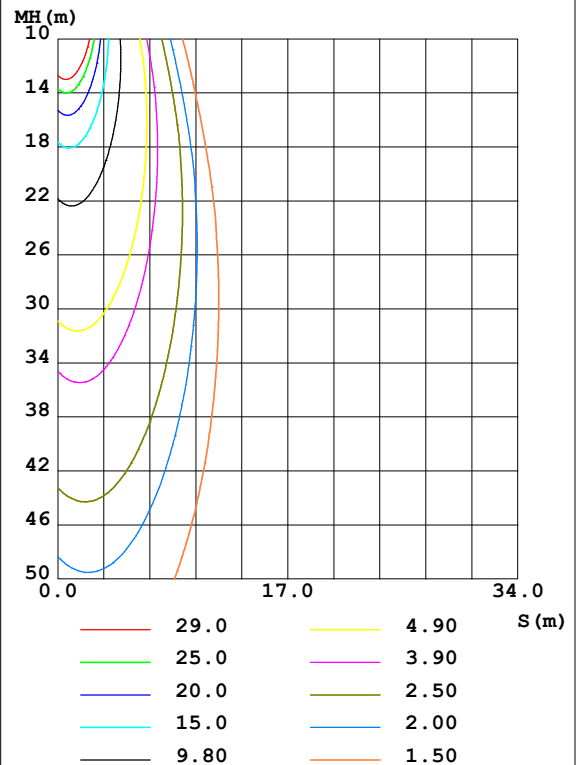

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-12-26

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	3869	3668	1973	3444					0- 10	368.7	368.7	18.9,36.9
20	1908	1752	624.7	1544					10- 20	620.7	989.4	50.6,98.9
30	860.3	628.4	220.7	572.8					20- 30	424.9	1414	72.4,141
40	433.5	247.6	76.60	236.2					30- 40	235.4	1650	84.4,165
50	276.1	102.9	21.68	105.9					40- 50	137.5	1787	91.5,179
60	179.7	35.83	3.971	34.52					50- 60	82.20	1869	95.7,187
70	114.0	9.012	1.700	6.318					60- 70	45.71	1915	98,192
80	31.53	2.420	0.4804	2.074					70- 80	21.97	1937	99.1,194
90	0.1073	0.4858	0.1461	0.9228					80- 90	2.763	1940	99.3,194
100	0.1031	0.8557	0.2924	1.809					90-100	0.6734	1940	99.3,194
110	0.1201	1.324	0.5117	2.179					100-110	0.9548	1941	99.4,194
120	0.1847	2.818	0.8212	4.153					110-120	1.505	1943	99.4,194
130	0.3606	2.277	1.329	2.847					120-130	1.522	1944	99.5,194
140	0.8499	3.623	2.426	3.953					130-140	1.611	1946	99.6,195
150	2.460	4.991	4.912	4.928					140-150	2.122	1948	99.7,195
160	6.321	6.796	8.443	6.256					150-160	2.560	1951	99.8,195
170	9.281	8.407	9.717	8.039					160-170	2.249	1953	100,195
180	9.695	9.291	9.747	9.265					170-180	0.8735	1954	100,195
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1726.9 lm

%lum = 88.4%

%lamp = 172.7%

Conical surface Flux(120deg): 1869.3 lm

%lum = 95.7%


%lamp = 186.9%

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-12-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.00V I:0.1760A P:35.000W PF:0.9040 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME:Lumino Guard-1223mm-3000K-30D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:1223mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

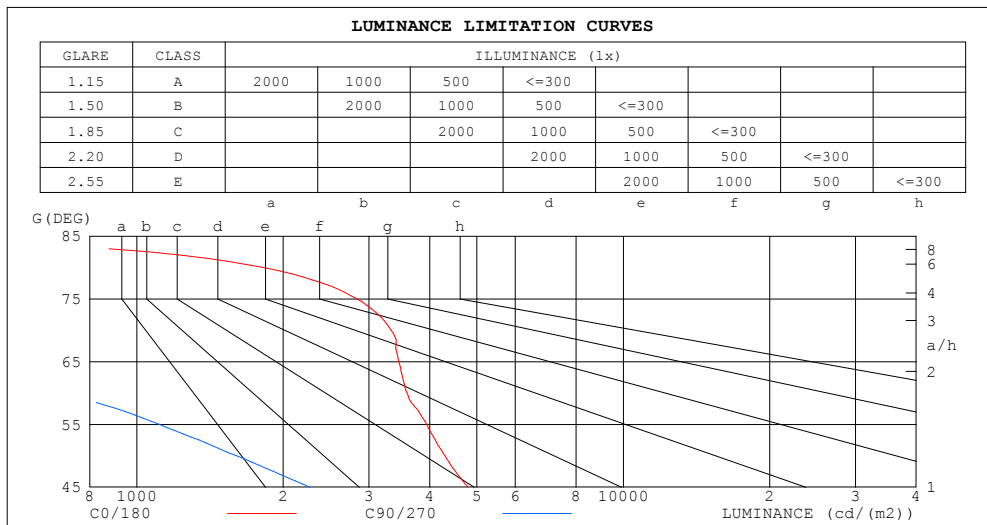

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	225	107
80	1816	139
75	2835	198
70	3332	264
65	3457	418
60	3594	717
55	3942	1111
50	4295	1601
45	4800	2270


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-12-26

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.00V I:0.1760A P:35.000W PF:0.9040 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME:Lumino Guard-1223mm-3000K-30D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:1223mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	2.32	2.32	2.32	2.27	2.27	2.27	2.16	2.16	2.16	2.07	2.07	2.07	1.98	1.98	1.98	1.94
1.0	2.16	2.11	2.06	2.11	2.07	2.03	2.03	1.99	1.96	1.95	1.93	1.90	1.89	1.86	1.84	1.81
2.0	2.00	1.92	1.85	1.97	1.89	1.83	1.90	1.84	1.79	1.84	1.79	1.75	1.79	1.75	1.71	1.68
3.0	1.87	1.77	1.69	1.84	1.75	1.68	1.79	1.71	1.65	1.74	1.68	1.62	1.69	1.64	1.60	1.56
4.0	1.75	1.65	1.56	1.73	1.63	1.55	1.69	1.60	1.53	1.65	1.57	1.51	1.61	1.55	1.50	1.47
5.0	1.65	1.54	1.46	1.63	1.53	1.45	1.59	1.50	1.43	1.56	1.48	1.42	1.53	1.46	1.41	1.38
6.0	1.56	1.45	1.36	1.54	1.44	1.36	1.51	1.42	1.35	1.48	1.40	1.34	1.46	1.39	1.33	1.30
7.0	1.48	1.37	1.29	1.47	1.36	1.28	1.44	1.34	1.27	1.42	1.33	1.27	1.39	1.32	1.26	1.23
8.0	1.41	1.29	1.22	1.39	1.29	1.21	1.37	1.28	1.21	1.35	1.27	1.20	1.33	1.26	1.20	1.17
9.0	1.34	1.23	1.16	1.33	1.23	1.16	1.31	1.22	1.15	1.29	1.21	1.15	1.28	1.20	1.14	1.12
10.0	1.28	1.17	1.10	1.27	1.17	1.10	1.26	1.16	1.10	1.24	1.16	1.09	1.23	1.15	1.09	1.07

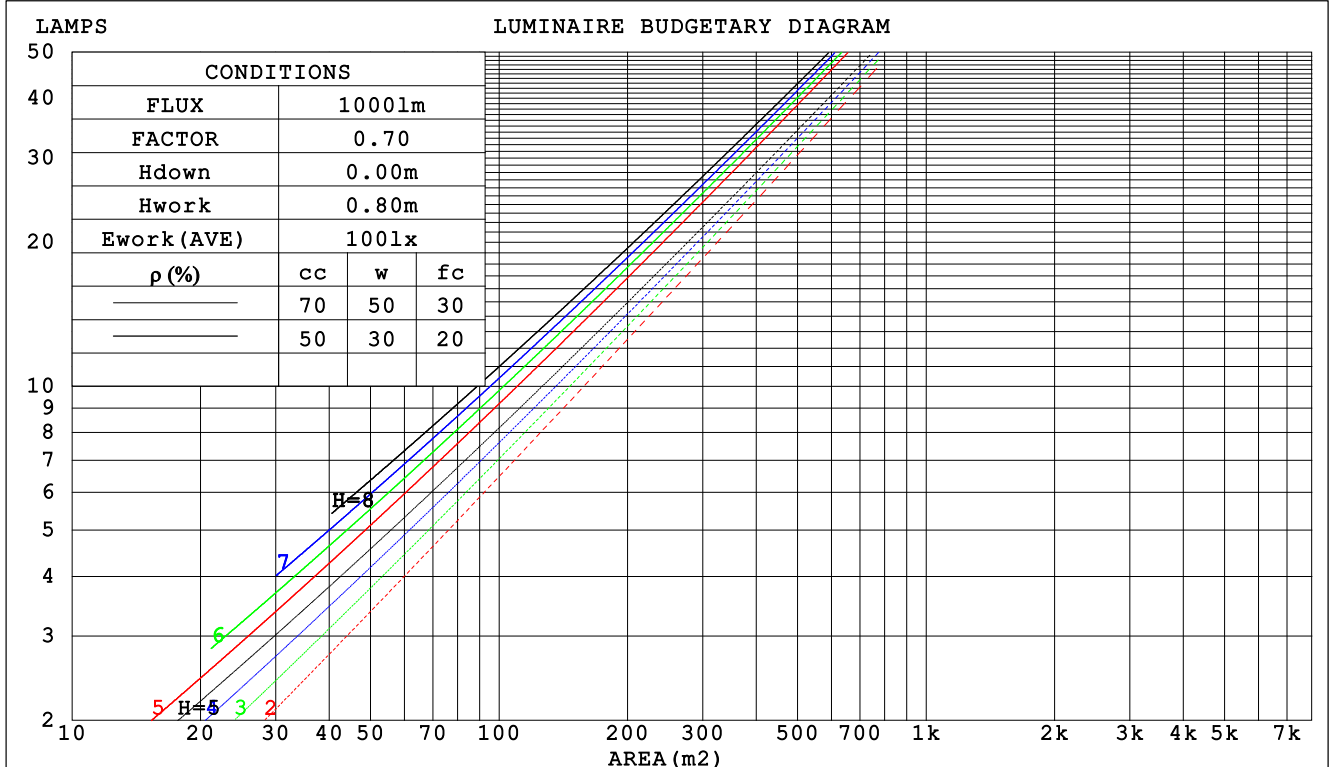

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-12-26

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.00V I:0.1760A P:35.000W PF:0.9040 Freq:50.00Hz Lamp Flux:1000x1 lm					
NAME:Lumino Guard-1223mm-3000K-30D-Rev1			TYPE:3000K		WEIGHT:
SPEC.:30 DEG			DIM.:1223mm		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.358	.204	.065	.345	.197	.062	.319	.183	.058	.296	.171	.055	.274	.159	.051		
2.0	.341	.187	.057	.329	.181	.056	.308	.171	.053	.288	.162	.051	.270	.152	.048		
3.0	.321	.171	.051	.311	.167	.050	.293	.159	.048	.276	.151	.046	.260	.144	.045		
4.0	.302	.157	.046	.294	.154	.045	.278	.147	.044	.263	.141	.043	.249	.136	.041		
5.0	.285	.145	.042	.278	.143	.042	.264	.137	.040	.251	.132	.039	.239	.128	.038		
6.0	.269	.135	.039	.263	.133	.038	.251	.129	.037	.239	.124	.037	.229	.120	.036		
7.0	.255	.126	.036	.250	.124	.035	.239	.121	.035	.229	.117	.034	.219	.114	.033		
8.0	.242	.118	.033	.237	.117	.033	.228	.114	.032	.219	.111	.032	.210	.108	.031		
9.0	.231	.112	.031	.226	.110	.031	.218	.108	.030	.209	.105	.030	.202	.103	.030		
10.0	.220	.106	.029	.216	.104	.029	.208	.102	.029	.201	.100	.028	.194	.098	.028		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.383	.383	.383	.327	.327	.327	.223	.223	.223	.128	.128	.128	.041	.041	.041	
1.0	.346	.318	.293	.296	.273	.252	.203	.188	.174	.117	.109	.101	.037	.035	.033	
2.0	.317	.270	.230	.271	.232	.199	.186	.161	.139	.107	.093	.081	.034	.030	.027	
3.0	.293	.233	.185	.251	.201	.161	.172	.140	.113	.099	.082	.066	.032	.026	.022	
4.0	.272	.204	.152	.233	.176	.132	.160	.123	.093	.093	.072	.055	.030	.023	.018	
5.0	.254	.181	.128	.218	.157	.111	.150	.110	.078	.087	.064	.047	.028	.021	.015	
6.0	.239	.163	.109	.205	.141	.095	.142	.099	.067	.082	.058	.040	.027	.019	.013	
7.0	.225	.148	.094	.194	.128	.082	.134	.090	.058	.078	.053	.035	.025	.017	.011	
8.0	.213	.136	.083	.184	.118	.072	.127	.083	.051	.074	.049	.030	.024	.016	.010	
9.0	.203	.125	.073	.175	.109	.064	.121	.077	.045	.070	.045	.027	.023	.015	.009	
10.0	.193	.117	.066	.167	.101	.057	.116	.071	.041	.067	.042	.024	.022	.014	.008	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-12-26

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.00V I:0.1760A P:35.000W PF:0.9040 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME:Lumino Guard-1223mm-3000K-30D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:1223mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.5	16.5	15.8	16.6	16.8	11.8	12.7	12.0	12.9	13.1
3H	16.9	17.8	17.2	18.0	18.2	11.9	12.8	12.2	13.0	13.2
4H	17.4	18.3	17.7	18.5	18.7	11.9	12.7	12.2	13.0	13.2
6H	17.7	18.5	18.0	18.7	19.0	11.9	12.6	12.2	12.9	13.2
8H	17.7	18.4	18.0	18.7	19.0	11.8	12.6	12.2	12.8	13.1
12H	17.7	18.4	18.0	18.7	18.9	11.8	12.5	12.1	12.8	13.1
4H 2H	15.7	16.5	15.9	16.7	16.9	12.5	13.3	12.8	13.6	13.8
3H	17.2	17.9	17.5	18.2	18.5	12.9	13.6	13.3	13.9	14.2
4H	17.8	18.5	18.2	18.8	19.1	13.0	13.7	13.4	14.0	14.3
6H	18.2	18.7	18.6	19.1	19.5	13.0	13.6	13.4	13.9	14.3
8H	18.2	18.7	18.6	19.1	19.5	13.0	13.5	13.4	13.9	14.2
12H	18.2	18.6	18.6	19.0	19.4	12.9	13.4	13.3	13.8	14.2
8H 4H	17.8	18.4	18.2	18.7	19.1	13.4	14.0	13.8	14.3	14.7
6H	18.2	18.6	18.7	19.1	19.5	13.5	13.9	13.9	14.3	14.8
8H	18.2	18.6	18.7	19.1	19.5	13.5	13.8	13.9	14.3	14.7
12H	18.2	18.5	18.7	19.0	19.5	13.4	13.7	13.9	14.2	14.7
12H 4H	17.8	18.3	18.2	18.7	19.1	13.4	13.9	13.9	14.3	14.7
6H	18.2	18.6	18.6	19.0	19.4	13.5	13.9	14.0	14.3	14.8
8H	18.2	18.5	18.7	19.0	19.5	13.5	13.8	14.0	14.3	14.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.3					+ 0.9 / - 1.3				
1.5H	+ 0.6 / - 0.5					+ 0.8 / - 1.3				
2.0H	+ 1.0 / - 0.9					+ 1.1 / - 2.2				

CIE Pub.117, 1000 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 0.0$)
Area: 0.1 m²

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-12-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.00V I:0.1760A P:35.000W PF:0.9040 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME:Lumino Guard-1223mm-3000K-30D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:1223mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	160	146	137	159	145	137	157	144	137	129
0.80	175	162	154	174	161	153	171	160	152	144
1.00	186	173	165	184	172	164	180	172	163	154
1.25	195	183	175	192	182	174	188	179	172	163
1.50	201	190	182	198	188	181	193	185	179	169
2.00	207	198	191	204	196	189	199	192	186	175
2.50	211	203	196	208	200	194	202	195	190	178
3.00	215	207	201	211	204	199	204	199	194	181
4.00	220	213	208	215	210	205	208	204	200	185
5.00	222	217	213	218	214	210	210	207	203	188
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2024-12-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 7.700m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.00V I:0.1760A P:35.000W PF:0.9040 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME:Lumino Guard-1223mm-3000K-30D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:1223mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

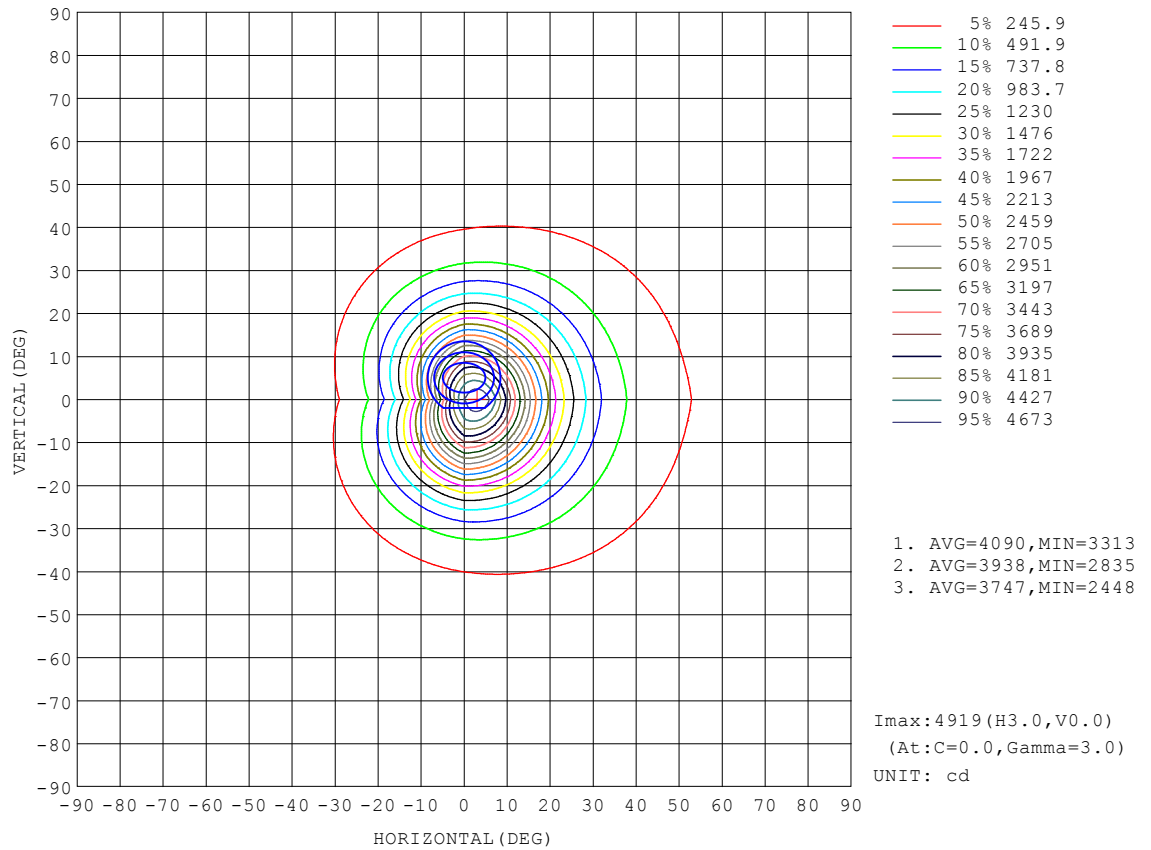


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-12-26

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.00V I:0.1760A P:35.000W PF:0.9040 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME:Lumino Guard-1223mm-3000K-30D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:1223mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Flux out:527.8 lm

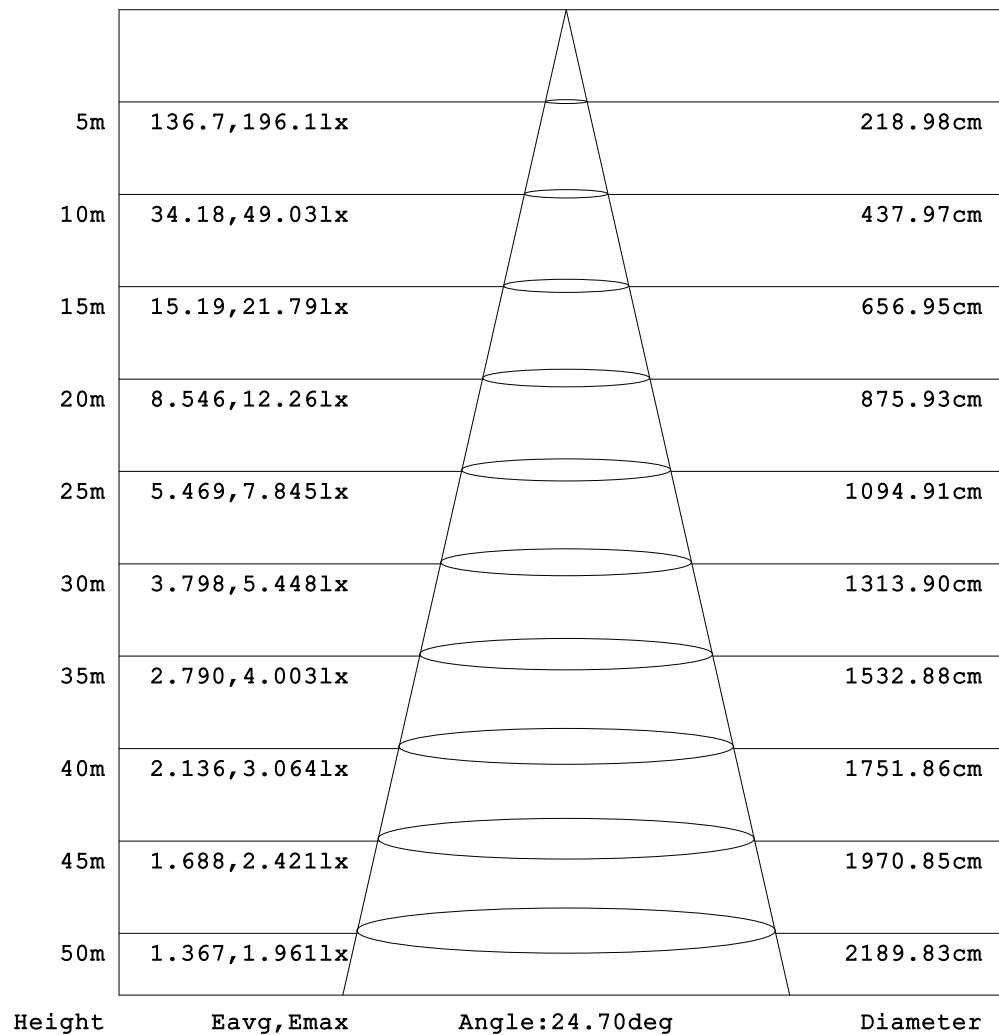


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-12-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.00V I:0.1760A P:35.000W PF:0.9040 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME:Lumino Guard-1223mm-3000K-30D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:1223mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

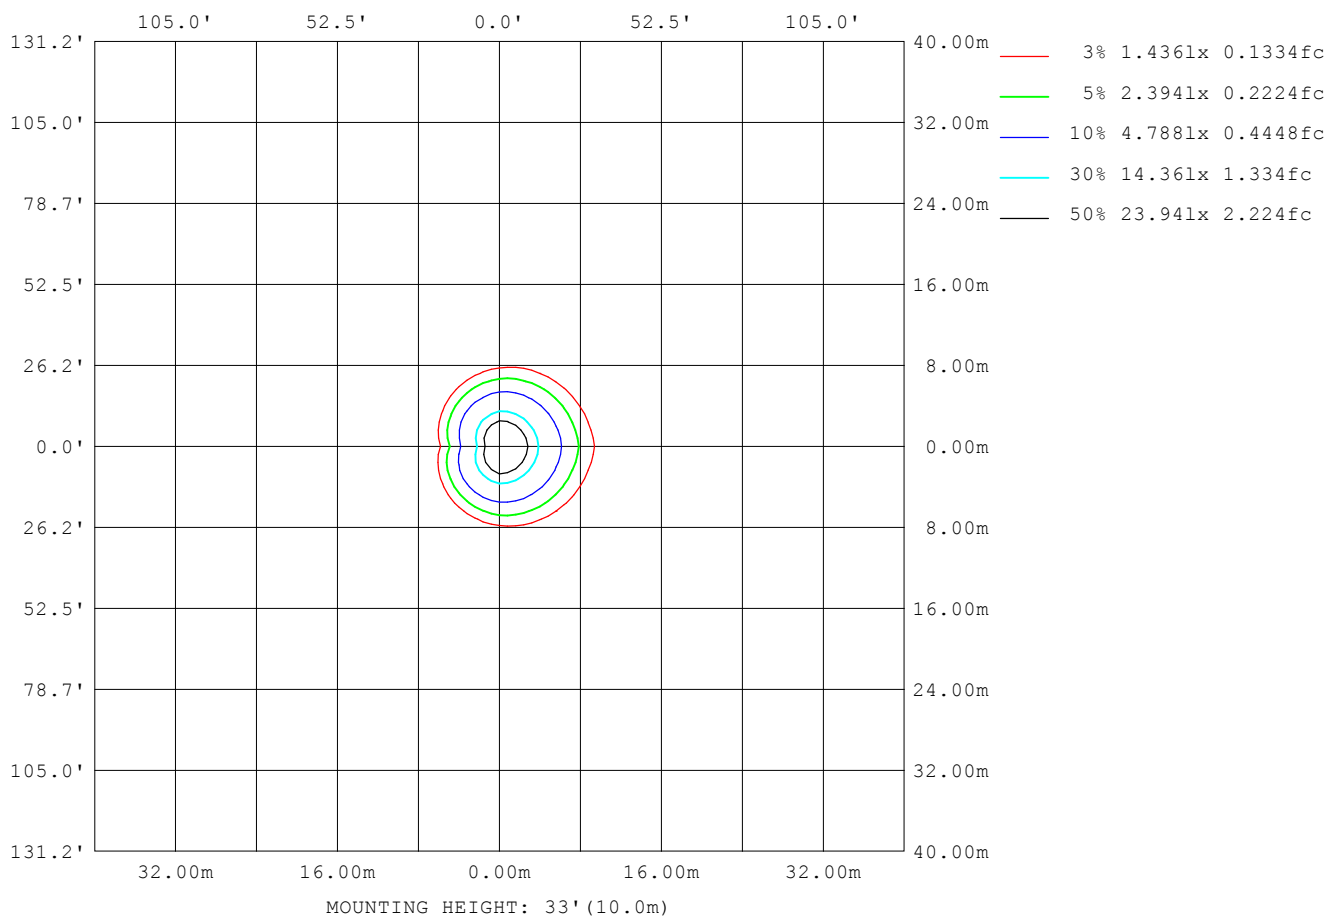

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-12-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.00V I:0.1760A P:35.000W PF:0.9040 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME:Lumino Guard-1223mm-3000K-30D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:1223mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1761
L_0~180 (75) av	1436
L_0~180 (85) av	123
L_90~270 (65) av	381
L_90~270 (75) av	171
L_90~270 (85) av	129
L_45 (65) av	796
L_45 (75) av	593
L_45 (85) av	121

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-12-26

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

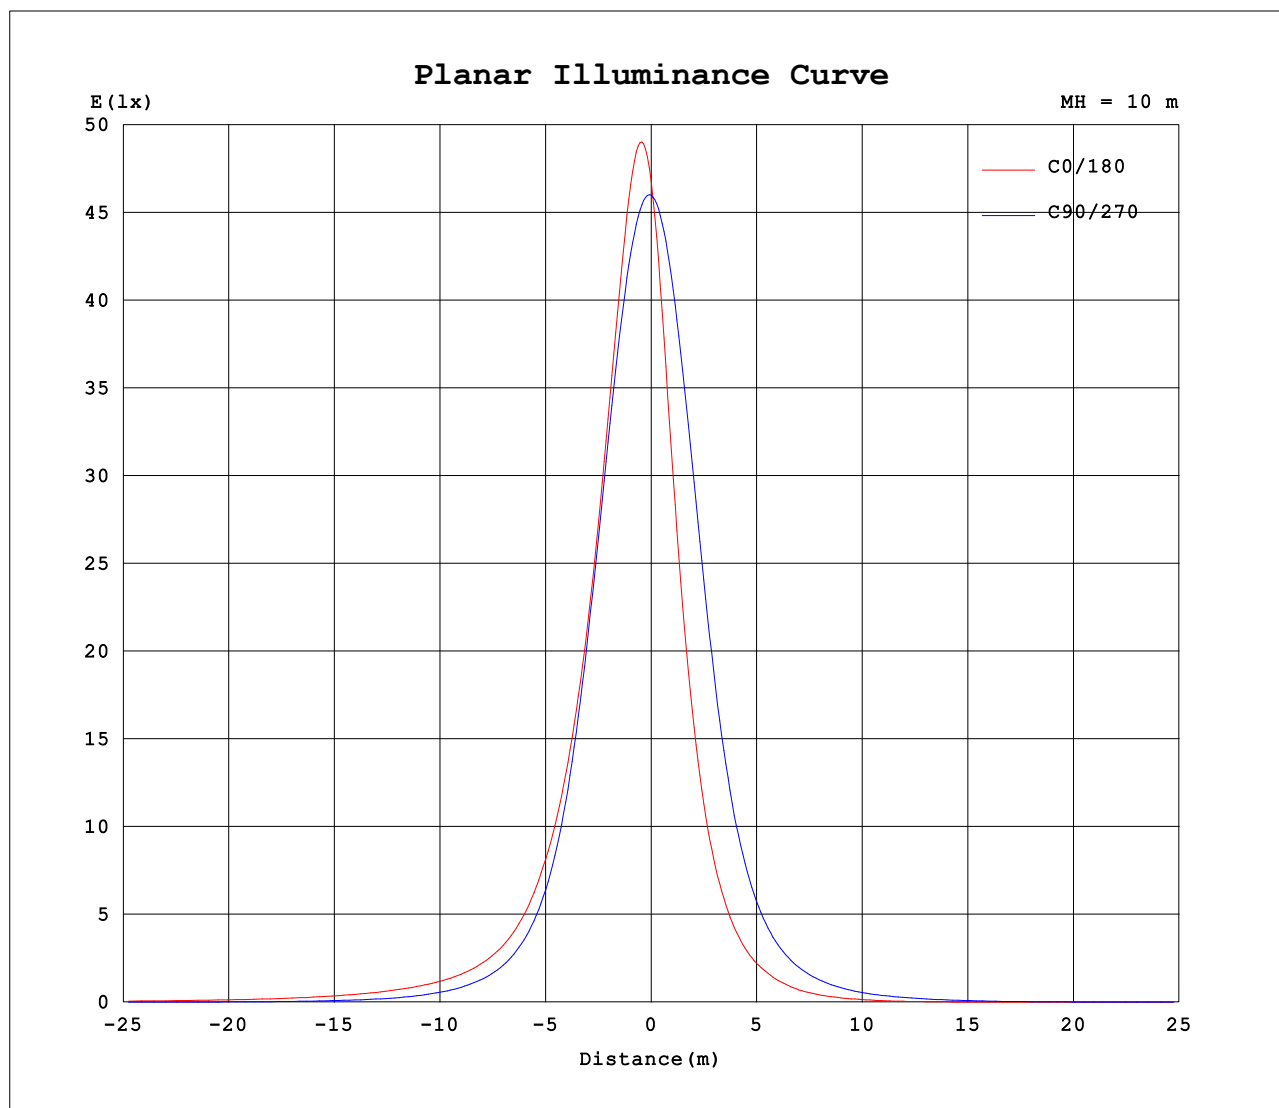

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-12-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.00V I:0.1760A P:35.000W PF:0.9040 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME:Lumino Guard-1223mm-3000K-30D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:1223mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	90	180	270															
0	4677	4599	4677	4599															
5	4790	4379	3339	4257															
10	3869	3668	1973	3444															
15	2786	2700	1105	2433															
20	1908	1752	625	1544															
25	1282	1053	364	939															
30	860	628	221	573															
35	591	386	129	362															
40	433	248	76.6	236															
45	339	161	43.5	157															
50	276	103	21.7	106															
55	226	63.7	9.31	65.1															
60	180	35.8	3.97	34.5															
65	146	17.6	2.71	14.6															
70	114	9.01	1.70	6.32															
75	73.4	5.12	0.98	3.75															
80	31.5	2.42	0.48	2.07															
85	1.96	0.93	0.18	1.32															
90	0.11	0.49	0.15	0.92															
95	0.10	0.68	0.21	1.55															
100	0.10	0.86	0.29	1.81															
105	0.10	1.03	0.40	2.04															
110	0.12	1.32	0.51	2.18															
115	0.14	2.04	0.66	3.14															
120	0.18	2.82	0.82	4.15															
125	0.24	2.08	1.03	3.05															
130	0.36	2.28	1.33	2.85															
135	0.53	2.66	1.75	3.19															
140	0.85	3.62	2.43	3.95															
145	1.43	4.13	3.44	4.31															
150	2.46	4.99	4.91	4.93															
155	4.17	5.90	6.74	5.59															
160	6.32	6.80	8.44	6.26															
165	8.19	7.69	9.42	7.09															
170	9.28	8.41	9.72	8.04															
175	9.60	8.99	9.74	8.86															
180	9.70	9.29	9.75	9.27															

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-12-26

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: