


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.000V I:0.7570A P:18.168W PF:0.9800 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME: Lumino Guard-623mm-RGBW ALL-30D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:623mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 38.49 lm/W			
MODEL	CA71D100.11	I _{max} (cd)	1565	S/MH(C0/180)	0.53
NOMINAL POWER(W)	18	LOR(%)	69.9	S/MH(C90/270)	0.55
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	699.22	η UP,DN(C0-180)	0.3,25.8
NOMINAL FLUX(lm)	1000	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.2,43.6
LAMPS INSIDE	1	η up(%)	0.5	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	24	η down(%)	69.4	CIBSE SHR MAX	0.55

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

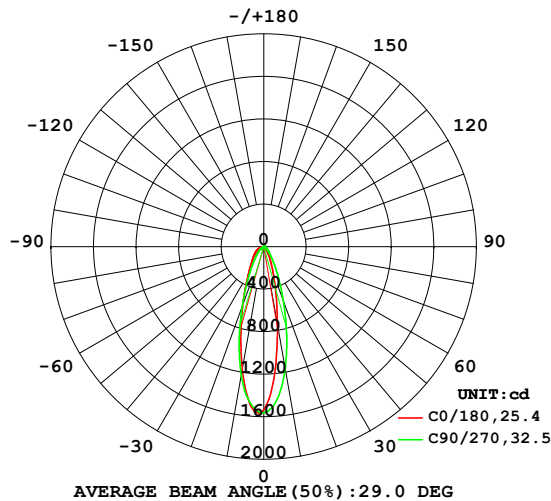

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

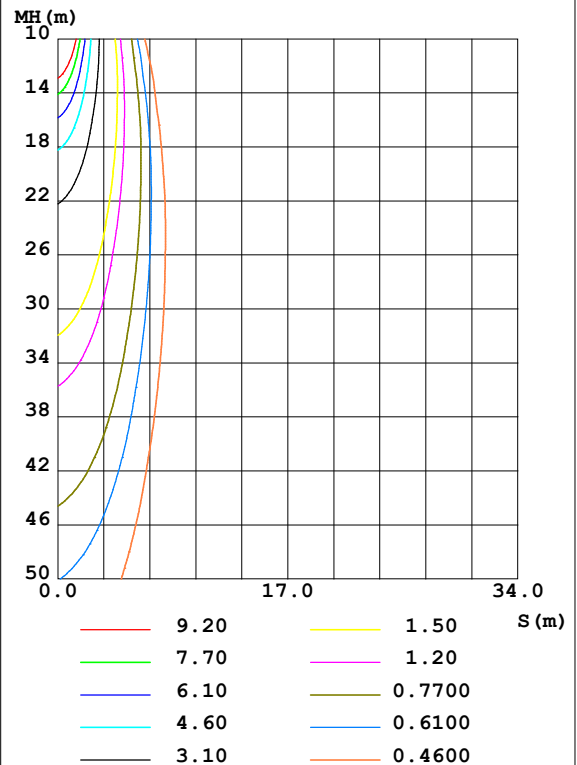

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-12-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	747.3	1166	1168	1228					0- 10	123.0	123.0	17.6,12.3
20	261.9	539.6	580.4	595.7					10- 20	207.1	330.2	47.2,33
30	99.25	211.6	286.0	242.1					20- 30	148.5	478.7	68.5,47.9
40	38.38	85.37	171.4	108.5					30- 40	90.97	569.6	81.5,57
50	12.50	34.77	118.7	50.77					40- 50	57.42	627.1	89.7,62.7
60	2.449	10.99	82.50	20.37					50- 60	36.29	663.3	94.9,66.3
70	1.075	2.379	48.13	5.522					60- 70	20.73	684.1	97.8,68.4
80	0.3700	0.8112	9.080	1.502					70- 80	8.838	692.9	99.1,69.3
90	0.0774	0.2923	0.0731	0.4169					80- 90	0.8469	693.8	99.2,69.4
100	0.1461	0.4643	0.0387	0.7301					90-100	0.3006	694.1	99.3,69.4
110	0.2534	0.6792	0.0515	0.8079					100-110	0.4216	694.5	99.3,69.4
120	0.4209	0.7823	0.0774	0.8807					110-120	0.4890	695.0	99.4,69.5
130	0.6701	1.040	0.1462	1.027					120-130	0.5562	695.5	99.5,69.6
140	1.155	1.505	0.3269	1.268					130-140	0.6707	696.2	99.6,69.6
150	2.139	2.240	0.8478	1.706					140-150	0.8538	697.1	99.7,69.7
160	3.377	2.936	2.086	2.337					150-160	1.004	698.1	99.8,69.8
170	3.559	3.326	3.060	3.012					160-170	0.8463	698.9	100,69.9
180	3.288	3.399	3.262	3.378					170-180	0.3136	699.2	100,69.9
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 601.52 lm

%lum = 86.0%

%lamp = 60.2%

Conical surface Flux(120deg): 663.35 lm

%lum = 94.9%


%lamp = 66.3%

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-12-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.000V I:0.7570A P:18.168W PF:0.9800 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME:Lumino Guard-623mm-RGBW ALL-30D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:623mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

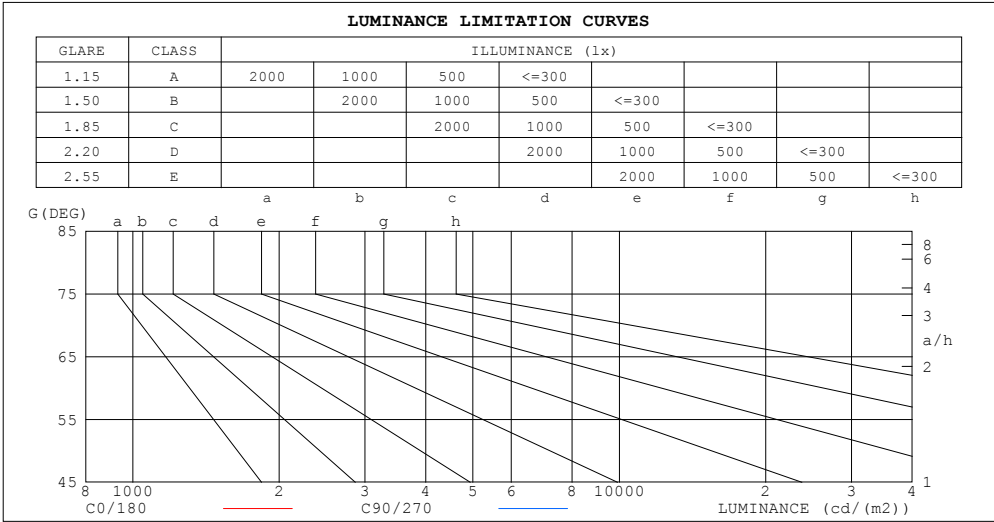


LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	20	52
80	21	47
75	26	59
70	31	70
65	38	111
60	49	220
55	101	363
50	194	541
45	324	778

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-12-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.000V I:0.7570A P:18.168W PF:0.9800 Freq:50.00Hz Lamp Flux:1000x1 lm																
NAME: Lumino Guard-623mm-RGBW ALL-30D-Rev1							TYPE:RGBW W=3000K						WEIGHT:			
SPEC.:30 DEG							DIM.:623mm						SERIAL No.:			
MFR.: EVERFINE							SUR.:						Shielding Angle:			
pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	.83	.83	.83	.81	.81	.81	.77	.77	.77	.74	.74	.74	.71	.71	.71	.69
1.0	.77	.75	.73	.75	.74	.72	.72	.71	.70	.70	.69	.68	.67	.66	.66	.64
2.0	.71	.68	.66	.70	.67	.65	.67	.65	.63	.65	.63	.62	.63	.62	.61	.59
3.0	.66	.62	.60	.65	.62	.59	.63	.60	.58	.61	.59	.57	.60	.58	.56	.55
4.0	.62	.58	.55	.61	.57	.54	.59	.56	.54	.58	.55	.53	.56	.54	.52	.51
5.0	.58	.54	.51	.57	.53	.50	.56	.53	.50	.55	.52	.49	.54	.51	.49	.48
6.0	.55	.50	.47	.54	.50	.47	.53	.49	.47	.52	.49	.46	.51	.48	.46	.45
7.0	.52	.47	.44	.51	.47	.44	.50	.47	.44	.49	.46	.44	.48	.46	.43	.42
8.0	.49	.45	.42	.48	.45	.42	.48	.44	.42	.47	.44	.41	.46	.43	.41	.40
9.0	.47	.42	.40	.46	.42	.40	.45	.42	.39	.45	.42	.39	.44	.41	.39	.38
10.0	.44	.40	.38	.44	.40	.38	.43	.40	.38	.43	.40	.37	.42	.39	.37	.36

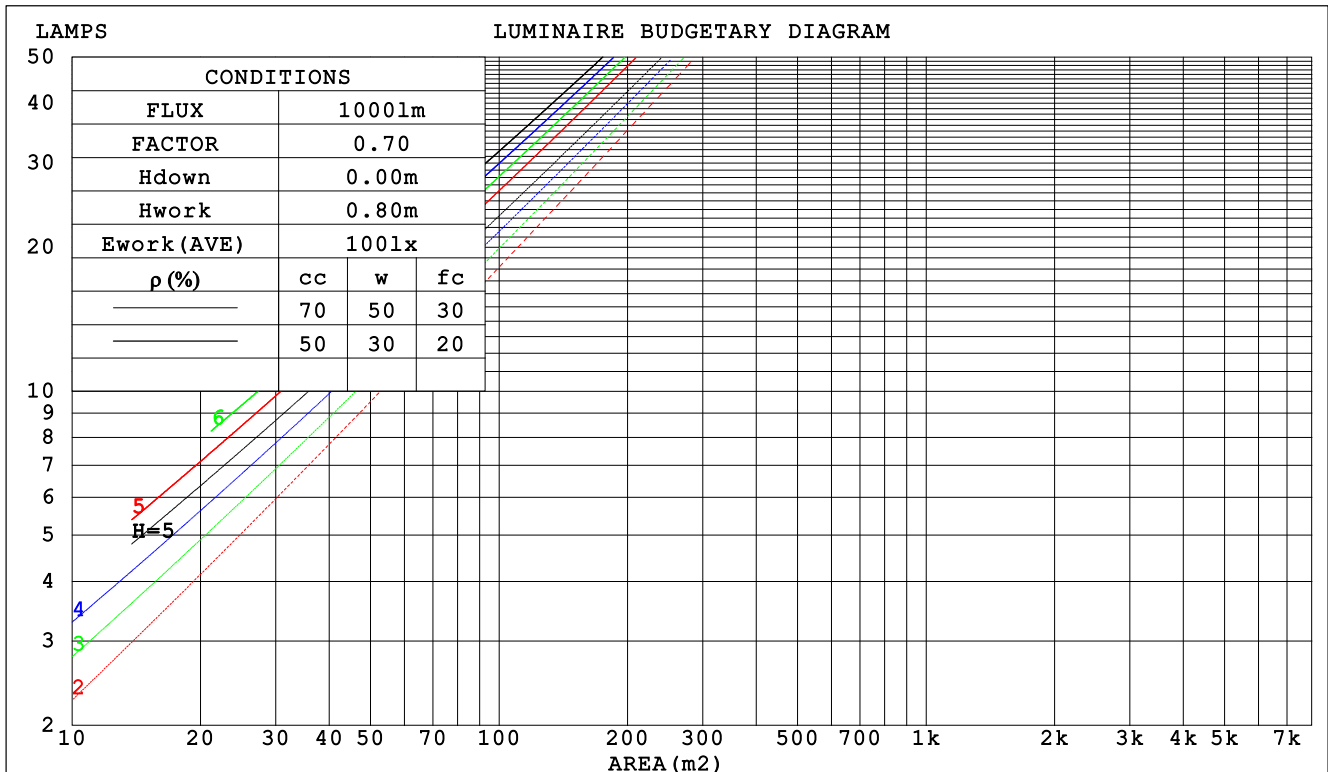

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-12-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:24.000V I:0.7570A P:18.168W PF:0.9800 Freq:50.00Hz Lamp Flux:1000x1 lm					
NAME: Lumino Guard-623mm-RGBW ALL-30D-Rev1			TYPE:RGBW W=3000K		WEIGHT:
SPEC.:30 DEG			DIM.:623mm		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.133	.076	.024	.128	.073	.023	.119	.068	.022	.111	.064	.020	.103	.060	.019	
2.0	.127	.070	.021	.123	.068	.021	.115	.064	.020	.108	.061	.019	.101	.057	.018	
3.0	.120	.064	.019	.116	.062	.019	.110	.059	.018	.103	.057	.017	.098	.054	.017	
4.0	.113	.059	.017	.110	.057	.017	.104	.055	.016	.099	.053	.016	.094	.051	.015	
5.0	.106	.054	.016	.104	.053	.015	.099	.051	.015	.094	.050	.015	.089	.048	.014	
6.0	.100	.050	.014	.098	.050	.014	.094	.048	.014	.089	.046	.014	.086	.045	.013	
7.0	.095	.047	.013	.093	.046	.013	.089	.045	.013	.085	.044	.013	.082	.043	.012	
8.0	.090	.044	.012	.088	.043	.012	.085	.042	.012	.081	.041	.012	.078	.040	.012	
9.0	.086	.041	.012	.084	.041	.011	.081	.040	.011	.078	.039	.011	.075	.038	.011	
10.0	.082	.039	.011	.080	.039	.011	.077	.038	.011	.075	.037	.011	.072	.036	.010	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.137	.137	.137	.117	.117	.117	.080	.080	.080	.046	.046	.046	.015	.015	.015	
1.0	.124	.114	.105	.107	.098	.090	.073	.067	.062	.042	.039	.036	.013	.013	.012	
2.0	.114	.097	.082	.098	.083	.071	.067	.058	.049	.039	.034	.029	.012	.011	.009	
3.0	.106	.084	.066	.091	.072	.057	.062	.050	.040	.036	.029	.024	.012	.010	.008	
4.0	.099	.074	.054	.085	.064	.047	.058	.044	.033	.034	.026	.020	.011	.008	.006	
5.0	.093	.065	.045	.080	.057	.039	.055	.040	.028	.032	.023	.017	.010	.008	.005	
6.0	.087	.059	.039	.075	.051	.034	.052	.036	.024	.030	.021	.014	.010	.007	.005	
7.0	.082	.054	.034	.071	.046	.029	.049	.033	.021	.028	.019	.012	.009	.006	.004	
8.0	.078	.049	.029	.067	.043	.026	.047	.030	.018	.027	.018	.011	.009	.006	.004	
9.0	.074	.046	.026	.064	.040	.023	.044	.028	.016	.026	.016	.010	.008	.005	.003	
10.0	.071	.042	.024	.061	.037	.021	.042	.026	.015	.025	.015	.009	.008	.005	.003	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-12-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.000V I:0.7570A P:18.168W PF:0.9800 Freq:50.00Hz Lamp Flux:1000x1 lm										
NAME: Lumino Guard-623mm-RGBW ALL-30D-Rev1					TYPE:RGBW W=3000K			WEIGHT:		
SPEC.:30 DEG					DIM.:623mm			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	1.6	2.5	1.8	2.7	2.9	4.8	5.8	5.1	6.0	6.2
3H	1.4	2.3	1.7	2.6	2.8	4.7	5.6	5.0	5.8	6.1
4H	1.4	2.2	1.7	2.5	2.7	4.7	5.5	5.0	5.8	6.0
6H	1.3	2.1	1.6	2.3	2.6	4.6	5.4	4.9	5.7	5.9
8H	1.2	2.0	1.6	2.3	2.6	4.6	5.3	4.9	5.6	5.9
12H	1.2	1.9	1.5	2.2	2.5	4.5	5.3	4.9	5.5	5.8
4H 2H	1.5	2.4	1.8	2.6	2.8	4.6	5.5	4.9	5.7	6.0
3H	1.4	2.1	1.7	2.4	2.7	4.5	5.3	4.9	5.6	5.9
4H	1.3	2.0	1.7	2.3	2.6	4.5	5.1	4.8	5.5	5.8
6H	1.3	1.8	1.6	2.2	2.6	4.4	5.0	4.8	5.4	5.7
8H	1.2	1.8	1.6	2.1	2.5	4.4	4.9	4.8	5.3	5.7
12H	1.2	1.7	1.6	2.1	2.5	4.3	4.8	4.8	5.2	5.6
8H 4H	1.2	1.8	1.6	2.1	2.5	4.3	4.9	4.7	5.3	5.6
6H	1.2	1.6	1.6	2.0	2.4	4.3	4.7	4.7	5.1	5.6
8H	1.1	1.5	1.6	1.9	2.4	4.2	4.6	4.7	5.1	5.5
12H	1.1	1.4	1.6	1.9	2.4	4.2	4.6	4.7	5.0	5.5
12H 4H	1.2	1.7	1.6	2.1	2.5	4.3	4.8	4.7	5.2	5.6
6H	1.1	1.5	1.6	1.9	2.4	4.2	4.6	4.7	5.1	5.5
8H	1.1	1.4	1.6	1.9	2.4	4.2	4.5	4.7	5.0	5.5
Variations with the observer position at spacings:										
S = 1.0H	+ 2.3 / - 5.9					+ 2.6 / - 3.7				
1.5H	+ 2.6 / - 4.3					+ 3.5 / - 3.5				
2.0H	+ 3.9 / - 6.5					+ 4.6 / - 6.0				

CIE Pub.117, 1000 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 0.0$)
Area: 0.1 m²

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-12-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.000V I:0.7570A P:18.168W PF:0.9800 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME: Lumino Guard-623mm-RGBW ALL-30D-Rev1	TYPE: RGBW W=3000K	WEIGHT:
SPEC.: 30 DEG	DIM.: 623mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	56	51	47	55	50	47	55	50	47	44
0.80	62	57	53	61	56	53	60	56	53	50
1.00	66	61	58	65	60	57	64	60	57	54
1.25	69	64	61	68	64	61	67	63	61	57
1.50	71	67	64	70	67	64	68	65	63	59
2.00	74	70	67	73	69	67	71	68	66	62
2.50	75	72	69	74	71	69	72	69	67	63
3.00	77	74	71	75	73	71	73	71	69	64
4.00	78	76	74	77	75	73	74	72	71	66
5.00	79	77	76	78	76	75	75	74	72	67
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2024-12-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 7.700m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:24.000V I:0.7570A P:18.168W PF:0.9800 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME: Lumino Guard-623mm-RGBW ALL-30D-Rev1	TYPE: RGBW W=3000K	WEIGHT:
SPEC.: 30 DEG	DIM.: 623mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

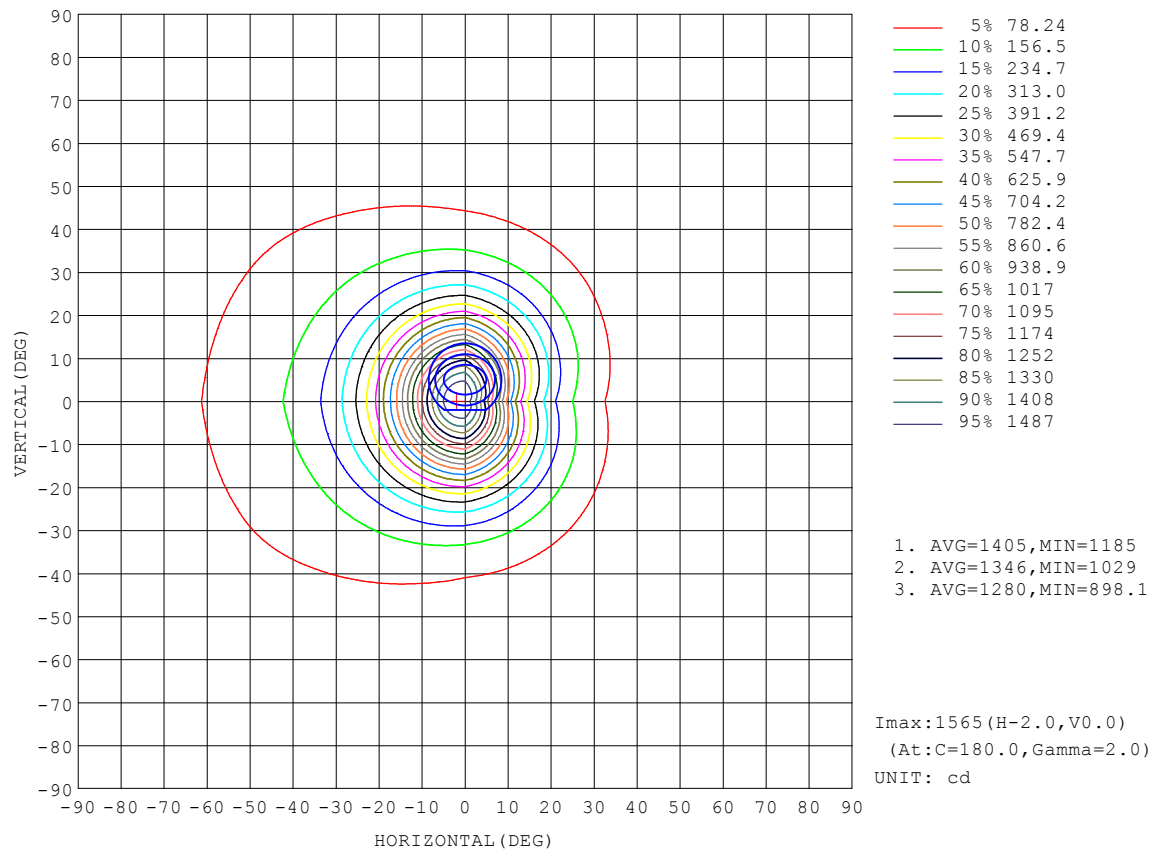


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-12-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.000V I:0.7570A P:18.168W PF:0.9800 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME: Lumino Guard-623mm-RGBW ALL-30D-Rev1	TYPE: RGBW W=3000K	WEIGHT:
SPEC.: 30 DEG	DIM.: 623mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

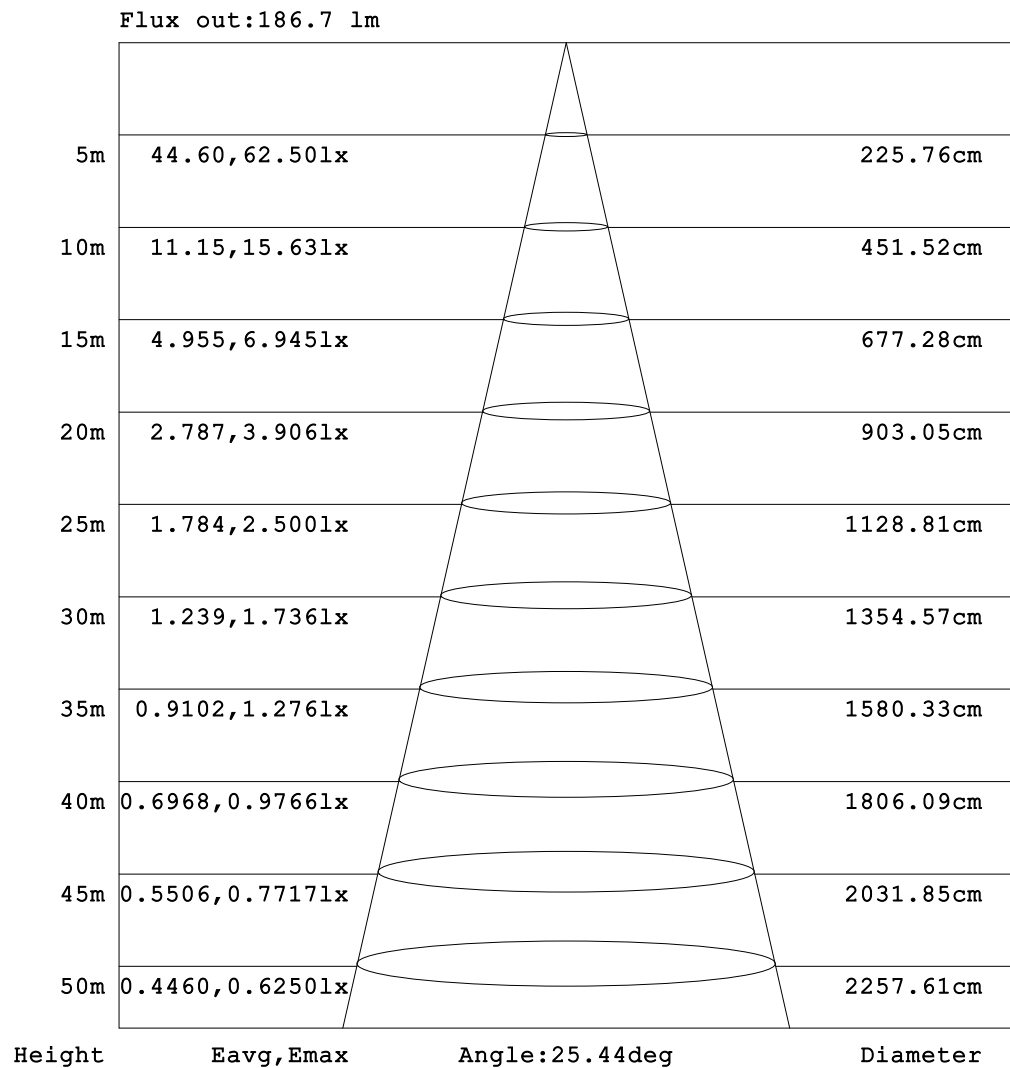


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-12-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.000V I:0.7570A P:18.168W PF:0.9800 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME: Lumino Guard-623mm-RGBW ALL-30D-Rev1	TYPE: RGBW W=3000K	WEIGHT:
SPEC.: 30 DEG	DIM.: 623mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

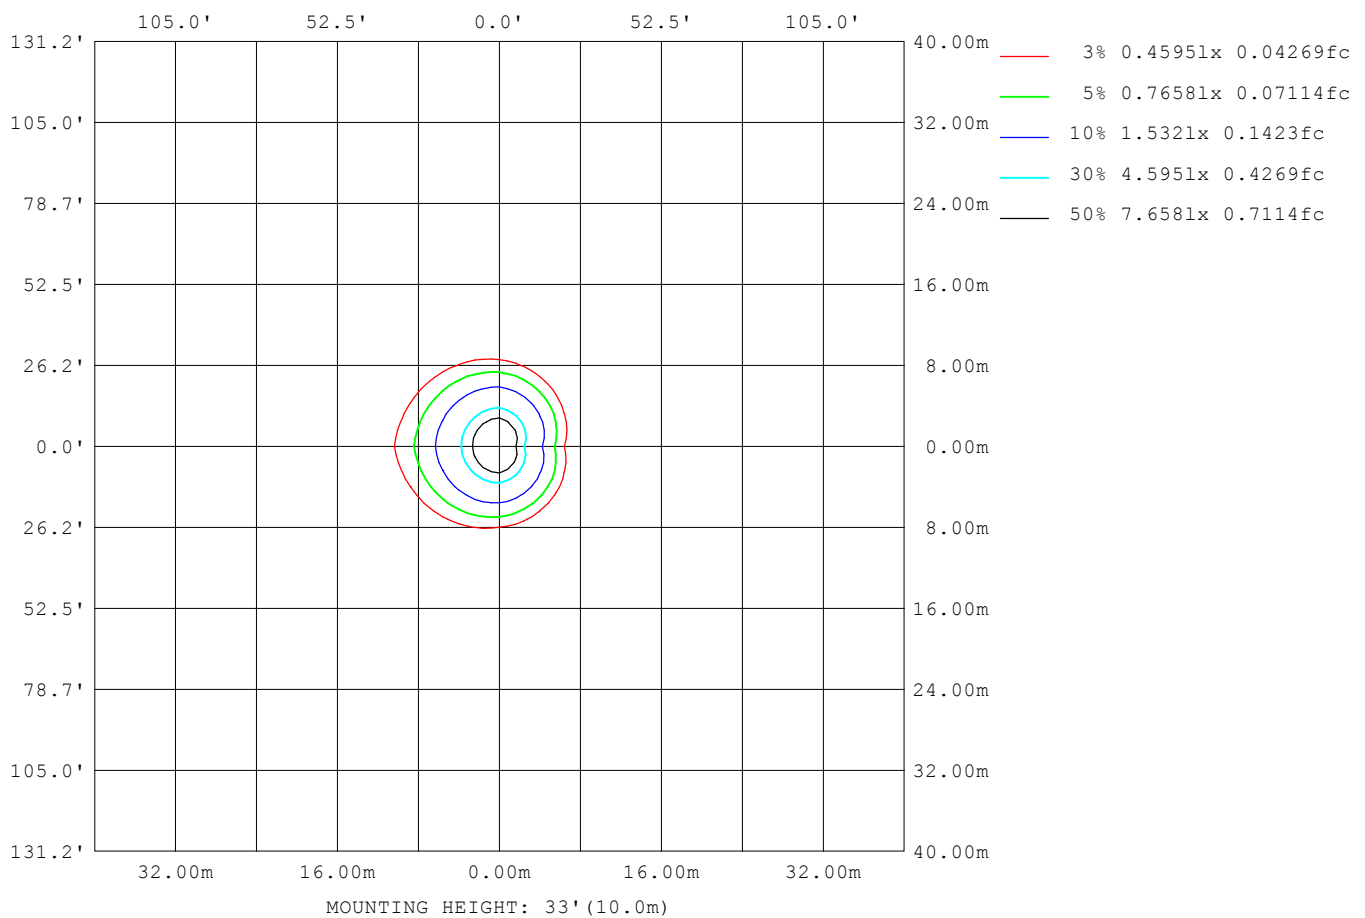

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-12-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 γ Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:24.000V I:0.7570A P:18.168W PF:0.9800 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME:Lumino Guard-623mm-RGBW ALL-30D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:623mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	801
L_0~180 (75) av	552
L_0~180 (85) av	19
L_90~270 (65) av	176
L_90~270 (75) av	90
L_90~270 (85) av	67
L_45 (65) av	483
L_45 (75) av	325
L_45 (85) av	49

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-12-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

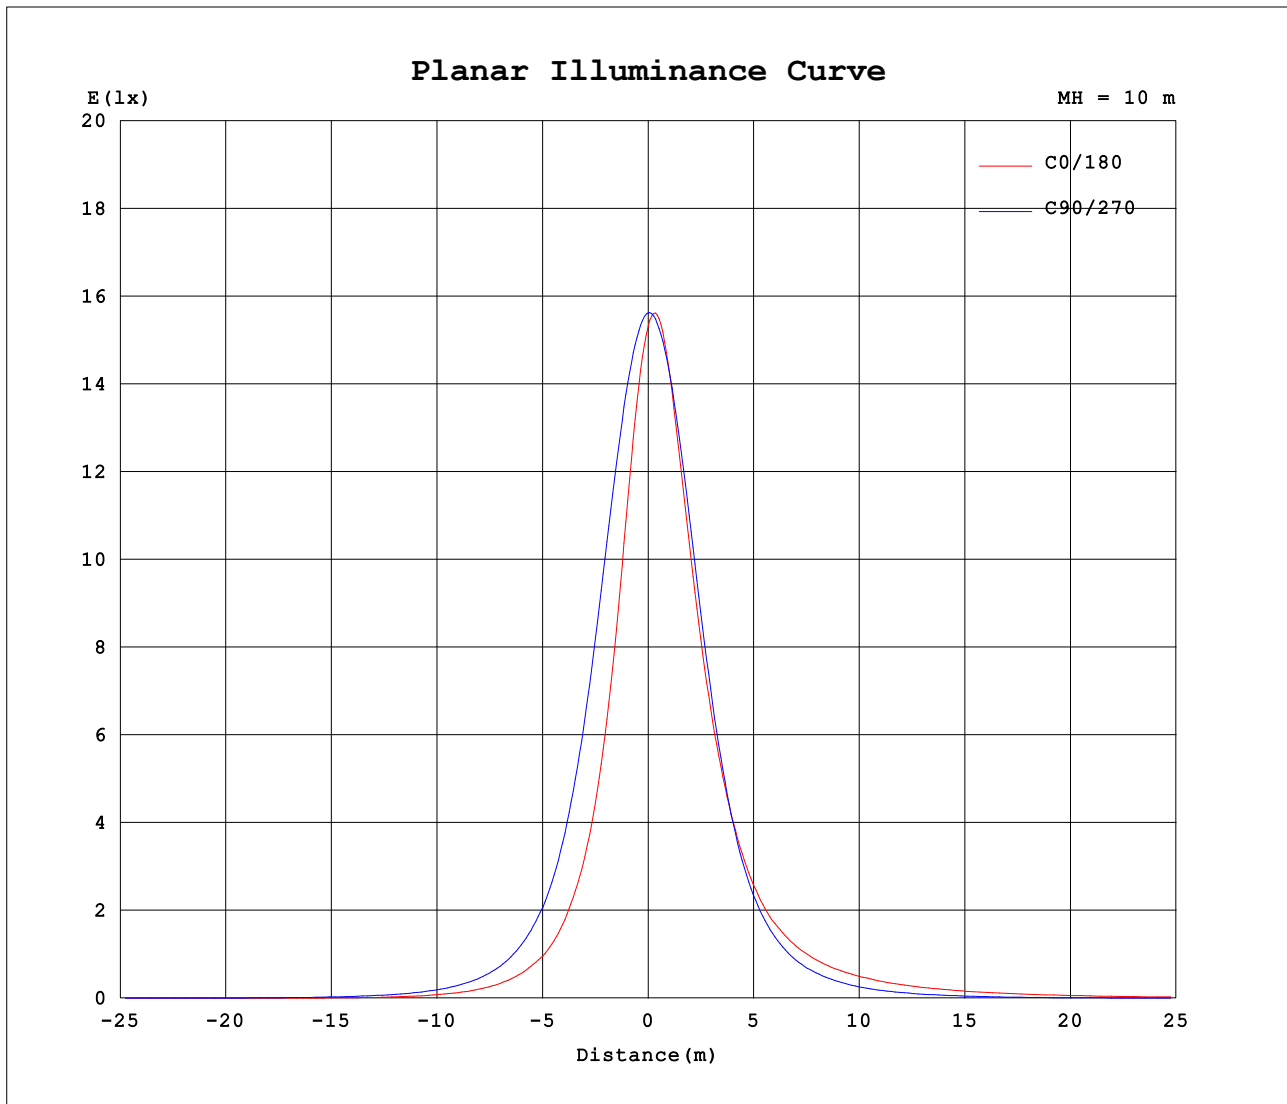

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-12-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.000V I:0.7570A P:18.168W PF:0.9800 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME: Lumino Guard-623mm-RGBW ALL-30D-Rev1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:623mm	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	90	180	270															
0	1532	1563	1532	1563															
5	1198	1444	1488	1477															
10	747	1166	1168	1228															
15	440	831	835	896															
20	262	540	580	596															
25	156	335	403	378															
30	99.3	212	286	242															
35	62.4	134	217	159															
40	38.4	85.4	171	108															
45	22.9	55.0	142	73.8															
50	12.5	34.8	119	50.8															
55	5.78	20.8	101	33.8															
60	2.45	11.0	82.5	20.4															
65	1.59	4.69	66.1	10.2															
70	1.08	2.38	48.1	5.52															
75	0.67	1.52	27.9	3.14															
80	0.37	0.81	9.08	1.50															
85	0.17	0.46	0.16	0.72															
90	0.08	0.29	0.07	0.42															
95	0.09	0.41	0.06	0.54															
100	0.15	0.46	0.04	0.73															
105	0.19	0.55	0.04	0.81															
110	0.25	0.68	0.05	0.81															
115	0.33	0.74	0.06	0.84															
120	0.42	0.78	0.08	0.88															
125	0.52	0.88	0.11	0.94															
130	0.67	1.04	0.15	1.03															
135	0.87	1.25	0.21	1.12															
140	1.16	1.50	0.33	1.27															
145	1.56	1.86	0.51	1.51															
150	2.14	2.24	0.85	1.71															
155	2.82	2.58	1.40	1.96															
160	3.38	2.94	2.09	2.34															
165	3.59	3.19	2.70	2.69															
170	3.56	3.33	3.06	3.01															
175	3.37	3.39	3.21	3.25															
180	3.29	3.40	3.26	3.38															

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-12-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: