

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	10347.8 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	26.1V x 25.9H
	At 50% of Imax	12.6V x 12.9H
	At 90% of Imax	3.6V x 4.7H

Beam Flux	Total	1000.6 lumens per klm.
	To 10% of Imax	571.0 lumens per klm.
	To 50% of Imax	284.9 lumens per klm.
	To 90% of Imax	38.4 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Astra D65-65mm-3000K-12D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:12 DEG	DIM.:65mm	SERIAL No.:IES001675
MFR.:	SUR.:	Shielding Angle:

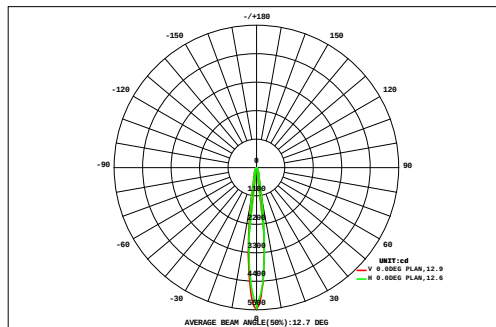

DATA OF LAMP		Eff:60.17lm/W	
MODEL		Imax(cd)	5454
NOMINAL POWER(W)	8.76	AVAILABILITY(%)	57.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	300.4
NOMINAL FLUX(lm)	527.1	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	527.1
TEST VOLTAGE(V)	220	q @50%(H,V)	13,13DEG

AREA FLUX DIAGRAM																	UNIT:lm		F t	F a
18	0.25	0.27	0.30	0.32	0.35	0.37	0.39	0.40	0.41	0.40	0.39	0.37	0.35	0.32	0.30	0.27	0.25	0.23	5.93	0.00
16	0.27	0.30	0.33	0.36	0.40	0.44	0.47	0.49	0.50	0.49	0.47	0.44	0.40	0.37	0.33	0.30	0.27	0.25	6.88	0.00
14	0.29	0.33	0.37	0.41	0.47	0.54	0.61	0.66	0.68	0.67	0.62	0.55	0.48	0.42	0.37	0.33	0.29	0.26	8.36	1.44
12	0.31	0.36	0.41	0.48	0.58	0.73	0.90	1.04	1.11	1.07	0.93	0.76	0.61	0.50	0.42	0.36	0.32	0.28	11.2	6.39
10	0.34	0.39	0.46	0.57	0.76	1.08	1.47	1.77	1.87	1.77	1.51	1.15	0.83	0.61	0.47	0.39	0.34	0.30	16.1	12.2
8	0.36	0.42	0.52	0.69	1.05	1.61	2.29	2.84	3.00	2.81	2.35	1.73	1.15	0.75	0.54	0.43	0.37	0.32	23.2	19.9
6	0.38	0.45	0.58	0.84	1.40	2.20	3.19	4.07	4.33	4.05	3.32	2.34	1.50	0.94	0.65	0.49	0.40	0.34	31.5	28.5
4	0.39	0.48	0.63	0.99	1.68	2.72	3.96	5.09	5.60	5.15	4.10	2.88	1.96	1.29	0.81	0.56	0.43	0.36	39.1	36.6
2	0.40	0.49	0.66	1.06	1.84	3.01	4.38	5.64	6.39	5.76	4.86	3.79	2.59	1.61	0.96	0.61	0.46	0.37	44.9	42.6
0	0.40	0.49	0.68	1.09	1.91	3.10	4.48	5.68	6.13	6.12	5.33	4.06	2.74	1.68	0.99	0.63	0.46	0.37	46.3	44.0
-2	0.39	0.49	0.67	1.08	1.87	3.00	4.21	5.01	5.34	5.15	4.46	3.45	2.35	1.46	0.88	0.59	0.45	0.36	41.2	38.8
-4	0.38	0.47	0.63	0.97	1.62	2.45	3.23	3.81	4.12	3.94	3.31	2.58	1.79	1.15	0.75	0.53	0.42	0.35	32.5	29.9
-6	0.36	0.44	0.56	0.79	1.18	1.69	2.19	2.61	2.84	2.70	2.25	1.74	1.26	0.86	0.62	0.48	0.39	0.33	23.3	20.3
-8	0.34	0.40	0.48	0.61	0.81	1.10	1.40	1.64	1.76	1.68	1.45	1.12	0.85	0.65	0.51	0.42	0.36	0.31	15.9	12.2
-10	0.31	0.36	0.41	0.49	0.59	0.72	0.87	1.00	1.05	1.01	0.89	0.74	0.61	0.51	0.44	0.38	0.33	0.29	11.0	6.30
-12	0.28	0.32	0.36	0.41	0.47	0.53	0.59	0.65	0.67	0.66	0.61	0.54	0.48	0.43	0.38	0.34	0.30	0.26	8.29	1.25
-14	0.26	0.29	0.32	0.35	0.39	0.42	0.46	0.48	0.49	0.49	0.47	0.44	0.40	0.37	0.33	0.30	0.27	0.24	6.77	0.00
-16	0.23	0.26	0.28	0.31	0.33	0.36	0.38	0.39	0.40	0.40	0.39	0.37	0.35	0.32	0.29	0.27	0.24	0.22	5.78	0.00
-18	0.23	0.26	0.28	0.31	0.33	0.36	0.38	0.39	0.40	0.40	0.39	0.37	0.35	0.32	0.29	0.27	0.24	0.22	5.78	0.00
	-18	-16	-14	-12	-10	-8	-6	-4	HORIZONTAL(DEG)	4	6	8	10	12	14	16	18			
F t	5.94	6.99	8.65	11.8	17.7	26.1	35.5	43.3	46.7	44.3	37.7	29.1	20.7	14.2	10.0	7.69	6.35	5.44	378	---
F a	0.00	0.00	1.79	7.54	14.1	23.1	32.7	40.9	44.3	41.9	35.1	26.0	17.4	9.93	4.75	0.84	0.00	0.00	---	300

one-half-peak spread: U:6.3,D:6.5 , L:6.6,R:6.3


NEMA Beam Type: Type 2

$H(b)$ Range: -90 - 90DEG
 $H(b)$ Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-09-11

$V(B)$ Range: -180 - 180DEG
 $V(B)$ Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Astra D65-65mm-3000K-12D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:12 DEG	DIM.:65mm	SERIAL No.:IES001675
MFR.:	SUR.:	Shielding Angle:

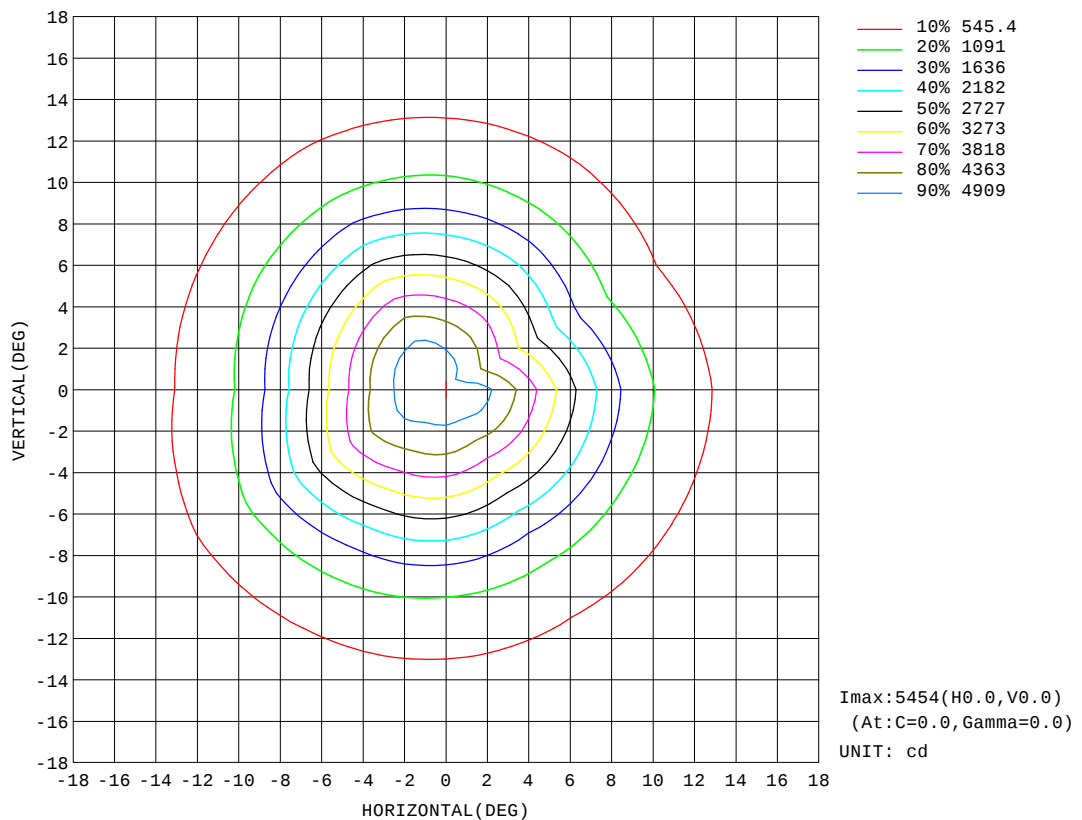


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-11

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Astra D65-65mm-3000K-12D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:12 DEG	DIM.:65mm	SERIAL No.:IES001675
MFR.:	SUR.:	Shielding Angle:

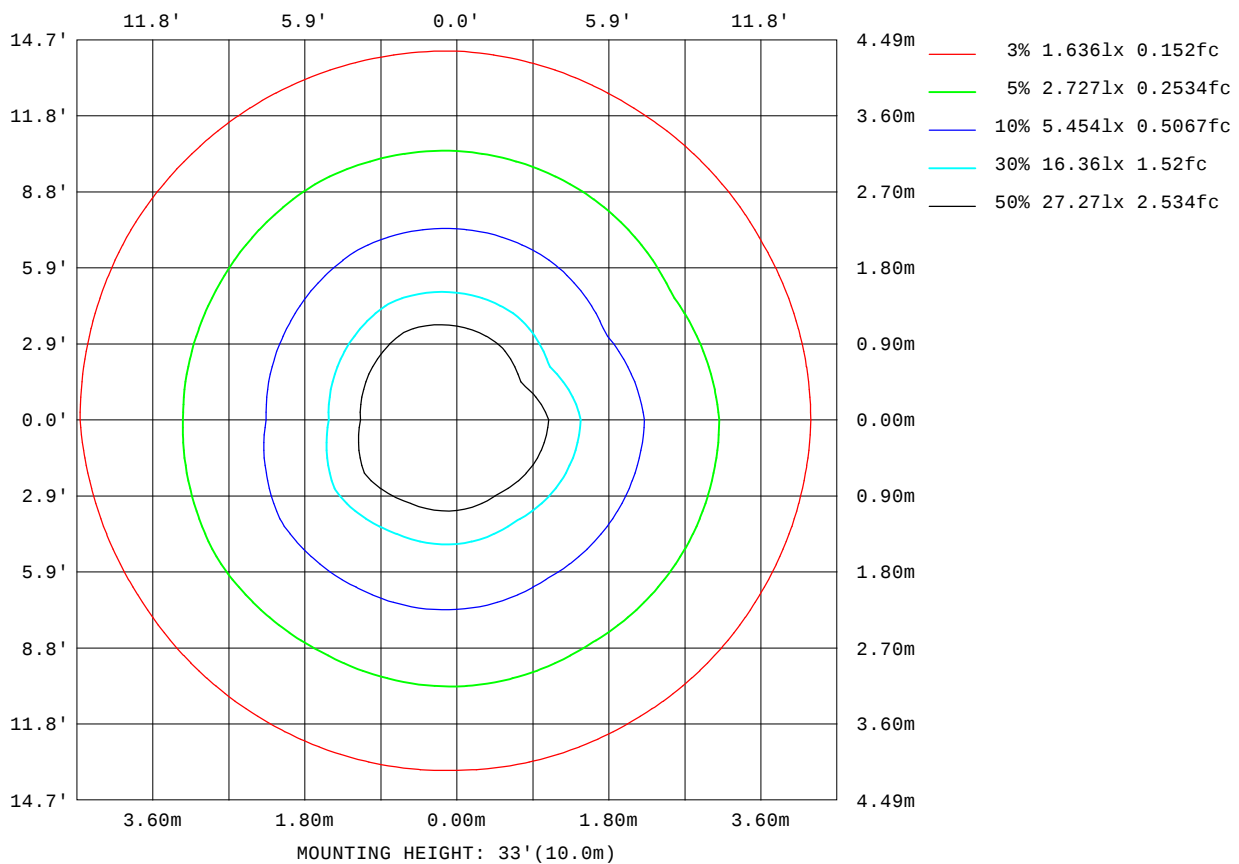

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-11

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

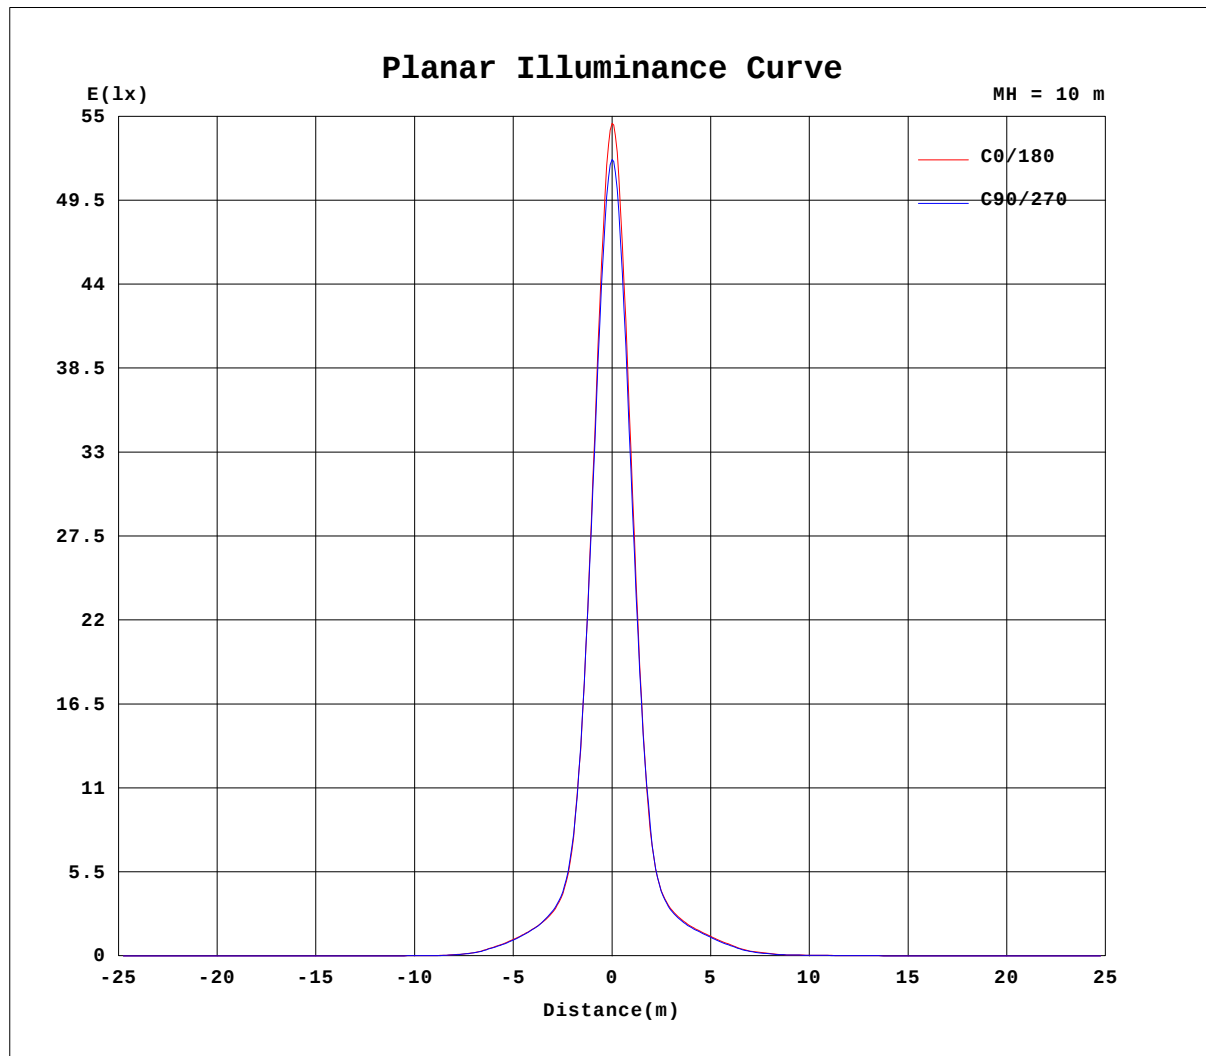


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-11

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Astra D65-65mm-3000K-12D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:12 DEG	DIM.:65mm	SERIAL No.:IES001675
MFR.:	SUR.:	Shielding Angle:

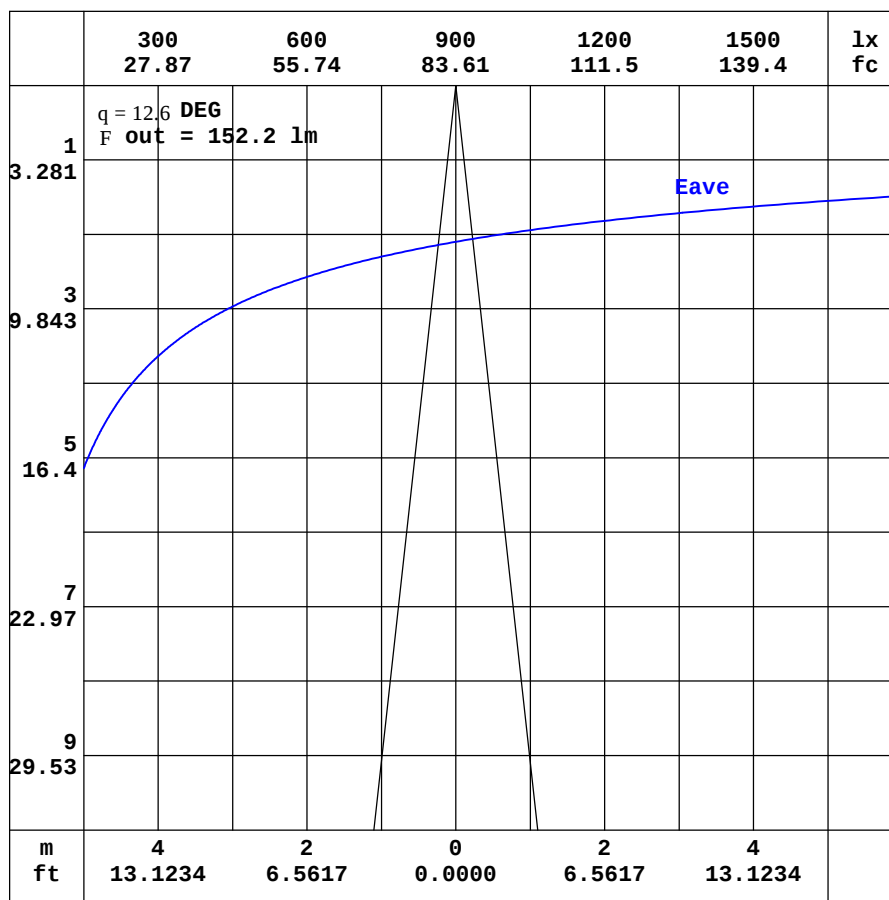

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

$H(b)$ Range:-90 - 90DEG
 $H(b)$ Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-09-11

$V(B)$ Range:-180 - 180DEG
 $V(B)$ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Astra D65-65mm-3000K-12D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:12 DEG	DIM.:65mm	SERIAL No.:IES001675
MFR.:	SUR.:	Shielding Angle:

Table--1
UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.88	1.44	1.28	1.31	1.35	1.39	1.53	1.87	2.60	3.56	4.19	4.48	4.52	4.38	4.28	4.24	4.01	3.43	3.15
-170	1.88	1.43	1.26	1.27	1.29	1.29	1.32	1.49	1.92	2.53	2.94	3.12	3.20	3.25	3.36	3.53	3.70	3.83	3.82
-160	1.88	1.43	1.24	1.24	1.24	1.19	1.12	1.11	1.23	1.45	1.61	1.65	1.68	2.15	2.61	3.00	3.31	3.51	3.61
-150	1.88	1.44	1.22	1.19	1.19	1.14	1.01	0.86	0.74	0.65	0.58	0.81	1.11	1.44	1.76	2.05	2.29	2.46	2.54
-140	1.88	1.46	1.21	1.16	1.14	1.09	0.98	0.80	0.56	0.42	0.43	0.47	0.58	0.74	0.91	1.09	1.23	1.34	1.39
-130	1.88	1.49	1.24	1.14	1.10	1.05	0.98	0.87	0.74	0.61	0.50	0.44	0.43	0.42	0.43	0.47	0.52	0.55	0.58
-120	1.88	1.53	1.28	1.13	1.07	1.02	0.96	0.92	0.90	0.87	0.81	0.75	0.68	0.61	0.55	0.50	0.47	0.45	0.43
-110	1.88	1.58	1.34	1.17	1.06	0.99	0.94	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.91	0.90	0.88	0.86	0.85
-100	1.88	1.63	1.41	1.23	1.09	0.97	0.88	0.88	0.89	0.89	0.89	0.89	0.88	0.89	0.90	0.91	0.92	0.92	0.92
-90	1.88	1.68	1.49	1.29	1.10	0.90	0.71	0.71	0.71	0.71	0.72	0.72	0.72	0.73	0.74	0.76	0.77	0.78	0.79
-80	1.88	1.74	1.55	1.33	1.07	0.79	0.49	0.49	0.53	0.56	0.59	0.61	0.63	0.64	0.64	0.64	0.64	0.64	0.64
-70	1.88	1.79	1.61	1.36	1.14	0.95	0.69	0.64	0.71	0.78	0.84	0.91	0.98	1.03	1.07	1.11	1.13	1.14	1.14
-60	1.88	1.85	1.67	1.54	1.44	1.27	1.05	0.92	1.05	1.20	1.35	1.50	1.65	1.79	1.92	2.03	2.12	2.17	2.18
-50	1.88	1.90	1.77	1.82	1.78	1.69	1.58	1.43	1.49	1.78	2.13	2.51	2.90	3.65	4.14	4.50	4.80	5.02	5.14
-40	1.88	1.95	1.96	2.11	2.17	2.23	2.32	2.40	2.38	2.69	3.65	4.39	5.13	5.90	6.90	8.04	9.11	10.7	11.7
-30	1.88	2.00	2.16	2.40	2.60	2.89	3.35	3.84	4.35	4.87	5.00	6.38	9.03	22.2	37.1	59.4	84.9	97.3	101
-20	1.88	2.05	2.35	2.70	3.05	3.68	4.58	5.63	7.21	8.37	9.50	18.8	41.7	92.1	138	181	218	244	251
-10	1.88	2.11	2.51	2.96	3.50	4.47	5.86	7.61	10.2	12.5	16.7	44.2	102	165	228	320	502	903	1095
0	1.88	2.16	2.64	3.20	3.88	5.14	6.94	9.49	12.9	16.1	24.9	60.4	132	202	275	415	1151	3642	5454
10	1.88	2.16	2.63	3.18	3.83	5.02	6.75	8.96	12.4	15.7	21.0	50.8	112	178	239	316	482	936	1176
20	1.88	2.15	2.59	3.11	3.68	4.69	6.19	8.08	11.0	13.9	17.2	27.9	56.1	110	160	203	233	257	264
30	1.88	2.15	2.50	2.99	3.47	4.21	5.39	6.89	8.66	11.4	13.8	16.4	20.5	37.1	55.5	82.8	109	120	122
40	1.88	2.13	2.37	2.84	3.24	3.72	4.48	5.54	6.79	8.20	10.2	12.0	13.7	15.4	17.2	19.0	20.5	22.4	23.0
50	1.88	2.10	2.23	2.63	2.98	3.30	3.71	4.28	5.03	5.90	6.83	7.78	8.74	10.0	10.9	11.5	12.0	12.3	12.4
60	1.88	2.07	2.18	2.37	2.67	2.93	3.17	3.43	3.72	4.09	4.53	5.00	5.49	5.92	6.25	6.53	6.72	6.82	6.83
70	1.88	2.02	2.13	2.20	2.30	2.51	2.70	2.85	2.99	3.12	3.24	3.36	3.50	3.62	3.72	3.80	3.86	3.90	3.90
80	1.88	1.96	2.04	2.10	2.15	2.19	2.23	2.27	2.33	2.41	2.47	2.53	2.58	2.61	2.64	2.66	2.67	2.68	2.68
90	1.88	1.89	1.91	1.92	1.94	1.95	1.97	1.97	1.98	1.98	1.98	1.99	1.99	1.99	1.99	1.98	1.98	1.98	1.98
100	1.88	1.82	1.75	1.68	1.63	1.57	1.52	1.46	1.42	1.37	1.34	1.31	1.29	1.28	1.28	1.28	1.28	1.28	1.28
110	1.88	1.74	1.60	1.47	1.38	1.32	1.29	1.27	1.27	1.27	1.28	1.30	1.31	1.31	1.30	1.30	1.30	1.29	1.28
120	1.88	1.66	1.47	1.33	1.29	1.27	1.27	1.28	1.29	1.31	1.33	1.35	1.37	1.40	1.42	1.44	1.46	1.46	1.46
130	1.88	1.60	1.37	1.29	1.28	1.29	1.30	1.31	1.33	1.38	1.46	1.57	1.70	1.85	2.02	2.20	2.36	2.46	2.50
140	1.88	1.54	1.31	1.28	1.29	1.31	1.33	1.36	1.45	1.62	1.88	2.28	2.77	3.24	3.61	3.86	4.02	4.10	4.12
150	1.88	1.50	1.29	1.28	1.31	1.33	1.37	1.48	1.70	2.13	2.80	3.49	3.98	4.26	4.44	4.55	4.61	4.63	4.62
160	1.88	1.47	1.28	1.30	1.33	1.35	1.43	1.64	2.08	2.85	3.66	4.16	4.41	4.56	4.68	4.80	4.90	4.94	4.94
170	1.88	1.45	1.28	1.30	1.34	1.38	1.50	1.79	2.44	3.38	4.06	4.40	4.54	4.61	4.74	4.89	4.87	4.76	4.76
180	1.88	1.44	1.28	1.31	1.35	1.39	1.53	1.87	2.60	3.56	4.19	4.48	4.52	4.38	4.28	4.24	4.01	3.43	3.15

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-11

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Astra D65-65mm-3000K-12D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:12 DEG	DIM.:65mm	SERIAL No.:IES001675
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	3.10	3.34	3.30	3.02	2.69	2.32	1.83	1.29	0.84	0.52	0.45	0.51	0.73	0.92	0.93	0.91	0.87	0.75
-170	3.80	3.69	3.61	3.28	2.79	2.27	1.73	1.22	0.79	0.51	0.45	0.52	0.73	0.92	0.93	0.91	0.87	0.75
-160	3.54	3.39	3.13	2.76	2.32	1.87	1.41	0.98	0.65	0.47	0.45	0.56	0.77	0.92	0.93	0.91	0.87	0.75
-150	2.50	2.36	2.16	1.88	1.57	1.24	0.93	0.67	0.50	0.44	0.47	0.65	0.84	0.92	0.92	0.91	0.87	0.75
-140	1.36	1.29	1.16	0.99	0.82	0.66	0.53	0.45	0.44	0.46	0.61	0.79	0.90	0.93	0.92	0.91	0.87	0.75
-130	0.57	0.54	0.50	0.45	0.43	0.44	0.44	0.47	0.56	0.68	0.80	0.89	0.92	0.92	0.92	0.89	0.86	0.75
-120	0.45	0.46	0.49	0.53	0.58	0.63	0.70	0.78	0.84	0.88	0.91	0.92	0.92	0.92	0.91	0.88	0.84	0.75
-110	0.86	0.87	0.89	0.91	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.91	0.89	0.87	0.81
-100	0.92	0.92	0.92	0.91	0.91	0.91	0.90	0.90	0.90	0.91	0.92	0.91	0.90	0.88	0.86	0.82	0.78	0.75
-90	0.79	0.78	0.78	0.77	0.77	0.77	0.77	0.77	0.78	0.78	0.79	0.79	0.79	0.78	0.77	0.76	0.76	0.75
-80	0.64	0.65	0.65	0.65	0.65	0.66	0.64	0.63	0.61	0.59	0.57	0.56	0.59	0.61	0.65	0.69	0.72	0.75
-70	1.15	1.14	1.12	1.09	1.05	1.00	0.94	0.88	0.81	0.75	0.69	0.64	0.62	0.57	0.53	0.60	0.68	0.75
-60	2.16	2.11	2.02	1.90	1.78	1.65	1.52	1.38	1.25	1.11	0.97	0.84	0.74	0.65	0.60	0.53	0.63	0.75
-50	5.06	4.87	4.56	4.14	3.61	2.87	2.52	2.17	1.84	1.56	1.33	1.13	0.93	0.77	0.65	0.57	0.60	0.75
-40	10.6	9.31	8.28	7.18	6.31	5.52	4.73	3.92	2.76	2.21	1.76	1.42	1.15	0.91	0.72	0.61	0.57	0.75
-30	94.0	78.5	52.0	32.4	18.9	9.27	6.89	5.55	4.49	3.01	2.29	1.74	1.36	1.05	0.79	0.64	0.53	0.75
-20	239	209	171	125	80.0	35.1	14.4	7.43	5.56	4.30	2.78	2.05	1.53	1.16	0.86	0.66	0.52	0.75
-10	733	430	294	211	146	84.3	31.3	10.4	6.44	4.86	3.31	2.28	1.66	1.24	0.90	0.68	0.52	0.75
0	3456	1115	393	253	174	105	41.2	13.8	6.84	5.05	3.62	2.38	1.72	1.27	0.92	0.69	0.51	0.75
10	765	407	278	214	152	86.4	34.4	13.4	8.81	6.50	4.42	3.05	2.14	1.54	1.10	0.79	0.56	0.75
20	248	219	185	139	86.9	41.6	19.3	13.0	9.72	7.18	4.87	3.45	2.43	1.75	1.24	0.88	0.61	0.75
30	115	99.7	70.7	46.0	28.6	17.9	14.5	12.2	9.40	6.70	4.92	3.53	2.55	1.86	1.33	0.96	0.66	0.75
40	21.6	19.5	17.9	16.1	14.3	12.6	11.0	9.23	7.49	6.02	4.52	3.36	2.54	1.90	1.39	1.00	0.73	0.75
50	12.2	11.8	11.2	10.5	9.57	8.15	7.27	6.37	5.49	4.71	3.91	3.10	2.43	1.87	1.40	1.00	0.78	0.75
60	6.76	6.60	6.35	6.03	5.66	5.23	4.76	4.32	3.92	3.60	3.32	2.81	2.26	1.79	1.37	0.99	0.83	0.75
70	3.87	3.82	3.75	3.65	3.53	3.40	3.27	3.14	3.00	2.86	2.72	2.49	2.07	1.65	1.29	1.05	0.87	0.75
80	2.66	2.64	2.61	2.58	2.54	2.49	2.45	2.40	2.33	2.26	2.20	2.13	1.83	1.56	1.32	1.09	0.91	0.75
90	1.96	1.95	1.93	1.91	1.89	1.88	1.87	1.86	1.85	1.83	1.82	1.81	1.63	1.46	1.28	1.10	0.93	0.75
100	1.28	1.28	1.28	1.28	1.27	1.27	1.28	1.30	1.32	1.34	1.37	1.41	1.35	1.29	1.20	1.08	0.93	0.75
110	1.29	1.29	1.30	1.30	1.31	1.31	1.30	1.28	1.27	1.27	1.26	1.22	1.17	1.12	1.09	1.06	0.94	0.75
120	1.46	1.46	1.45	1.43	1.40	1.38	1.34	1.31	1.30	1.29	1.28	1.23	1.18	1.12	1.09	1.03	0.95	0.75
130	2.49	2.42	2.29	2.12	1.94	1.77	1.61	1.49	1.39	1.31	1.26	1.21	1.15	1.10	1.06	1.00	0.94	0.75
140	4.11	4.05	3.93	3.72	3.41	2.97	2.48	2.03	1.69	1.43	1.22	1.15	1.13	1.08	1.03	1.00	0.93	0.75
150	4.63	4.61	4.56	4.46	4.31	4.08	3.67	3.06	2.12	1.47	1.15	1.04	1.06	1.05	1.01	0.97	0.91	0.75
160	4.93	4.90	4.80	4.68	4.56	4.42	3.83	3.05	2.16	1.40	1.01	0.90	0.95	1.01	0.99	0.96	0.90	0.75
170	4.72	4.83	4.90	4.52	4.00	3.50	2.94	2.33	1.68	1.08	0.77	0.71	0.83	0.97	0.96	0.93	0.88	0.75
180	3.10	3.34	3.30	3.02	2.69	2.32	1.83	1.29	0.84	0.52	0.45	0.51	0.73	0.92	0.93	0.91	0.87	0.75

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-11

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: