

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	5021.0 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	40.1V x 40.3H
	At 50% of Imax	20.9V x 20.6H
	At 90% of Imax	8.4V x 8.3H

Beam Flux	Total	1000.5 lumens per klm.
	To 10% of Imax	780.5 lumens per klm.
	To 50% of Imax	464.0 lumens per klm.
	To 90% of Imax	160.2 lumens per klm.

Upward LOR	2.0 %
Downward LOR	98.1 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-02-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Astra D65-65mm-RGBW ALL-20D-Rev2	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:20 DEG	DIA.:65MM	SERIAL No.:IES003422
MFR.:	SUR.:1	Shielding Angle:

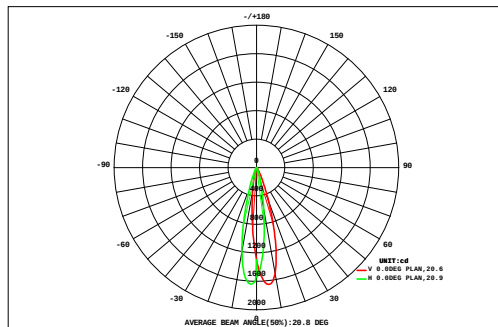

DATA OF LAMP		Eff:39.19lm/W	
MODEL		Imax(cd)	1653
NOMINAL POWER(W)	8.4	AVAILABILITY(%)	78.5
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	258.4
NOMINAL FLUX(lm)	329.2	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	329.2
TEST VOLTAGE(V)	24	q @50%(H,V)	21,21DEG

		AREA FLUX DIAGRAM															UNIT:lm				F t	F a
		0.04	0.05	0.06	0.07	0.08	0.10	0.12	0.13	0.14	0.15	0.14	0.13	0.12	0.10	0.09	0.07	0.06	0.05	1.69	0.00	
VERTICAL (DEG)	27	0.05	0.06	0.07	0.09	0.11	0.14	0.17	0.19	0.21	0.22	0.21	0.19	0.17	0.14	0.11	0.09	0.08	0.07	2.36	0.00	
	24	0.05	0.07	0.09	0.11	0.15	0.19	0.24	0.29	0.32	0.34	0.32	0.29	0.25	0.20	0.15	0.13	0.11	0.09	3.39	0.00	
	21	0.06	0.08	0.11	0.15	0.20	0.27	0.35	0.44	0.52	0.54	0.51	0.45	0.37	0.28	0.23	0.20	0.16	0.12	5.06	1.78	
	18	0.07	0.09	0.13	0.18	0.26	0.38	0.53	0.71	0.86	0.92	0.85	0.71	0.55	0.45	0.40	0.32	0.24	0.17	7.83	5.48	
	15	0.08	0.11	0.15	0.22	0.34	0.51	0.77	1.09	1.39	1.49	1.35	1.09	0.88	0.82	0.68	0.50	0.35	0.23	12.0	10.5	
	12	0.08	0.12	0.17	0.27	0.42	0.67	1.04	1.57	2.12	2.30	2.04	1.68	1.60	1.39	1.07	0.74	0.48	0.31	18.1	16.8	
	9	0.09	0.12	0.19	0.29	0.48	0.80	1.30	2.03	2.89	3.21	2.89	2.77	2.54	2.09	1.53	1.01	0.63	0.38	25.2	24.2	
		0.09	0.12	0.19	0.30	0.49	0.84	1.39	2.23	3.30	3.96	3.97	3.90	3.50	2.81	1.99	1.27	0.76	0.45	31.6	30.6	
		0.10	0.14	0.23	0.39	0.68	1.17	1.92	2.99	4.19	4.28	4.43	4.35	3.85	3.03	2.12	1.33	0.79	0.46	36.5	35.6	
		0.11	0.18	0.31	0.54	0.96	1.67	2.72	3.93	4.37	4.39	4.34	4.08	3.51	2.71	1.87	1.18	0.71	0.42	38.0	37.2	
	-9	0.12	0.20	0.34	0.60	1.05	1.80	2.81	3.53	3.87	3.97	3.88	3.55	2.97	2.24	1.53	0.98	0.60	0.36	34.4	33.5	
	0.12	0.20	0.33	0.58	0.97	1.58	2.20	2.72	3.04	3.16	3.08	2.77	2.27	1.69	1.16	0.76	0.47	0.30	27.4	26.4		
-12	0.11	0.18	0.29	0.48	0.80	1.14	1.52	1.87	2.10	2.20	2.16	1.93	1.57	1.17	0.83	0.55	0.36	0.23	19.5	18.2		
-15	0.09	0.15	0.24	0.38	0.55	0.76	0.98	1.18	1.31	1.37	1.35	1.22	1.00	0.77	0.55	0.39	0.27	0.18	12.7	11.2		
-18	0.08	0.12	0.18	0.27	0.37	0.48	0.60	0.71	0.77	0.81	0.80	0.73	0.62	0.48	0.36	0.27	0.19	0.13	7.97	5.79		
-21	0.06	0.09	0.13	0.18	0.24	0.30	0.37	0.42	0.45	0.47	0.47	0.43	0.37	0.31	0.24	0.18	0.14	0.10	4.94	1.24		
-24	0.05	0.06	0.09	0.12	0.15	0.19	0.22	0.25	0.27	0.28	0.27	0.26	0.23	0.20	0.16	0.12	0.09	0.07	3.09	0.00		
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27		
F t	1.43	2.12	3.29	5.22	8.31	13.0	19.3	26.3	32.1	34.1	33.1	30.5	26.4	20.9	15.1	10.1	6.50	4.14	292	---		
F a	0.00	0.00	0.00	2.24	5.88	11.2	17.8	24.9	30.8	33.0	31.8	29.2	24.9	19.3	13.5	8.39	4.37	1.17	---	258		

one-half-peak spread: U:10.3,D:10.8 , L:10.1,R:10.6


NEMA Beam Type: Type 3

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-02-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Astra D65-65mm-RGBW ALL-20D-Rev2	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:20 DEG	DIA.:65MM	SERIAL No.:IES003422
MFR.:	SUR.:1	Shielding Angle:

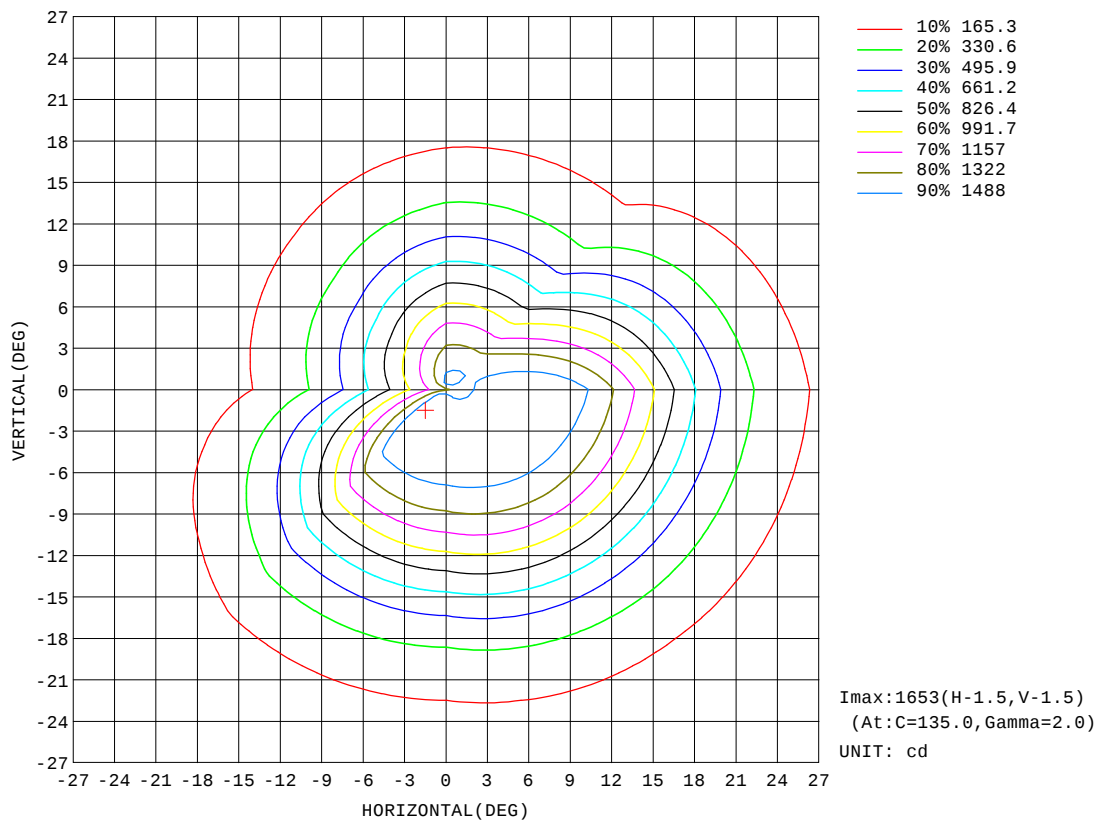


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-02-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Astra D65-65mm-RGBW ALL-20D-Rev2	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:20 DEG	DIA.:65MM	SERIAL No.:IES003422
MFR.:	SUR.:1	Shielding Angle:

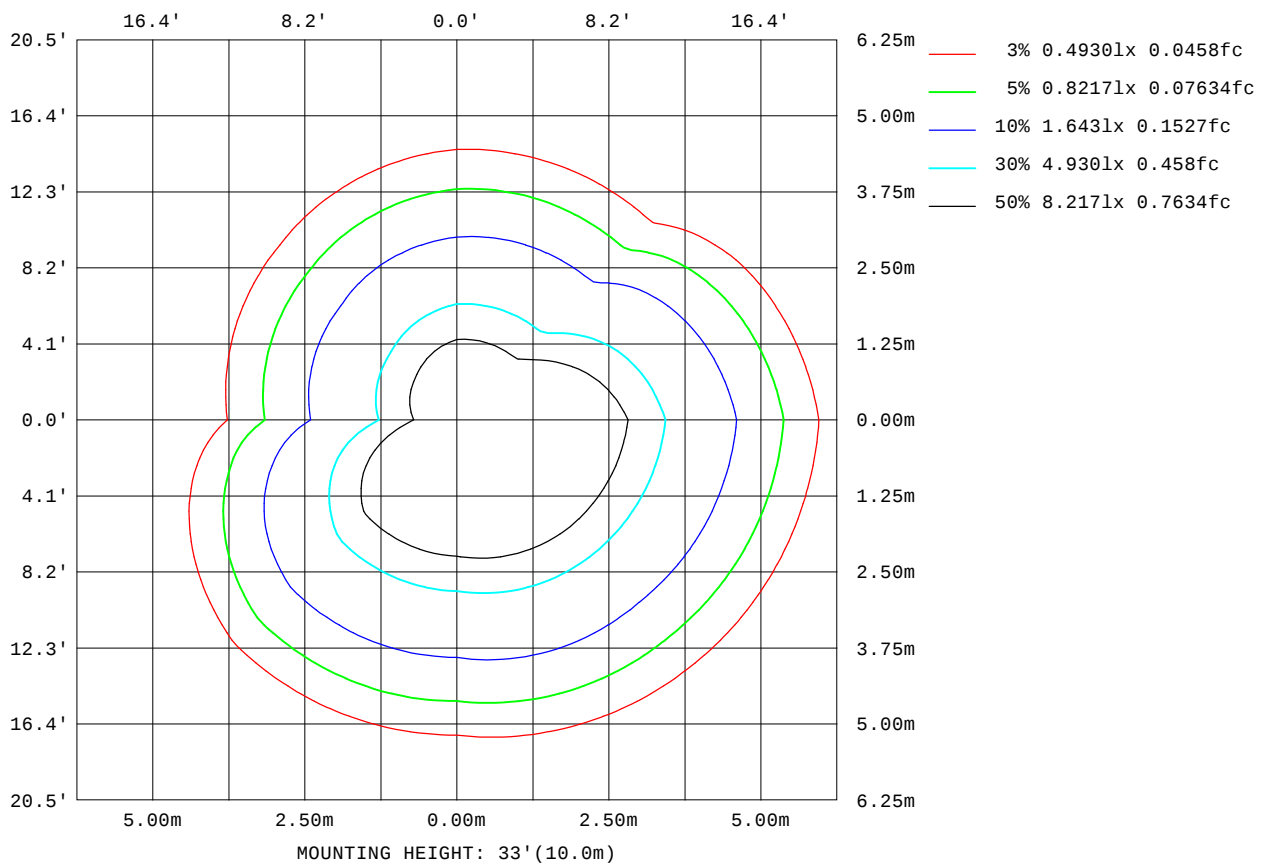

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-02-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

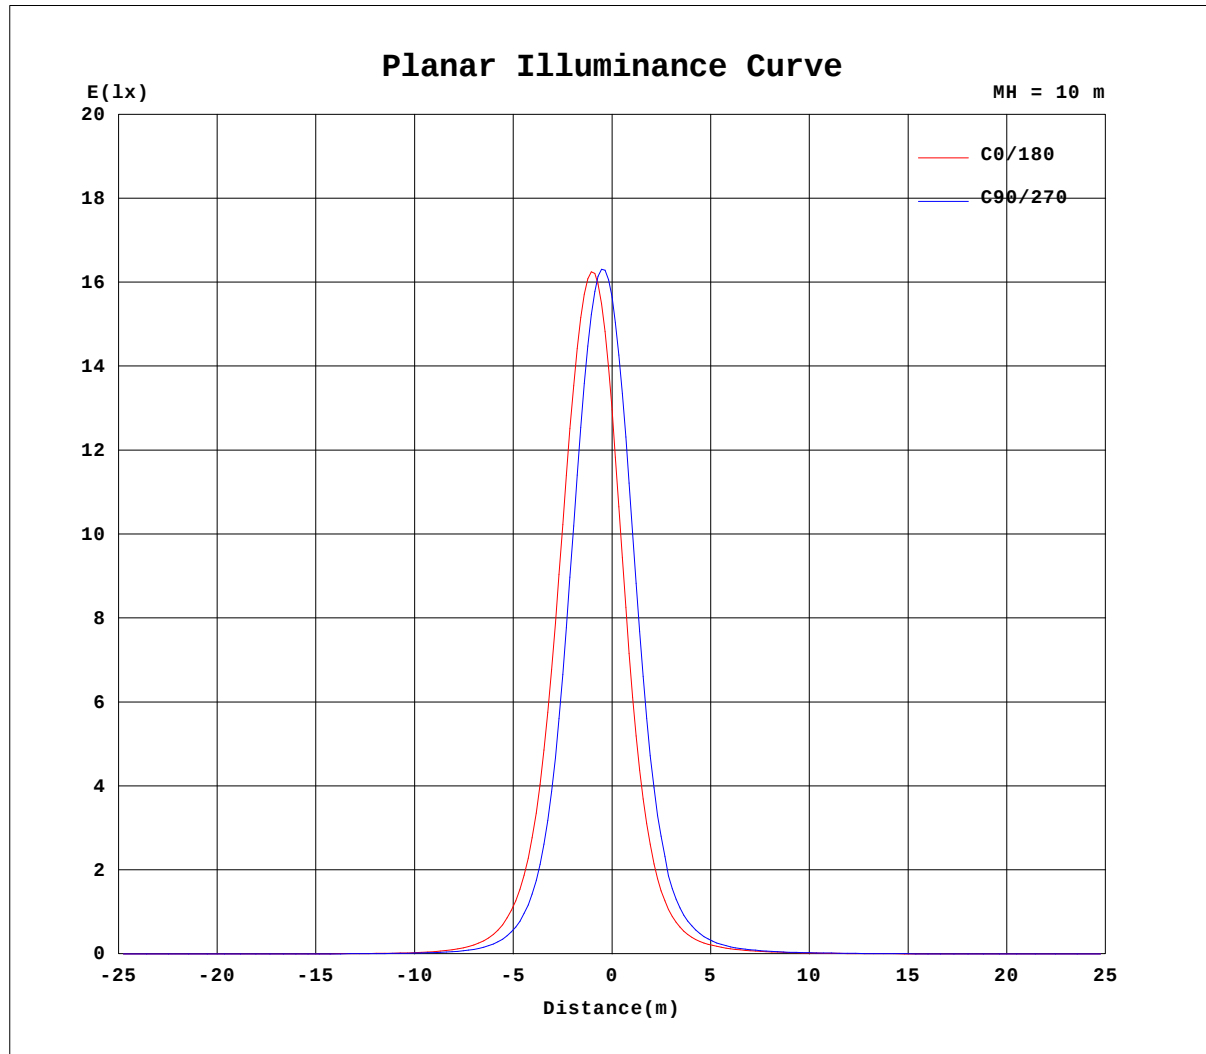


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-02-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Astra D65-65mm-RGBW ALL-20D-Rev2	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:20 DEG	DIA.:65MM	SERIAL No.:IES003422
MFR.:	SUR.:1	Shielding Angle:

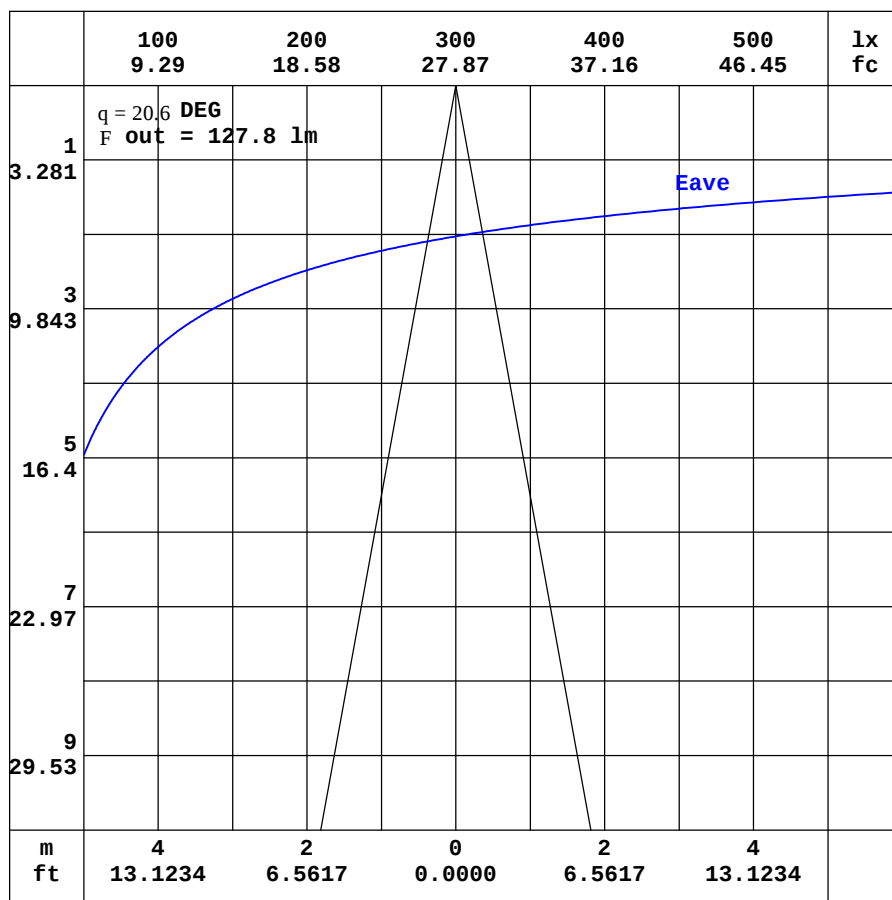

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-02-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Astra D65-65mm-RGBW ALL-20D-Rev2	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:20 DEG	DIA.:65MM	SERIAL No.:IES003422
MFR.:	SUR.:1	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.91	0.79	0.73	0.73	0.77	0.90	1.19	1.61	2.06	2.39	2.56	2.56	2.52	2.50	2.42	2.22	1.92	1.84	1.92
-170	0.91	0.79	0.73	0.72	0.74	0.83	1.04	1.35	1.67	1.91	2.02	2.03	2.03	2.05	2.08	2.09	2.05	2.08	2.15
-160	0.91	0.79	0.72	0.71	0.70	0.75	0.86	1.04	1.24	1.38	1.44	1.44	1.41	1.42	1.46	1.62	1.77	1.86	1.89
-150	0.91	0.79	0.72	0.69	0.68	0.68	0.72	0.78	0.84	0.89	0.87	0.80	0.71	0.70	0.86	1.02	1.13	1.20	1.22
-140	0.91	0.79	0.73	0.68	0.66	0.64	0.63	0.63	0.59	0.53	0.46	0.31	0.26	0.32	0.39	0.46	0.52	0.55	0.55
-130	0.91	0.81	0.73	0.67	0.65	0.63	0.59	0.56	0.50	0.43	0.31	0.21	0.20	0.21	0.20	0.21	0.21	0.21	0.21
-120	0.91	0.81	0.73	0.69	0.64	0.62	0.59	0.56	0.51	0.46	0.41	0.38	0.36	0.33	0.31	0.30	0.29	0.28	0.28
-110	0.91	0.81	0.75	0.69	0.65	0.62	0.58	0.55	0.53	0.51	0.49	0.49	0.49	0.48	0.49	0.49	0.49	0.49	0.50
-100	0.91	0.83	0.76	0.71	0.66	0.61	0.57	0.55	0.52	0.49	0.49	0.49	0.49	0.49	0.49	0.49	0.50	0.50	0.50
-90	0.91	0.85	0.79	0.74	0.68	0.62	0.56	0.51	0.45	0.39	0.39	0.40	0.40	0.40	0.40	0.40	0.41	0.41	0.41
-80	0.91	0.87	0.82	0.77	0.72	0.66	0.60	0.54	0.48	0.42	0.44	0.47	0.49	0.52	0.54	0.56	0.58	0.60	0.61
-70	0.91	0.88	0.86	0.83	0.79	0.77	0.77	0.77	0.77	0.77	0.82	0.90	0.97	1.04	1.10	1.14	1.18	1.21	1.22
-60	0.91	0.91	0.90	0.90	0.93	0.98	1.06	1.14	1.22	1.29	1.37	1.53	1.68	1.82	1.95	2.06	2.15	2.21	2.24
-50	0.91	0.94	0.95	1.01	1.11	1.25	1.42	1.60	1.79	1.98	2.17	2.43	2.78	3.15	3.51	3.85	4.12	4.31	4.38
-40	0.91	0.95	1.01	1.13	1.31	1.55	1.84	2.16	2.53	2.94	3.42	4.00	4.86	5.99	7.23	8.54	9.72	10.6	10.9
-30	0.91	0.97	1.07	1.25	1.52	1.86	2.28	2.80	3.43	4.21	5.29	6.85	9.29	13.2	18.8	26.5	35.3	42.4	45.2
-20	0.91	1.00	1.12	1.36	1.70	2.15	2.72	3.45	4.39	5.67	7.61	10.9	17.3	31.3	62.0	110	170	231	258
-10	0.91	1.02	1.17	1.45	1.85	2.39	3.10	4.02	5.22	6.94	9.63	14.6	25.3	51.7	117	286	663	1023	1195
0	0.91	1.03	1.20	1.50	1.95	2.54	3.34	4.37	5.71	7.56	10.3	14.7	22.2	35.8	65.7	141	325	725	1297
10	0.91	1.03	1.20	1.50	1.93	2.51	3.29	4.29	5.57	7.32	9.87	13.9	20.6	32.6	56.4	107	210	402	588
20	0.91	1.03	1.18	1.46	1.85	2.37	3.06	3.94	5.04	6.46	8.40	11.2	15.3	21.6	31.3	47.0	69.7	95.0	112
30	0.91	1.01	1.16	1.39	1.73	2.16	2.72	3.44	4.29	5.31	6.57	8.17	10.3	12.9	16.3	20.4	24.7	28.5	30.7
40	0.91	1.00	1.12	1.30	1.57	1.90	2.32	2.83	3.44	4.13	4.92	5.79	6.79	7.91	9.12	10.3	11.5	12.4	12.8
50	0.91	1.00	1.09	1.22	1.40	1.64	1.92	2.25	2.63	3.07	3.54	4.03	4.55	5.06	5.55	6.01	6.39	6.69	6.85
60	0.91	0.98	1.05	1.13	1.24	1.39	1.56	1.76	1.97	2.20	2.45	2.70	2.96	3.21	3.45	3.64	3.82	3.94	4.02
70	0.91	0.96	1.01	1.07	1.12	1.20	1.28	1.37	1.47	1.58	1.69	1.80	1.90	2.00	2.09	2.18	2.24	2.30	2.33
80	0.91	0.94	0.97	1.01	1.04	1.07	1.10	1.13	1.16	1.19	1.24	1.28	1.30	1.32	1.34	1.37	1.38	1.40	1.41
90	0.91	0.92	0.93	0.94	0.96	0.97	0.98	0.99	1.00	1.01	1.02	1.02	1.02	1.02	1.03	1.03	1.03	1.03	1.04
100	0.91	0.89	0.88	0.88	0.87	0.86	0.86	0.85	0.85	0.85	0.84	0.83	0.82	0.81	0.80	0.79	0.79	0.78	0.78
110	0.91	0.87	0.85	0.82	0.81	0.79	0.78	0.77	0.76	0.76	0.75	0.74	0.73	0.73	0.73	0.73	0.73	0.73	0.73
120	0.91	0.86	0.81	0.79	0.76	0.75	0.75	0.74	0.74	0.74	0.74	0.76	0.79	0.84	0.87	0.90	0.92	0.93	0.93
130	0.91	0.85	0.79	0.76	0.75	0.74	0.74	0.76	0.79	0.88	0.98	1.11	1.25	1.39	1.51	1.59	1.66	1.69	1.68
140	0.91	0.82	0.78	0.74	0.74	0.75	0.78	0.87	1.03	1.25	1.49	1.74	1.96	2.14	2.27	2.36	2.41	2.44	2.45
150	0.91	0.81	0.76	0.74	0.74	0.78	0.88	1.09	1.38	1.72	2.04	2.28	2.44	2.56	2.63	2.68	2.72	2.75	2.77
160	0.91	0.80	0.74	0.74	0.75	0.82	1.01	1.33	1.72	2.10	2.37	2.53	2.60	2.65	2.72	2.75	2.77	2.79	2.81
170	0.91	0.80	0.74	0.74	0.76	0.87	1.13	1.52	1.95	2.31	2.52	2.58	2.59	2.61	2.61	2.60	2.49	2.35	2.35
180	0.91	0.79	0.73	0.73	0.77	0.90	1.19	1.61	2.06	2.39	2.56	2.56	2.52	2.50	2.42	2.22	1.92	1.84	1.94

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2025-02-06

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Astra D65-65mm-RGBW ALL-20D-Rev2	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:20 DEG	DIA.:65MM	SERIAL No.:IES003422
MFR.:	SUR.:1	Shielding Angle:

Table--2

UNIT: cd

H(°) V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.94	1.86	1.69	1.44	1.17	0.86	0.57	0.34	0.21	0.21	0.27	0.39	0.48	0.50	0.49	0.43	0.36	0.38	
-170	2.05	1.98	1.78	1.50	1.18	0.85	0.56	0.33	0.22	0.21	0.28	0.39	0.48	0.49	0.49	0.43	0.36	0.38	
-160	1.81	1.67	1.47	1.22	0.93	0.66	0.43	0.27	0.21	0.22	0.30	0.41	0.48	0.49	0.49	0.43	0.36	0.38	
-150	1.16	1.05	0.91	0.74	0.57	0.40	0.27	0.21	0.21	0.25	0.35	0.44	0.48	0.50	0.48	0.42	0.36	0.38	
-140	0.53	0.47	0.41	0.33	0.26	0.22	0.20	0.21	0.25	0.33	0.42	0.47	0.49	0.49	0.47	0.41	0.36	0.38	
-130	0.21	0.20	0.20	0.20	0.20	0.21	0.24	0.30	0.36	0.43	0.46	0.48	0.49	0.48	0.44	0.38	0.36	0.38	
-120	0.29	0.30	0.31	0.34	0.35	0.38	0.42	0.44	0.46	0.48	0.49	0.49	0.48	0.46	0.42	0.37	0.37	0.38	
-110	0.49	0.49	0.50	0.49	0.49	0.49	0.49	0.49	0.49	0.49	0.48	0.47	0.45	0.41	0.38	0.37	0.37	0.38	
-100	0.50	0.50	0.50	0.49	0.49	0.49	0.48	0.48	0.47	0.45	0.43	0.40	0.39	0.38	0.38	0.37	0.38	0.38	
-90	0.41	0.41	0.40	0.40	0.40	0.40	0.39	0.39	0.39	0.39	0.39	0.38	0.38	0.38	0.38	0.38	0.38	0.38	
-80	0.61	0.61	0.60	0.59	0.58	0.56	0.55	0.53	0.51	0.49	0.48	0.46	0.44	0.43	0.42	0.41	0.40	0.38	
-70	1.23	1.22	1.20	1.17	1.13	1.08	1.02	0.95	0.88	0.81	0.75	0.68	0.61	0.55	0.49	0.45	0.41	0.38	
-60	2.25	2.23	2.17	2.08	1.97	1.84	1.70	1.54	1.40	1.26	1.11	0.97	0.83	0.71	0.60	0.50	0.43	0.38	
-50	4.43	4.35	4.15	3.86	3.50	3.13	2.75	2.41	2.09	1.81	1.55	1.31	1.09	0.89	0.71	0.56	0.45	0.38	
-40	11.2	10.7	9.74	8.47	7.08	5.83	4.71	3.80	3.09	2.51	2.05	1.67	1.35	1.07	0.83	0.62	0.47	0.38	
-30	46.8	42.5	34.5	25.7	17.9	12.4	8.69	6.24	4.55	3.42	2.63	2.05	1.61	1.24	0.93	0.67	0.49	0.38	
-20	264	216	147	91.5	53.9	30.3	17.0	10.1	6.57	4.49	3.23	2.40	1.82	1.38	1.02	0.72	0.50	0.38	
-10	1176	928	561	283	133	62.7	30.3	15.3	8.65	5.48	3.74	2.68	1.98	1.48	1.08	0.76	0.51	0.38	
0	1640	1511	1004	487	207	87.8	39.5	18.7	9.90	6.03	3.98	2.81	2.06	1.52	1.11	0.77	0.52	0.38	
10	515	344	312	196	105	54.0	28.3	15.2	8.97	5.83	4.02	2.89	2.12	1.57	1.14	0.79	0.53	0.38	
20	108	87.2	62.1	45.1	35.6	24.7	16.2	10.6	7.30	5.17	3.77	2.79	2.08	1.55	1.13	0.78	0.53	0.38	
30	30.1	27.2	23.2	19.0	15.2	12.3	9.69	7.44	5.69	4.36	3.34	2.55	1.95	1.47	1.08	0.77	0.53	0.38	
40	12.7	12.1	11.1	9.99	8.82	7.65	6.51	5.40	4.40	3.54	2.82	2.23	1.75	1.35	1.01	0.74	0.53	0.38	
50	6.80	6.62	6.33	5.94	5.49	5.01	4.52	3.95	3.33	2.78	2.29	1.87	1.51	1.20	0.93	0.70	0.52	0.38	
60	4.00	3.94	3.82	3.66	3.48	3.26	3.02	2.78	2.44	2.11	1.80	1.52	1.26	1.04	0.83	0.65	0.50	0.38	
70	2.33	2.31	2.28	2.22	2.16	2.08	1.99	1.90	1.76	1.57	1.39	1.21	1.04	0.88	0.74	0.61	0.49	0.38	
80	1.42	1.42	1.41	1.40	1.39	1.37	1.35	1.33	1.29	1.18	1.07	0.97	0.86	0.76	0.66	0.56	0.47	0.38	
90	1.04	1.04	1.04	1.04	1.05	1.05	1.05	1.05	1.05	0.98	0.90	0.83	0.75	0.68	0.60	0.53	0.45	0.38	
100	0.78	0.79	0.80	0.81	0.82	0.83	0.84	0.85	0.87	0.82	0.77	0.73	0.68	0.62	0.57	0.51	0.45	0.38	
110	0.73	0.72	0.72	0.72	0.73	0.73	0.74	0.75	0.75	0.73	0.71	0.67	0.64	0.59	0.53	0.49	0.43	0.38	
120	0.92	0.89	0.86	0.82	0.78	0.75	0.73	0.72	0.70	0.68	0.66	0.65	0.62	0.58	0.53	0.47	0.42	0.38	
130	1.66	1.60	1.50	1.39	1.26	1.11	0.97	0.82	0.71	0.66	0.64	0.62	0.60	0.58	0.53	0.46	0.41	0.38	
140	2.42	2.37	2.29	2.16	2.00	1.77	1.44	1.10	0.84	0.68	0.62	0.60	0.58	0.56	0.53	0.46	0.40	0.38	
150	2.75	2.71	2.66	2.59	2.46	2.13	1.68	1.28	0.93	0.71	0.59	0.57	0.56	0.55	0.53	0.46	0.39	0.38	
160	2.82	2.81	2.78	2.66	2.29	1.93	1.54	1.17	0.87	0.64	0.54	0.53	0.54	0.53	0.52	0.45	0.38	0.38	
170	2.44	2.62	2.45	2.17	1.83	1.48	1.14	0.83	0.60	0.46	0.42	0.46	0.51	0.51	0.50	0.44	0.37	0.38	
180	1.94	1.86	1.69	1.44	1.17	0.86	0.57	0.34	0.21	0.21	0.27	0.39	0.48	0.50	0.49	0.43	0.36	0.38	

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2025-02-06

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: