

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	4896.0 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	41.7V x 41.2H
	At 50% of Imax	21.7V x 21.1H
	At 90% of Imax	8.7V x 8.4H

Beam Flux	Total	1000.7 lumens per klm.
	To 10% of Imax	832.5 lumens per klm.
	To 50% of Imax	482.3 lumens per klm.
	To 90% of Imax	165.0 lumens per klm.

Upward LOR	0.1 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-02-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Astra D65-65mm-RGBW BLUE-20D-Rev2	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:20 DEG	DIA.:65MM	SERIAL No.:IES003425
MFR.:	SUR.:1	Shielding Angle:

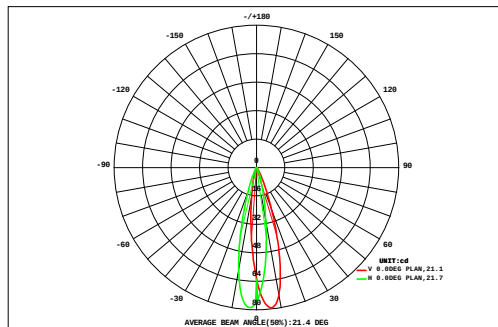

DATA OF LAMP		Eff:6.75lm/W	
MODEL		Imax(cd)	79.27
NOMINAL POWER(W)	2.4	AVAILABILITY(%)	82.6
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	13.38
NOMINAL FLUX(lm)	16.19	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	16.19
TEST VOLTAGE(V)	24	q @50%(H,V)	21,22DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				F t	F a																																													
	27	24	21	18	15	12	9	6	3	0	-3	-6	-9	-12	-15	-18	-21	-24	-27																																																
	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.11	0.00																																																
	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.17	0.00																																																
	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.25	0.09																																																
	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.04	0.04	0.04	0.03	0.03	0.02	0.01	0.38	0.28																																																
	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.04	0.05	0.06	0.06	0.07	0.06	0.05	0.04	0.03	0.02	0.57	0.49																																																
	0.00	0.01	0.01	0.01	0.02	0.03	0.04	0.06	0.07	0.09	0.10	0.10	0.09	0.07	0.05	0.04	0.02	0.82	0.76																																																
	0.00	0.01	0.01	0.01	0.02	0.04	0.06	0.08	0.11	0.13	0.14	0.13	0.12	0.10	0.07	0.05	0.03	1.12	1.07																																																
	0.00	0.01	0.01	0.02	0.03	0.04	0.07	0.11	0.14	0.17	0.17	0.17	0.15	0.12	0.09	0.06	0.04	1.41	1.37																																																
	0.00	0.01	0.01	0.02	0.03	0.04	0.07	0.11	0.16	0.19	0.20	0.20	0.18	0.14	0.10	0.07	0.04	1.60	1.56																																																
	0.00	0.01	0.01	0.02	0.03	0.05	0.08	0.12	0.18	0.21	0.21	0.21	0.19	0.15	0.10	0.07	0.04	1.70	1.66																																																
	0.00	0.01	0.01	0.02	0.04	0.06	0.10	0.14	0.19	0.21	0.21	0.20	0.17	0.13	0.09	0.06	0.04	1.70	1.66																																																
	0.00	0.01	0.01	0.02	0.04	0.06	0.10	0.13	0.17	0.19	0.19	0.17	0.14	0.11	0.08	0.05	0.03	1.53	1.49																																																
	0.00	0.01	0.01	0.02	0.03	0.05	0.08	0.11	0.14	0.15	0.15	0.14	0.11	0.09	0.06	0.04	0.02	1.24	1.19																																																
	0.00	0.01	0.01	0.02	0.03	0.04	0.06	0.08	0.10	0.11	0.11	0.10	0.08	0.06	0.04	0.03	0.02	0.91	0.85																																																
	0.00	0.01	0.01	0.01	0.02	0.03	0.04	0.05	0.07	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.61	0.54																																																
	0.00	0.00	0.01	0.01	0.01	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.01	0.01	0.39	0.29																																																
	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.24	0.08																																																
	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.15	0.00																																															
HORIZONTAL (DEG)																																																																			
-27				-24				-21				-18				-15				-12				-9				-6				3				6				9				12				15				18				21				24				27			
F t	0.06	0.09	0.14	0.23	0.36	0.56	0.83	1.17	1.52	1.73	1.78	1.70	1.49	1.19	0.86	0.58	0.37	0.23	15	---																																															
F a	0.00	0.00	0.00	0.05	0.25	0.47	0.76	1.11	1.47	1.68	1.73	1.66	1.44	1.13	0.79	0.50	0.26	0.09	---	13																																															

one-half-peak spread: U:10.6,D:11.2 , L:10.4,R:10.9


NEMA Beam Type: Type 3

H_(b) Range:-90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-02-06

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Astra D65-65mm-RGBW BLUE-20D-Rev2	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:20 DEG	DIA.:65MM	SERIAL No.:IES003425
MFR.:	SUR.:1	Shielding Angle:

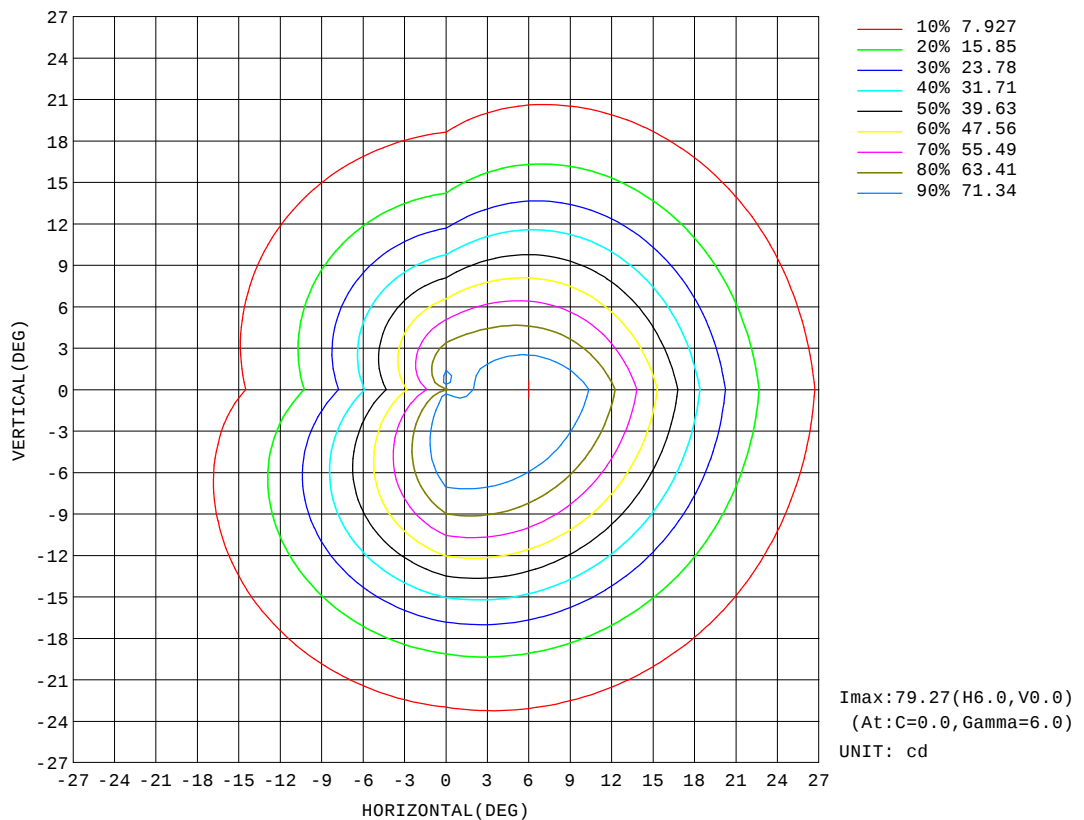


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-02-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Astra D65-65mm-RGBW BLUE-20D-Rev2	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:20 DEG	DIA.:65MM	SERIAL No.:IES003425
MFR.:	SUR.:1	Shielding Angle:

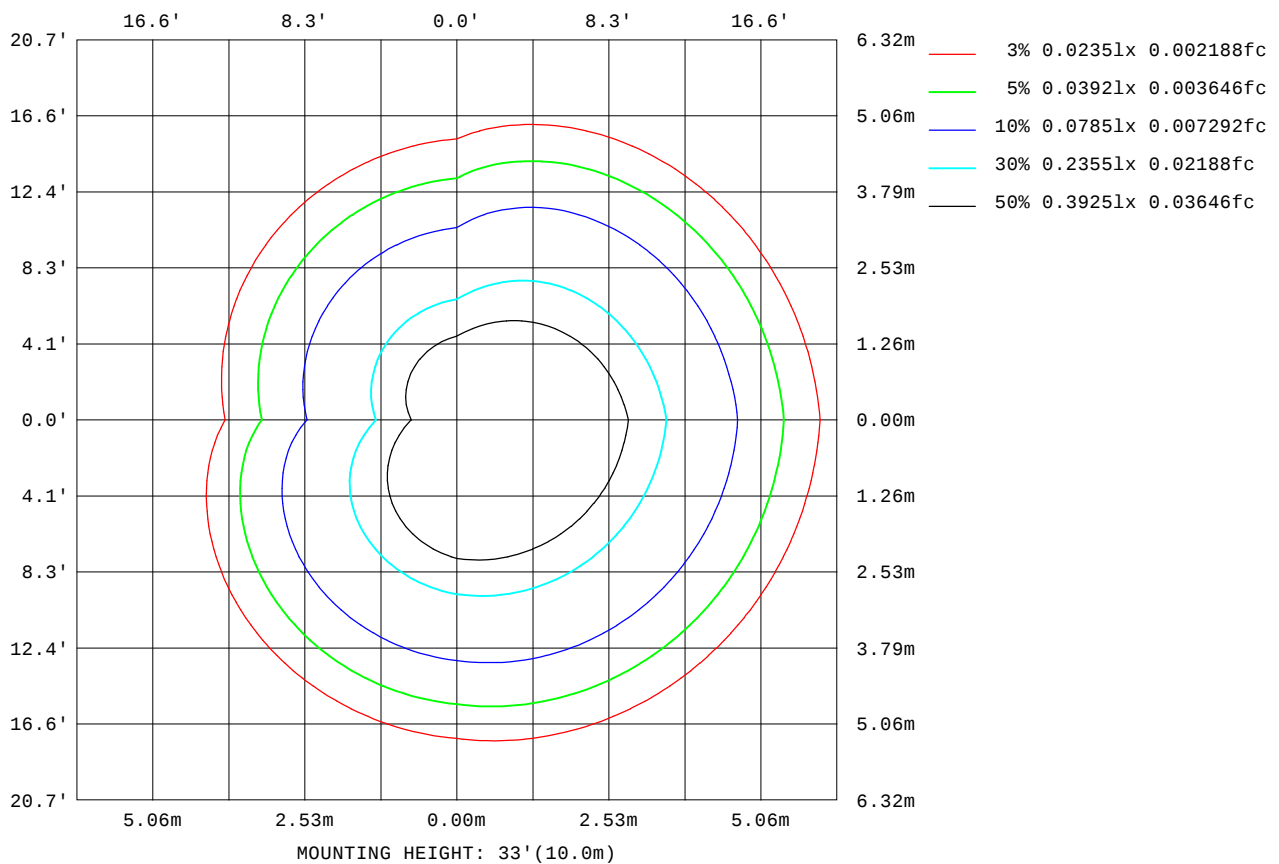

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-02-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

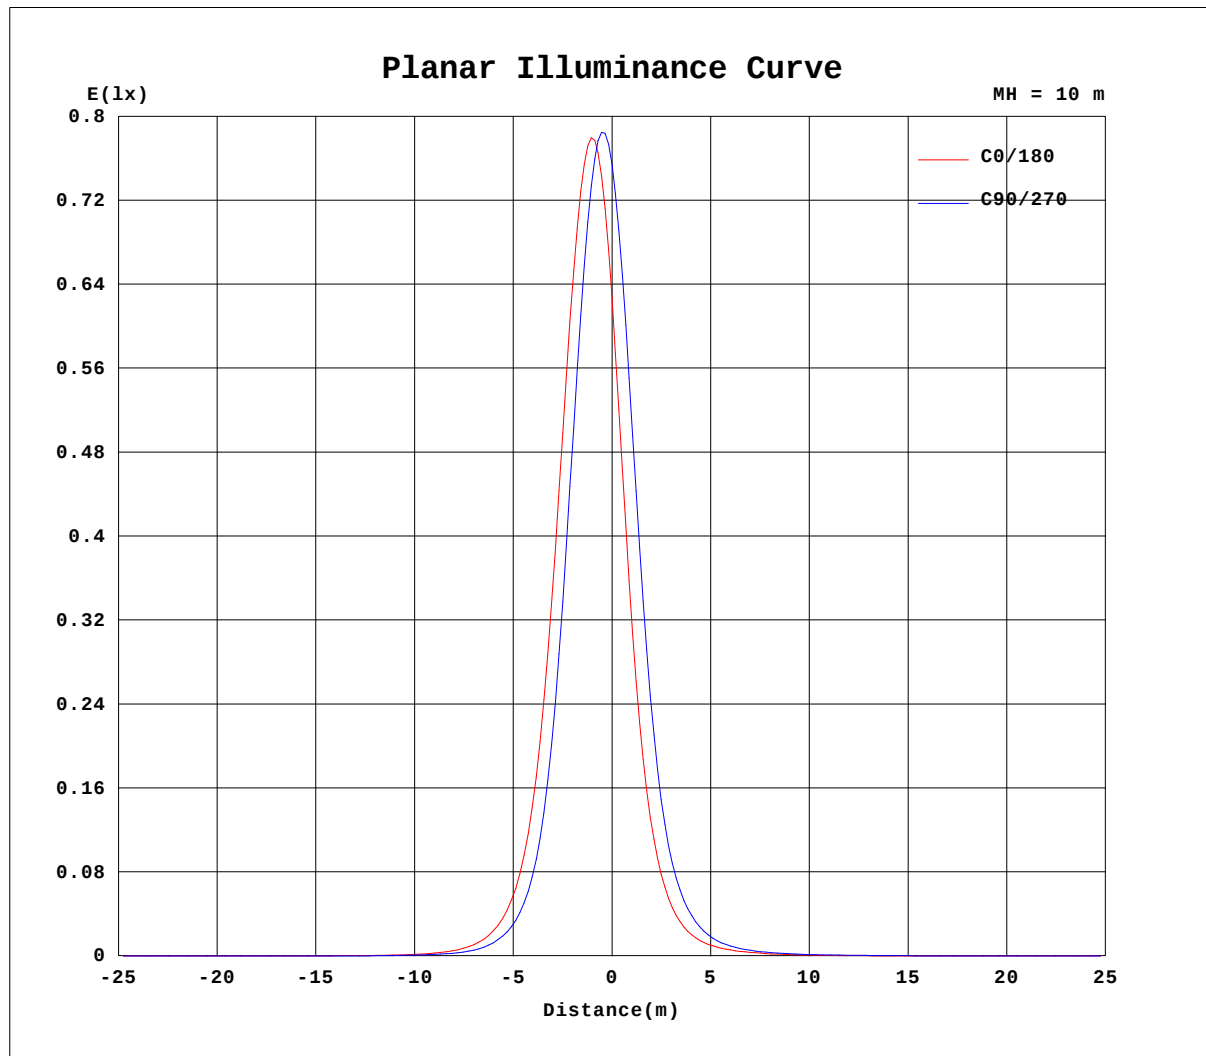


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-02-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Astra D65-65mm-RGBW BLUE-20D-Rev2	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:20 DEG	DIA.:65MM	SERIAL No.:IES003425
MFR.:	SUR.:1	Shielding Angle:

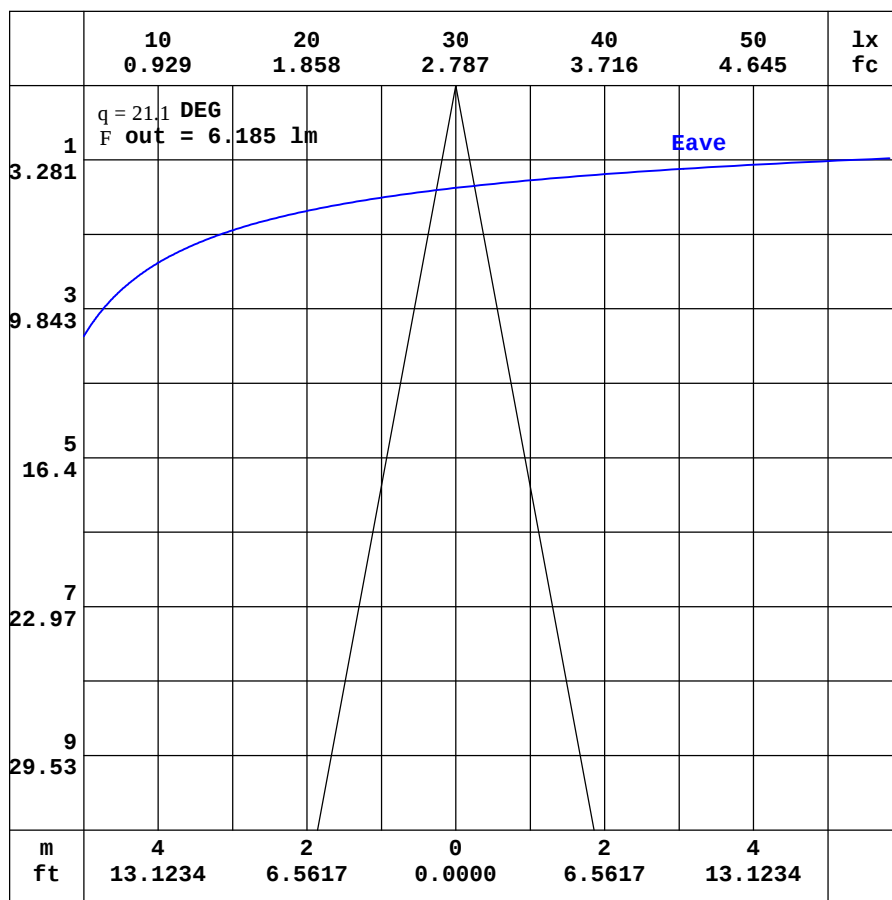

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-02-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Astra D65-65mm-RGBW BLUE-20D-Rev2	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:20 DEG	DIA.:65MM	SERIAL No.:IES003425
MFR.:	SUR.:1	Shielding Angle:

Table--1

UNIT: cd

H(DEC) V(DEC)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.01
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.05	0.07	0.08	0.10	0.11	0.13	0.13	0.13
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.07	0.10	0.14	0.19	0.24	0.30	0.36	0.42	0.48	0.50
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.08	0.13	0.19	0.28	0.39	0.56	0.83	1.19	1.66	2.12	2.40
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.07	0.13	0.20	0.30	0.46	0.73	1.26	2.27	4.09	7.04	10.8	13.5
-10	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.10	0.16	0.27	0.39	0.62	1.07	2.02	4.32	10.1	22.3	40.8	58.5
0	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.12	0.19	0.28	0.41	0.64	1.03	1.74	3.37	7.31	16.5	36.2	62.7
10	0.00	0.00	0.00	0.00	0.00	0.01	0.06	0.11	0.18	0.29	0.41	0.63	0.99	1.67	3.08	6.08	12.2	22.1	30.5
20	0.00	0.00	0.00	0.00	0.00	0.01	0.06	0.10	0.16	0.24	0.34	0.49	0.73	1.10	1.69	2.64	4.00	5.46	6.41
30	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.12	0.18	0.25	0.34	0.46	0.61	0.81	1.05	1.32	1.56	1.70
40	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.08	0.12	0.17	0.22	0.28	0.35	0.41	0.49	0.55	0.60	0.63
50	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.04	0.07	0.09	0.12	0.15	0.19	0.21	0.24	0.27	0.29	0.30
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.07	0.09	0.10	0.12	0.13	0.14	0.14
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.05	0.05
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.01	0.02	0.02
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.01	0.01	0.02	0.02
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H_b Range:-90 - 90DEGH_b Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2025-02-06

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Astra D65-65mm-RGBW BLUE-20D-Rev2	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:20 DEG	DIA.:65MM	SERIAL No.:IES003425
MFR.:	SUR.:1	Shielding Angle:

Table--2

UNIT: cd

H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.01	0.01	0.01	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.14	0.14	0.12	0.11	0.09	0.08	0.06	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	0.52	0.49	0.44	0.37	0.29	0.23	0.17	0.12	0.08	0.05	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-30	2.48	2.23	1.78	1.31	0.90	0.59	0.39	0.25	0.16	0.10	0.06	0.03	0.02	0.00	0.00	0.00	0.00	0.00	
-20	13.9	11.4	7.98	4.92	2.81	1.53	0.83	0.47	0.27	0.16	0.10	0.06	0.03	0.00	0.00	0.00	0.00	0.00	
-10	57.0	45.3	28.5	14.7	6.95	3.24	1.52	0.74	0.38	0.22	0.12	0.07	0.03	0.00	0.00	0.00	0.00	0.00	
0	78.6	72.6	49.2	24.6	10.6	4.51	1.97	0.91	0.45	0.25	0.14	0.08	0.04	0.00	0.00	0.00	0.00	0.00	
10	38.3	35.3	24.5	13.5	6.59	3.16	1.52	0.76	0.40	0.23	0.13	0.08	0.04	0.01	0.00	0.00	0.00	0.00	
20	8.55	8.39	6.53	4.34	2.65	1.52	0.87	0.51	0.31	0.19	0.12	0.07	0.03	0.01	0.00	0.00	0.00	0.00	
30	1.91	1.89	1.64	1.30	0.95	0.67	0.45	0.31	0.21	0.14	0.09	0.05	0.02	0.00	0.00	0.00	0.00	0.00	
40	0.64	0.62	0.56	0.48	0.39	0.32	0.24	0.19	0.14	0.10	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	
50	0.29	0.28	0.25	0.22	0.20	0.16	0.14	0.11	0.08	0.05	0.03	0.01	0.01	0.00	0.00	0.00	0.00	0.00	
60	0.14	0.13	0.12	0.11	0.09	0.08	0.06	0.05	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.05	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2025-02-06

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: