

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	5276.6 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	38.8V x 38.8H
	At 50% of Imax	20.3V x 19.9H
	At 90% of Imax	8.5V x 8.2H

Beam Flux	Total	1000.7 lumens per klm.
	To 10% of Imax	811.1 lumens per klm.
	To 50% of Imax	480.6 lumens per klm.
	To 90% of Imax	177.9 lumens per klm.

Upward LOR	0.9 %
Downward LOR	99.2 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-02-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Astra D65-65mm-RGBW RED-20D-Rev2	TYPE:RGBW-RED	WEIGHT:
SPEC.:20 DEG	DIA.:65MM	SERIAL No.:IES003423
MFR.:	SUR.:1	Shielding Angle:

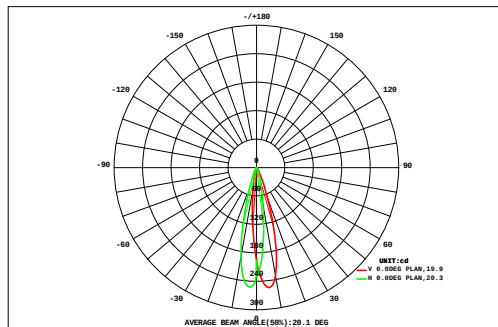

DATA OF LAMP		Eff:25.10lm/W	
MODEL		Imax(cd)	254.3
NOMINAL POWER(W)	1.92	AVAILABILITY(%)	80.6
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	38.83
NOMINAL FLUX(lm)	48.2	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	48.20
TEST VOLTAGE(V)	24	q @50%(H,V)	20,20DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	27	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.27	0.00		
	24	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.40	0.00	
	21	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.05	0.06	0.06	0.06	0.05	0.04	0.03	0.02	0.02	0.60	0.07	
	18	0.01	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.06	0.08	0.10	0.11	0.10	0.08	0.07	0.05	0.03	0.02	0.93	0.51	
	15	0.01	0.01	0.02	0.02	0.03	0.05	0.07	0.09	0.11	0.14	0.17	0.18	0.16	0.13	0.10	0.07	0.05	0.03	1.44	1.16	
	12	0.01	0.01	0.02	0.03	0.05	0.07	0.10	0.15	0.18	0.23	0.27	0.28	0.25	0.20	0.14	0.10	0.06	0.04	2.19	1.97	
	9	0.01	0.02	0.02	0.04	0.06	0.09	0.15	0.22	0.29	0.36	0.40	0.40	0.36	0.28	0.20	0.13	0.08	0.05	3.14	2.95	
		0.01	0.02	0.02	0.04	0.06	0.11	0.19	0.30	0.42	0.50	0.53	0.52	0.47	0.37	0.26	0.16	0.10	0.06	4.12	3.95	
		0.01	0.02	0.02	0.04	0.07	0.11	0.20	0.33	0.49	0.60	0.64	0.63	0.56	0.44	0.30	0.19	0.11	0.06	4.82	4.66	
		0.01	0.02	0.03	0.05	0.08	0.14	0.23	0.37	0.55	0.66	0.68	0.67	0.59	0.46	0.31	0.19	0.11	0.06	5.22	5.08	
		0.01	0.02	0.03	0.06	0.11	0.18	0.29	0.44	0.60	0.68	0.67	0.63	0.54	0.41	0.28	0.17	0.10	0.06	5.28	5.14	
	-9	0.01	0.02	0.04	0.06	0.11	0.19	0.30	0.43	0.56	0.62	0.60	0.55	0.45	0.34	0.23	0.14	0.09	0.05	4.78	4.62	
	-12	0.01	0.02	0.03	0.06	0.10	0.16	0.25	0.36	0.45	0.50	0.48	0.43	0.34	0.25	0.17	0.11	0.07	0.04	3.84	3.66	
	-15	0.01	0.02	0.03	0.05	0.08	0.12	0.18	0.25	0.32	0.35	0.33	0.29	0.24	0.18	0.12	0.08	0.05	0.03	2.75	2.54	
	-18	0.01	0.02	0.02	0.04	0.06	0.09	0.12	0.16	0.20	0.21	0.21	0.19	0.15	0.12	0.08	0.06	0.04	0.03	1.80	1.53	
-21	0.01	0.01	0.02	0.03	0.04	0.06	0.08	0.10	0.12	0.13	0.12	0.11	0.09	0.07	0.06	0.04	0.03	0.02	1.13	0.80		
-24	0.01	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.07	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.71	0.19		
-27	0.01	0.01	0.01	0.01	0.02	0.02	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.02	0.02	0.01	0.01	0.45	0.00		
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27		
F t	0.18	0.26	0.38	0.60	0.96	1.53	2.35	3.42	4.55	5.27	5.45	5.21	4.53	3.52	2.46	1.59	0.99	0.61	44	---		
F a	0.00	0.00	0.00	0.06	0.52	1.24	2.11	3.20	4.35	5.09	5.28	5.03	4.34	3.30	2.22	1.31	0.65	0.11	---	39		

one-half-peak spread: U:10.5,D:10.0 , L:9.7,R:10.3


NEMA Beam Type: Type 3

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-02-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Astra D65-65mm-RGBW RED-20D-Rev2	TYPE:RGBW-RED	WEIGHT:
SPEC.:20 DEG	DIA.:65MM	SERIAL No.:IES003423
MFR.:	SUR.:1	Shielding Angle:

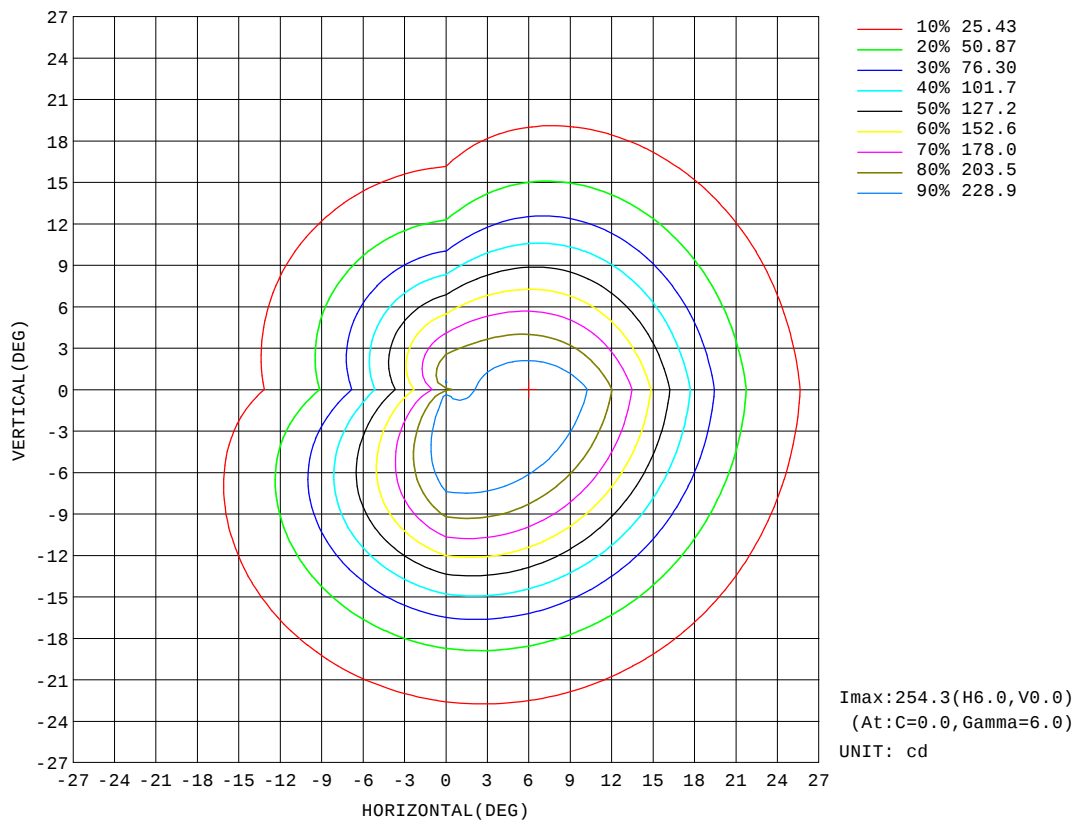


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-02-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Astra D65-65mm-RGBW RED-20D-Rev2	TYPE:RGBW-RED	WEIGHT:
SPEC.:20 DEG	DIA.:65MM	SERIAL No.:IES003423
MFR.:	SUR.:1	Shielding Angle:

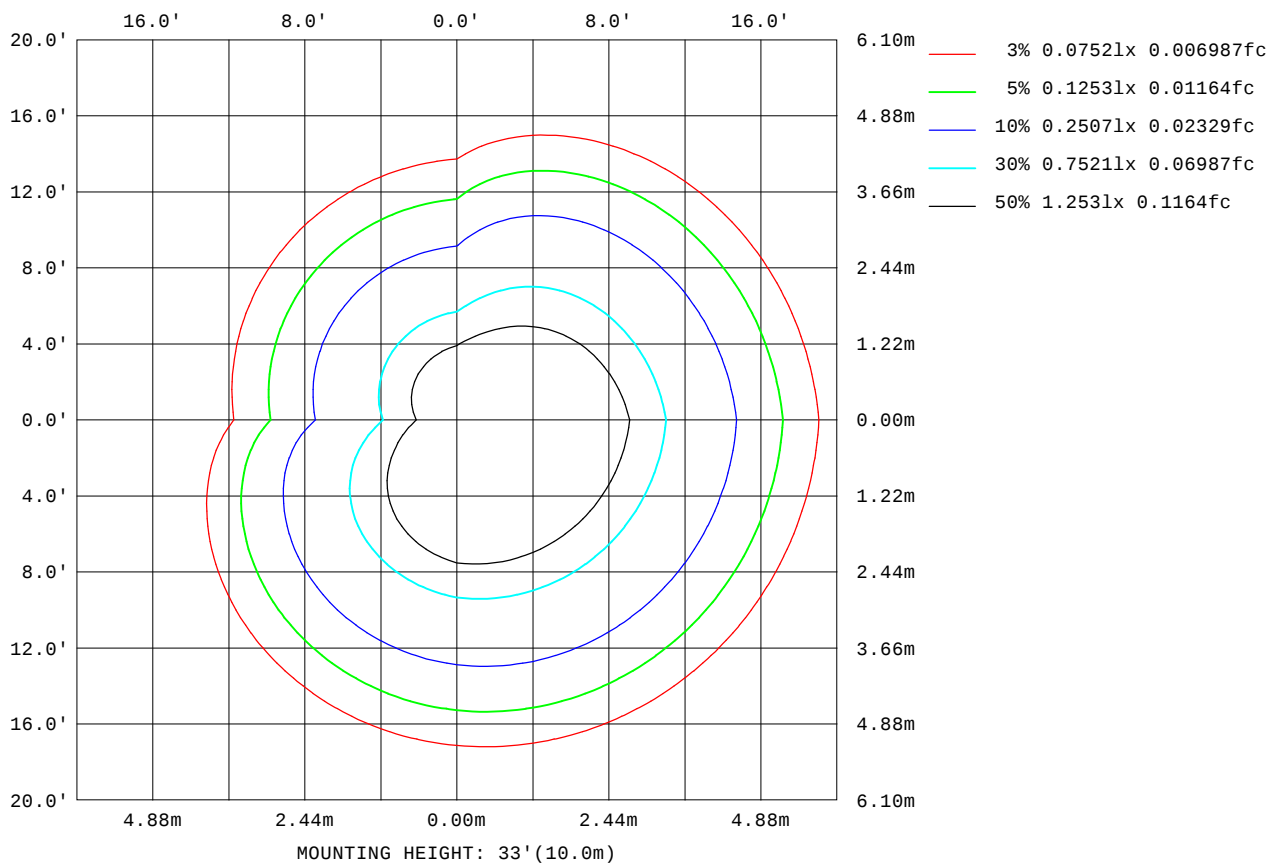

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-02-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

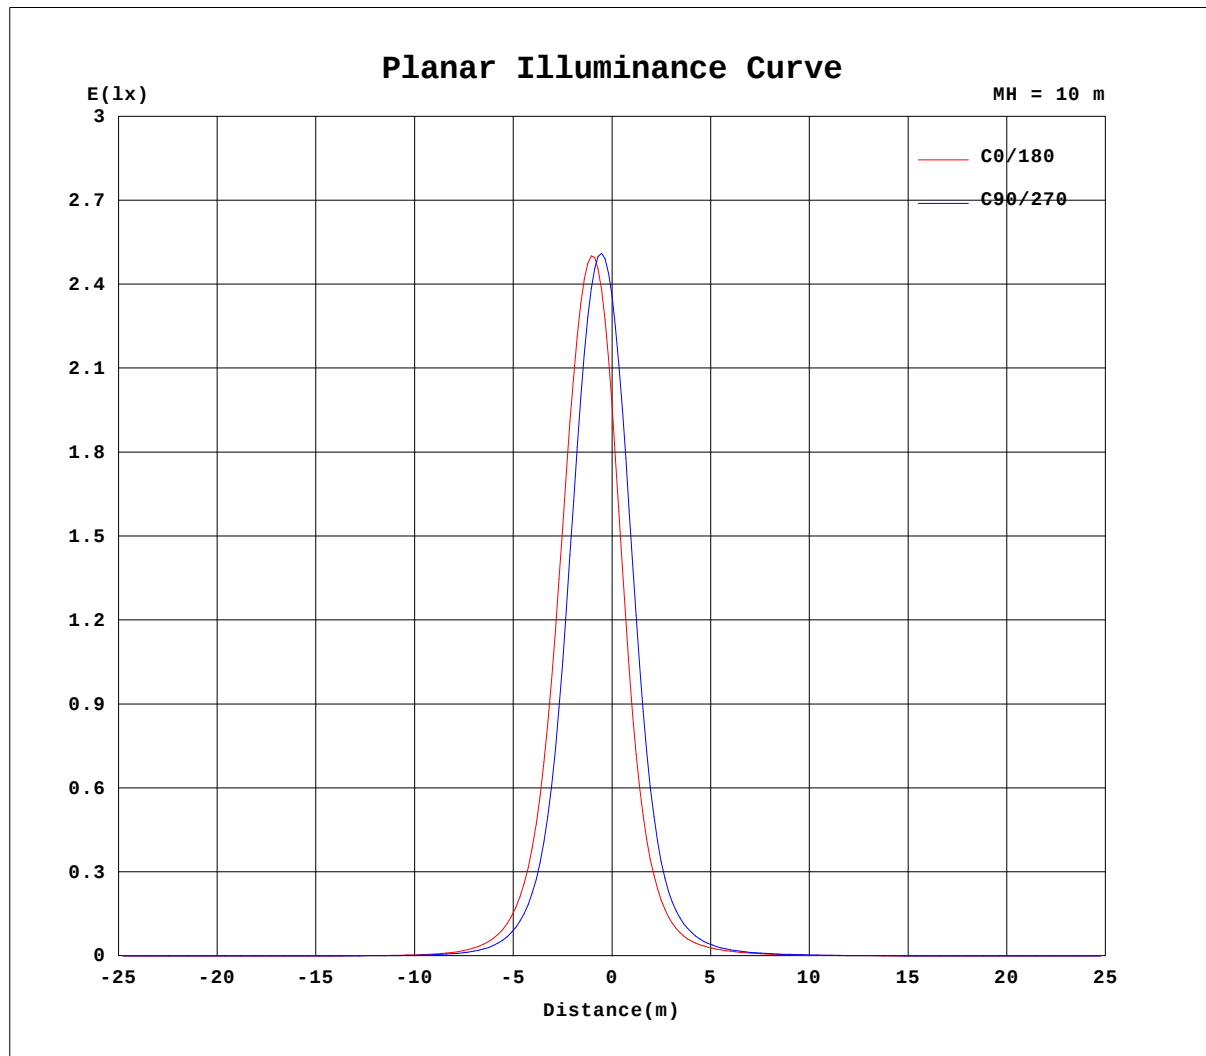


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-02-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Astra D65-65mm-RGBW RED-20D-Rev2	TYPE:RGBW-RED	WEIGHT:
SPEC.:20 DEG	DIA.:65MM	SERIAL No.:IES003423
MFR.:	SUR.:1	Shielding Angle:

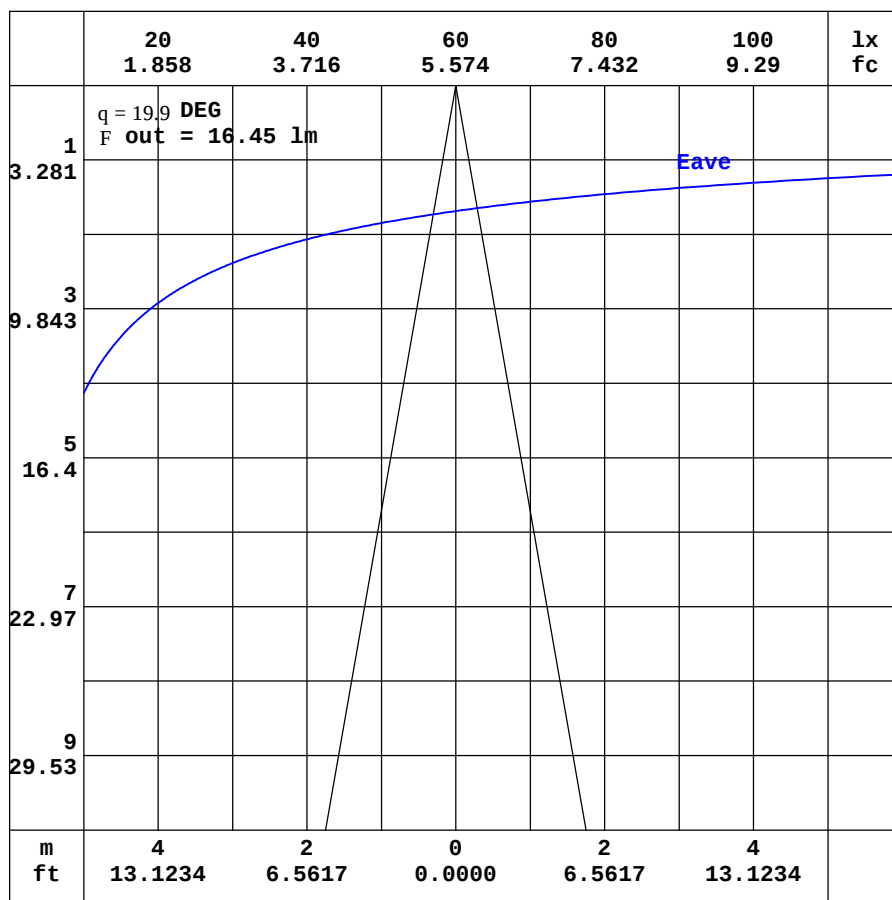

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-02-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Astra D65-65mm-RGBW RED-20D-Rev2	TYPE:RGBW-RED	WEIGHT:
SPEC.:20 DEG	DIA.:65MM	SERIAL No.:IES003423
MFR.:	SUR.:1	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.02	0.01	0.01	0.01	0.02	0.05	0.09	0.16	0.23	0.27	0.28	0.28	0.27	0.27	0.26	0.20	0.18	0.18	0.19
-170	0.02	0.01	0.01	0.01	0.02	0.04	0.08	0.14	0.20	0.24	0.25	0.24	0.24	0.24	0.24	0.22	0.21	0.20	0.21
-160	0.02	0.01	0.01	0.01	0.02	0.03	0.06	0.11	0.15	0.19	0.21	0.20	0.20	0.20	0.20	0.21	0.21	0.21	0.21
-150	0.02	0.01	0.01	0.01	0.02	0.02	0.04	0.07	0.11	0.14	0.16	0.17	0.15	0.15	0.14	0.13	0.13	0.12	0.10
-140	0.02	0.01	0.01	0.01	0.01	0.02	0.02	0.04	0.06	0.08	0.10	0.11	0.11	0.11	0.09	0.07	0.05	0.02	0.00
-130	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.05	0.06	0.06	0.05	0.04	0.03	0.02	0.00
-120	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00
-110	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00
-100	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00
-80	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00
-70	0.02	0.02	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.05	0.06	0.07	0.06	0.06	0.06	0.06	0.05
-60	0.02	0.03	0.04	0.05	0.05	0.05	0.06	0.08	0.10	0.11	0.14	0.15	0.17	0.18	0.19	0.20	0.20	0.20	0.19
-50	0.02	0.03	0.05	0.05	0.06	0.09	0.11	0.14	0.18	0.22	0.26	0.31	0.36	0.40	0.45	0.48	0.51	0.53	0.53
-40	0.02	0.04	0.05	0.06	0.08	0.12	0.17	0.22	0.28	0.37	0.45	0.55	0.68	0.83	1.00	1.18	1.37	1.51	1.58
-30	0.02	0.04	0.06	0.07	0.12	0.16	0.22	0.30	0.41	0.53	0.70	0.93	1.26	1.74	2.50	3.55	4.92	6.26	7.09
-20	0.02	0.04	0.06	0.07	0.13	0.20	0.27	0.39	0.53	0.72	1.00	1.44	2.22	3.73	6.70	12.1	20.7	31.9	40.4
-10	0.02	0.04	0.06	0.09	0.14	0.22	0.32	0.46	0.62	0.87	1.25	1.89	3.16	5.90	12.2	28.8	67.2	129	190
0	0.02	0.04	0.06	0.09	0.15	0.23	0.34	0.48	0.67	0.94	1.32	1.94	2.98	4.78	8.61	18.6	43.6	104	197
10	0.02	0.04	0.06	0.09	0.15	0.23	0.34	0.48	0.66	0.91	1.26	1.83	2.76	4.38	7.50	14.3	28.9	54.2	76.5
20	0.02	0.04	0.06	0.08	0.15	0.22	0.30	0.43	0.59	0.79	1.06	1.45	2.03	2.90	4.23	6.24	9.04	12.1	13.9
30	0.02	0.04	0.06	0.08	0.14	0.19	0.27	0.36	0.49	0.63	0.81	1.04	1.33	1.70	2.17	2.70	3.24	3.70	3.94
40	0.02	0.04	0.06	0.07	0.11	0.16	0.21	0.28	0.37	0.47	0.58	0.71	0.85	1.01	1.17	1.34	1.49	1.60	1.66
50	0.02	0.04	0.06	0.07	0.09	0.12	0.16	0.21	0.26	0.32	0.39	0.46	0.54	0.61	0.68	0.74	0.80	0.84	0.86
60	0.02	0.03	0.05	0.06	0.07	0.09	0.11	0.15	0.17	0.20	0.24	0.28	0.31	0.35	0.38	0.41	0.44	0.46	0.47
70	0.02	0.02	0.04	0.05	0.06	0.07	0.08	0.09	0.11	0.12	0.14	0.16	0.17	0.19	0.20	0.21	0.22	0.23	0.24
80	0.02	0.02	0.03	0.04	0.05	0.05	0.06	0.06	0.07	0.08	0.08	0.09	0.09	0.09	0.10	0.10	0.11	0.11	0.12
90	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.05	0.05	0.05	0.05	0.06	0.06	0.06	0.06	0.07
100	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.04
110	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00
120	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01
130	0.02	0.02	0.02	0.02	0.01	0.01	0.02	0.02	0.03	0.03	0.05	0.07	0.09	0.10	0.12	0.14	0.14	0.14	0.14
140	0.02	0.01	0.02	0.01	0.01	0.02	0.02	0.04	0.06	0.10	0.13	0.17	0.20	0.22	0.23	0.24	0.25	0.26	0.26
150	0.02	0.01	0.01	0.01	0.02	0.02	0.04	0.07	0.12	0.17	0.21	0.25	0.26	0.28	0.29	0.29	0.29	0.29	0.30
160	0.02	0.01	0.01	0.01	0.02	0.03	0.06	0.11	0.17	0.23	0.27	0.28	0.29	0.28	0.28	0.29	0.29	0.30	0.31
170	0.02	0.01	0.01	0.01	0.02	0.04	0.08	0.14	0.21	0.26	0.28	0.28	0.28	0.28	0.28	0.26	0.25	0.25	0.27
180	0.02	0.01	0.01	0.01	0.02	0.05	0.09	0.16	0.23	0.27	0.28	0.28	0.27	0.27	0.26	0.20	0.18	0.18	0.19

H_b Range: -90 - 90DEGH_b Interval: 0.5DEG

Test Speed: HIGH

Temperature: 25.3DEG

Operators:

Test Date: 2025-02-06

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Astra D65-65mm-RGBW RED-20D-Rev2	TYPE:RGBW-RED	WEIGHT:
SPEC.:20 DEG	DIA.:65MM	SERIAL No.:IES003423
MFR.:	SUR.:1	Shielding Angle:

Table--2

UNIT: cd

H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.18	0.16	0.14	0.10	0.06	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.19	0.17	0.16	0.11	0.07	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.18	0.15	0.12	0.07	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.09	0.07	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.06	0.06	0.06	0.05	0.05	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.20	0.20	0.19	0.18	0.16	0.15	0.14	0.12	0.10	0.08	0.06	0.04	0.03	0.02	0.00	0.00	0.00	0.00	
-50	0.53	0.52	0.49	0.45	0.39	0.34	0.29	0.23	0.19	0.15	0.12	0.09	0.06	0.04	0.02	0.00	0.00	0.00	
-40	1.60	1.51	1.34	1.14	0.92	0.73	0.57	0.44	0.34	0.25	0.19	0.14	0.09	0.06	0.03	0.00	0.00	0.00	
-30	7.19	6.37	5.04	3.69	2.52	1.68	1.13	0.78	0.54	0.38	0.27	0.19	0.13	0.08	0.04	0.01	0.00	0.00	
-20	40.6	32.8	22.5	13.6	7.65	4.19	2.27	1.31	0.81	0.53	0.35	0.23	0.16	0.10	0.05	0.02	0.00	0.00	
-10	183	140	83.1	40.8	18.9	8.65	4.08	1.98	1.10	0.66	0.42	0.27	0.18	0.13	0.06	0.02	0.00	0.00	
0	252	232	149	69.0	28.5	11.9	5.25	2.38	1.24	0.72	0.46	0.29	0.19	0.14	0.06	0.02	0.00	0.00	
10	108	102	68.6	36.1	17.3	8.25	4.02	2.00	1.13	0.69	0.45	0.29	0.19	0.13	0.06	0.02	0.00	0.00	
20	20.8	21.1	16.7	11.2	6.82	4.00	2.28	1.37	0.88	0.59	0.40	0.26	0.18	0.11	0.06	0.02	0.00	0.00	
30	4.62	4.69	4.19	3.36	2.48	1.75	1.24	0.89	0.64	0.46	0.33	0.23	0.16	0.10	0.05	0.01	0.00	0.00	
40	1.69	1.63	1.50	1.30	1.10	0.90	0.72	0.57	0.44	0.34	0.25	0.18	0.13	0.08	0.05	0.01	0.00	0.00	
50	0.84	0.80	0.75	0.68	0.60	0.52	0.44	0.36	0.29	0.23	0.19	0.13	0.09	0.06	0.03	0.01	0.00	0.00	
60	0.45	0.43	0.40	0.37	0.34	0.30	0.26	0.22	0.19	0.15	0.12	0.09	0.06	0.04	0.02	0.01	0.00	0.00	
70	0.23	0.22	0.21	0.19	0.18	0.16	0.14	0.13	0.11	0.09	0.07	0.05	0.03	0.02	0.01	0.01	0.00	0.00	
80	0.11	0.11	0.10	0.09	0.08	0.07	0.07	0.06	0.05	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.00	
90	0.06	0.06	0.06	0.05	0.05	0.05	0.04	0.04	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.00	
100	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	
120	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	0.00	
130	0.12	0.11	0.09	0.06	0.05	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.23	0.20	0.17	0.14	0.12	0.08	0.06	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.26	0.23	0.20	0.17	0.14	0.11	0.08	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.27	0.24	0.20	0.15	0.12	0.10	0.08	0.05	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.24	0.22	0.19	0.14	0.10	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.18	0.16	0.14	0.10	0.06	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2025-02-06

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: