

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1480.6 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	83.0V x 80.6H
	At 50% of Imax	42.7V x 42.4H
	At 90% of Imax	18.5V x 17.8H

Beam Flux	Total	999.9 lumens per klm.
	To 10% of Imax	849.6 lumens per klm.
	To 50% of Imax	464.6 lumens per klm.
	To 90% of Imax	112.7 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2025-02-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Astra D65-65mm-RGBW ALL-40D-Rev2	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:40 DEG	DIA.:65MM	SERIAL No.:IES003438
MFR.:	SUR.:1	Shielding Angle:

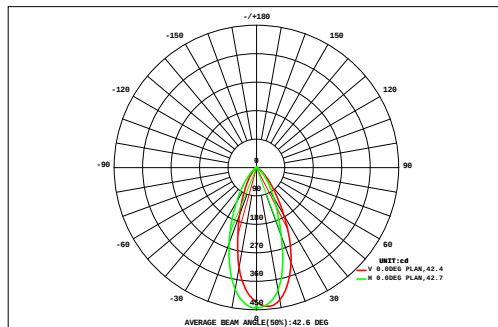

DATA OF LAMP		Eff:35.71lm/W	
MODEL		Imax(cd)	444.2
NOMINAL POWER(W)	8.4	AVAILABILITY(%)	85.0
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	254.9
NOMINAL FLUX(lm)	300	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	300.0
TEST VOLTAGE(V)	24	q @50%(H,V)	42,43DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	72	0.01	0.02	0.03	0.04	0.05	0.07	0.08	0.09	0.10	0.10	0.09	0.08	0.07	0.06	0.04	0.03	0.02	0.01	0.98	0.00	
	64	0.01	0.02	0.04	0.06	0.08	0.10	0.13	0.15	0.16	0.16	0.15	0.13	0.11	0.08	0.06	0.04	0.03	0.01	1.53	0.00	
	56	0.01	0.03	0.05	0.08	0.11	0.16	0.21	0.26	0.30	0.30	0.26	0.22	0.17	0.12	0.09	0.06	0.03	0.02	2.47	0.00	
	48	0.02	0.04	0.06	0.11	0.16	0.25	0.38	0.52	0.63	0.65	0.55	0.42	0.28	0.18	0.12	0.07	0.04	0.02	4.51	0.12	
	40	0.02	0.04	0.08	0.14	0.24	0.43	0.72	1.03	1.27	1.29	1.09	0.80	0.52	0.32	0.18	0.10	0.05	0.02	8.37	5.11	
	32	0.02	0.05	0.09	0.18	0.36	0.72	1.26	1.88	2.36	2.38	1.93	1.36	0.90	0.56	0.29	0.13	0.06	0.03	14.6	12.3	
	24	0.02	0.05	0.11	0.22	0.49	1.06	2.00	3.21	4.23	4.28	3.31	2.22	1.50	0.88	0.44	0.18	0.07	0.03	24.3	22.6	
		0.03	0.06	0.12	0.25	0.60	1.36	2.73	4.80	6.60	6.68	5.21	3.75	2.33	1.24	0.59	0.23	0.08	0.03	36.7	35.2	
		0.03	0.06	0.12	0.26	0.64	1.46	3.02	5.55	7.79	8.11	7.10	5.26	3.17	1.57	0.72	0.27	0.09	0.03	45.2	43.9	
		0.03	0.06	0.12	0.27	0.67	1.53	3.20	5.87	8.02	8.32	7.41	5.49	3.28	1.61	0.73	0.27	0.09	0.03	47.0	45.6	
		0.03	0.06	0.12	0.27	0.68	1.54	3.15	5.56	6.97	7.04	6.06	4.35	2.60	1.33	0.62	0.24	0.08	0.03	40.7	39.3	
	-24	0.02	0.05	0.10	0.24	0.58	1.28	2.43	3.82	4.78	4.89	4.13	2.89	1.80	0.99	0.47	0.18	0.07	0.03	28.8	27.2	
	-32	0.02	0.04	0.09	0.18	0.42	0.90	1.57	2.28	2.81	2.88	2.44	1.76	1.13	0.66	0.32	0.13	0.06	0.03	17.7	15.8	
	-40	0.02	0.04	0.07	0.13	0.26	0.52	0.87	1.24	1.50	1.53	1.32	0.99	0.65	0.38	0.19	0.09	0.05	0.02	9.86	7.14	
	-48	0.02	0.03	0.05	0.09	0.15	0.26	0.41	0.57	0.69	0.71	0.63	0.48	0.33	0.20	0.11	0.07	0.04	0.02	4.84	0.53	
-56	0.01	0.02	0.04	0.06	0.09	0.13	0.18	0.23	0.27	0.28	0.26	0.21	0.15	0.10	0.07	0.05	0.03	0.02	2.20	0.00		
-64	0.01	0.02	0.03	0.04	0.06	0.07	0.09	0.11	0.12	0.12	0.11	0.10	0.08	0.06	0.05	0.03	0.02	0.01	1.13	0.00		
-72	0.01	0.01	0.02	0.03	0.03	0.04	0.05	0.06	0.06	0.06	0.06	0.06	0.05	0.04	0.03	0.02	0.02	0.01	0.66	0.00		
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72		
F t	0.33	0.70	1.33	2.63	5.68	11.9	22.5	37.2	48.7	49.8	42.1	30.6	19.1	10.4	5.15	2.21	0.92	0.41	292	---		
F a	0.00	0.00	0.00	0.00	1.41	9.23	20.1	35.1	46.6	47.7	40.0	28.3	16.7	7.88	1.85	0.00	0.00	0.00	---	255		

one-half-peak spread: U:21.9,D:21.1 , L:20.8,R:21.9


NEMA Beam Type: Type 5

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2025-02-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Astra D65-65mm-RGBW ALL-40D-Rev2	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:40 DEG	DIA.:65MM	SERIAL No.:IES003438
MFR.:	SUR.:1	Shielding Angle:

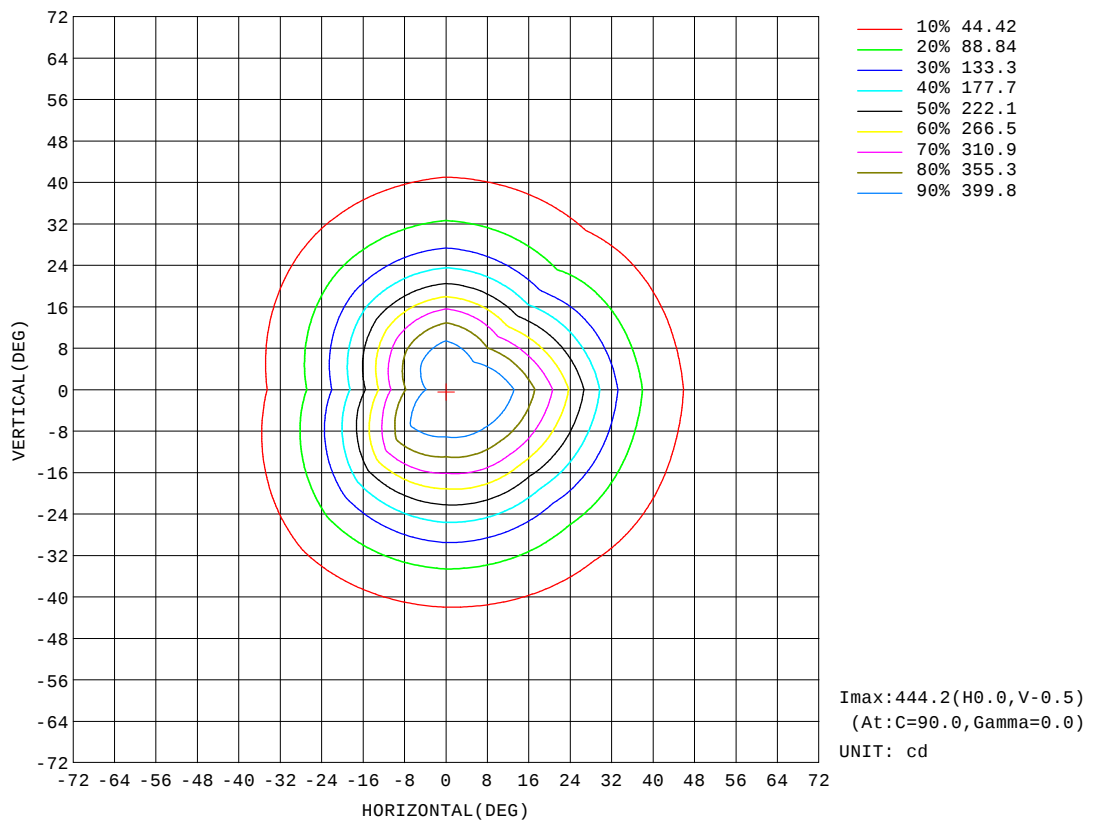


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2025-02-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Astra D65-65mm-RGBW ALL-40D-Rev2	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:40 DEG	DIA.:65MM	SERIAL No.:IES003438
MFR.:	SUR.:1	Shielding Angle:

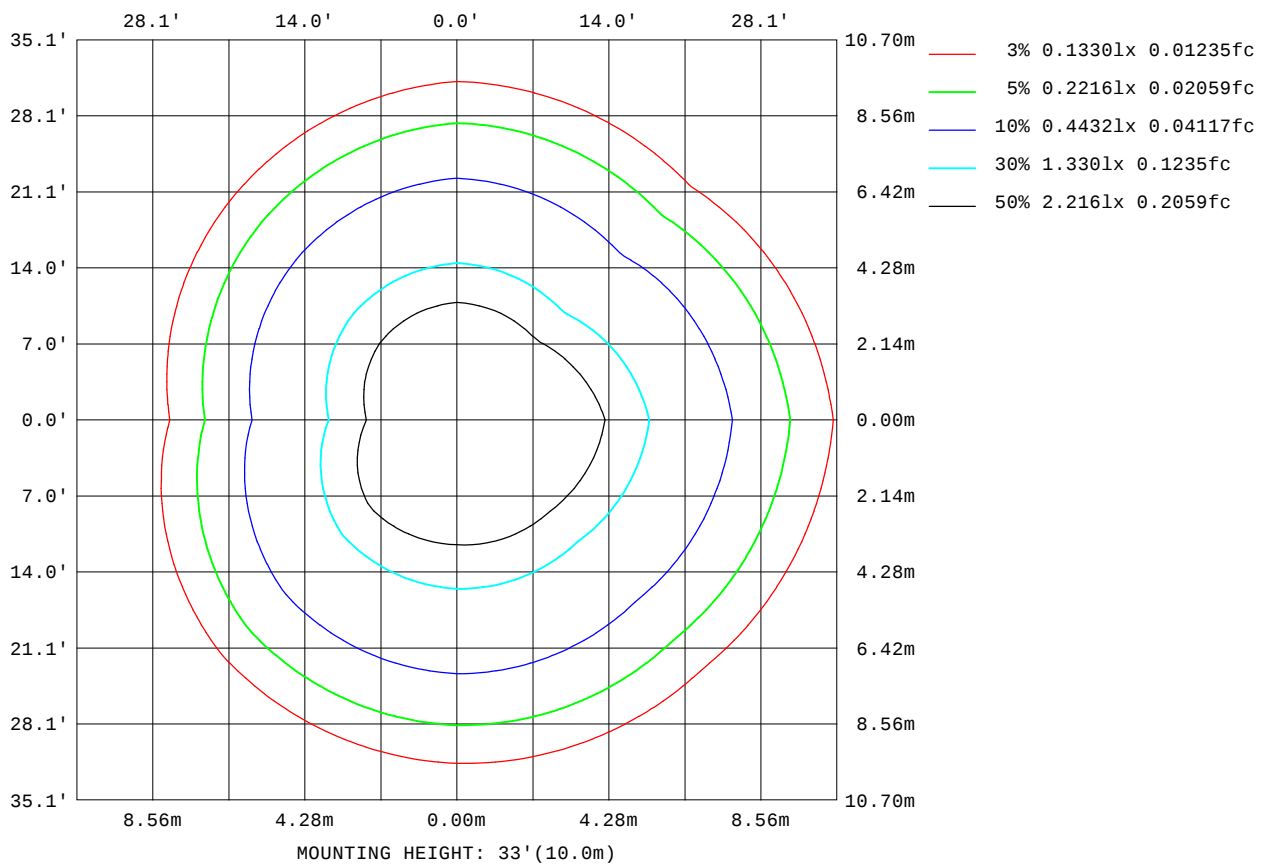

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2025-02-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

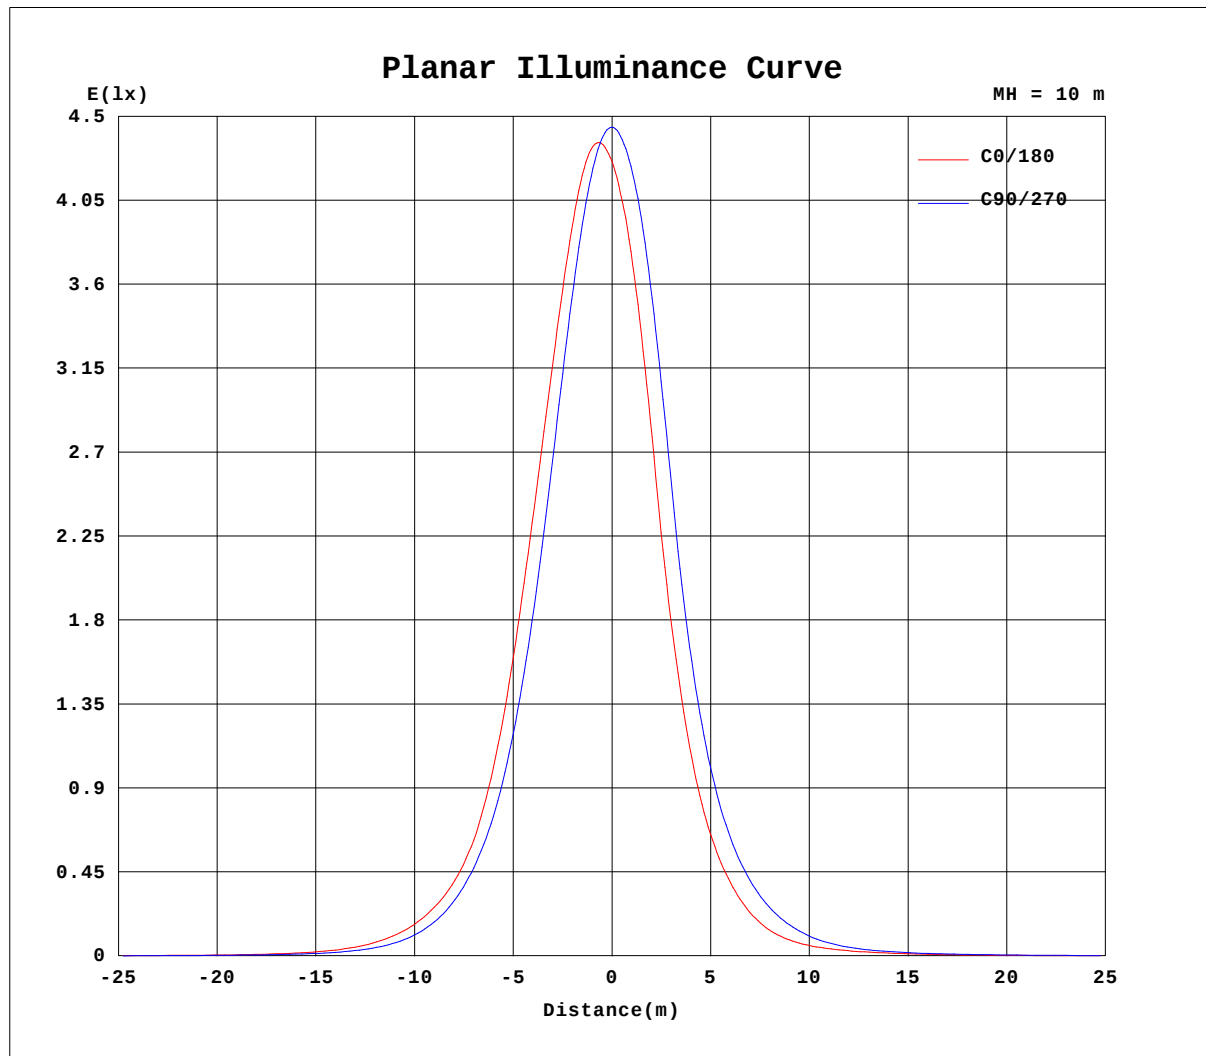


H(b) Range: -90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators:
Test Date: 2025-02-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Astra D65-65mm-RGBW ALL-40D-Rev2	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:40 DEG	DIA.:65MM	SERIAL No.:IES003438
MFR.:	SUR.:1	Shielding Angle:

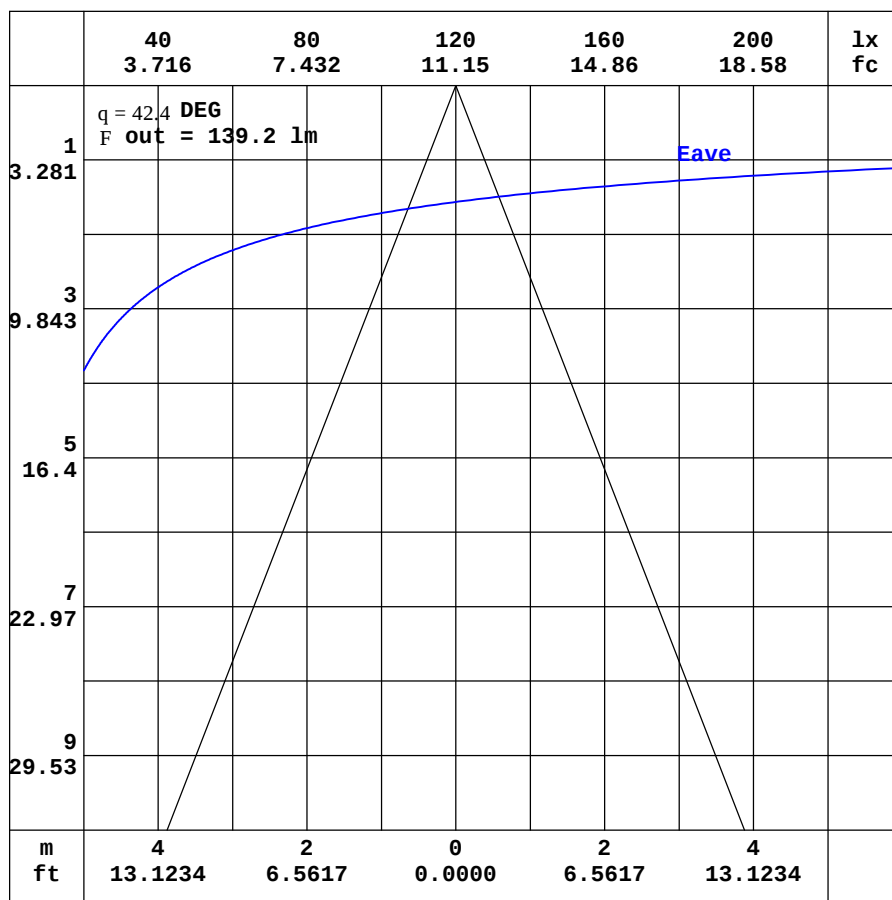

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:
Test Date:2025-02-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Astra D65-65mm-RGBW ALL-40D-Rev2	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:40 DEG	DIA.:65MM	SERIAL No.:IES003438
MFR.:	SUR.:1	Shielding Angle:

Table--1

UNIT: cd

H(°)\V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.05	1.01	1.01	1.04	1.11	1.24	1.41	1.60	1.81	2.01	2.15	2.27	2.27	2.26	2.20	2.14	2.07	2.00	2.08
-170	1.05	1.00	0.99	1.00	1.04	1.13	1.26	1.39	1.54	1.67	1.77	1.83	1.84	1.84	1.81	1.78	1.74	1.79	1.78
-160	1.05	0.99	0.96	0.95	0.97	1.02	1.09	1.17	1.24	1.31	1.35	1.37	1.37	1.34	1.32	1.40	1.48	1.52	1.54
-150	1.05	0.97	0.94	0.91	0.90	0.90	0.93	0.95	0.97	0.96	0.95	0.91	0.86	0.84	0.95	1.05	1.11	1.16	1.17
-140	1.05	0.96	0.91	0.87	0.84	0.81	0.79	0.77	0.74	0.69	0.62	0.53	0.52	0.57	0.63	0.69	0.73	0.76	0.77
-130	1.05	0.95	0.89	0.84	0.79	0.74	0.69	0.64	0.58	0.51	0.42	0.37	0.38	0.40	0.42	0.44	0.46	0.46	0.46
-120	1.05	0.94	0.88	0.81	0.75	0.69	0.63	0.56	0.49	0.41	0.34	0.34	0.34	0.35	0.35	0.35	0.35	0.36	0.36
-110	1.05	0.95	0.86	0.79	0.72	0.65	0.58	0.51	0.44	0.37	0.34	0.34	0.34	0.34	0.34	0.35	0.35	0.35	0.35
-100	1.05	0.96	0.86	0.77	0.70	0.62	0.55	0.47	0.40	0.32	0.32	0.32	0.32	0.32	0.32	0.31	0.31	0.31	0.31
-90	1.05	0.96	0.88	0.79	0.70	0.62	0.53	0.44	0.36	0.27	0.27	0.28	0.28	0.28	0.28	0.29	0.29	0.29	0.29
-80	1.05	0.98	0.90	0.83	0.77	0.72	0.68	0.66	0.64	0.63	0.69	0.76	0.82	0.87	0.92	0.96	0.99	1.01	1.02
-70	1.05	0.99	0.95	0.93	0.94	0.99	1.10	1.24	1.39	1.56	1.74	1.93	2.11	2.27	2.41	2.53	2.63	2.69	2.72
-60	1.05	1.01	1.01	1.05	1.20	1.45	1.76	2.10	2.44	2.81	3.17	3.60	4.02	4.47	4.88	5.26	5.58	5.81	5.92
-50	1.05	1.04	1.08	1.23	1.57	2.03	2.55	3.14	3.78	4.50	5.37	6.48	7.93	9.70	11.7	13.7	15.5	16.9	17.6
-40	1.05	1.07	1.14	1.45	1.98	2.65	3.44	4.35	5.49	7.04	9.44	13.1	18.5	25.2	32.7	40.3	47.0	51.8	54.3
-30	1.05	1.09	1.22	1.66	2.37	3.26	4.32	5.68	7.62	10.8	16.4	25.6	39.2	56.7	74.6	92.6	109	122	128
-20	1.05	1.11	1.29	1.85	2.71	3.78	5.11	6.93	9.80	14.9	24.1	39.5	62.3	92.5	132	176	215	243	254
-10	1.05	1.13	1.35	1.99	2.95	4.15	5.69	7.79	11.1	17.1	28.1	47.0	75.4	116	176	259	347	383	391
0	1.05	1.14	1.37	2.04	3.05	4.32	5.92	8.00	11.0	16.1	25.5	42.3	68.1	104	157	231	321	388	426
10	1.05	1.15	1.38	2.04	3.04	4.30	5.89	7.99	11.1	16.3	25.9	42.4	67.9	103	155	224	302	361	393
20	1.05	1.14	1.35	1.96	2.89	4.06	5.50	7.39	10.0	14.2	21.3	33.5	51.6	76.4	108	145	182	213	229
30	1.05	1.14	1.31	1.81	2.61	3.63	4.86	6.37	8.33	11.0	15.2	21.8	31.7	44.7	59.7	75.5	90.3	102	108
40	1.05	1.13	1.25	1.62	2.25	3.07	4.04	5.17	6.50	8.15	10.2	13.1	16.9	22.0	28.2	34.8	40.7	45.6	48.6
50	1.05	1.12	1.21	1.43	1.86	2.45	3.15	3.94	4.82	5.79	6.88	8.09	9.48	11.0	12.7	14.5	16.2	17.5	18.4
60	1.05	1.10	1.17	1.28	1.51	1.85	2.30	2.80	3.34	3.92	4.51	5.11	5.72	6.31	6.87	7.37	7.82	8.17	8.40
70	1.05	1.09	1.14	1.20	1.27	1.40	1.60	1.84	2.11	2.41	2.71	3.01	3.29	3.56	3.81	4.03	4.21	4.36	4.46
80	1.05	1.08	1.10	1.13	1.16	1.20	1.24	1.29	1.35	1.42	1.49	1.58	1.66	1.75	1.83	1.91	1.97	2.02	2.07
90	1.05	1.06	1.07	1.08	1.10	1.11	1.12	1.13	1.14	1.15	1.15	1.15	1.15	1.15	1.15	1.15	1.15	1.15	1.14
100	1.05	1.05	1.05	1.05	1.05	1.05	1.06	1.05	1.06	1.06	1.05	1.04	1.03	1.03	1.02	1.02	1.01	1.01	1.00
110	1.05	1.04	1.03	1.03	1.03	1.03	1.03	1.03	1.03	1.02	1.02	1.02	1.01	1.01	1.01	1.01	1.01	1.01	1.00
120	1.05	1.02	1.03	1.02	1.02	1.03	1.03	1.03	1.03	1.04	1.06	1.10	1.13	1.16	1.19	1.20	1.21	1.22	1.22
130	1.05	1.02	1.02	1.02	1.03	1.04	1.05	1.08	1.13	1.19	1.25	1.32	1.39	1.45	1.50	1.55	1.58	1.59	1.59
140	1.05	1.02	1.02	1.02	1.04	1.06	1.12	1.19	1.29	1.40	1.52	1.61	1.71	1.80	1.89	1.95	1.99	2.02	2.02
150	1.05	1.02	1.02	1.02	1.05	1.11	1.21	1.34	1.48	1.62	1.76	1.89	2.01	2.10	2.18	2.24	2.28	2.31	2.33
160	1.05	1.02	1.02	1.03	1.08	1.17	1.30	1.46	1.63	1.81	1.97	2.11	2.20	2.26	2.29	2.32	2.33	2.35	2.37
170	1.05	1.02	1.01	1.04	1.10	1.21	1.37	1.55	1.75	1.94	2.10	2.22	2.26	2.28	2.27	2.27	2.25	2.25	2.29
180	1.05	1.01	1.01	1.04	1.11	1.24	1.41	1.60	1.81	2.01	2.15	2.27	2.27	2.26	2.20	2.14	2.07	2.00	2.09

H_b Range:-90 - 90DEG

H_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:

Test Date:2025-02-06

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Astra D65-65mm-RGBW ALL-40D-Rev2	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:40 DEG	DIA.:65MM	SERIAL No.:IES003438
MFR.:	SUR.:1	Shielding Angle:

Table--2

UNIT: cd

H(°)\V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	1.72	1.59	1.44	1.28	1.09	0.89	0.71	0.55	0.42	0.35	0.34	0.34	0.31	0.31	0.30	0.29	0.29	0.44
-170	1.70	1.59	1.45	1.29	1.10	0.91	0.71	0.56	0.44	0.36	0.35	0.34	0.32	0.31	0.30	0.29	0.29	0.44
-160	1.48	1.40	1.29	1.16	0.98	0.81	0.65	0.51	0.42	0.37	0.35	0.34	0.32	0.31	0.30	0.29	0.29	0.44
-150	1.13	1.07	0.98	0.88	0.77	0.64	0.54	0.44	0.39	0.36	0.35	0.32	0.32	0.31	0.30	0.29	0.29	0.44
-140	0.75	0.71	0.66	0.60	0.54	0.48	0.43	0.39	0.36	0.35	0.33	0.33	0.32	0.31	0.30	0.29	0.29	0.44
-130	0.46	0.45	0.43	0.41	0.39	0.37	0.36	0.36	0.35	0.34	0.33	0.33	0.32	0.31	0.30	0.29	0.30	0.44
-120	0.36	0.35	0.35	0.35	0.35	0.35	0.35	0.34	0.34	0.34	0.33	0.32	0.32	0.31	0.30	0.29	0.32	0.44
-110	0.35	0.35	0.35	0.34	0.34	0.34	0.34	0.34	0.34	0.33	0.33	0.32	0.31	0.30	0.29	0.30	0.35	0.44
-100	0.31	0.32	0.32	0.32	0.32	0.32	0.32	0.32	0.32	0.31	0.30	0.30	0.30	0.30	0.31	0.34	0.38	0.44
-90	0.29	0.29	0.29	0.29	0.29	0.29	0.29	0.29	0.29	0.31	0.32	0.34	0.36	0.37	0.39	0.41	0.43	0.44
-80	1.04	1.05	1.05	1.04	1.03	1.00	0.96	0.92	0.87	0.84	0.79	0.73	0.69	0.64	0.58	0.53	0.48	0.44
-70	2.74	2.73	2.69	2.62	2.52	2.41	2.26	2.10	1.92	1.75	1.57	1.39	1.21	1.03	0.85	0.70	0.55	0.44
-60	5.94	5.82	5.60	5.28	4.93	4.54	4.13	3.72	3.32	2.94	2.57	2.19	1.83	1.49	1.17	0.87	0.63	0.44
-50	17.6	16.9	15.5	13.6	11.5	9.49	7.73	6.43	5.41	4.54	3.78	3.11	2.52	1.98	1.50	1.07	0.71	0.44
-40	53.4	50.0	44.6	38.1	31.1	24.2	18.1	13.2	9.58	7.08	5.41	4.18	3.25	2.47	1.81	1.25	0.78	0.44
-30	125	116	101	83.4	65.7	51.3	38.8	27.5	18.1	11.6	7.72	5.44	4.00	2.95	2.10	1.41	0.84	0.44
-20	251	230	195	156	123	91.5	66.2	46.4	30.3	18.2	10.8	6.86	4.70	3.35	2.35	1.54	0.89	0.44
-10	387	359	315	258	197	140	95.1	64.4	41.8	24.9	13.9	8.14	5.26	3.64	2.51	1.63	0.92	0.44
0	440	425	381	319	247	174	113	74.9	48.4	28.6	15.6	8.85	5.55	3.78	2.58	1.66	0.93	0.44
10	366	314	275	228	177	129	89.5	61.5	40.3	24.3	13.8	8.28	5.39	3.73	2.56	1.65	0.93	0.44
20	216	187	151	117	98.7	78.2	58.9	42.2	28.1	17.6	11.0	7.17	4.93	3.50	2.44	1.59	0.91	0.44
30	103	92.5	79.3	65.3	51.5	41.6	32.6	23.9	16.9	11.7	8.19	5.88	4.32	3.16	2.23	1.49	0.88	0.44
40	46.7	42.9	37.9	31.8	25.3	19.4	15.3	12.5	9.95	7.79	6.07	4.70	3.62	2.72	1.97	1.34	0.84	0.44
50	17.8	16.6	15.1	13.3	11.6	10.0	8.62	7.49	6.45	5.42	4.48	3.64	2.90	2.24	1.67	1.18	0.78	0.44
60	8.24	7.95	7.55	7.09	6.58	6.03	5.45	4.88	4.31	3.74	3.19	2.67	2.19	1.75	1.36	1.01	0.71	0.44
70	4.40	4.29	4.14	3.96	3.75	3.51	3.25	2.97	2.69	2.39	2.10	1.82	1.56	1.31	1.08	0.86	0.64	0.44
80	2.05	2.01	1.97	1.91	1.85	1.77	1.70	1.62	1.54	1.43	1.33	1.21	1.10	0.98	0.85	0.71	0.57	0.44
90	1.14	1.14	1.14	1.14	1.14	1.14	1.14	1.14	1.14	1.06	0.99	0.91	0.83	0.75	0.68	0.60	0.52	0.44
100	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.01	1.01	0.94	0.86	0.79	0.71	0.63	0.57	0.52	0.47	0.44
110	1.00	1.00	0.99	0.99	0.98	0.98	0.97	0.97	0.94	0.87	0.80	0.73	0.66	0.60	0.53	0.46	0.44	0.44
120	1.21	1.19	1.17	1.14	1.10	1.07	1.02	0.99	0.91	0.83	0.76	0.69	0.62	0.56	0.50	0.43	0.40	0.44
130	1.58	1.55	1.51	1.45	1.39	1.31	1.22	1.10	0.95	0.83	0.73	0.66	0.59	0.53	0.47	0.41	0.37	0.44
140	2.01	1.97	1.92	1.84	1.74	1.63	1.45	1.21	1.02	0.85	0.72	0.62	0.55	0.49	0.44	0.39	0.35	0.44
150	2.32	2.28	2.24	2.16	2.06	1.81	1.50	1.23	1.01	0.83	0.69	0.58	0.50	0.46	0.40	0.37	0.33	0.44
160	2.37	2.37	2.36	2.27	1.98	1.69	1.40	1.13	0.90	0.73	0.62	0.53	0.45	0.41	0.38	0.34	0.32	0.44
170	2.31	2.33	2.09	1.86	1.61	1.37	1.12	0.89	0.71	0.56	0.49	0.45	0.38	0.36	0.34	0.32	0.30	0.44
180	1.72	1.59	1.44	1.28	1.09	0.89	0.71	0.55	0.42	0.35	0.34	0.34	0.31	0.31	0.30	0.29	0.29	0.44

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:

Test Date:2025-02-06

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: