

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2359.7 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	61.2V x 62.4H
	At 50% of Imax	35.2V x 36.0H
	At 90% of Imax	13.6V x 14.1H

Beam Flux	Total	999.9 lumens per klm.
	To 10% of Imax	862.0 lumens per klm.
	To 50% of Imax	513.9 lumens per klm.
	To 90% of Imax	99.0 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Astra D88-88mm-3000K-35D-REV2	TYPE:3000K	WEIGHT:
SPEC.:35 DEG	DIA.:88MM	SERIAL No.:IES001442
MFR.:	SUR.:	Shielding Angle:

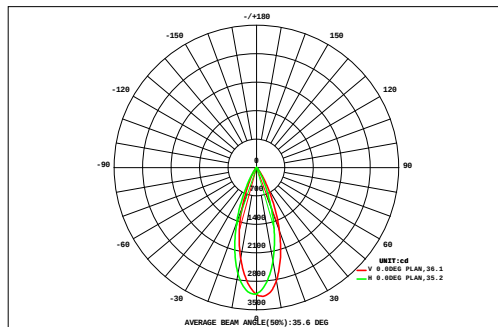

DATA OF LAMP		Eff:73.72lm/W	
MODEL		Imax(cd)	3167
NOMINAL POWER(W)	18.2	AVAILABILITY(%)	86.2
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1156
NOMINAL FLUX(lm)	1342	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1342
TEST VOLTAGE(V)	220	q @50%(H,V)	36,35DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.09	0.11	0.15	0.19	0.24	0.29	0.34	0.38	0.40	0.41	0.40	0.37	0.33	0.27	0.22	0.18	0.14	0.10	4.62	0.00
45	0.11	0.14	0.20	0.27	0.36	0.47	0.58	0.69	0.75	0.77	0.75	0.66	0.55	0.43	0.32	0.24	0.18	0.13	7.58	0.00
40	0.13	0.19	0.27	0.40	0.58	0.83	1.10	1.36	1.52	1.58	1.52	1.30	1.01	0.73	0.50	0.34	0.23	0.16	13.7	0.00
35	0.16	0.24	0.38	0.61	0.98	1.49	2.10	2.68	3.06	3.20	3.05	2.57	1.93	1.31	0.82	0.49	0.30	0.19	25.6	12.9
30	0.19	0.31	0.53	0.94	1.62	2.60	3.85	5.12	5.98	6.26	5.87	4.81	3.49	2.28	1.35	0.74	0.40	0.22	46.5	38.9
25	0.22	0.38	0.72	1.38	2.50	4.26	6.62	8.91	10.3	10.7	10.1	8.24	5.83	3.66	2.09	1.09	0.53	0.25	77.9	71.7
20	0.25	0.47	0.94	1.88	3.56	6.36	9.86	13.0	15.0	15.6	14.7	12.1	8.69	5.44	3.04	1.53	0.69	0.30	113	108
15	0.28	0.54	1.12	2.33	4.61	8.32	12.6	16.5	19.2	20.0	18.7	15.5	11.5	7.36	4.03	1.97	0.86	0.34	146	141
10	0.30	0.58	1.23	2.61	5.29	9.53	14.2	18.7	22.0	23.0	21.6	18.2	13.6	8.85	4.81	2.30	0.97	0.36	168	164
5	0.29	0.57	1.24	2.67	5.46	9.85	14.7	19.3	22.6	23.7	22.4	18.8	14.1	9.20	4.99	2.36	0.99	0.36	174	169
0	0.25	0.51	1.13	2.48	5.06	9.19	13.8	17.9	20.8	21.7	20.4	17.3	12.9	8.33	4.48	2.14	0.90	0.33	160	155
-5	0.21	0.42	0.93	2.02	4.09	7.44	11.3	14.7	17.3	18.0	16.8	14.1	10.6	6.72	3.61	1.75	0.74	0.28	131	126
-10	0.16	0.31	0.67	1.45	2.89	5.17	8.07	10.8	12.8	13.4	12.3	10.2	7.45	4.68	2.62	1.28	0.55	0.22	95.1	89.9
-15	0.12	0.21	0.44	0.94	1.83	3.16	4.89	6.79	8.21	8.59	7.85	6.32	4.51	2.89	1.67	0.84	0.37	0.16	59.8	53.6
-20	0.08	0.13	0.27	0.55	1.04	1.76	2.65	3.61	4.34	4.55	4.16	3.36	2.45	1.62	0.95	0.49	0.23	0.11	32.4	23.8
-25	0.05	0.09	0.16	0.30	0.54	0.88	1.31	1.75	2.07	2.17	2.00	1.65	1.22	0.81	0.49	0.27	0.14	0.08	16.0	2.74
-30	0.03	0.06	0.10	0.16	0.26	0.40	0.59	0.77	0.90	0.94	0.87	0.73	0.55	0.37	0.24	0.14	0.09	0.05	7.24	0.00
-35	0.02	0.04	0.06	0.09	0.13	0.18	0.25	0.31	0.36	0.38	0.35	0.30	0.23	0.17	0.12	0.08	0.05	0.03	3.16	0.00
-40	0.02	0.04	0.06	0.09	0.13	0.18	0.25	0.31	0.36	0.38	0.35	0.30	0.23	0.17	0.12	0.08	0.05	0.03	3.16	0.00
-45	0.02	0.04	0.06	0.09	0.13	0.18	0.25	0.31	0.36	0.38	0.35	0.30	0.23	0.17	0.12	0.08	0.05	0.03	3.16	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
F t	2.93	5.31	10.5	21.3	41.0	72.2	109	143	168	175	164	137	101	65.1	36.3	18.2	8.35	3.66	1281	---
F a	0.00	0.00	0.00	9.55	33.2	65.4	103	138	162	169	158	131	94.7	58.3	28.5	6.50	0.00	0.00	---	1156

one-half-peak spread: U:17.7,D:16.3 , L:18.7,R:17.6


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-08-05

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Astra D88-88mm-3000K-35D-REV2	TYPE:3000K	WEIGHT:
SPEC.:35 DEG	DIA.:88MM	SERIAL No.:IES001442
MFR.:	SUR.:	Shielding Angle:

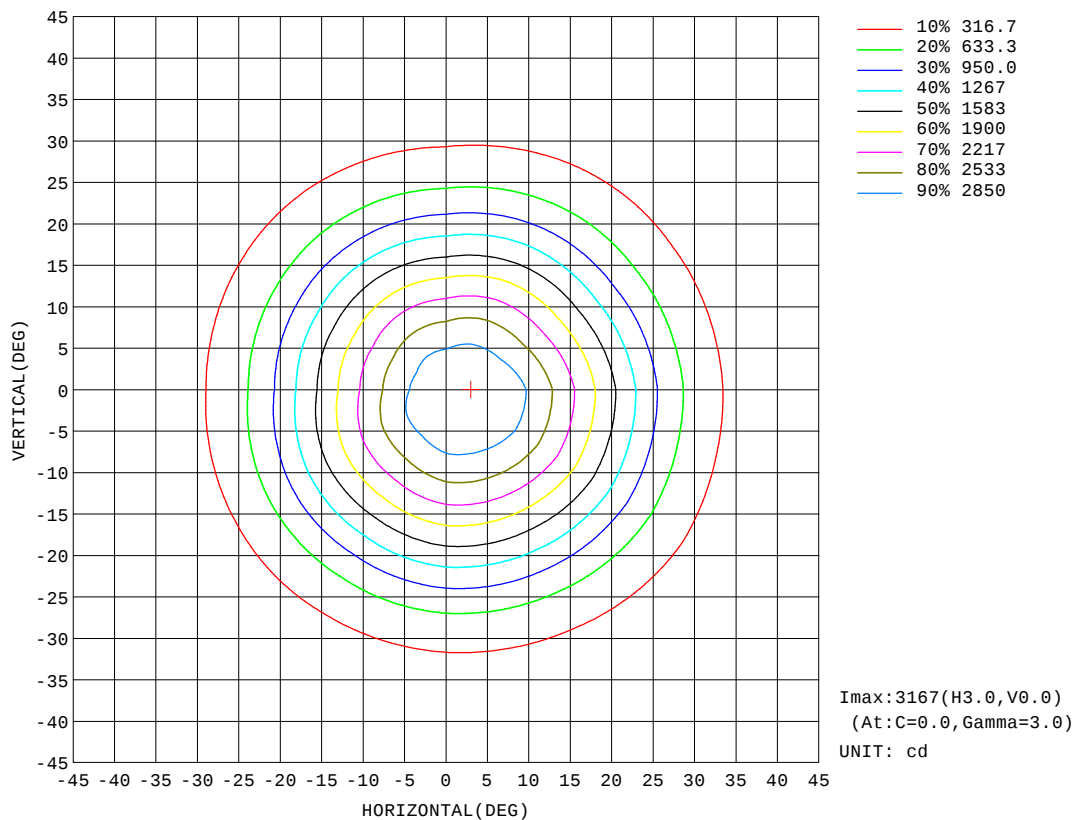


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-05

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Astra D88-88mm-3000K-35D-REV2	TYPE:3000K	WEIGHT:
SPEC.:35 DEG	DIA.:88MM	SERIAL No.:IES001442
MFR.:	SUR.:	Shielding Angle:

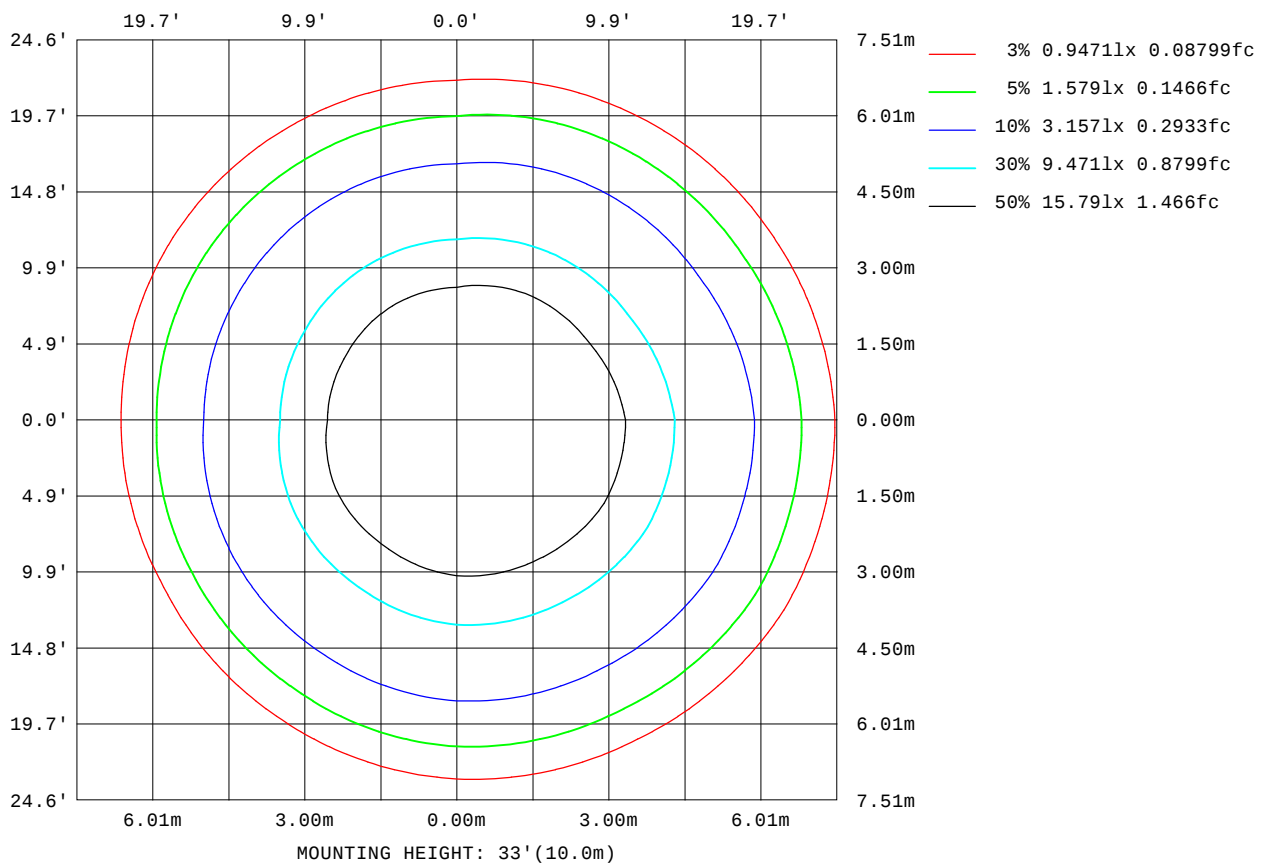

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-05

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

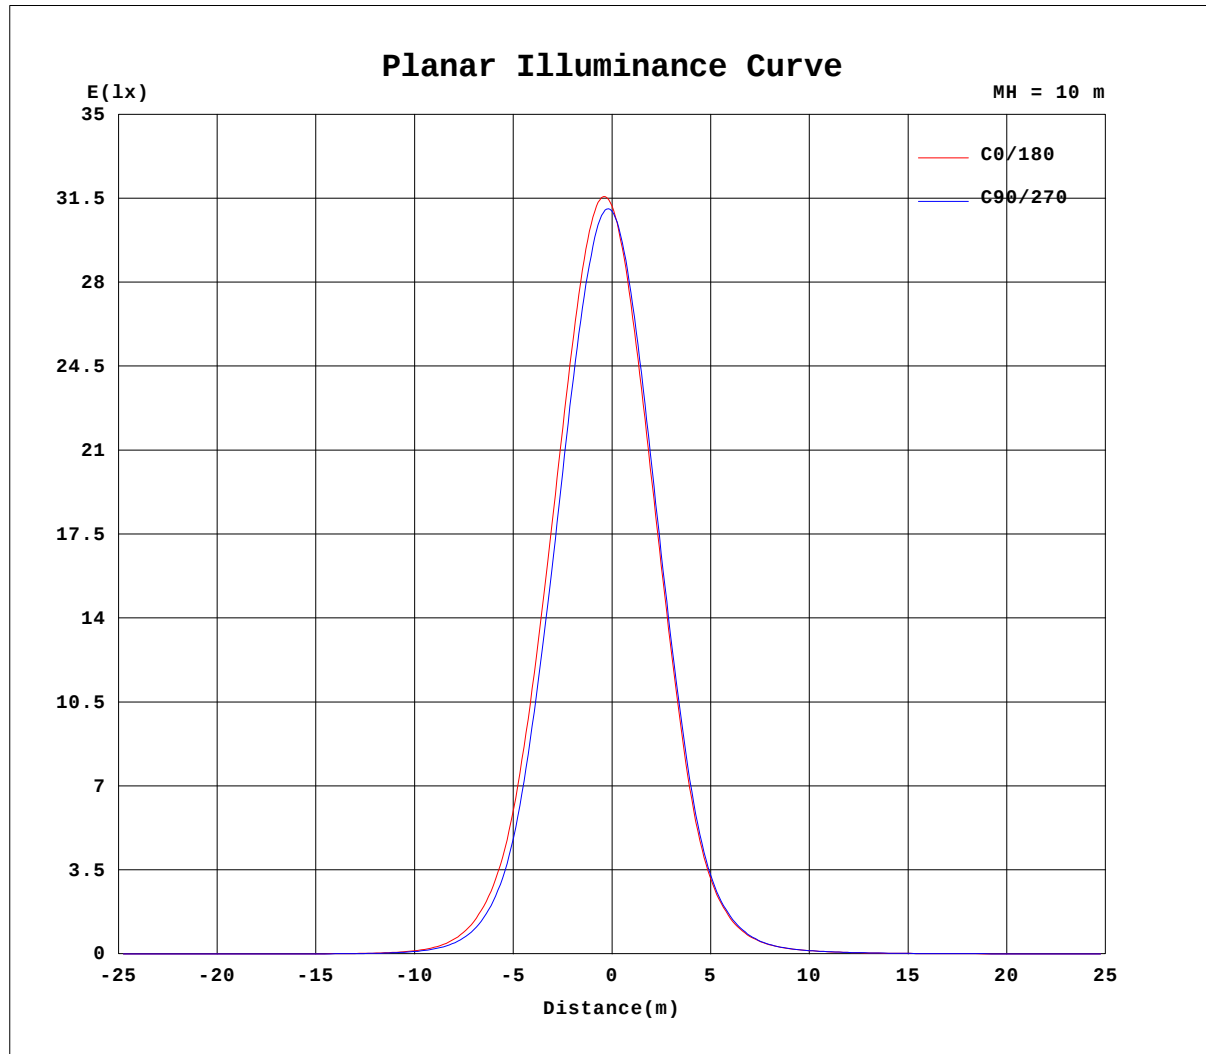


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-05

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Astra D88-88mm-3000K-35D-REV2	TYPE:3000K	WEIGHT:
SPEC.:35 DEG	DIA.:88MM	SERIAL No.:IES001442
MFR.:	SUR.:	Shielding Angle:

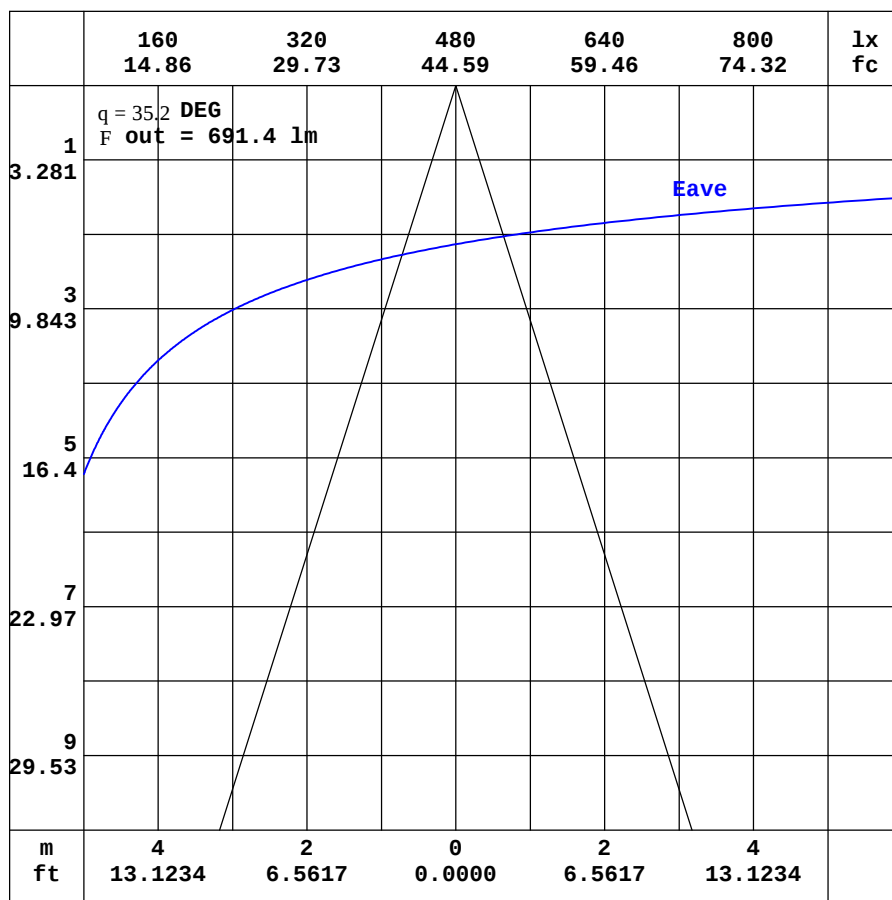

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Astra D88-88mm-3000K-35D-REV2	TYPE:3000K	WEIGHT:
SPEC.:35 DEG	DIA.:88MM	SERIAL No.:IES001442
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	4.41	4.01	3.74	3.70	3.89	4.42	5.32	6.52	7.89	9.24	10.4	11.2	11.7	11.7	11.5	11.1	10.5	10.2	10.4
-170	4.41	3.97	3.66	3.57	3.63	3.97	4.55	5.31	6.15	6.97	7.67	8.17	8.47	8.54	8.42	8.40	8.77	9.00	9.24
-160	4.41	3.93	3.58	3.43	3.38	3.48	3.72	4.03	4.34	4.61	4.80	4.89	5.02	5.98	6.83	7.52	8.00	8.23	8.30
-150	4.41	3.90	3.52	3.31	3.17	3.08	3.02	2.97	2.83	2.59	2.40	2.96	3.62	4.31	4.98	5.54	5.93	6.14	6.16
-140	4.41	3.88	3.50	3.21	3.02	2.80	2.57	2.26	1.88	1.72	1.83	2.05	2.34	2.68	3.02	3.32	3.54	3.65	3.66
-130	4.41	3.87	3.47	3.15	2.91	2.67	2.37	2.01	1.78	1.70	1.68	1.69	1.70	1.76	1.84	1.94	2.00	2.04	2.04
-120	4.41	3.88	3.47	3.14	2.84	2.59	2.33	2.09	2.02	1.95	1.89	1.82	1.78	1.75	1.72	1.70	1.69	1.70	1.70
-110	4.41	3.91	3.48	3.13	2.83	2.54	2.28	2.21	2.20	2.19	2.19	2.17	2.15	2.13	2.10	2.08	2.07	2.06	2.06
-100	4.41	3.95	3.52	3.13	2.78	2.46	2.16	2.16	2.19	2.20	2.21	2.22	2.22	2.24	2.25	2.26	2.27	2.28	2.29
-90	4.41	3.99	3.57	3.15	2.73	2.31	1.88	1.88	1.88	1.87	1.87	1.87	1.86	1.86	1.86	1.86	1.86	1.86	1.86
-80	4.41	4.06	3.66	3.22	2.78	2.30	1.82	1.82	1.83	1.84	1.85	1.85	1.86	1.87	1.88	1.88	1.89	1.89	1.90
-70	4.41	4.14	3.81	3.48	3.13	2.65	2.03	1.81	1.82	1.83	1.85	1.88	1.93	1.95	1.99	2.02	2.04	2.06	2.07
-60	4.41	4.23	4.05	3.92	3.59	3.09	2.42	1.82	1.90	2.01	2.15	2.30	2.46	2.62	2.77	2.92	3.10	3.25	3.35
-50	4.41	4.35	4.41	4.40	4.19	3.79	3.24	2.48	2.25	2.53	2.88	3.41	4.50	5.97	7.81	9.71	11.4	12.8	13.6
-40	4.41	4.47	4.78	4.94	4.95	4.85	4.62	4.17	3.42	3.69	5.78	9.21	14.0	20.8	30.3	43.0	56.8	68.9	75.9
-30	4.41	4.60	5.16	5.54	5.89	6.24	6.56	6.75	7.23	9.11	13.1	23.5	43.6	79.5	135	209	292	366	409
-20	4.41	4.74	5.51	6.19	6.95	7.87	8.94	10.3	13.4	19.5	31.1	58.5	120	238	432	701	1016	1294	1446
-10	4.41	4.87	5.84	6.81	8.01	9.56	11.5	14.4	20.4	31.5	54.4	109	228	467	889	1447	1967	2381	2648
0	4.41	4.98	6.12	7.36	8.95	11.1	13.9	18.1	26.2	40.7	69.0	133	275	542	1033	1654	2265	2796	3118
10	4.41	4.96	6.09	7.29	8.83	10.9	13.5	17.3	24.5	37.4	61.1	113	222	423	778	1273	1766	2160	2329
20	4.41	4.92	5.99	7.11	8.50	10.3	12.6	15.7	20.7	29.8	44.6	72.1	127	220	362	564	802	1000	1087
30	4.41	4.86	5.84	6.81	8.00	9.48	11.3	13.6	16.6	21.5	29.4	41.0	58.7	86.6	127	176	227	269	286
40	4.41	4.80	5.59	6.45	7.39	8.52	9.87	11.5	13.4	15.7	18.8	23.6	29.6	36.8	44.9	53.7	61.8	67.9	70.1
50	4.41	4.74	5.30	6.03	6.75	7.54	8.46	9.49	10.7	12.0	13.5	15.0	16.7	18.7	21.0	23.2	25.1	26.3	26.8
60	4.41	4.66	4.97	5.53	6.09	6.62	7.18	7.80	8.47	9.18	9.92	10.7	11.4	12.2	12.8	13.3	13.8	14.1	14.2
70	4.41	4.59	4.77	4.99	5.37	5.75	6.09	6.42	6.76	7.10	7.44	7.77	8.09	8.38	8.63	8.84	9.00	9.11	9.17
80	4.41	4.51	4.60	4.69	4.79	4.88	4.97	5.14	5.31	5.47	5.63	5.78	5.91	6.01	6.10	6.17	6.23	6.28	6.31
90	4.41	4.42	4.43	4.45	4.46	4.47	4.48	4.49	4.49	4.50	4.50	4.50	4.51	4.53	4.55	4.57	4.59	4.61	4.62
100	4.41	4.35	4.29	4.23	4.17	4.12	4.08	4.03	3.99	3.95	3.92	3.89	3.86	3.85	3.85	3.85	3.86	3.87	3.88
110	4.41	4.28	4.15	4.04	3.94	3.87	3.80	3.76	3.72	3.71	3.70	3.70	3.71	3.73	3.74	3.74	3.74	3.74	3.73
120	4.41	4.21	4.03	3.89	3.78	3.73	3.71	3.70	3.75	3.86	4.00	4.17	4.34	4.50	4.64	4.76	4.85	4.88	4.87
130	4.41	4.15	3.93	3.78	3.72	3.71	3.76	3.95	4.25	4.62	5.05	5.50	5.94	6.33	6.71	6.99	7.20	7.31	7.31
140	4.41	4.10	3.87	3.72	3.71	3.78	4.06	4.52	5.13	5.84	6.60	7.36	8.07	8.70	9.23	9.63	9.91	10.1	10.1
150	4.41	4.07	3.80	3.71	3.73	3.97	4.48	5.22	6.14	7.18	8.23	9.18	10.0	10.7	11.2	11.6	11.9	12.0	12.0
160	4.41	4.04	3.77	3.70	3.79	4.19	4.89	5.87	7.05	8.29	9.46	10.5	11.2	11.8	12.1	12.3	12.3	12.4	12.4
170	4.41	4.02	3.75	3.71	3.85	4.36	5.21	6.34	7.66	8.99	10.2	11.1	11.7	11.9	11.9	11.7	11.4	11.2	11.4
180	4.41	4.01	3.74	3.70	3.89	4.42	5.32	6.52	7.89	9.24	10.4	11.2	11.7	11.7	11.5	11.1	10.5	10.2	10.4

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Astra D88-88mm-3000K-35D-REV2	TYPE:3000K	WEIGHT:
SPEC.:35 DEG	DIA.:88MM	SERIAL No.:IES001442
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	9.26	8.75	8.24	7.48	6.47	5.33	4.17	3.16	2.37	1.89	1.74	1.80	1.98	2.18	2.23	2.16	1.94	1.67
-170	8.72	8.44	7.96	7.21	6.22	5.11	4.00	3.03	2.30	1.86	1.74	1.80	1.99	2.19	2.23	2.16	1.94	1.67
-160	8.05	7.62	7.01	6.20	5.24	4.26	3.35	2.59	2.05	1.77	1.75	1.84	2.03	2.20	2.23	2.15	1.92	1.67
-150	5.99	5.63	5.11	4.47	3.77	3.10	2.51	2.07	1.82	1.74	1.76	1.92	2.10	2.22	2.22	2.14	1.91	1.67
-140	3.56	3.35	3.07	2.73	2.39	2.09	1.87	1.75	1.73	1.74	1.88	2.04	2.18	2.23	2.21	2.09	1.88	1.67
-130	2.01	1.94	1.86	1.77	1.72	1.71	1.72	1.74	1.83	1.93	2.06	2.17	2.22	2.22	2.18	2.04	1.84	1.67
-120	1.71	1.71	1.74	1.77	1.83	1.88	1.94	2.02	2.09	2.16	2.20	2.23	2.22	2.20	2.10	1.96	1.79	1.67
-110	2.08	2.10	2.13	2.16	2.19	2.22	2.24	2.23	2.23	2.23	2.23	2.22	2.16	2.08	1.98	1.87	1.74	1.67
-100	2.28	2.26	2.25	2.23	2.22	2.19	2.18	2.15	2.13	2.10	2.06	2.01	1.95	1.89	1.82	1.76	1.69	1.67
-90	1.85	1.85	1.85	1.84	1.84	1.83	1.82	1.80	1.79	1.77	1.76	1.74	1.73	1.72	1.70	1.69	1.68	1.67
-80	1.89	1.89	1.89	1.88	1.88	1.87	1.86	1.85	1.83	1.82	1.81	1.80	1.79	1.78	1.75	1.72	1.70	1.67
-70	2.08	2.08	2.07	2.05	2.03	1.99	1.95	1.91	1.87	1.83	1.81	1.80	1.78	1.77	1.76	1.75	1.71	1.67
-60	3.33	3.22	3.06	2.93	2.79	2.64	2.49	2.33	2.18	2.05	1.93	1.85	1.79	1.77	1.76	1.75	1.73	1.67
-50	13.4	12.6	11.2	9.55	7.84	6.16	4.61	3.44	2.86	2.53	2.26	2.05	1.89	1.80	1.76	1.74	1.74	1.67
-40	74.8	67.0	54.5	40.6	28.8	19.7	13.3	8.90	5.66	3.56	2.74	2.34	2.06	1.87	1.77	1.74	1.73	1.67
-30	400	350	276	198	129	74.6	40.1	21.3	11.9	6.63	3.66	2.70	2.26	1.96	1.80	1.74	1.73	1.67
-20	1411	1238	962	657	406	227	110	48.1	21.5	10.8	5.43	3.05	2.44	2.06	1.82	1.74	1.73	1.67
-10	2603	2342	1906	1365	815	426	202	83.9	33.2	14.6	7.09	3.51	2.57	2.12	1.85	1.74	1.73	1.67
0	3133	2822	2282	1650	1013	526	247	101	38.6	16.2	7.71	3.69	2.62	2.14	1.86	1.74	1.73	1.67
10	2346	2077	1644	1148	695	377	186	82.8	37.4	18.9	10.2	5.78	4.08	3.06	2.41	2.03	1.84	1.67
20	1092	962	739	511	322	186	101	54.6	31.2	18.6	11.2	7.30	5.23	3.84	2.89	2.30	1.95	1.67
30	293	268	217	162	113	75.3	51.3	36.7	25.1	16.7	11.4	8.22	5.97	4.38	3.27	2.53	2.04	1.67
40	71.3	67.7	60.7	51.9	43.0	35.2	28.5	22.9	18.5	14.8	11.2	8.37	6.27	4.68	3.53	2.70	2.12	1.67
50	27.1	26.6	25.3	23.4	21.3	18.9	16.9	15.2	13.6	12.2	10.3	8.03	6.20	4.77	3.66	2.82	2.18	1.67
60	14.3	14.2	14.0	13.6	13.1	12.5	11.7	11.0	10.2	9.50	8.77	7.34	5.89	4.68	3.68	2.87	2.21	1.67
70	9.23	9.23	9.17	9.06	8.89	8.65	8.39	8.09	7.77	7.45	7.12	6.52	5.42	4.46	3.60	2.86	2.22	1.67
80	6.34	6.36	6.36	6.34	6.30	6.26	6.19	6.11	6.03	5.93	5.81	5.63	4.82	4.09	3.41	2.79	2.22	1.67
90	4.64	4.65	4.66	4.68	4.69	4.70	4.72	4.74	4.76	4.78	4.80	4.82	4.30	3.77	3.25	2.72	2.19	1.67
100	3.89	3.90	3.91	3.93	3.96	3.99	4.03	4.09	4.15	4.21	4.28	4.33	3.97	3.59	3.16	2.69	2.18	1.67
110	3.72	3.72	3.71	3.71	3.70	3.70	3.71	3.72	3.75	3.82	3.90	3.90	3.68	3.41	3.08	2.67	2.19	1.67
120	4.82	4.71	4.58	4.42	4.24	4.08	3.93	3.79	3.72	3.70	3.72	3.59	3.42	3.23	2.98	2.64	2.18	1.67
130	7.19	6.98	6.66	6.28	5.84	5.41	4.96	4.54	4.18	3.89	3.62	3.39	3.21	3.06	2.87	2.59	2.17	1.67
140	9.94	9.67	9.26	8.71	8.09	7.37	6.59	5.82	5.11	4.35	3.64	3.22	3.04	2.89	2.75	2.52	2.15	1.67
150	11.9	11.7	11.3	10.8	10.1	9.28	8.31	7.27	5.73	4.45	3.57	3.05	2.82	2.74	2.63	2.45	2.11	1.67
160	12.4	12.3	12.2	11.9	11.3	10.6	8.80	6.95	5.34	4.07	3.24	2.77	2.59	2.57	2.50	2.36	2.06	1.67
170	11.3	11.6	11.9	11.2	9.96	8.50	6.95	5.44	4.15	3.17	2.60	2.33	2.29	2.37	2.37	2.27	2.00	1.67
180	9.26	8.75	8.24	7.48	6.47	5.33	4.17	3.16	2.37	1.89	1.74	1.80	1.98	2.18	2.23	2.16	1.94	1.67

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: