

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	5402.4 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	40.8V x 41.1H
	At 50% of Imax	21.2V x 20.8H
	At 90% of Imax	8.7V x 8.4H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	771.0 lumens per klm.
	To 50% of Imax	411.9 lumens per klm.
	To 90% of Imax	88.2 lumens per klm.

Upward LOR	2.1 %
Downward LOR	97.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-31

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Astra D88-88mm-RGBW ALL-20D-Rev2	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:20 DEG	DIA.:88MM	SERIAL No.:IES001364
MFR.:	SUR.:	Shielding Angle:

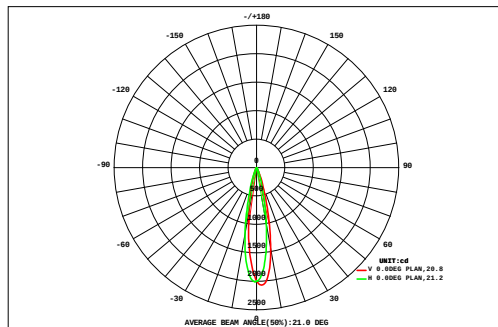

DATA OF LAMP		Eff:20.54lm/W	
MODEL		Imax(cd)	2066
NOMINAL POWER(W)	18.624	AVAILABILITY(%)	77.1
RATED VOLTAGE(V)	48	Avai. FLUX(lm)	295.0
NOMINAL FLUX(lm)	382.5	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	382.5
TEST VOLTAGE(V)	48	q @50%(H,V)	21,21DEG

		AREA FLUX DIAGRAM															UNIT:lm				F t	F a
VERTICAL (DEG)	27	0.06	0.08	0.10	0.12	0.15	0.17	0.20	0.23	0.25	0.25	0.23	0.20	0.17	0.14	0.12	0.09	0.08	2.89	0.00		
	24	0.08	0.10	0.13	0.16	0.20	0.25	0.30	0.34	0.38	0.39	0.37	0.34	0.30	0.25	0.20	0.15	0.12	0.09	4.12	0.00	
	21	0.09	0.12	0.16	0.21	0.27	0.35	0.44	0.52	0.58	0.60	0.59	0.53	0.44	0.36	0.27	0.20	0.15	0.11	6.01	1.55	
	18	0.11	0.15	0.20	0.28	0.38	0.51	0.67	0.82	0.94	0.99	0.96	0.85	0.69	0.52	0.38	0.27	0.19	0.14	9.05	6.13	
	15	0.13	0.18	0.25	0.37	0.53	0.75	1.02	1.31	1.54	1.65	1.58	1.36	1.05	0.76	0.53	0.36	0.25	0.17	13.8	11.4	
	12	0.15	0.21	0.31	0.47	0.70	1.05	1.51	2.02	2.44	2.63	2.52	2.10	1.55	1.07	0.71	0.48	0.31	0.20	20.4	18.5	
	9	0.17	0.25	0.38	0.58	0.90	1.39	2.08	2.87	3.51	3.79	3.62	2.95	2.14	1.45	0.96	0.61	0.39	0.24	28.3	26.5	
		0.18	0.27	0.43	0.68	1.09	1.71	2.59	3.62	4.47	4.83	4.55	3.77	2.82	1.93	1.23	0.75	0.46	0.28	35.7	34.2	
		0.19	0.29	0.46	0.75	1.22	1.95	2.95	4.07	5.02	5.45	5.23	4.53	3.46	2.34	1.45	0.87	0.51	0.30	41.0	39.5	
		0.19	0.29	0.47	0.78	1.29	2.08	3.17	4.36	5.23	5.54	5.41	4.72	3.61	2.43	1.50	0.89	0.52	0.30	42.8	41.4	
		0.18	0.28	0.46	0.77	1.27	2.06	3.11	4.11	4.81	5.10	4.90	4.25	3.23	2.17	1.34	0.80	0.47	0.28	39.6	38.2	
	-9	0.16	0.25	0.41	0.68	1.11	1.75	2.54	3.34	3.97	4.20	3.97	3.39	2.58	1.76	1.11	0.67	0.40	0.24	32.6	31.0	
	-12	0.14	0.22	0.34	0.55	0.87	1.30	1.84	2.43	2.90	3.06	2.86	2.41	1.84	1.28	0.84	0.53	0.33	0.20	23.9	22.2	
	-15	0.11	0.17	0.27	0.41	0.62	0.89	1.23	1.59	1.88	1.98	1.85	1.56	1.21	0.88	0.60	0.39	0.25	0.16	16.0	13.9	
	-18	0.09	0.13	0.20	0.30	0.42	0.58	0.78	0.98	1.14	1.19	1.12	0.96	0.76	0.57	0.41	0.28	0.18	0.12	10.2	7.64	
	-21	0.07	0.10	0.15	0.21	0.29	0.38	0.49	0.60	0.68	0.71	0.67	0.58	0.47	0.37	0.27	0.19	0.13	0.09	6.46	2.81	
-24	0.05	0.08	0.11	0.14	0.19	0.25	0.31	0.37	0.41	0.43	0.40	0.36	0.30	0.23	0.18	0.13	0.10	0.07	4.12	0.00		
-27	0.04	0.06	0.07	0.10	0.13	0.16	0.20	0.23	0.26	0.26	0.25	0.22	0.19	0.15	0.12	0.09	0.07	0.05	2.66	0.00		
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27		
F t	2.19	3.23	4.90	7.56	11.6	17.6	25.4	33.8	40.4	43.0	41.1	35.1	26.8	18.7	12.2	7.80	4.93	3.11	340	---		
F a	0.00	0.00	0.31	4.37	9.10	15.4	23.6	32.1	38.8	41.5	39.5	33.4	24.9	16.6	9.78	4.82	0.71	0.00	---	295		

one-half-peak spread: U:10.8,D:10.5 , L:10.6,R:10.3


NEMA Beam Type: Type 3

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-07-31

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Astra D88-88mm-RGBW ALL-20D-Rev2	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:20 DEG	DIA.:88MM	SERIAL No.:IES001364
MFR.:	SUR.:	Shielding Angle:

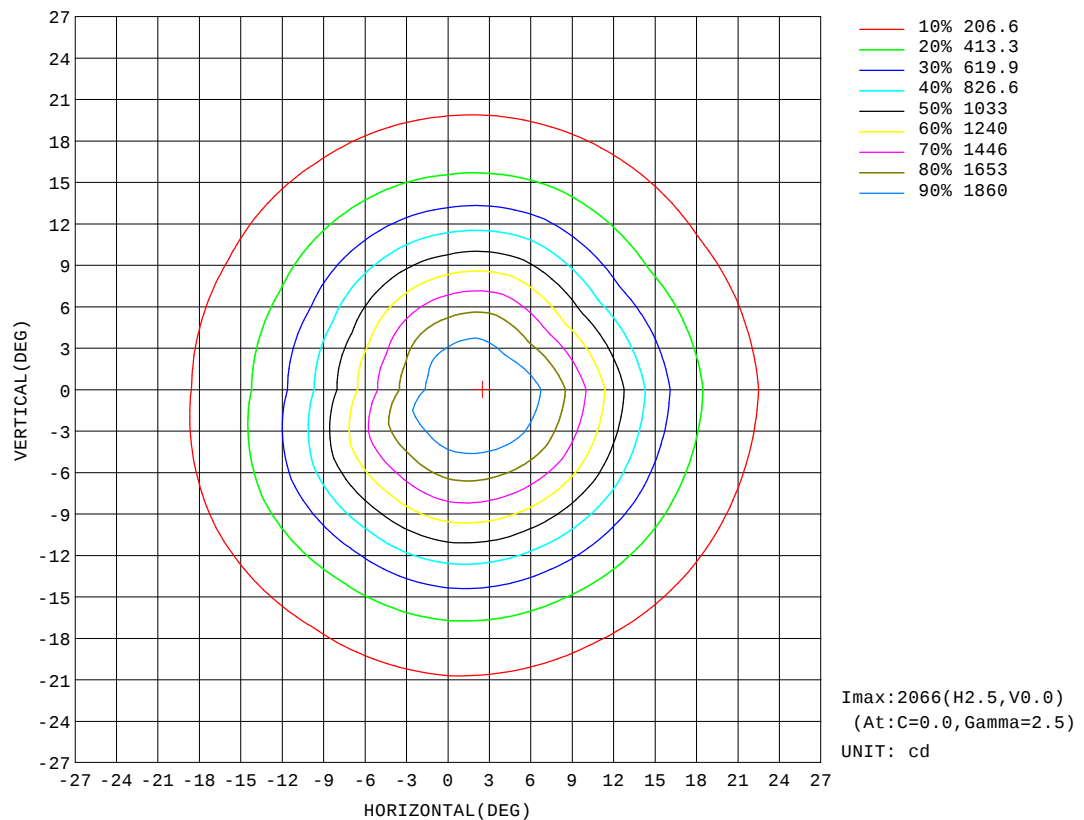


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-31

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Astra D88-88mm-RGBW ALL-20D-Rev2	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:20 DEG	DIA.:88MM	SERIAL No.:IES001364
MFR.:	SUR.:	Shielding Angle:

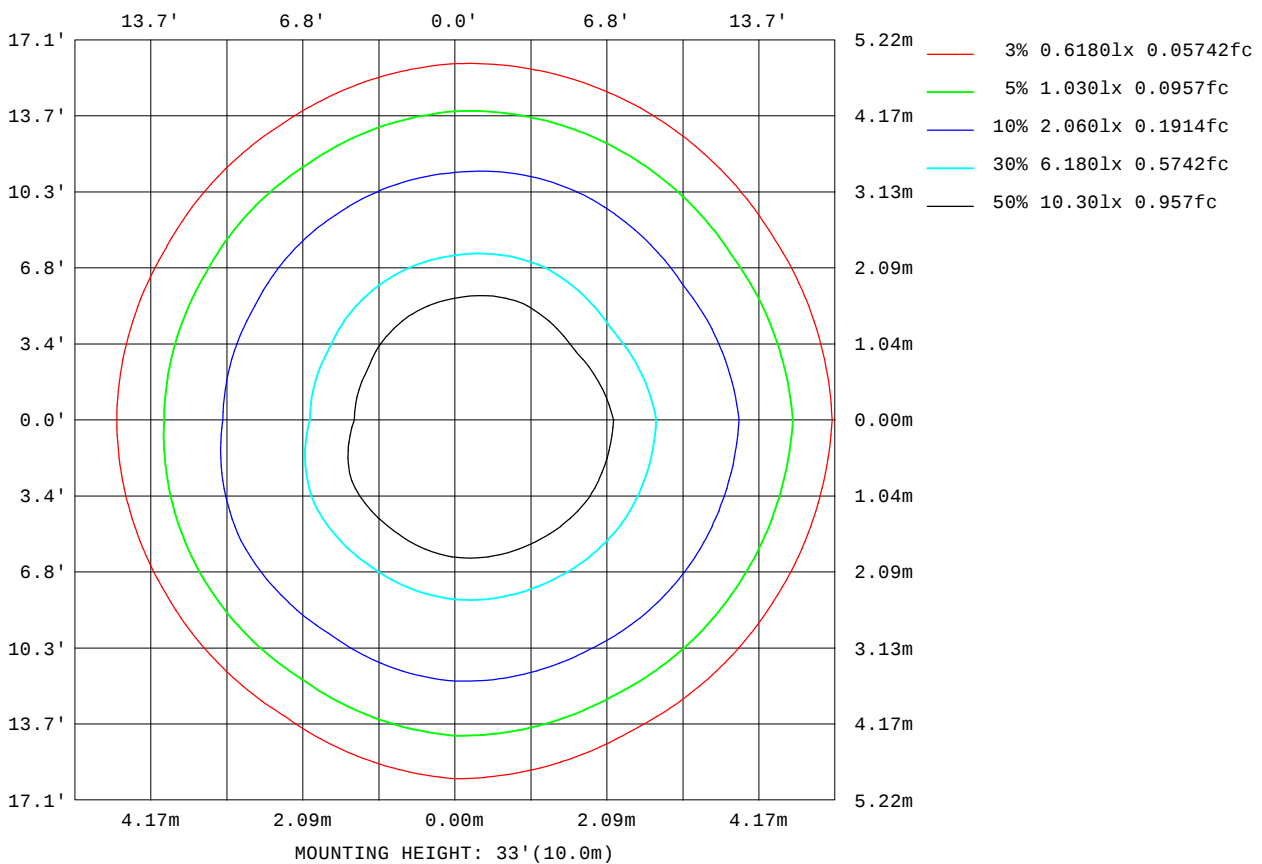

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-07-31

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

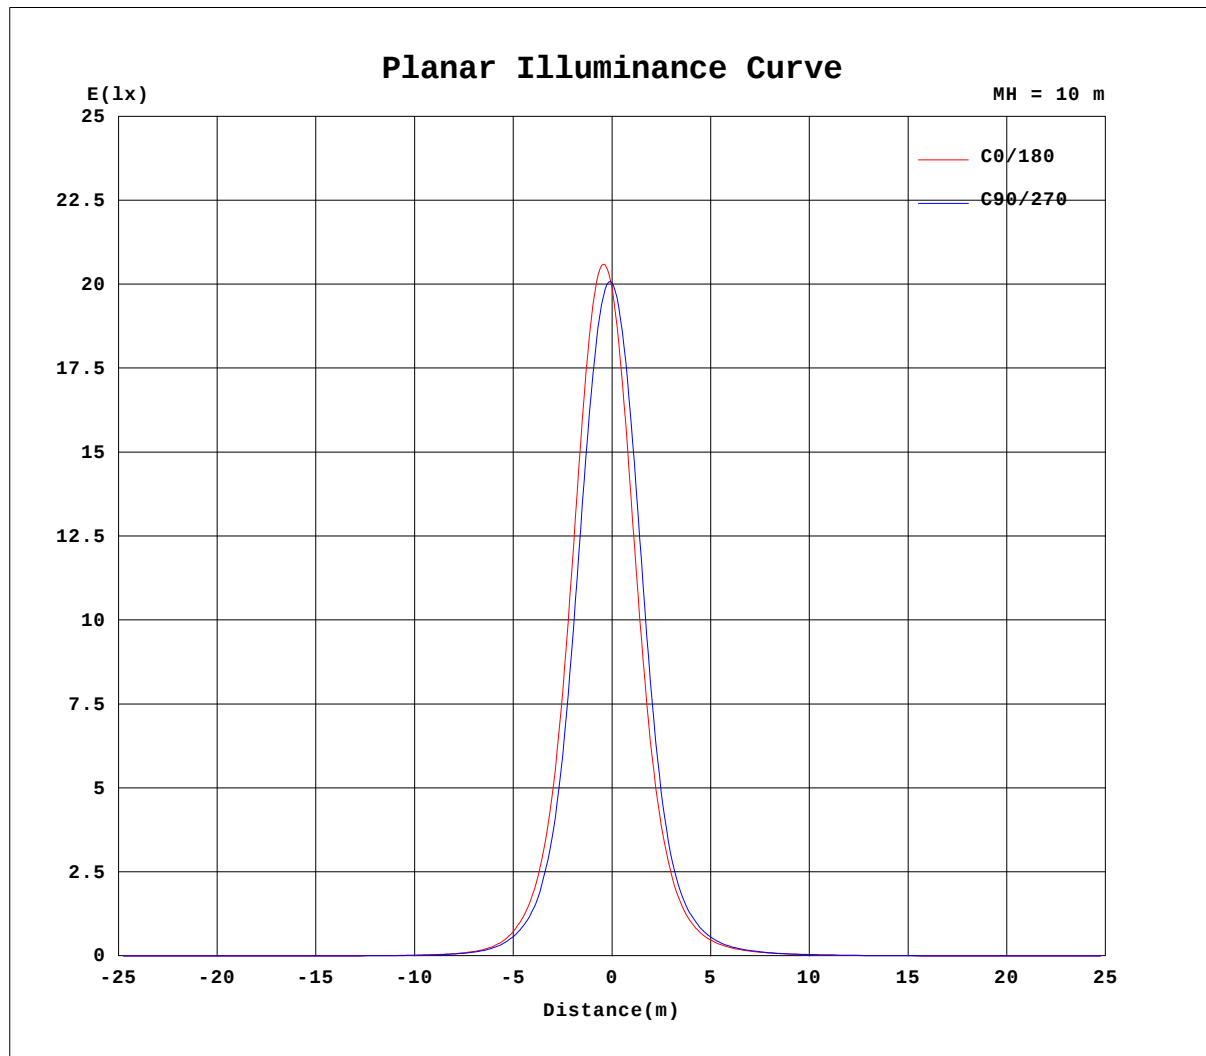


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-07-31

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Astra D88-88mm-RGBW ALL-20D-Rev2	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:20 DEG	DIA.:88MM	SERIAL No.:IES001364
MFR.:	SUR.:	Shielding Angle:

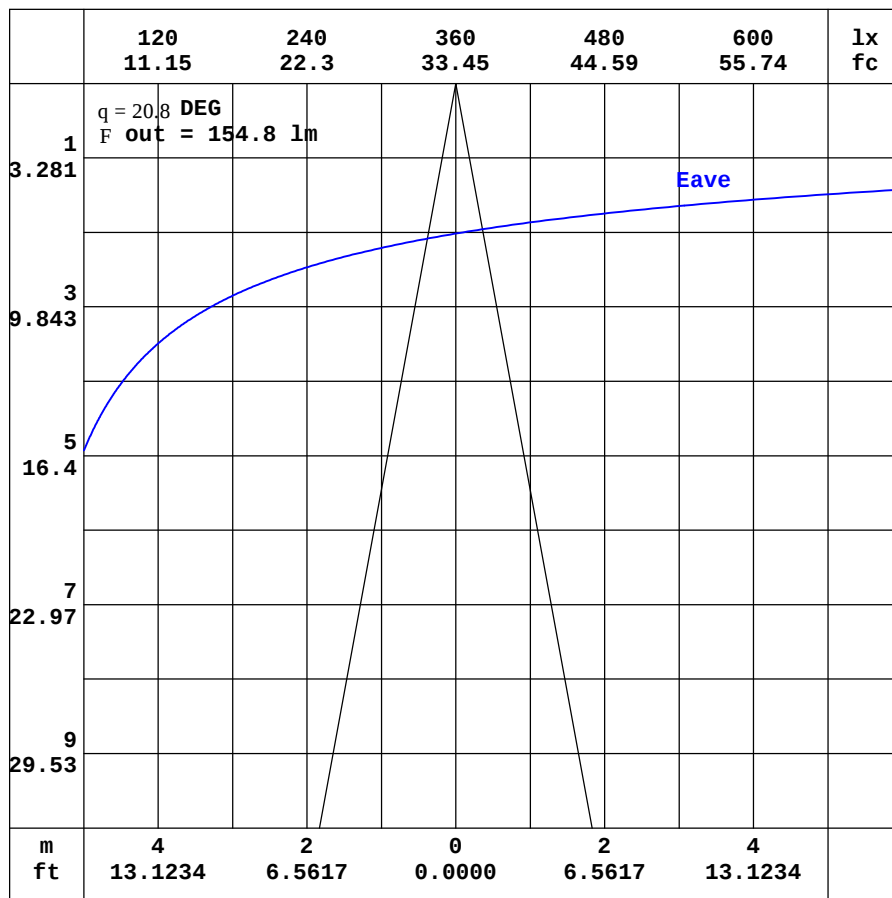

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-31

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Astra D88-88mm-RGBW ALL-20D-Rev2	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:20 DEG	DIA.:88MM	SERIAL No.:IES001364
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.20	1.01	0.91	0.90	0.91	0.98	1.20	1.61	2.16	2.71	3.09	3.25	3.24	3.22	3.17	3.05	2.75	2.44	2.52
-170	1.20	1.01	0.89	0.88	0.86	0.89	1.00	1.26	1.61	1.97	2.21	2.34	2.39	2.45	2.49	2.52	2.57	2.62	2.62
-160	1.20	1.00	0.88	0.85	0.82	0.80	0.81	0.90	1.03	1.17	1.26	1.30	1.37	1.70	2.00	2.25	2.43	2.53	2.58
-150	1.20	1.00	0.88	0.83	0.79	0.74	0.67	0.61	0.59	0.52	0.47	0.66	0.88	1.12	1.35	1.55	1.70	1.79	1.82
-140	1.20	1.01	0.88	0.82	0.77	0.71	0.62	0.49	0.35	0.30	0.31	0.36	0.45	0.56	0.68	0.80	0.89	0.94	0.96
-130	1.20	1.01	0.89	0.80	0.76	0.70	0.63	0.52	0.42	0.35	0.32	0.30	0.30	0.30	0.31	0.33	0.36	0.38	0.39
-120	1.20	1.02	0.90	0.81	0.75	0.70	0.65	0.59	0.56	0.52	0.49	0.45	0.42	0.39	0.36	0.34	0.32	0.31	0.30
-110	1.20	1.04	0.92	0.83	0.76	0.70	0.64	0.63	0.63	0.63	0.63	0.63	0.63	0.61	0.60	0.58	0.57	0.56	0.55
-100	1.20	1.06	0.95	0.84	0.77	0.70	0.64	0.63	0.63	0.63	0.63	0.63	0.63	0.64	0.64	0.64	0.65	0.65	0.65
-90	1.20	1.09	0.98	0.87	0.76	0.65	0.54	0.53	0.53	0.52	0.52	0.51	0.50	0.51	0.52	0.52	0.53	0.54	0.55
-80	1.20	1.11	1.02	0.90	0.76	0.61	0.45	0.41	0.40	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39
-70	1.20	1.15	1.06	0.96	0.81	0.64	0.44	0.39	0.42	0.48	0.55	0.62	0.69	0.74	0.79	0.83	0.87	0.88	0.89
-60	1.20	1.18	1.13	1.04	0.92	0.77	0.66	0.60	0.75	0.92	1.08	1.25	1.40	1.54	1.68	1.80	1.89	1.95	1.99
-50	1.20	1.22	1.21	1.16	1.11	1.10	1.11	1.10	1.24	1.52	1.82	2.14	2.48	2.83	3.20	3.55	3.87	4.11	4.25
-40	1.20	1.26	1.30	1.32	1.40	1.55	1.72	1.88	1.97	2.29	2.86	3.57	4.44	5.52	6.75	8.15	9.52	10.6	11.3
-30	1.20	1.31	1.40	1.51	1.74	2.08	2.47	2.89	3.31	3.75	4.41	6.10	8.49	11.9	16.8	23.6	32.5	41.2	46.5
-20	1.20	1.35	1.50	1.72	2.10	2.64	3.31	4.10	5.05	6.31	8.15	11.1	16.2	28.2	50.4	86.2	137	195	233
-10	1.20	1.39	1.59	1.91	2.43	3.18	4.14	5.36	6.96	9.29	13.0	19.6	32.6	61.2	126	276	540	906	1181
0	1.20	1.42	1.68	2.08	2.70	3.61	4.83	6.42	8.59	11.8	17.2	26.6	44.5	81.5	166	366	789	1460	1988
10	1.20	1.42	1.67	2.05	2.65	3.53	4.70	6.20	8.22	11.1	15.8	23.6	37.7	64.3	117	223	436	756	1000
20	1.20	1.41	1.65	1.99	2.53	3.29	4.31	5.61	7.25	9.49	12.7	17.5	25.0	37.5	56.9	86.1	127	172	200
30	1.20	1.39	1.61	1.89	2.33	2.95	3.76	4.78	6.00	7.49	9.46	12.1	15.5	20.2	26.2	33.3	40.9	47.6	51.3
40	1.20	1.37	1.56	1.78	2.11	2.55	3.14	3.86	4.71	5.69	6.82	8.14	9.64	11.4	13.2	15.2	16.9	18.3	19.0
50	1.20	1.34	1.50	1.67	1.88	2.17	2.54	2.99	3.52	4.12	4.78	5.47	6.18	6.90	7.57	8.18	8.71	9.07	9.24
60	1.20	1.31	1.44	1.56	1.69	1.85	2.05	2.28	2.55	2.87	3.20	3.55	3.90	4.23	4.53	4.79	4.98	5.13	5.19
70	1.20	1.28	1.36	1.45	1.54	1.62	1.70	1.80	1.89	2.01	2.13	2.26	2.38	2.51	2.63	2.74	2.82	2.88	2.91
80	1.20	1.24	1.29	1.34	1.38	1.43	1.48	1.51	1.54	1.57	1.58	1.61	1.63	1.66	1.69	1.72	1.74	1.76	1.78
90	1.20	1.21	1.22	1.23	1.24	1.25	1.26	1.26	1.26	1.26	1.26	1.27	1.27	1.28	1.29	1.31	1.32	1.33	1.35
100	1.20	1.17	1.15	1.13	1.11	1.09	1.08	1.06	1.03	1.01	0.99	0.98	0.96	0.96	0.97	0.97	0.98	0.99	1.00
110	1.20	1.14	1.08	1.04	1.01	0.98	0.97	0.94	0.92	0.91	0.91	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
120	1.20	1.11	1.03	0.98	0.95	0.92	0.92	0.90	0.90	0.90	0.91	0.93	0.96	0.99	1.01	1.02	1.03	1.03	1.02
130	1.20	1.08	0.99	0.94	0.92	0.91	0.90	0.90	0.91	0.98	1.08	1.21	1.34	1.49	1.63	1.73	1.80	1.84	1.83
140	1.20	1.06	0.96	0.92	0.91	0.90	0.91	0.96	1.09	1.30	1.57	1.88	2.18	2.43	2.64	2.77	2.85	2.88	2.87
150	1.20	1.04	0.94	0.91	0.90	0.91	0.97	1.13	1.42	1.80	2.23	2.61	2.90	3.10	3.24	3.33	3.36	3.38	3.36
160	1.20	1.03	0.92	0.90	0.90	0.94	1.06	1.34	1.78	2.29	2.74	3.04	3.23	3.37	3.46	3.54	3.58	3.58	3.59
170	1.20	1.02	0.91	0.90	0.91	0.97	1.15	1.52	2.05	2.60	3.00	3.23	3.32	3.38	3.42	3.47	3.35	3.25	3.33
180	1.20	1.01	0.91	0.90	0.91	0.98	1.20	1.61	2.16	2.71	3.09	3.25	3.24	3.22	3.17	3.05	2.75	2.44	2.52

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-07-31

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Astra D88-88mm-RGBW ALL-20D-Rev2	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:20 DEG	DIA.:88MM	SERIAL No.:IES001364
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	2.43	2.44	2.35	2.13	1.82	1.47	1.09	0.72	0.44	0.30	0.32	0.41	0.55	0.65	0.65	0.63		0.45	
-170	2.60	2.53	2.42	2.17	1.83	1.44	1.04	0.69	0.43	0.31	0.32	0.41	0.55	0.65	0.65	0.63	0.55	0.41	
-160	2.49	2.33	2.11	1.83	1.50	1.16	0.82	0.54	0.36	0.31	0.33	0.44	0.56	0.64	0.65	0.63	0.54	0.41	
-150	1.75	1.61	1.42	1.20	0.97	0.73	0.52	0.38	0.31	0.31	0.37	0.49	0.60	0.64	0.64	0.63	0.54	0.41	
-140	0.91	0.83	0.71	0.58	0.47	0.37	0.31	0.30	0.30	0.36	0.46	0.56	0.63	0.65	0.64	0.61	0.52	0.41	
-130	0.37	0.34	0.32	0.30	0.30	0.30	0.32	0.36	0.42	0.49	0.56	0.62	0.64	0.64	0.63	0.59	0.51	0.41	
-120	0.31	0.33	0.36	0.39	0.43	0.47	0.51	0.55	0.58	0.62	0.63	0.65	0.64	0.64	0.62	0.56	0.49	0.41	
-110	0.57	0.58	0.60	0.62	0.64	0.64	0.64	0.64	0.64	0.64	0.64	0.64	0.64	0.64	0.61	0.58	0.53	0.47	0.41
-100	0.65	0.65	0.65	0.64	0.64	0.63	0.63	0.63	0.63	0.63	0.62	0.61	0.58	0.55	0.52	0.48	0.44	0.41	
-90	0.53	0.52	0.51	0.50	0.49	0.48	0.48	0.48	0.48	0.48	0.48	0.48	0.47	0.45	0.44	0.43	0.42	0.41	
-80	0.39	0.39	0.39	0.39	0.39	0.38	0.37	0.36	0.36	0.36	0.36	0.36	0.37	0.37	0.38	0.39	0.40	0.41	
-70	0.90	0.89	0.87	0.83	0.79	0.74	0.67	0.60	0.52	0.45	0.39	0.35	0.34	0.34	0.34	0.35	0.37	0.41	
-60	1.98	1.94	1.86	1.76	1.64	1.50	1.35	1.18	1.01	0.84	0.68	0.54	0.43	0.36	0.34	0.34	0.36	0.41	
-50	4.19	4.01	3.74	3.41	3.05	2.69	2.33	2.00	1.68	1.38	1.11	0.86	0.64	0.47	0.36	0.33	0.34	0.41	
-40	11.0	10.1	8.90	7.53	6.24	5.04	4.04	3.22	2.56	2.02	1.59	1.22	0.89	0.62	0.42	0.34	0.33	0.41	
-30	43.4	36.0	27.4	19.9	14.3	10.2	7.28	5.23	3.78	2.80	2.10	1.57	1.14	0.77	0.49	0.35	0.33	0.41	
-20	218	167	111	66.2	36.8	21.0	12.8	8.14	5.37	3.67	2.61	1.89	1.34	0.90	0.56	0.36	0.33	0.41	
-10	1095	762	414	196	89.1	40.4	20.1	11.4	6.90	4.42	3.01	2.11	1.49	0.99	0.61	0.38	0.33	0.41	
0	1998	1446	742	319	136	55.8	24.9	13.1	7.65	4.76	3.19	2.21	1.55	1.03	0.63	0.38	0.32	0.41	
10	972	641	346	179	89.6	45.1	24.4	14.4	8.92	5.80	3.94	2.73	1.88	1.24	0.76	0.46	0.36	0.41	
20	194	157	111	71.4	45.6	30.3	19.9	13.1	8.84	6.09	4.27	3.01	2.07	1.37	0.85	0.53	0.40	0.41	
30	49.9	44.6	37.4	29.9	23.3	17.9	13.8	10.7	7.92	5.77	4.20	3.01	2.11	1.41	0.90	0.59	0.43	0.41	
40	18.8	17.9	16.4	14.5	12.5	10.6	9.00	7.54	6.30	5.06	3.81	2.79	1.99	1.37	0.92	0.63	0.46	0.41	
50	9.21	8.98	8.56	8.02	7.38	6.65	5.93	5.22	4.55	3.91	3.21	2.42	1.79	1.30	0.92	0.66	0.48	0.41	
60	5.19	5.11	4.96	4.74	4.49	4.18	3.84	3.49	3.14	2.80	2.50	2.03	1.59	1.22	0.92	0.69	0.51	0.41	
70	2.91	2.88	2.83	2.75	2.65	2.53	2.40	2.27	2.15	2.03	1.91	1.74	1.43	1.16	0.92	0.70	0.53	0.41	
80	1.77	1.76	1.75	1.73	1.72	1.69	1.67	1.66	1.64	1.62	1.60	1.57	1.33	1.11	0.91	0.72	0.55	0.41	
90	1.35	1.34	1.34	1.34	1.34	1.33	1.34	1.35	1.36	1.37	1.38	1.38	1.22	1.06	0.89	0.73	0.57	0.41	
100	0.99	0.99	0.99	0.99	1.00	1.01	1.03	1.06	1.08	1.12	1.15	1.17	1.09	0.99	0.88	0.74	0.58	0.41	
110	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.92	0.94	0.97	1.00	0.96	0.92	0.84	0.74	0.59	0.41	
120	1.02	1.01	0.99	0.97	0.95	0.93	0.91	0.90	0.89	0.90	0.91	0.89	0.88	0.86	0.81	0.73	0.60	0.41	
130	1.80	1.73	1.62	1.50	1.36	1.22	1.09	0.99	0.92	0.89	0.87	0.85	0.82	0.81	0.78	0.71	0.59	0.41	
140	2.84	2.77	2.64	2.46	2.21	1.93	1.63	1.36	1.12	0.94	0.82	0.80	0.79	0.77	0.75	0.70	0.59	0.41	
150	3.35	3.32	3.26	3.14	2.95	2.68	2.32	1.91	1.37	0.98	0.78	0.72	0.74	0.74	0.72	0.70	0.59	0.41	
160	3.56	3.54	3.47	3.37	3.25	3.08	2.54	1.90	1.33	0.92	0.69	0.63	0.68	0.71	0.71	0.68	0.58	0.41	
170	3.32	3.40	3.42	3.19	2.83	2.41	1.94	1.45	1.00	0.68	0.53	0.53	0.61	0.69	0.68	0.65	0.56	0.41	
180	2.43	2.44	2.35	2.13	1.82	1.47	1.09	0.72	0.44	0.30	0.32	0.41	0.55	0.65	0.65	0.63	0.55	0.41	

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-07-31

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: