

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	5323.5 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	41.1V x 41.2H
	At 50% of Imax	21.4V x 20.9H
	At 90% of Imax	8.7V x 8.4H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	776.2 lumens per klm.
	To 50% of Imax	423.7 lumens per klm.
	To 90% of Imax	95.4 lumens per klm.

Upward LOR	1.9 %
Downward LOR	98.2 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-31

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Astra D88-88mm-RGBW GREEN-20D-Rev2	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:20 DEG	DIA.:88MM	SERIAL No.:IES001366
MFR.:	SUR.:	Shielding Angle:

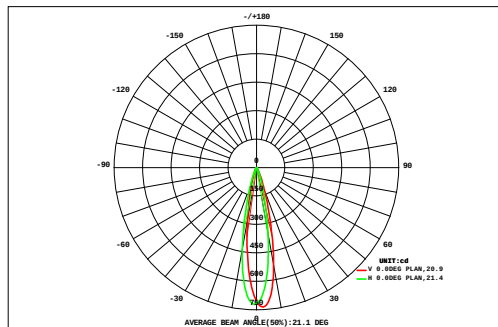

DATA OF LAMP		Eff:22.28lm/W	
MODEL		Imax(cd)	734.6
NOMINAL POWER(W)	6.192	AVAILABILITY(%)	77.7
RATED VOLTAGE(V)	48	Avai. FLUX(lm)	107.3
NOMINAL FLUX(lm)	138	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	138.0
TEST VOLTAGE(V)	48	q @50%(H,V)	21,21DEG

		AREA FLUX DIAGRAM															UNIT:lm				F t	F a
		0.02	0.03	0.03	0.04	0.05	0.06	0.07	0.08	0.08	0.09	0.08	0.08	0.07	0.06	0.05	0.04	0.03	0.03	0.99	0.00	
VERTICAL (DEG)	27	0.03	0.03	0.04	0.05	0.07	0.08	0.10	0.12	0.13	0.13	0.12	0.10	0.08	0.07	0.05	0.04	0.03	1.41	0.00		
	24	0.03	0.04	0.05	0.07	0.09	0.12	0.15	0.18	0.20	0.21	0.20	0.18	0.15	0.12	0.10	0.07	0.05	2.06	0.44		
	21	0.04	0.05	0.07	0.10	0.13	0.17	0.23	0.28	0.33	0.34	0.33	0.29	0.24	0.18	0.13	0.10	0.07	3.13	2.07		
	18	0.04	0.06	0.09	0.13	0.18	0.25	0.35	0.45	0.54	0.58	0.56	0.48	0.37	0.27	0.19	0.13	0.09	4.81	3.99		
	15	0.05	0.07	0.11	0.16	0.24	0.36	0.52	0.70	0.86	0.93	0.90	0.75	0.55	0.39	0.26	0.17	0.11	7.21	6.51		
	12	0.06	0.09	0.13	0.20	0.31	0.48	0.73	1.01	1.24	1.35	1.30	1.07	0.78	0.53	0.35	0.22	0.14	10.1	9.46		
	9	0.06	0.10	0.15	0.24	0.38	0.60	0.91	1.27	1.58	1.73	1.64	1.36	1.03	0.70	0.45	0.28	0.17	12.7	12.2		
	-9	0.07	0.10	0.16	0.26	0.42	0.68	1.04	1.43	1.78	1.96	1.88	1.63	1.25	0.85	0.53	0.32	0.19	14.7	14.1		
	-12	0.07	0.10	0.17	0.27	0.45	0.74	1.13	1.56	1.89	1.98	1.94	1.70	1.31	0.89	0.55	0.33	0.19	15.4	14.9		
	-15	0.06	0.10	0.17	0.27	0.45	0.75	1.13	1.49	1.75	1.85	1.78	1.55	1.18	0.80	0.50	0.30	0.18	14.4	13.9		
	-18	0.06	0.09	0.15	0.25	0.40	0.64	0.93	1.22	1.45	1.54	1.46	1.25	0.96	0.65	0.41	0.25	0.15	12.0	11.4		
	-21	0.05	0.08	0.13	0.20	0.32	0.48	0.68	0.90	1.07	1.14	1.07	0.91	0.69	0.48	0.32	0.20	0.13	8.93	8.32		
-24	0.04	0.06	0.10	0.16	0.23	0.34	0.46	0.60	0.71	0.75	0.70	0.60	0.46	0.34	0.23	0.15	0.10	6.10	5.43			
-27	0.03	0.05	0.08	0.11	0.16	0.22	0.30	0.38	0.43	0.46	0.43	0.37	0.30	0.22	0.16	0.11	0.07	3.94	3.08			
	0.03	0.04	0.06	0.08	0.11	0.15	0.19	0.23	0.27	0.28	0.26	0.23	0.19	0.15	0.11	0.08	0.05	0.04	2.53	1.37		
	0.02	0.03	0.04	0.06	0.08	0.10	0.12	0.15	0.17	0.17	0.16	0.14	0.12	0.10	0.07	0.05	0.04	0.03	1.64	0.00		
	0.02	0.02	0.03	0.04	0.05	0.07	0.08	0.09	0.10	0.11	0.10	0.09	0.08	0.06	0.05	0.04	0.03	0.02	1.07	0.00		
		-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)			6	9	12	15	18	21	24	27		
F t	0.78	1.16	1.75	2.69	4.14	6.29	9.12	12.2	14.6	15.6	14.9	12.8	9.83	6.88	4.53	2.89	1.83	1.15	123	---		
F a	0.00	0.00	0.11	1.58	3.27	5.53	8.46	11.5	14.0	15.0	14.3	12.2	9.20	6.16	3.68	1.87	0.35	0.00	---	107		

one-half-peak spread: U:10.6,D:10.9 , L:10.5,R:10.5


NEMA Beam Type: Type 3

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-07-31

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Astra D88-88mm-RGBW GREEN-20D-Rev2	TYPE:RGBW 6500K-GREEN	WEIGHT:
SPEC.:20 DEG	DIA.:88MM	SERIAL No.:IES001366
MFR.:	SUR.:	Shielding Angle:

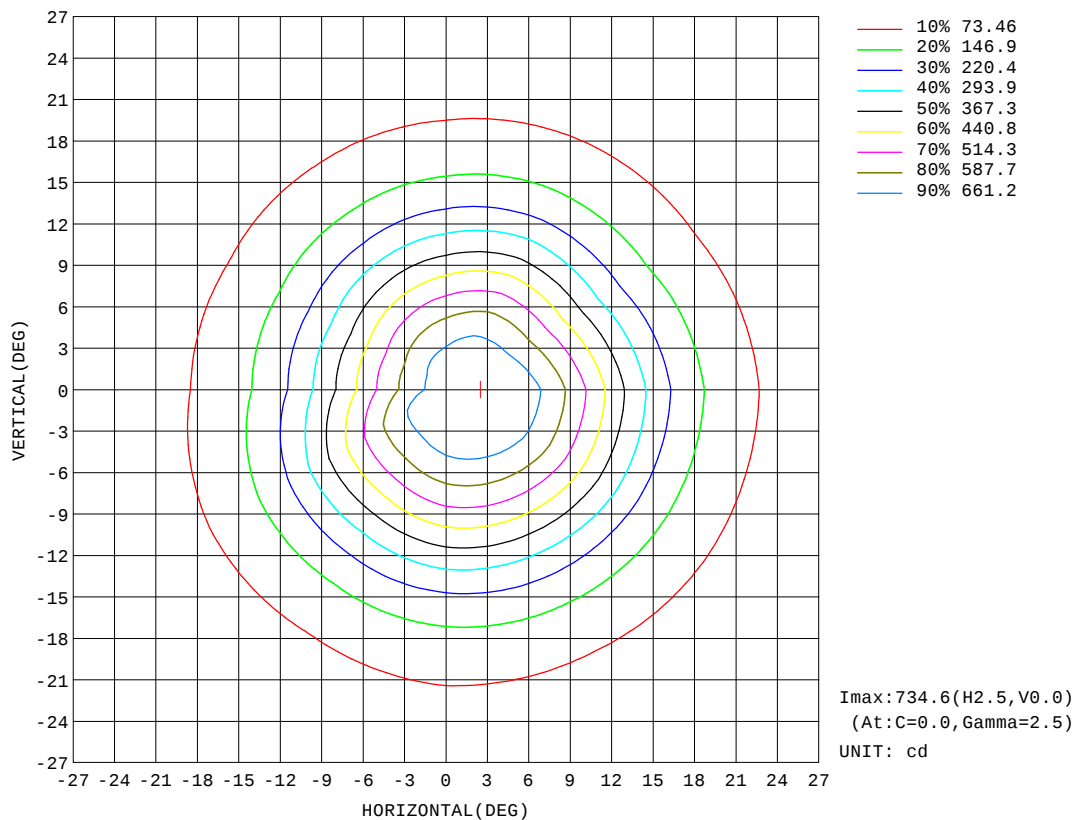


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-07-31

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Astra D88-88mm-RGBW GREEN-20D-Rev2	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:20 DEG	DIA.:88MM	SERIAL No.:IES001366
MFR.:	SUR.:	Shielding Angle:

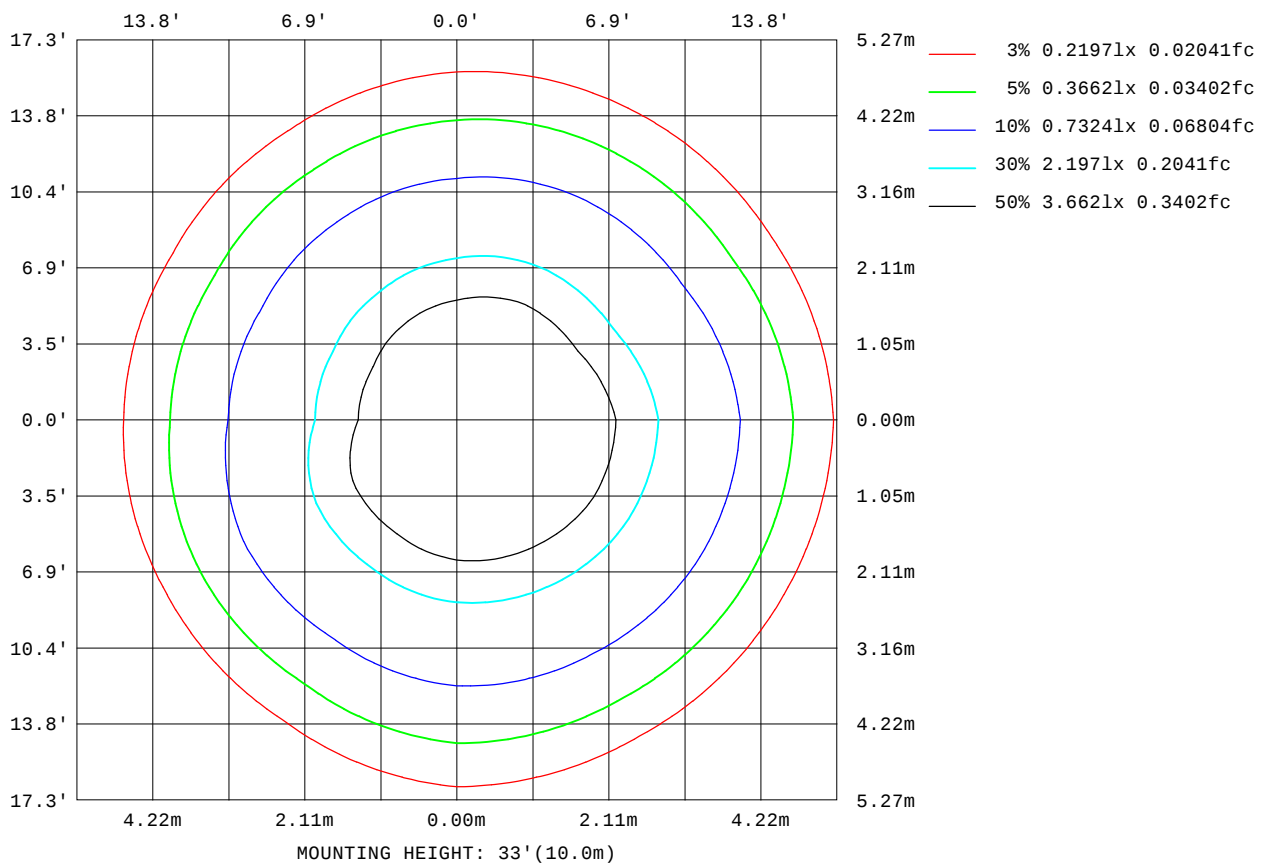

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-07-31

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

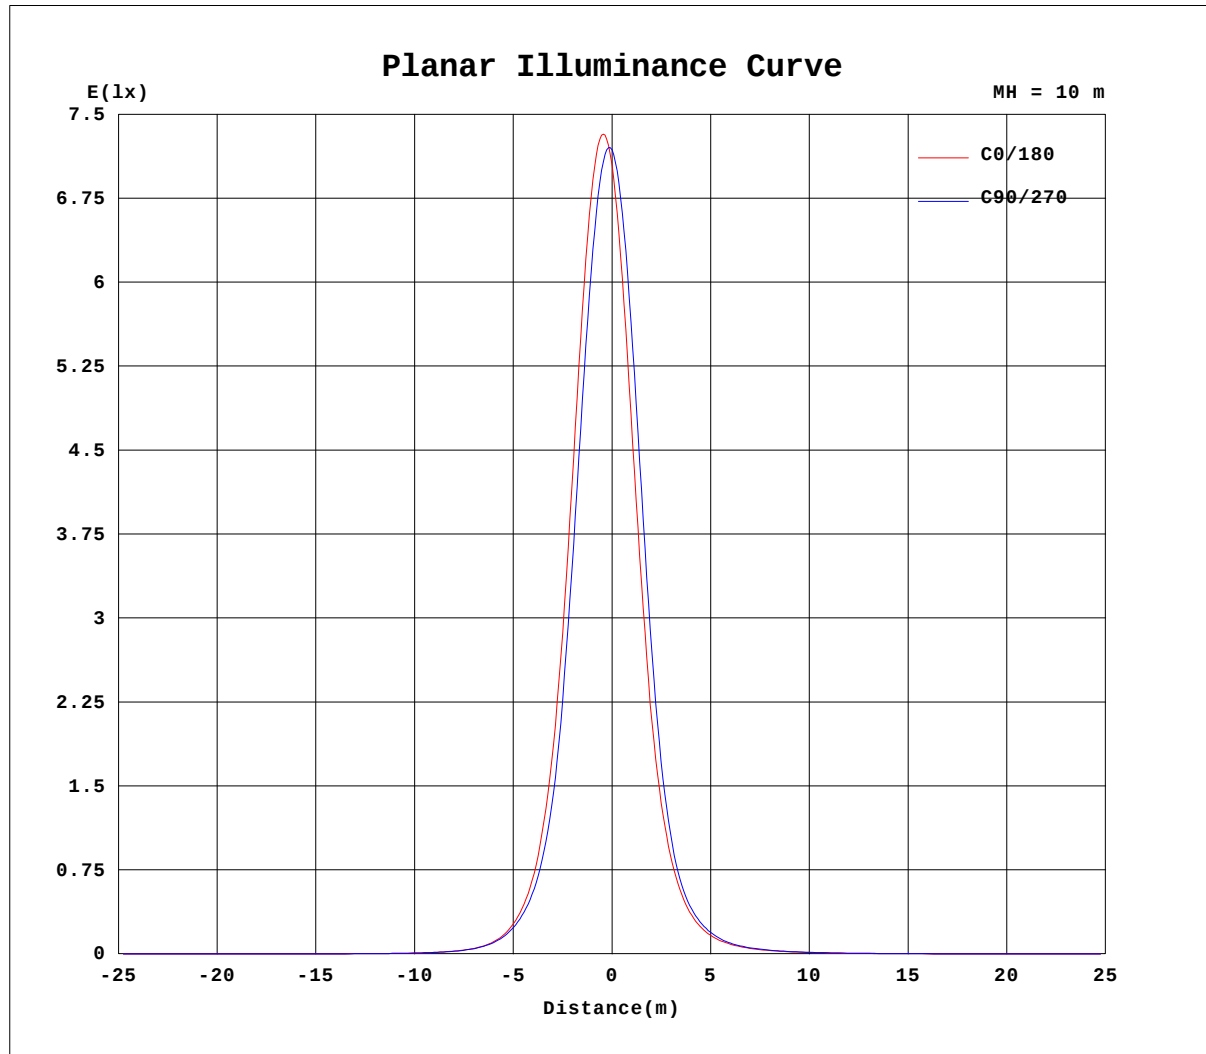


H(b) Range: -90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-07-31

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Astra D88-88mm-RGBW GREEN-20D-Rev2	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:20 DEG	DIA.:88MM	SERIAL No.:IES001366
MFR.:	SUR.:	Shielding Angle:

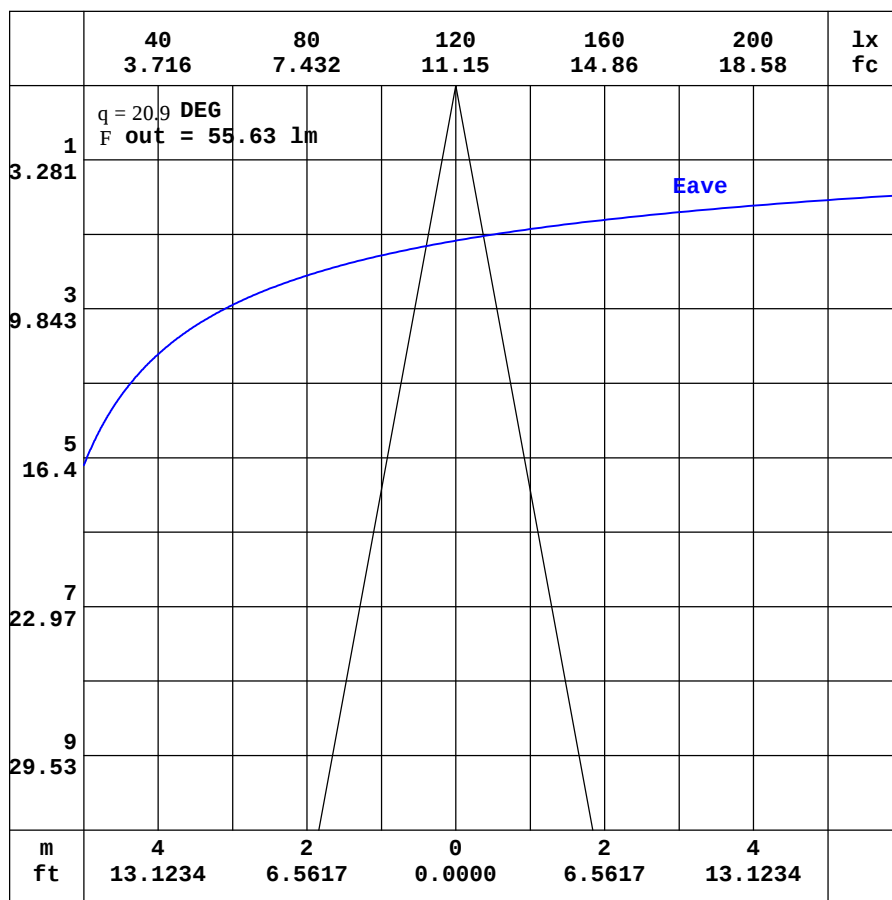

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-31

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Astra D88-88mm-RGBW GREEN-20D-Rev2	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:20 DEG	DIA.:88MM	SERIAL No.:IES001366
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.34	0.28	0.27	0.27	0.28	0.31	0.39	0.54	0.74	0.94	1.07	1.09	1.09	1.08	1.06	1.01	0.92	0.81	0.85
-170	0.34	0.27	0.27	0.26	0.26	0.27	0.32	0.41	0.54	0.67	0.75	0.79	0.80	0.83	0.85	0.84	0.86	0.88	0.87
-160	0.34	0.27	0.26	0.25	0.24	0.23	0.24	0.28	0.33	0.38	0.41	0.43	0.45	0.56	0.66	0.74	0.80	0.86	0.89
-150	0.34	0.27	0.25	0.24	0.22	0.20	0.18	0.17	0.16	0.15	0.12	0.19	0.26	0.34	0.42	0.49	0.55	0.59	0.60
-140	0.34	0.27	0.25	0.23	0.22	0.19	0.15	0.11	0.08	0.06	0.06	0.08	0.10	0.13	0.17	0.22	0.25	0.28	0.30
-130	0.34	0.28	0.24	0.23	0.21	0.18	0.15	0.10	0.07	0.07	0.07	0.06	0.06	0.06	0.06	0.07	0.08	0.09	0.09
-120	0.34	0.28	0.24	0.22	0.20	0.18	0.16	0.13	0.13	0.13	0.11	0.11	0.10	0.09	0.08	0.07	0.07	0.06	0.06
-110	0.34	0.30	0.25	0.22	0.20	0.18	0.16	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.14	0.14	0.13
-100	0.34	0.31	0.27	0.23	0.20	0.17	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15
-90	0.34	0.31	0.27	0.24	0.21	0.18	0.14	0.14	0.14	0.13	0.13	0.12	0.12	0.12	0.12	0.13	0.13	0.14	0.14
-80	0.34	0.32	0.29	0.25	0.21	0.16	0.11	0.10	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09
-70	0.34	0.33	0.31	0.27	0.23	0.17	0.11	0.09	0.10	0.12	0.15	0.18	0.22	0.23	0.25	0.26	0.27	0.27	0.27
-60	0.34	0.34	0.33	0.31	0.26	0.22	0.16	0.15	0.22	0.29	0.35	0.42	0.48	0.54	0.59	0.63	0.66	0.68	0.69
-50	0.34	0.35	0.36	0.34	0.33	0.32	0.33	0.33	0.39	0.51	0.63	0.76	0.89	1.03	1.18	1.32	1.45	1.54	1.59
-40	0.34	0.37	0.39	0.40	0.43	0.48	0.55	0.62	0.66	0.79	1.01	1.30	1.64	2.08	2.58	3.18	3.77	4.27	4.57
-30	0.34	0.38	0.42	0.46	0.55	0.67	0.82	0.98	1.14	1.32	1.58	2.25	3.21	4.62	6.59	9.44	13.1	16.8	19.1
-20	0.34	0.40	0.45	0.54	0.68	0.87	1.11	1.40	1.75	2.23	2.94	4.09	6.11	10.8	19.5	33.7	53.1	76.5	92.3
-10	0.34	0.41	0.49	0.61	0.79	1.06	1.40	1.84	2.43	3.27	4.66	7.04	11.9	22.5	47.0	99.9	200	335	438
0	0.34	0.42	0.51	0.66	0.89	1.21	1.64	2.21	2.98	4.14	6.03	9.32	15.6	28.6	58.6	127	278	515	705
10	0.34	0.42	0.51	0.66	0.87	1.18	1.60	2.14	2.86	3.88	5.51	8.21	13.1	22.2	40.1	76.6	151	263	352
20	0.34	0.42	0.51	0.64	0.83	1.10	1.47	1.93	2.52	3.30	4.41	6.07	8.62	12.9	19.5	29.3	43.2	58.4	67.8
30	0.34	0.41	0.50	0.60	0.76	0.99	1.28	1.65	2.08	2.61	3.29	4.18	5.38	6.98	9.01	11.4	14.0	16.2	17.5
40	0.34	0.41	0.48	0.57	0.69	0.85	1.06	1.32	1.63	1.97	2.37	2.82	3.35	3.94	4.58	5.25	5.84	6.32	6.55
50	0.34	0.40	0.46	0.53	0.61	0.72	0.85	1.02	1.21	1.41	1.64	1.88	2.12	2.37	2.61	2.83	3.01	3.14	3.21
60	0.34	0.38	0.44	0.49	0.54	0.60	0.68	0.77	0.86	0.96	1.07	1.20	1.31	1.42	1.53	1.63	1.71	1.77	1.80
70	0.34	0.37	0.41	0.45	0.49	0.52	0.56	0.59	0.62	0.66	0.70	0.73	0.77	0.82	0.87	0.91	0.95	0.97	0.99
80	0.34	0.37	0.38	0.40	0.43	0.45	0.48	0.48	0.49	0.49	0.50	0.49	0.50	0.52	0.53	0.55	0.57	0.58	0.59
90	0.34	0.35	0.36	0.37	0.38	0.39	0.41	0.40	0.39	0.39	0.38	0.38	0.37	0.38	0.39	0.40	0.41	0.42	0.43
100	0.34	0.35	0.34	0.34	0.33	0.33	0.33	0.32	0.31	0.30	0.29	0.29	0.28	0.29	0.30	0.30	0.30	0.31	0.31
110	0.34	0.33	0.31	0.30	0.30	0.30	0.30	0.29	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28
120	0.34	0.32	0.29	0.29	0.29	0.29	0.28	0.28	0.28	0.28	0.28	0.29	0.30	0.31	0.32	0.32	0.32	0.32	0.31
130	0.34	0.31	0.29	0.29	0.28	0.28	0.28	0.28	0.28	0.29	0.33	0.39	0.45	0.51	0.55	0.59	0.60	0.61	0.59
140	0.34	0.30	0.28	0.28	0.28	0.28	0.28	0.29	0.32	0.41	0.51	0.63	0.74	0.84	0.92	0.96	0.98	0.99	0.98
150	0.34	0.29	0.28	0.28	0.28	0.28	0.30	0.35	0.45	0.59	0.74	0.88	0.99	1.07	1.12	1.16	1.17	1.16	1.15
160	0.34	0.28	0.28	0.28	0.28	0.29	0.33	0.43	0.59	0.76	0.92	1.03	1.10	1.15	1.18	1.20	1.21	1.22	1.22
170	0.34	0.28	0.28	0.28	0.28	0.30	0.37	0.50	0.69	0.88	1.02	1.09	1.12	1.14	1.17	1.18	1.15	1.10	1.15
180	0.34	0.28	0.27	0.27	0.28	0.31	0.39	0.54	0.74	0.94	1.07	1.09	1.09	1.08	1.06	1.01	0.92	0.81	0.88

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-07-31

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Astra D88-88mm-RGBW GREEN-20D-Rev2	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:20 DEG	DIA.: 88MM	SERIAL No.:IES001366
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.80	0.79	0.77	0.68	0.57	0.45	0.32	0.18	0.08	0.06	0.07	0.10	0.14	0.15	0.15	0.14	0.12	0.07	
-170	0.86	0.83	0.81	0.72	0.60	0.46	0.31	0.18	0.08	0.06	0.07	0.09	0.14	0.15	0.15	0.14	0.12	0.07	
-160	0.83	0.76	0.69	0.59	0.49	0.36	0.24	0.14	0.08	0.06	0.07	0.09	0.14	0.15	0.15	0.14	0.12	0.07	
-150	0.57	0.51	0.43	0.36	0.28	0.20	0.14	0.09	0.06	0.06	0.07	0.11	0.14	0.15	0.15	0.13	0.12	0.07	
-140	0.27	0.23	0.18	0.13	0.09	0.07	0.07	0.06	0.05	0.06	0.09	0.13	0.14	0.15	0.15	0.13	0.12	0.07	
-130	0.09	0.08	0.07	0.06	0.06	0.06	0.06	0.07	0.08	0.10	0.13	0.14	0.15	0.15	0.14	0.13	0.11	0.07	
-120	0.06	0.07	0.08	0.09	0.11	0.12	0.13	0.14	0.14	0.14	0.14	0.15	0.15	0.14	0.14	0.13	0.09	0.07	
-110	0.13	0.13	0.14	0.14	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.14	0.14	0.13	0.12	0.09	0.07	
-100	0.15	0.15	0.15	0.15	0.15	0.15	0.14	0.14	0.14	0.14	0.15	0.15	0.14	0.14	0.12	0.10	0.08	0.07	
-90	0.13	0.12	0.11	0.10	0.09	0.09	0.09	0.10	0.10	0.11	0.11	0.12	0.11	0.10	0.09	0.08	0.08	0.07	
-80	0.09	0.09	0.09	0.09	0.09	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.07	0.07	
-70	0.28	0.28	0.27	0.26	0.25	0.23	0.20	0.17	0.13	0.09	0.08	0.07	0.07	0.07	0.07	0.07	0.07	0.07	
-60	0.70	0.68	0.66	0.63	0.59	0.53	0.46	0.39	0.32	0.25	0.18	0.13	0.09	0.08	0.07	0.07	0.07	0.07	
-50	1.57	1.51	1.40	1.27	1.12	0.98	0.83	0.70	0.57	0.45	0.34	0.25	0.17	0.11	0.08	0.07	0.07	0.07	
-40	4.44	4.05	3.52	2.94	2.38	1.89	1.48	1.15	0.89	0.69	0.53	0.39	0.27	0.17	0.10	0.07	0.07	0.07	
-30	17.8	14.8	11.3	8.10	5.69	3.96	2.75	1.92	1.35	0.98	0.72	0.52	0.36	0.23	0.13	0.08	0.07	0.07	
-20	86.2	66.3	44.5	26.5	14.6	8.24	4.91	3.03	1.95	1.31	0.91	0.64	0.44	0.28	0.16	0.08	0.07	0.07	
-10	408	288	156	75.2	34.3	15.4	7.59	4.19	2.50	1.58	1.06	0.74	0.50	0.32	0.17	0.09	0.07	0.07	
0	712	521	272	118	49.3	20.7	9.15	4.77	2.73	1.70	1.13	0.77	0.52	0.33	0.18	0.09	0.07	0.07	
10	347	230	126	64.4	32.5	16.3	8.76	5.14	3.18	2.07	1.39	0.96	0.65	0.41	0.23	0.12	0.08	0.07	
20	66.6	54.5	38.6	25.1	16.1	10.7	7.08	4.66	3.14	2.17	1.51	1.05	0.71	0.45	0.27	0.14	0.09	0.07	
30	17.1	15.3	12.9	10.4	8.13	6.32	4.88	3.81	2.83	2.06	1.49	1.05	0.72	0.47	0.28	0.16	0.10	0.07	
40	6.50	6.18	5.69	5.06	4.39	3.74	3.17	2.67	2.24	1.80	1.34	0.97	0.68	0.45	0.29	0.18	0.11	0.07	
50	3.20	3.12	2.98	2.79	2.56	2.32	2.07	1.83	1.59	1.37	1.12	0.84	0.61	0.43	0.29	0.19	0.12	0.07	
60	1.79	1.76	1.70	1.62	1.53	1.42	1.31	1.20	1.07	0.96	0.86	0.69	0.53	0.39	0.28	0.20	0.13	0.07	
70	0.99	0.97	0.95	0.92	0.87	0.83	0.79	0.75	0.72	0.68	0.64	0.59	0.47	0.37	0.28	0.20	0.13	0.07	
80	0.58	0.58	0.57	0.56	0.54	0.53	0.53	0.53	0.53	0.52	0.52	0.52	0.43	0.35	0.27	0.20	0.13	0.07	
90	0.42	0.42	0.42	0.41	0.41	0.41	0.41	0.42	0.43	0.44	0.44	0.45	0.39	0.32	0.26	0.20	0.13	0.07	
100	0.31	0.30	0.30	0.29	0.29	0.28	0.30	0.32	0.33	0.34	0.36	0.38	0.34	0.30	0.25	0.19	0.13	0.07	
110	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.29	0.31	0.31	0.29	0.27	0.24	0.20	0.13	0.07	
120	0.31	0.31	0.31	0.31	0.30	0.30	0.29	0.28	0.28	0.28	0.28	0.27	0.26	0.25	0.22	0.20	0.13	0.07	
130	0.59	0.58	0.55	0.51	0.46	0.40	0.34	0.30	0.29	0.28	0.27	0.25	0.24	0.23	0.21	0.19	0.14	0.07	
140	0.97	0.95	0.92	0.85	0.76	0.65	0.54	0.43	0.34	0.27	0.25	0.23	0.22	0.21	0.20	0.17	0.15	0.07	
150	1.15	1.15	1.14	1.10	1.02	0.92	0.78	0.62	0.43	0.29	0.22	0.21	0.20	0.19	0.19	0.17	0.14	0.07	
160	1.21	1.21	1.20	1.17	1.12	1.06	0.85	0.62	0.42	0.27	0.19	0.18	0.19	0.18	0.17	0.16	0.13	0.07	
170	1.13	1.17	1.17	1.08	0.95	0.80	0.63	0.45	0.28	0.19	0.14	0.14	0.17	0.16	0.16	0.15	0.13	0.07	
180	0.80	0.79	0.77	0.68	0.57	0.45	0.32	0.18	0.08	0.06	0.07	0.10	0.14	0.15	0.15	0.14	0.12	0.07	

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-07-31

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: