

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2986.3 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	56.6V x 55.5H
	At 50% of Imax	30.4V x 30.0H
	At 90% of Imax	11.9V x 12.0H

Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	834.6 lumens per klm.
	To 50% of Imax	463.6 lumens per klm.
	To 90% of Imax	94.7 lumens per klm.

Upward LOR	1.9 %
Downward LOR	98.2 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-31

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Astra D88-88mm-RGBW GREEN-30D-Rev2	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:30 DEG	DIA.:88MM	SERIAL No.:IES001388
MFR.:	SUR.:	Shielding Angle:

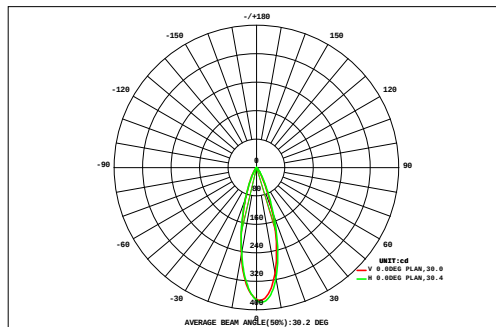

DATA OF LAMP		Eff:20.48lm/W	
MODEL		Imax(cd)	378.7
NOMINAL POWER(W)	6.192	AVAILABILITY(%)	83.4
RATED VOLTAGE(V)	48	Avai. FLUX(lm)	105.7
NOMINAL FLUX(lm)	126.8	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	126.8
TEST VOLTAGE(V)	48	q @50%(H,V)	30,30DEG

		AREA FLUX DIAGRAM														UNIT:lm				F t	F a
		0.01	0.01	0.02	0.02	0.03	0.04	0.05	0.06	0.06	0.06	0.06	0.05	0.04	0.03	0.03	0.02	0.01	0.01	0.61	0.00
VERTICAL (DEG)	45	0.01	0.02	0.02	0.03	0.05	0.07	0.09	0.10	0.11	0.11	0.10	0.09	0.07	0.05	0.04	0.03	0.02	0.01	1.03	0.00
	40	0.01	0.02	0.03	0.05	0.08	0.12	0.16	0.19	0.21	0.21	0.18	0.15	0.11	0.08	0.06	0.04	0.02	0.02	1.74	0.00
	35	0.02	0.03	0.05	0.08	0.13	0.20	0.28	0.35	0.40	0.40	0.34	0.26	0.18	0.12	0.08	0.05	0.03	0.02	3.03	1.62
	30	0.02	0.04	0.07	0.12	0.20	0.32	0.48	0.64	0.77	0.77	0.66	0.48	0.31	0.19	0.11	0.07	0.04	0.02	5.30	4.32
	25	0.02	0.05	0.09	0.16	0.29	0.49	0.79	1.11	1.34	1.36	1.16	0.84	0.51	0.28	0.15	0.08	0.05	0.02	8.80	7.97
	20	0.03	0.06	0.11	0.21	0.38	0.68	1.15	1.66	2.00	2.04	1.75	1.27	0.77	0.40	0.20	0.10	0.05	0.03	12.9	12.2
	15	0.03	0.06	0.12	0.24	0.45	0.85	1.45	2.10	2.55	2.59	2.23	1.64	1.03	0.54	0.26	0.12	0.06	0.03	16.4	15.7
	10	0.03	0.07	0.13	0.25	0.48	0.91	1.55	2.25	2.74	2.81	2.47	1.88	1.21	0.63	0.29	0.13	0.06	0.03	17.9	17.2
	5	0.03	0.06	0.13	0.24	0.46	0.86	1.47	2.14	2.58	2.66	2.37	1.81	1.17	0.62	0.28	0.13	0.06	0.03	17.1	16.4
	0	0.03	0.06	0.11	0.21	0.40	0.74	1.23	1.74	2.09	2.15	1.91	1.45	0.93	0.50	0.24	0.11	0.05	0.02	14.0	13.3
	-5	0.02	0.04	0.09	0.17	0.31	0.54	0.87	1.21	1.47	1.53	1.35	1.01	0.64	0.35	0.18	0.09	0.04	0.02	9.92	9.17
	-10	0.02	0.03	0.06	0.12	0.21	0.35	0.53	0.74	0.91	0.94	0.81	0.61	0.39	0.22	0.12	0.06	0.03	0.02	6.18	5.33
	-15	0.01	0.02	0.04	0.08	0.14	0.21	0.30	0.41	0.49	0.50	0.43	0.32	0.22	0.13	0.08	0.04	0.02	0.01	3.48	2.32
	-20	0.01	0.01	0.02	0.05	0.08	0.12	0.17	0.21	0.25	0.25	0.22	0.17	0.12	0.08	0.05	0.03	0.02	0.01	1.85	0.16
	-25	0.00	0.01	0.01	0.03	0.04	0.07	0.09	0.11	0.12	0.12	0.11	0.09	0.06	0.05	0.03	0.02	0.01	0.01	0.96	0.00
	-30	0.00	0.00	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.06	0.05	0.04	0.03	0.02	0.02	0.01	0.01	0.00	0.48	0.00
-35	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.22	0.00	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
		-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
F t	0.31	0.59	1.13	2.08	3.75	6.61	10.7	15.1	18.2	18.6	16.2	12.2	7.81	4.31	2.21	1.13	0.59	0.30	122	---	
F a	0.00	0.00	0.00	0.38	2.63	5.68	9.85	14.3	17.4	17.8	15.5	11.3	6.91	3.24	0.69	0.00	0.00	0.00	---	106	

one-half-peak spread: U:15.4,D:15.3 , L:15.0,R:15.2


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-07-31

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Astra D88-88mm-RGBW GREEN-30D-Rev2	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:30 DEG	DIA.:88MM	SERIAL No.:IES001388
MFR.:	SUR.:	Shielding Angle:

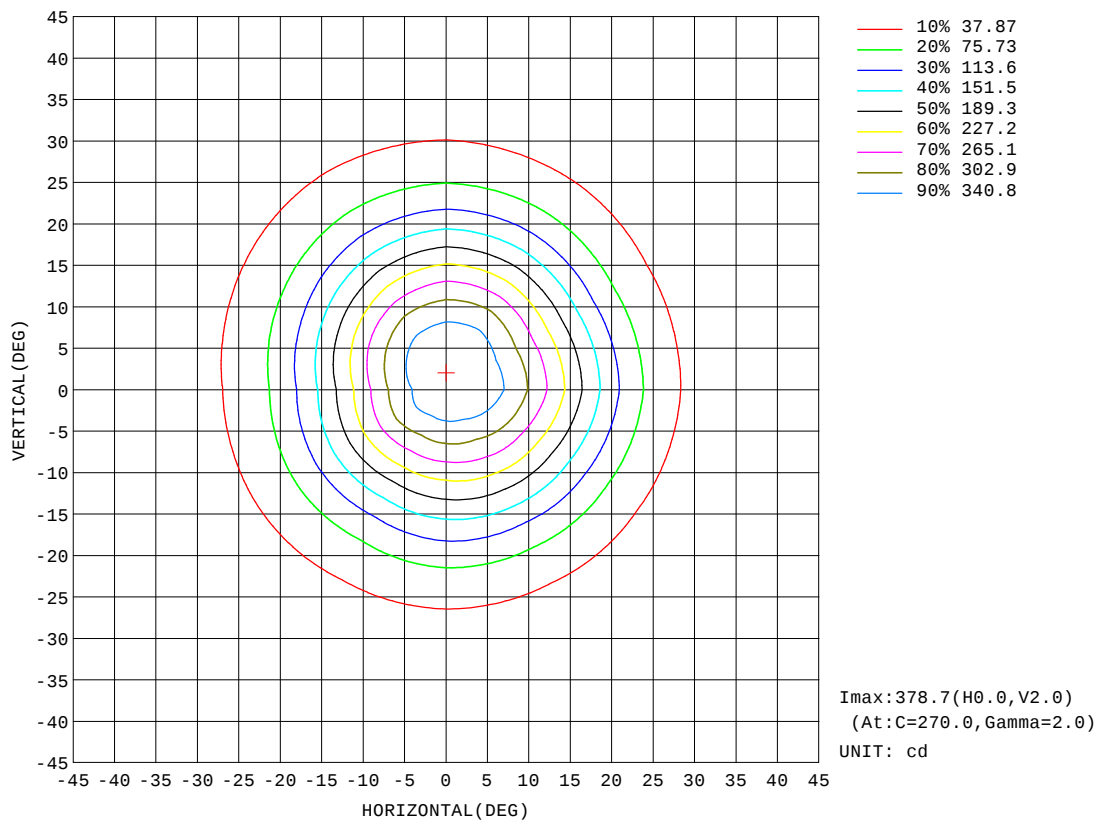


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-31

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Astra D88-88mm-RGBW GREEN-30D-Rev2	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:30 DEG	DIA.:88MM	SERIAL No.:IES001388
MFR.:	SUR.:	Shielding Angle:

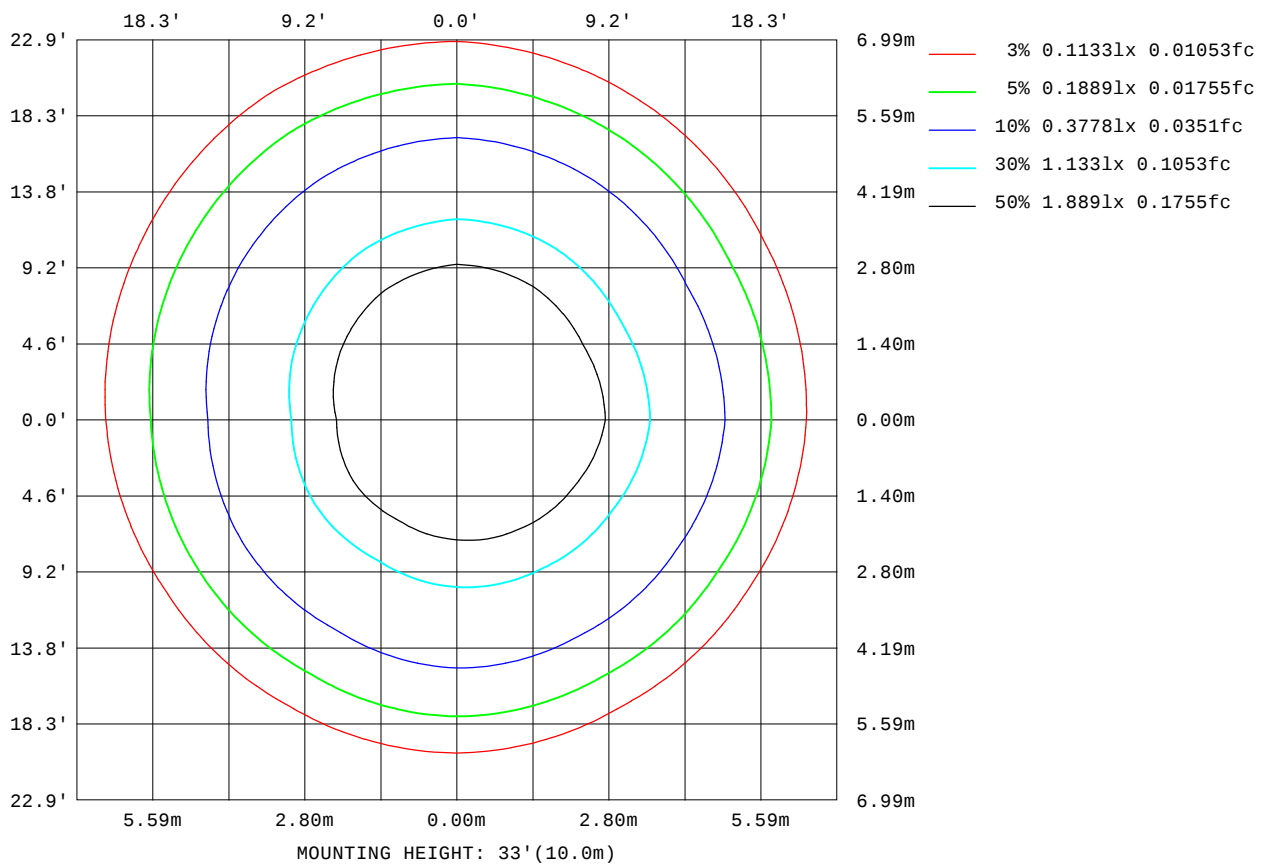

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-07-31

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

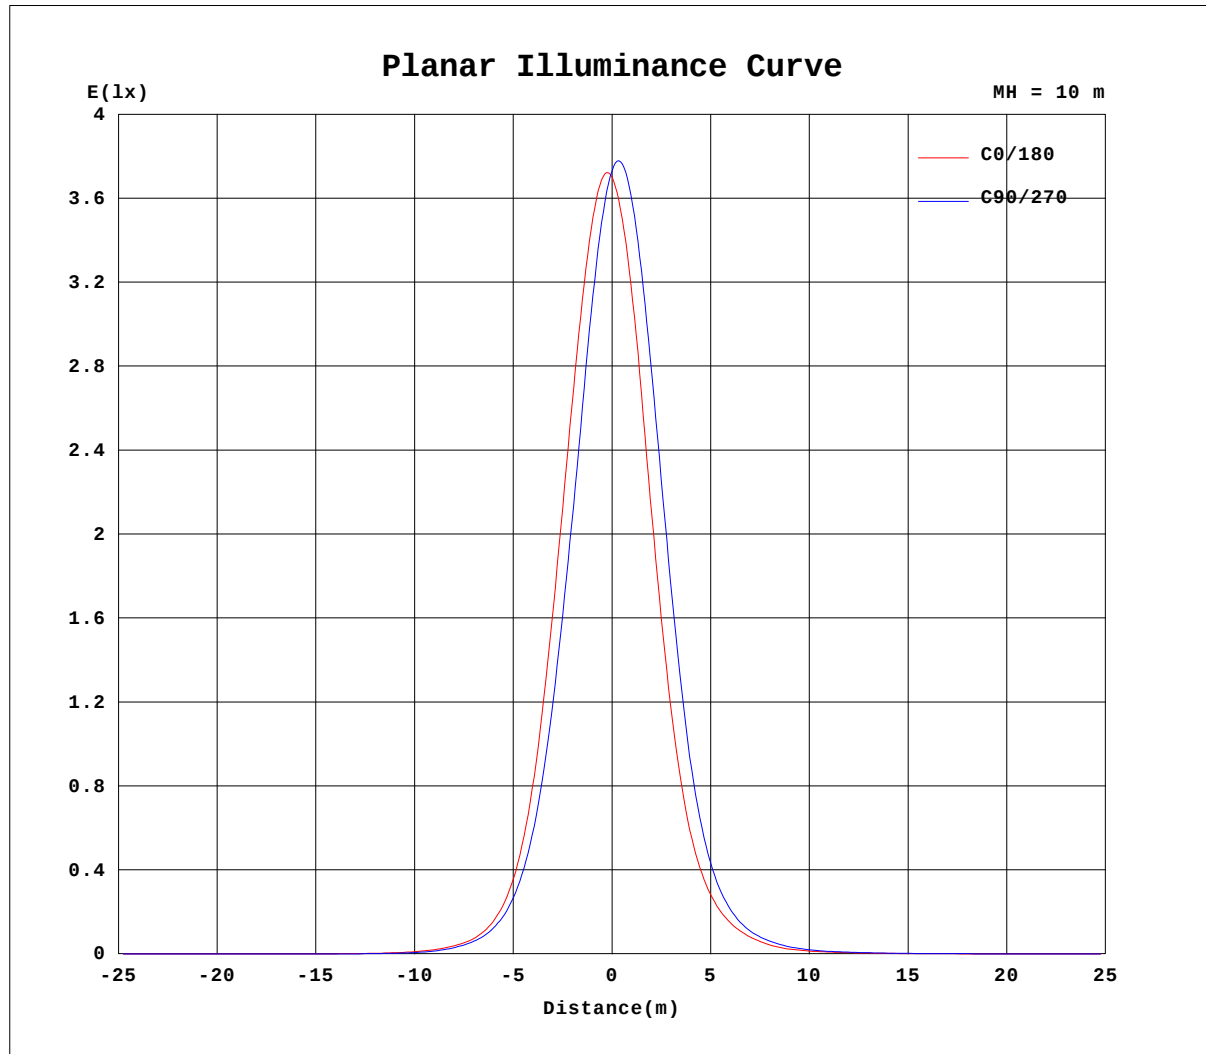


H(b) Range: -90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-07-31

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Astra D88-88mm-RGBW GREEN-30D-Rev2	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:30 DEG	DIA.:88MM	SERIAL No.:IES001388
MFR.:	SUR.:	Shielding Angle:

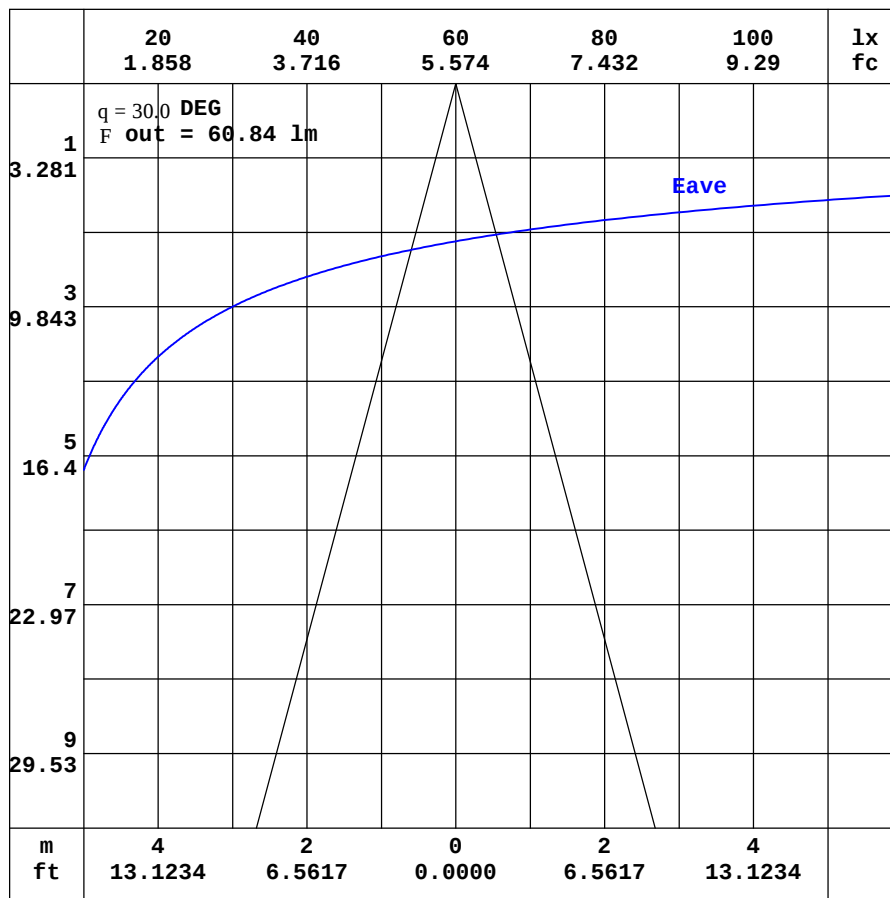

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-31

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Astra D88-88mm-RGBW GREEN-30D-Rev2	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:30 DEG	DIA.:88MM	SERIAL No.:IES001388
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.34	0.29	0.28	0.28	0.29	0.32	0.40	0.51	0.65	0.80	0.92	1.01	1.01	1.01	1.00	0.96	0.89	0.85	0.93
-170	0.34	0.28	0.27	0.26	0.26	0.28	0.33	0.40	0.49	0.58	0.66	0.72	0.74	0.75	0.75	0.76	0.78	0.78	0.82
-160	0.34	0.28	0.26	0.25	0.23	0.23	0.25	0.28	0.32	0.36	0.38	0.40	0.43	0.52	0.60	0.66	0.71	0.76	0.79
-150	0.34	0.28	0.25	0.23	0.21	0.20	0.19	0.19	0.18	0.17	0.15	0.21	0.28	0.35	0.42	0.48	0.54	0.58	0.61
-140	0.34	0.28	0.24	0.23	0.20	0.17	0.15	0.13	0.09	0.08	0.09	0.10	0.13	0.17	0.21	0.26	0.30	0.33	0.36
-130	0.34	0.28	0.24	0.21	0.19	0.15	0.12	0.09	0.08	0.08	0.08	0.08	0.08	0.08	0.09	0.10	0.12	0.14	0.15
-120	0.34	0.27	0.24	0.21	0.18	0.15	0.11	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.08	0.08	0.08	0.08	0.08
-110	0.34	0.28	0.24	0.21	0.17	0.15	0.12	0.11	0.11	0.11	0.11	0.11	0.12	0.12	0.11	0.10	0.10	0.09	0.08
-100	0.34	0.29	0.25	0.21	0.18	0.14	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.12	0.12	0.12	0.12	0.13	0.13
-90	0.34	0.30	0.26	0.22	0.18	0.15	0.11	0.10	0.10	0.09	0.09	0.08	0.08	0.08	0.09	0.10	0.11	0.11	0.12
-80	0.34	0.30	0.26	0.22	0.18	0.14	0.09	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.09	0.09	0.09
-70	0.34	0.31	0.28	0.25	0.21	0.16	0.09	0.08	0.07	0.07	0.07	0.08	0.08	0.09	0.09	0.08	0.08	0.08	0.08
-60	0.34	0.31	0.30	0.28	0.24	0.19	0.13	0.07	0.07	0.08	0.08	0.10	0.12	0.12	0.12	0.13	0.12	0.12	0.11
-50	0.34	0.33	0.33	0.32	0.29	0.26	0.20	0.11	0.07	0.10	0.14	0.18	0.28	0.40	0.54	0.67	0.80	0.90	0.94
-40	0.34	0.34	0.36	0.37	0.36	0.35	0.31	0.25	0.18	0.21	0.43	0.75	1.16	1.63	2.27	3.18	4.08	4.80	5.13
-30	0.34	0.36	0.39	0.42	0.45	0.47	0.49	0.51	0.58	0.80	1.19	2.05	3.76	6.78	10.3	14.0	18.1	21.4	22.8
-20	0.34	0.37	0.43	0.48	0.55	0.63	0.72	0.88	1.26	1.89	2.98	5.79	10.9	18.8	30.1	45.2	63.0	81.8	92.3
-10	0.34	0.38	0.46	0.54	0.65	0.79	0.99	1.32	2.01	3.14	5.63	11.5	20.7	37.1	66.3	113	170	218	243
0	0.34	0.39	0.48	0.59	0.73	0.94	1.22	1.71	2.64	4.14	7.64	14.9	26.5	47.8	89.4	159	248	330	370
10	0.34	0.39	0.48	0.59	0.74	0.94	1.22	1.67	2.55	3.95	6.99	13.7	24.4	43.8	79.2	140	216	286	315
20	0.34	0.39	0.49	0.58	0.72	0.90	1.14	1.50	2.18	3.26	5.07	9.10	15.9	26.4	42.9	67.4	98.7	126	141
30	0.34	0.39	0.46	0.56	0.67	0.83	1.03	1.29	1.69	2.38	3.38	4.90	7.78	12.4	17.9	24.3	30.7	36.0	38.4
40	0.34	0.38	0.45	0.53	0.63	0.75	0.90	1.08	1.31	1.62	2.12	2.82	3.66	4.76	6.22	7.91	9.43	10.5	10.9
50	0.34	0.37	0.44	0.50	0.57	0.66	0.77	0.89	1.02	1.16	1.33	1.55	1.86	2.23	2.61	2.94	3.22	3.41	3.49
60	0.34	0.36	0.41	0.46	0.52	0.58	0.64	0.72	0.78	0.85	0.93	1.02	1.10	1.19	1.27	1.34	1.40	1.45	1.47
70	0.34	0.35	0.39	0.42	0.47	0.50	0.54	0.57	0.60	0.63	0.66	0.70	0.72	0.76	0.80	0.83	0.85	0.87	0.89
80	0.34	0.35	0.37	0.38	0.41	0.43	0.46	0.47	0.47	0.49	0.49	0.49	0.50	0.51	0.53	0.55	0.56	0.57	0.59
90	0.34	0.35	0.36	0.36	0.37	0.38	0.39	0.39	0.38	0.38	0.37	0.37	0.36	0.37	0.38	0.39	0.39	0.40	0.41
100	0.34	0.33	0.33	0.33	0.34	0.34	0.35	0.34	0.32	0.31	0.30	0.29	0.28	0.29	0.30	0.30	0.31	0.32	0.32
110	0.34	0.32	0.32	0.32	0.32	0.31	0.31	0.30	0.29	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28
120	0.34	0.31	0.31	0.30	0.30	0.29	0.29	0.28	0.28	0.28	0.28	0.29	0.30	0.32	0.32	0.32	0.31	0.30	0.29
130	0.34	0.31	0.29	0.29	0.29	0.28	0.28	0.28	0.28	0.29	0.33	0.37	0.41	0.45	0.48	0.50	0.51	0.51	0.50
140	0.34	0.30	0.29	0.29	0.28	0.28	0.29	0.29	0.33	0.38	0.45	0.53	0.61	0.68	0.74	0.77	0.80	0.80	0.79
150	0.34	0.29	0.29	0.28	0.28	0.29	0.30	0.35	0.42	0.51	0.60	0.71	0.81	0.89	0.96	1.00	1.02	1.02	1.00
160	0.34	0.29	0.28	0.28	0.28	0.30	0.33	0.41	0.52	0.64	0.76	0.86	0.94	1.01	1.05	1.08	1.08	1.08	1.10
170	0.34	0.29	0.28	0.28	0.28	0.31	0.38	0.47	0.60	0.75	0.86	0.96	1.01	1.04	1.06	1.07	1.05	1.02	1.08
180	0.34	0.29	0.28	0.28	0.29	0.32	0.40	0.51	0.65	0.80	0.92	1.01	1.01	1.01	1.00	0.96	0.89	0.85	0.94

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-31

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Astra D88-88mm-RGBW GREEN-30D-Rev2	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:30 DEG	DIA.:88MM	SERIAL No.:IES001388
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.78	0.73	0.70	0.64	0.54	0.43	0.31	0.21	0.13	0.08	0.08	0.09	0.12	0.13	0.13	0.12	0.08	0.07
-170	0.74	0.74	0.73	0.66	0.56	0.45	0.33	0.22	0.13	0.09	0.08	0.09	0.11	0.13	0.12	0.12	0.08	0.07
-160	0.74	0.70	0.64	0.57	0.49	0.40	0.29	0.19	0.12	0.09	0.08	0.10	0.11	0.12	0.12	0.12	0.08	0.07
-150	0.58	0.53	0.46	0.40	0.33	0.26	0.19	0.15	0.10	0.08	0.09	0.10	0.11	0.12	0.13	0.11	0.08	0.07
-140	0.33	0.30	0.25	0.20	0.16	0.14	0.12	0.09	0.08	0.08	0.09	0.10	0.10	0.12	0.13	0.10	0.08	0.07
-130	0.15	0.14	0.13	0.09	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.09	0.11	0.13	0.12	0.10	0.08	0.07
-120	0.08	0.08	0.08	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.11	0.12	0.12	0.11	0.09	0.08	0.07
-110	0.09	0.10	0.10	0.11	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.11	0.10	0.09	0.08	0.07
-100	0.13	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.11	0.10	0.10	0.08	0.08	0.07
-90	0.11	0.11	0.10	0.09	0.08	0.08	0.08	0.09	0.09	0.10	0.11	0.11	0.11	0.10	0.09	0.08	0.08	0.07
-80	0.09	0.09	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.09	0.09	0.10	0.09	0.09	0.08	0.08	0.07	0.07
-70	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.07	0.07	0.07	0.08	0.08	0.08	0.08	0.08	0.08	0.07	0.07
-60	0.12	0.11	0.12	0.12	0.12	0.11	0.09	0.09	0.08	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07
-50	0.93	0.86	0.74	0.59	0.44	0.31	0.19	0.12	0.09	0.08	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07
-40	4.90	4.28	3.49	2.64	1.97	1.41	0.95	0.54	0.26	0.12	0.09	0.08	0.08	0.07	0.07	0.07	0.07	0.07
-30	21.3	17.8	13.6	10.0	7.00	4.45	2.66	1.55	0.87	0.37	0.15	0.10	0.09	0.07	0.07	0.07	0.07	0.07
-20	86.6	69.5	49.5	31.6	18.6	10.7	6.23	3.32	1.71	0.85	0.32	0.12	0.09	0.08	0.07	0.07	0.06	0.07
-10	235	195	136	80.7	42.3	21.0	10.7	5.53	2.66	1.29	0.51	0.17	0.11	0.08	0.07	0.06	0.06	0.07
0	360	301	215	128	63.4	29.3	13.6	6.87	3.23	1.52	0.63	0.21	0.12	0.09	0.07	0.06	0.06	0.07
10	298	235	160	91.6	47.2	23.7	12.5	6.80	3.50	1.84	0.87	0.41	0.26	0.18	0.13	0.09	0.08	0.07
20	129	103	69.1	42.0	24.5	14.7	9.17	5.42	3.11	1.80	0.96	0.56	0.37	0.25	0.18	0.12	0.09	0.07
30	35.3	29.3	22.4	16.4	11.8	8.15	5.54	3.78	2.49	1.51	0.95	0.65	0.45	0.31	0.21	0.14	0.10	0.07
40	10.4	9.32	7.91	6.40	5.08	3.94	3.05	2.28	1.71	1.28	0.94	0.68	0.49	0.34	0.24	0.16	0.11	0.07
50	3.44	3.28	3.03	2.70	2.33	1.94	1.62	1.36	1.19	1.05	0.87	0.66	0.49	0.36	0.26	0.18	0.12	0.07
60	1.46	1.41	1.35	1.28	1.20	1.12	1.04	0.95	0.87	0.80	0.74	0.61	0.47	0.36	0.26	0.18	0.12	0.07
70	0.88	0.86	0.84	0.80	0.77	0.74	0.70	0.68	0.65	0.63	0.60	0.54	0.44	0.34	0.26	0.19	0.12	0.07
80	0.58	0.57	0.55	0.54	0.52	0.51	0.51	0.50	0.50	0.50	0.49	0.48	0.40	0.32	0.25	0.19	0.12	0.07
90	0.40	0.40	0.39	0.38	0.37	0.37	0.37	0.38	0.38	0.39	0.40	0.40	0.35	0.29	0.23	0.18	0.12	0.07
100	0.32	0.31	0.30	0.30	0.29	0.29	0.29	0.31	0.32	0.33	0.34	0.35	0.31	0.27	0.22	0.17	0.12	0.07
110	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.29	0.30	0.31	0.28	0.25	0.21	0.17	0.12	0.07
120	0.30	0.31	0.31	0.31	0.31	0.30	0.29	0.28	0.28	0.27	0.28	0.27	0.26	0.23	0.20	0.16	0.12	0.07
130	0.51	0.50	0.49	0.47	0.44	0.40	0.36	0.32	0.29	0.28	0.27	0.25	0.23	0.22	0.19	0.16	0.11	0.07
140	0.80	0.79	0.77	0.73	0.66	0.59	0.51	0.43	0.36	0.29	0.24	0.23	0.21	0.20	0.19	0.15	0.11	0.07
150	1.02	1.02	1.00	0.95	0.88	0.79	0.69	0.58	0.43	0.31	0.23	0.20	0.19	0.18	0.17	0.15	0.10	0.07
160	1.09	1.09	1.08	1.06	1.00	0.93	0.76	0.56	0.40	0.28	0.20	0.17	0.17	0.16	0.16	0.14	0.09	0.07
170	1.03	1.06	1.07	0.99	0.88	0.74	0.58	0.42	0.29	0.20	0.15	0.13	0.14	0.15	0.14	0.13	0.09	0.07
180	0.78	0.73	0.70	0.64	0.54	0.43	0.31	0.21	0.13	0.08	0.08	0.09	0.12	0.13	0.13	0.12	0.08	0.07

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-07-31

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks: