

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1785.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	70.5V x 72.9H
	At 50% of Imax	41.8V x 41.8H
	At 90% of Imax	17.5V x 18.2H
Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	887.0 lumens per klm.
	To 50% of Imax	546.7 lumens per klm.
	To 90% of Imax	131.8 lumens per klm.
Upward LOR		1.4 %
Downward LOR		98.6 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-31

V(β) Range:-180 - 180DEG
V(β) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Astra D88-88mm-RGBW RED-40D-Rev2	TYPE:RGBW-RED	WEIGHT:
SPEC.:40 DEG	DIA.:88MM	SERIAL No.:IES001376
MFR.:	SUR.:	Shielding Angle:

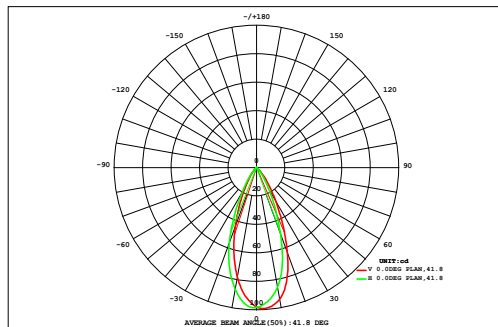

DATA OF LAMP		Eff:9.65lm/W	
MODEL		Imax(cd)	99.28
NOMINAL POWER(W)	5.76	AVAILABILITY(%)	88.6
RATED VOLTAGE(V)	48	Avai. FLUX(lm)	49.28
NOMINAL FLUX(lm)	55.6	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	55.60
TEST VOLTAGE(V)	48	q @50%(H,V)	42,42DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm	F t	F a
	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.08	0.00
72	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.12	0.00
64	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.20	0.00
56	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.42	0.00
48	0.00	0.00	0.01	0.01	0.02	0.04	0.05	0.06	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.00	1.01	0.18
40	0.00	0.00	0.01	0.01	0.02	0.05	0.08	0.13	0.16	0.17	0.15	0.10	0.06	0.03	0.02	0.01	0.00	2.36	1.89
32	0.00	0.00	0.01	0.02	0.04	0.10	0.19	0.30	0.41	0.44	0.37	0.25	0.14	0.06	0.02	0.01	0.00	4.90	4.56
24	0.00	0.00	0.01	0.03	0.07	0.17	0.37	0.63	0.89	0.97	0.81	0.52	0.26	0.11	0.04	0.01	0.00	7.87	7.59
16	0.00	0.01	0.01	0.04	0.10	0.27	0.60	1.06	1.44	1.54	1.31	0.84	0.42	0.17	0.05	0.01	0.00	9.77	9.51
8	0.00	0.01	0.01	0.04	0.13	0.34	0.77	1.32	1.74	1.85	1.62	1.09	0.55	0.21	0.06	0.01	0.00	9.97	9.72
0	0.00	0.00	0.01	0.04	0.13	0.35	0.80	1.36	1.77	1.87	1.66	1.12	0.55	0.22	0.06	0.01	0.00	8.29	8.02
-8	0.00	0.00	0.01	0.04	0.11	0.28	0.66	1.15	1.49	1.59	1.37	0.90	0.45	0.18	0.05	0.01	0.00	5.45	5.15
-16	0.00	0.00	0.01	0.02	0.07	0.18	0.42	0.76	1.02	1.07	0.87	0.56	0.29	0.12	0.03	0.01	0.00	2.71	2.31
-24	0.00	0.00	0.00	0.01	0.04	0.10	0.21	0.37	0.50	0.53	0.43	0.28	0.15	0.06	0.02	0.00	0.00	1.08	0.36
-32	0.00	0.00	0.00	0.01	0.02	0.05	0.09	0.15	0.19	0.20	0.17	0.12	0.06	0.02	0.01	0.00	0.00	0.34	0.00
-40	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.05	0.06	0.06	0.05	0.03	0.02	0.01	0.00	0.00	0.00	0.08	0.00
-48	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.01	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72 -64 -56 -48 -40 -32 -24 -16 HORIZONTAL (DEG) 16 24 32 40 48 56 64 72																			
F t	0.03	0.05	0.11	0.28	0.78	1.96	4.30	7.36	9.79	10.4	8.91	5.91	3.02	1.24	0.39	0.10	0.03	0.01	55
F a	0.00	0.00	0.00	0.00	0.09	1.45	3.89	6.98	9.43	10.0	8.55	5.54	2.62	0.68	0.00	0.00	0.00	0.00	49

one-half-peak spread: U:20.9,D:21.1 , L:22.1,R:20.0


NEMA Beam Type: Type 5

H_b) Range:-90 - 90DEG
H_b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-31

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Astra D88-88mm-RGBW RED-40D-Rev2	TYPE:RGBW-RED	WEIGHT:
SPEC.:40 DEG	DIA.:88MM	SERIAL No.:IES001376
MFR.:	SUR.:	Shielding Angle:

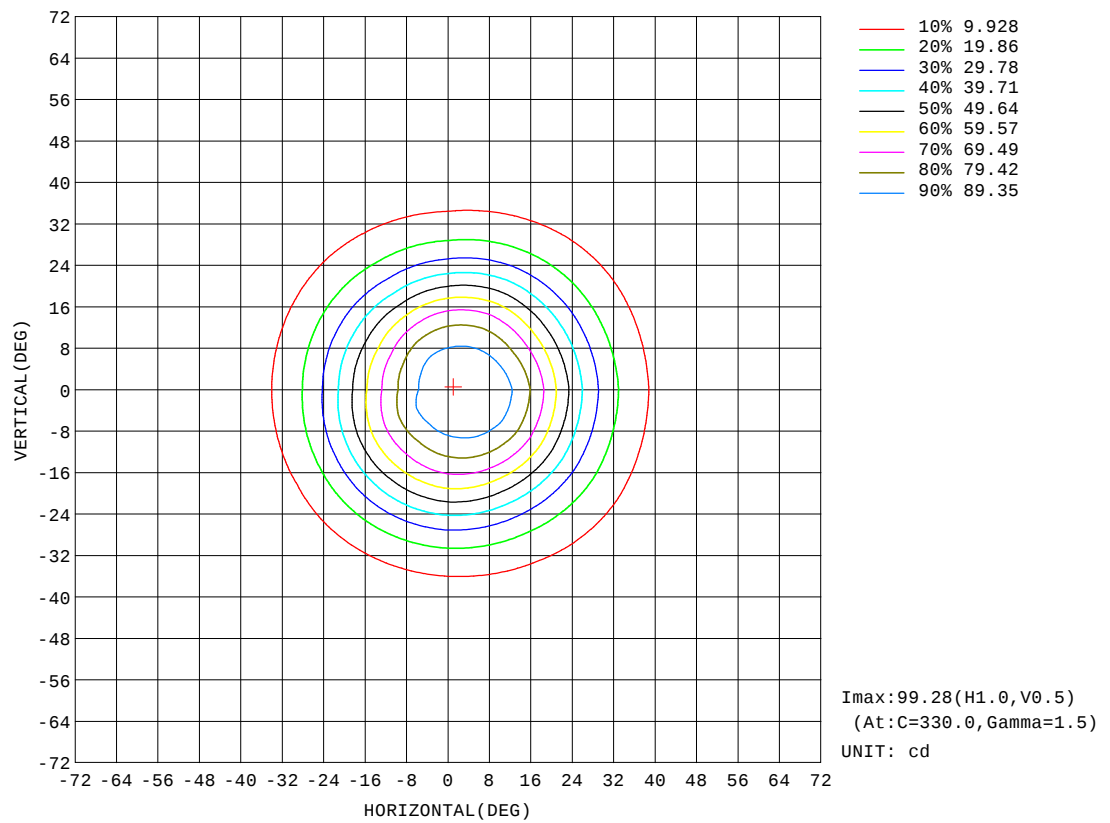


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-31

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Astra D88-88mm-RGBW RED-40D-Rev2	TYPE:RGBW-RED	WEIGHT:
SPEC.:40 DEG	DIA.:88MM	SERIAL No.:IES001376
MFR.:	SUR.:	Shielding Angle:

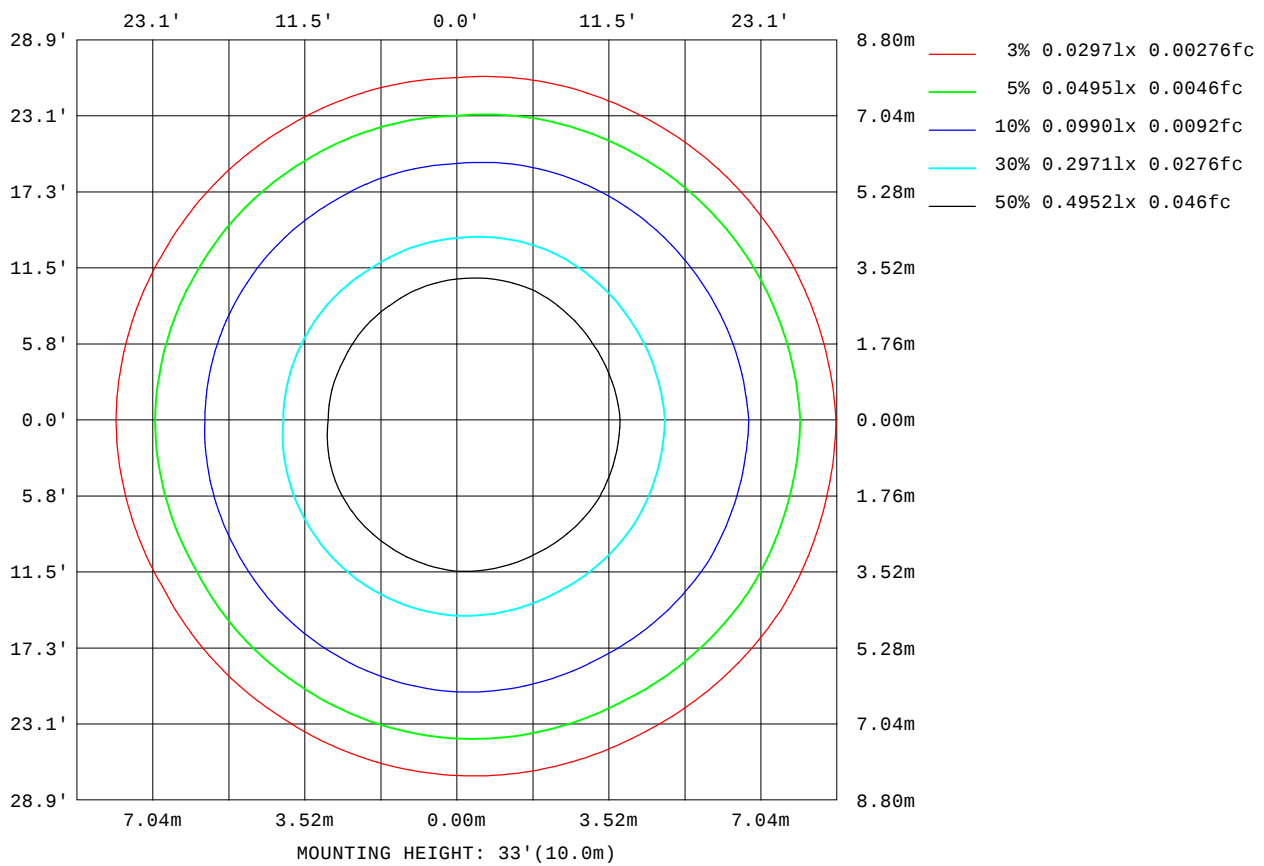

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-31

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

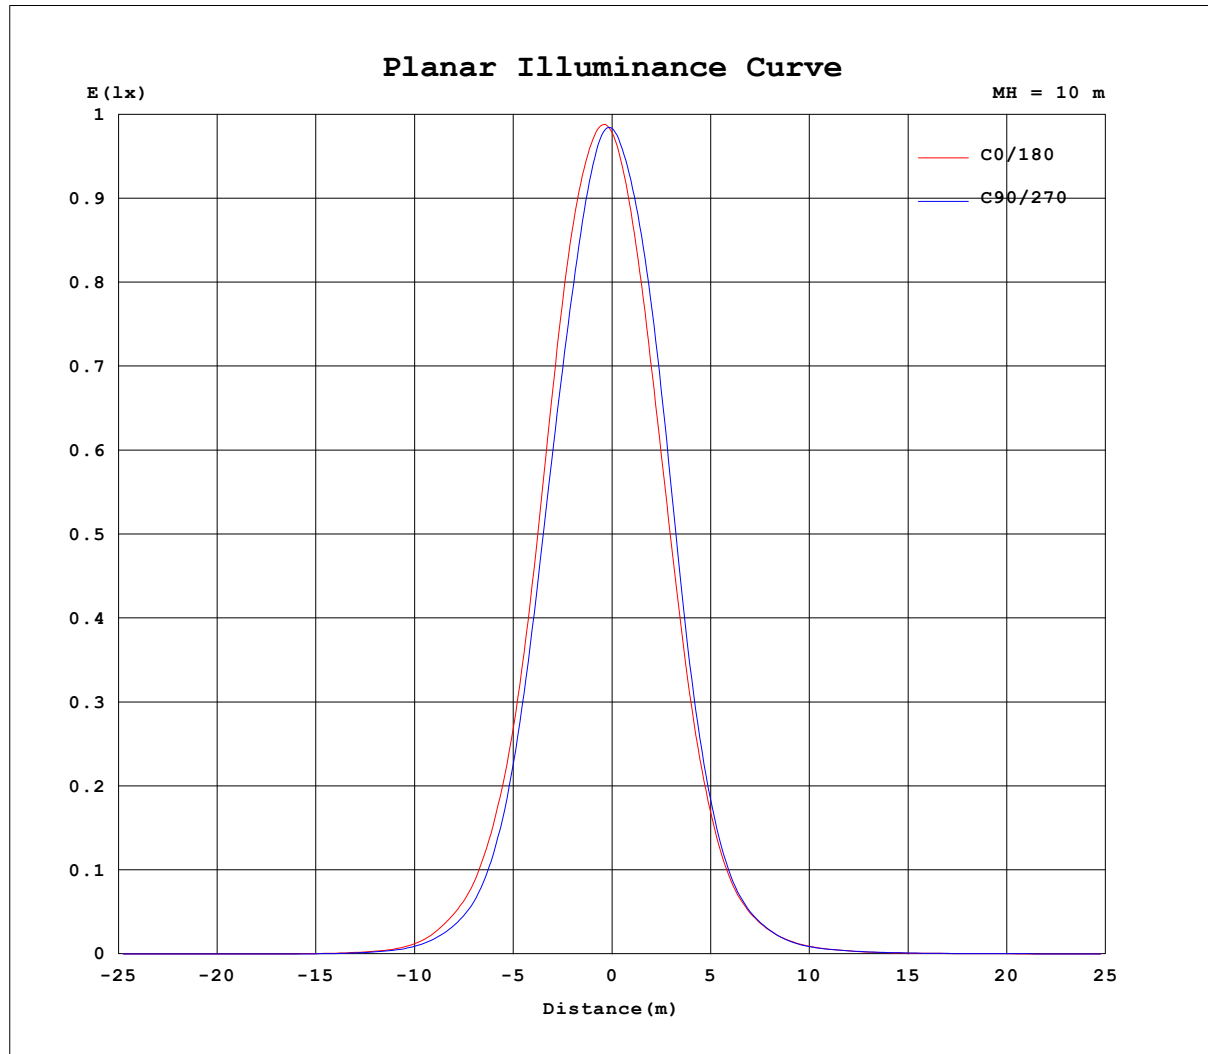


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-31

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Astra D88-88mm-RGBW RED-40D-Rev2	TYPE:RGBW-RED	WEIGHT:
SPEC.:40 DEG	DIA.:88MM	SERIAL No.:IES001376
MFR.:	SUR.:	Shielding Angle:

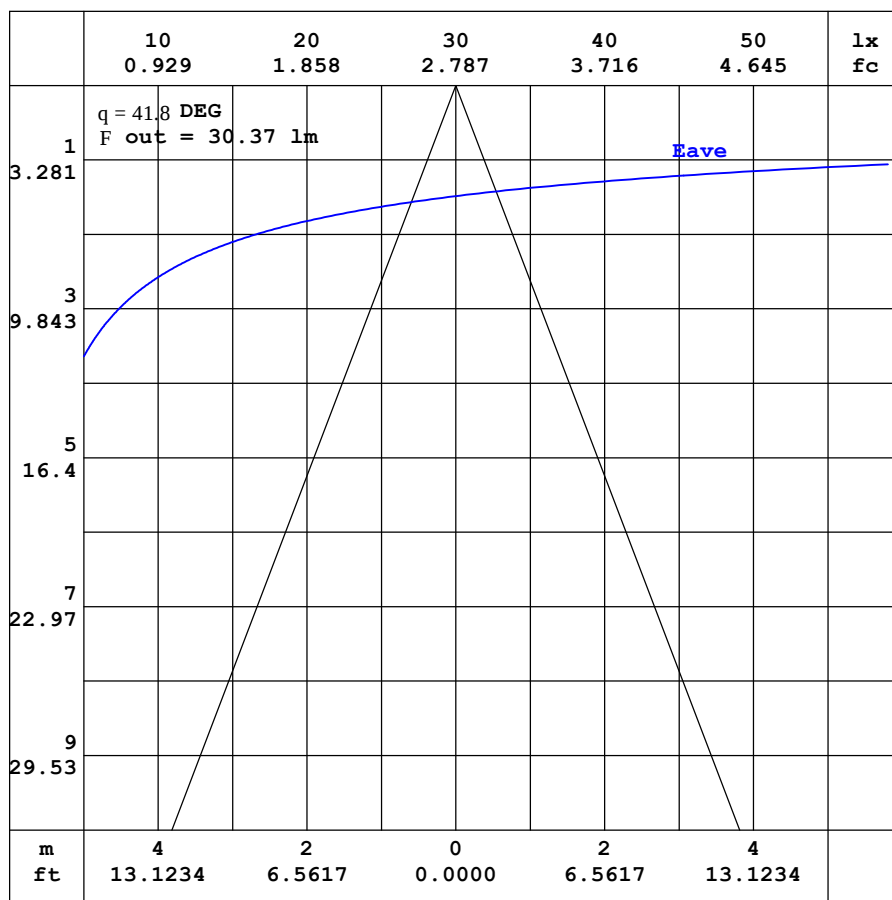

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-07-31

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Astra D88-88mm-RGBW RED-40D-Rev2	TYPE:RGBW-RED	WEIGHT:
SPEC.:40 DEG	DIA.:88MM	SERIAL No.:IES001376
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.10	0.10	0.10	0.10	0.11	0.14	0.16	0.22	0.28	0.32	0.36	0.37	0.37	0.37	0.37	0.36	0.36	0.36	0.35
-170	0.10	0.10	0.09	0.09	0.10	0.12	0.14	0.17	0.20	0.23	0.25	0.27	0.27	0.27	0.28	0.28	0.29	0.28	0.32
-160	0.10	0.09	0.09	0.08	0.09	0.09	0.10	0.11	0.13	0.14	0.15	0.14	0.15	0.17	0.20	0.21	0.22	0.25	0.27
-150	0.10	0.09	0.08	0.08	0.07	0.07	0.07	0.06	0.06	0.06	0.05	0.06	0.08	0.10	0.13	0.14	0.16	0.18	0.19
-140	0.10	0.09	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.02	0.02	0.02	0.03	0.06	0.07	0.09	0.10
-130	0.10	0.09	0.07	0.06	0.05	0.04	0.03	0.01	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.03
-120	0.10	0.09	0.07	0.06	0.04	0.03	0.02	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.10	0.08	0.07	0.05	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.10	0.08	0.07	0.05	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.10	0.08	0.07	0.05	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.10	0.08	0.07	0.05	0.03	0.02	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00
-70	0.10	0.08	0.07	0.07	0.05	0.03	0.01	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.00
-60	0.10	0.08	0.09	0.08	0.07	0.05	0.02	0.00	0.01	0.01	0.02	0.03	0.05	0.06	0.06	0.05	0.06	0.06	0.05
-50	0.10	0.09	0.09	0.09	0.09	0.08	0.06	0.02	0.01	0.03	0.06	0.12	0.21	0.36	0.54	0.72	0.87	0.98	1.03
-40	0.10	0.09	0.11	0.13	0.13	0.13	0.11	0.09	0.07	0.13	0.36	0.76	1.23	1.89	2.73	3.81	4.81	5.59	6.00
-30	0.10	0.10	0.12	0.15	0.17	0.19	0.20	0.22	0.30	0.64	1.22	2.32	4.07	6.28	9.03	12.5	16.5	19.7	21.4
-20	0.10	0.11	0.13	0.17	0.21	0.25	0.31	0.40	0.73	1.43	2.76	5.03	8.26	14.1	22.9	33.4	43.8	51.9	56.4
-10	0.10	0.12	0.15	0.20	0.26	0.33	0.42	0.61	1.17	2.22	4.31	7.69	13.6	24.2	38.9	56.1	70.5	80.7	86.8
0	0.10	0.13	0.16	0.22	0.30	0.41	0.53	0.78	1.44	2.64	4.97	8.92	15.8	27.7	43.8	61.9	78.2	90.7	97.9
10	0.10	0.13	0.16	0.22	0.30	0.40	0.52	0.74	1.30	2.33	4.29	7.66	13.1	22.7	35.6	51.1	66.8	79.4	85.3
20	0.10	0.12	0.16	0.22	0.29	0.37	0.49	0.64	0.99	1.72	2.88	5.00	8.12	12.8	19.7	27.8	36.4	44.6	49.3
30	0.10	0.12	0.15	0.21	0.27	0.35	0.44	0.55	0.71	1.06	1.68	2.54	3.94	5.93	8.24	10.7	13.4	15.7	16.9
40	0.10	0.11	0.15	0.20	0.24	0.31	0.37	0.46	0.55	0.66	0.87	1.22	1.67	2.19	2.85	3.55	4.24	4.74	4.97
50	0.10	0.11	0.14	0.17	0.22	0.26	0.32	0.37	0.43	0.49	0.54	0.61	0.70	0.84	1.01	1.19	1.34	1.44	1.49
60	0.10	0.11	0.14	0.15	0.18	0.22	0.26	0.29	0.32	0.34	0.37	0.39	0.42	0.46	0.50	0.53	0.57	0.59	0.61
70	0.10	0.11	0.11	0.14	0.16	0.18	0.20	0.22	0.23	0.23	0.24	0.25	0.26	0.27	0.30	0.32	0.34	0.35	0.37
80	0.10	0.10	0.11	0.12	0.13	0.15	0.16	0.16	0.16	0.16	0.15	0.15	0.15	0.16	0.17	0.18	0.20	0.21	0.22
90	0.10	0.10	0.11	0.11	0.12	0.12	0.13	0.12	0.12	0.11	0.11	0.10	0.10	0.11	0.11	0.12	0.12	0.13	0.14
100	0.10	0.10	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.10	0.10	0.10	0.10	0.10	0.11	0.11	0.11
110	0.10	0.10	0.11	0.11	0.11	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10
120	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.11	0.11	0.13	0.14	0.14	0.13	0.13	0.12	0.11
130	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.12	0.14	0.16	0.19	0.21	0.22	0.22	0.22	0.21	0.20
140	0.10	0.10	0.10	0.10	0.10	0.10	0.11	0.11	0.12	0.15	0.20	0.23	0.26	0.29	0.32	0.33	0.32	0.33	0.32
150	0.10	0.10	0.10	0.10	0.10	0.11	0.12	0.14	0.17	0.20	0.24	0.28	0.32	0.36	0.39	0.40	0.39	0.39	0.37
160	0.10	0.10	0.10	0.10	0.11	0.12	0.14	0.17	0.22	0.26	0.29	0.34	0.36	0.38	0.39	0.40	0.40	0.40	0.42
170	0.10	0.10	0.10	0.10	0.11	0.13	0.16	0.20	0.25	0.30	0.34	0.36	0.37	0.38	0.38	0.38	0.37	0.37	0.41
180	0.10	0.10	0.10	0.10	0.11	0.14	0.16	0.22	0.28	0.32	0.36	0.37	0.37	0.37	0.37	0.36	0.36	0.36	0.38

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-07-31

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Astra D88-88mm-RGBW RED-40D-Rev2	TYPE:RGBW-RED	WEIGHT:
SPEC.:40 DEG	DIA.:88MM	SERIAL No.:IES001376
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.29	0.28	0.23	0.19	0.15	0.12	0.06	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.28	0.27	0.25	0.22	0.18	0.13	0.08	0.04	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.23	0.20	0.19	0.17	0.15	0.11	0.08	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.17	0.15	0.12	0.09	0.07	0.06	0.04	0.03	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.08	0.06	0.04	0.02	0.01	0.01	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.01	0.01	0.01	0.01	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.06	0.06	0.06	0.06	0.05	0.05	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	1.01	0.93	0.80	0.64	0.46	0.30	0.17	0.07	0.03	0.01	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	
-40	5.97	5.50	4.61	3.50	2.40	1.53	0.96	0.53	0.24	0.06	0.03	0.01	0.01	0.01	0.01	0.00	0.00	0.00	
-30	21.0	18.8	15.5	12.1	9.08	6.14	3.32	1.64	0.82	0.34	0.09	0.04	0.03	0.02	0.01	0.00	0.00	0.00	
-20	55.0	49.2	40.5	30.4	21.3	13.9	8.47	4.09	1.71	0.76	0.26	0.07	0.04	0.02	0.02	0.01	0.00	0.00	
-10	87.5	82.1	70.4	53.3	36.0	22.7	13.1	7.14	2.91	1.15	0.44	0.11	0.05	0.03	0.02	0.01	0.00	0.00	
0	98.7	93.9	82.3	63.5	43.2	27.2	15.5	8.50	3.50	1.34	0.52	0.14	0.06	0.04	0.02	0.00	0.00	0.00	
10	85.2	79.1	66.6	50.3	34.4	21.6	12.6	6.81	2.97	1.33	0.58	0.23	0.13	0.08	0.05	0.02	0.01	0.00	
20	49.7	45.5	37.3	27.9	19.2	12.6	7.74	3.99	2.06	1.09	0.54	0.29	0.18	0.11	0.07	0.03	0.01	0.00	
30	17.3	16.0	13.6	10.9	8.22	5.36	3.35	2.19	1.38	0.80	0.48	0.33	0.22	0.14	0.08	0.04	0.01	0.00	
40	5.02	4.67	4.03	3.31	2.60	2.03	1.56	1.13	0.84	0.64	0.47	0.32	0.22	0.15	0.09	0.04	0.02	0.00	
50	1.50	1.44	1.33	1.19	1.02	0.86	0.72	0.64	0.57	0.50	0.42	0.31	0.22	0.15	0.10	0.05	0.02	0.00	
60	0.61	0.59	0.57	0.55	0.52	0.49	0.46	0.43	0.40	0.37	0.33	0.27	0.20	0.14	0.09	0.05	0.02	0.00	
70	0.36	0.35	0.34	0.33	0.30	0.29	0.29	0.28	0.27	0.26	0.25	0.22	0.17	0.13	0.08	0.05	0.02	0.00	
80	0.21	0.21	0.20	0.19	0.18	0.17	0.17	0.17	0.18	0.18	0.18	0.17	0.14	0.11	0.08	0.05	0.02	0.00	
90	0.13	0.12	0.12	0.11	0.11	0.10	0.11	0.12	0.12	0.13	0.14	0.14	0.12	0.10	0.07	0.05	0.02	0.00	
100	0.11	0.11	0.10	0.10	0.10	0.10	0.10	0.11	0.11	0.12	0.12	0.13	0.10	0.09	0.07	0.05	0.02	0.00	
110	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.11	0.11	0.09	0.08	0.06	0.04	0.02	0.00	
120	0.12	0.12	0.12	0.13	0.12	0.12	0.11	0.10	0.10	0.10	0.10	0.09	0.08	0.07	0.05	0.04	0.02	0.00	
130	0.21	0.21	0.21	0.20	0.19	0.17	0.14	0.12	0.11	0.10	0.09	0.08	0.06	0.05	0.05	0.03	0.02	0.00	
140	0.32	0.31	0.31	0.30	0.27	0.23	0.20	0.16	0.12	0.10	0.08	0.07	0.06	0.04	0.04	0.03	0.01	0.00	
150	0.39	0.40	0.40	0.38	0.33	0.29	0.25	0.20	0.14	0.10	0.07	0.05	0.04	0.03	0.03	0.02	0.01	0.00	
160	0.41	0.41	0.40	0.39	0.37	0.35	0.25	0.18	0.13	0.08	0.05	0.04	0.03	0.02	0.02	0.01	0.01	0.00	
170	0.37	0.38	0.40	0.37	0.30	0.24	0.19	0.12	0.08	0.05	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.00	
180	0.29	0.28	0.23	0.19	0.15	0.12	0.06	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(°) Range:-90 - 90DEG

H(°) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-07-31

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: