

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	4392.0 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	48.1V x 49.7H
	At 50% of Imax	18.7V x 22.4H
	At 90% of Imax	6.6V x 8.4H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	765.7 lumens per klm.
	To 50% of Imax	310.8 lumens per klm.
	To 90% of Imax	54.7 lumens per klm.

Upward LOR	2.1 %
Downward LOR	97.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeMini Recessed-500mm-RGBW 3000K-1525D-Rev2	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15x25 DEG	DIM.:500mm	SERIAL No.:IES000901-W
MFR.:	SUR.:	Shielding Angle:

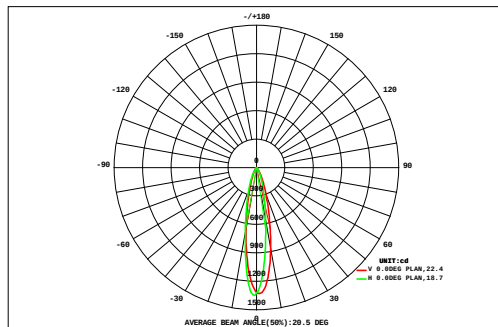

DATA OF LAMP		Eff:44.78lm/W	
MODEL		Imax(cd)	1345
NOMINAL POWER(W)	6.84	AVAILABILITY(%)	76.6
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	234.6
NOMINAL FLUX(lm)	306.3	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	306.3
TEST VOLTAGE(V)	24	q @50%(H,V)	22,19DEG

		AREA FLUX DIAGRAM															UNIT:lm				F t	F a
		0.02	0.02	0.03	0.04	0.06	0.08	0.09	0.10	0.10	0.10	0.10	0.09	0.08	0.06	0.04	0.03	0.02	0.02	1.09	0.00	
VERTICAL (DEG)	45	0.02	0.03	0.05	0.08	0.11	0.15	0.17	0.19	0.19	0.20	0.20	0.18	0.16	0.12	0.08	0.05	0.03	0.02	2.03	0.00	
	40	0.03	0.05	0.08	0.13	0.19	0.25	0.30	0.34	0.36	0.37	0.36	0.33	0.28	0.21	0.13	0.08	0.04	0.03	3.55	0.00	
	35	0.04	0.07	0.12	0.19	0.28	0.39	0.49	0.58	0.62	0.63	0.61	0.54	0.44	0.33	0.22	0.13	0.06	0.03	5.78	0.00	
	30	0.05	0.09	0.17	0.27	0.41	0.58	0.77	0.94	1.05	1.07	1.00	0.85	0.67	0.49	0.33	0.19	0.09	0.04	9.08	2.39	
	25	0.06	0.12	0.22	0.36	0.56	0.83	1.18	1.53	1.77	1.82	1.64	1.33	0.99	0.69	0.45	0.26	0.12	0.04	14.0	9.82	
	20	0.07	0.14	0.26	0.44	0.72	1.16	1.79	2.57	3.12	3.20	2.78	2.07	1.41	0.93	0.58	0.32	0.15	0.05	21.8	18.4	
	15	0.07	0.15	0.29	0.51	0.88	1.52	2.62	4.20	5.54	5.70	4.62	3.13	1.98	1.21	0.70	0.38	0.17	0.05	33.7	30.8	
	10	0.08	0.15	0.30	0.55	0.98	1.81	3.37	5.89	8.39	8.78	6.91	4.47	2.58	1.45	0.80	0.41	0.17	0.05	47.2	44.5	
	5	0.07	0.15	0.30	0.56	1.01	1.89	3.63	6.50	9.16	9.49	7.55	4.80	2.72	1.52	0.83	0.42	0.18	0.05	50.8	48.3	
	0	0.07	0.15	0.29	0.53	0.95	1.72	3.12	4.98	6.53	6.75	5.54	3.82	2.34	1.36	0.77	0.40	0.17	0.05	39.5	36.8	
	-5	0.06	0.13	0.26	0.46	0.80	1.34	2.14	3.07	3.87	4.02	3.46	2.62	1.78	1.12	0.66	0.35	0.15	0.05	26.4	23.5	
	-10	0.05	0.11	0.21	0.37	0.61	0.95	1.40	1.89	2.29	2.38	2.15	1.72	1.25	0.84	0.53	0.29	0.12	0.04	17.2	13.7	
	-15	0.04	0.08	0.16	0.27	0.44	0.65	0.90	1.16	1.36	1.41	1.32	1.11	0.84	0.59	0.37	0.21	0.09	0.02	11.0	6.26	
	-20	0.02	0.05	0.10	0.18	0.29	0.42	0.56	0.69	0.78	0.82	0.78	0.67	0.53	0.37	0.23	0.12	0.05	0.01	6.67	0.00	
	-25	0.01	0.03	0.05	0.09	0.16	0.24	0.31	0.37	0.41	0.42	0.41	0.37	0.29	0.20	0.11	0.05	0.02	0.01	3.55	0.00	
	-30	0.00	0.01	0.02	0.04	0.06	0.10	0.13	0.15	0.15	0.15	0.16	0.15	0.11	0.07	0.04	0.02	0.01	0.00	1.38	0.00	
-35	0.00	0.00	0.01	0.01	0.02	0.03	0.04	0.04	0.04	0.04	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.00	0.40	0.00		
-40	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45		
F t	0.76	1.55	2.92	5.10	8.53	14.1	23.0	35.2	45.7	47.4	39.6	28.3	18.5	11.6	6.90	3.72	1.64	0.56	295	---		
F a	0.00	0.00	0.00	0.00	2.36	9.87	19.4	31.9	42.7	44.3	36.5	24.9	14.8	7.12	0.83	0.00	0.00	0.00	---	235		

one-half-peak spread: U:9.4,D:9.5 , L:11.3,R:11.2


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-03-13

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeMini Recessed-500mm-RGBW 3000K-1525D-Rev2	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15x25 DEG	DIM.:500mm	SERIAL No.:IES000901-W
MFR.:	SUR.:	Shielding Angle:

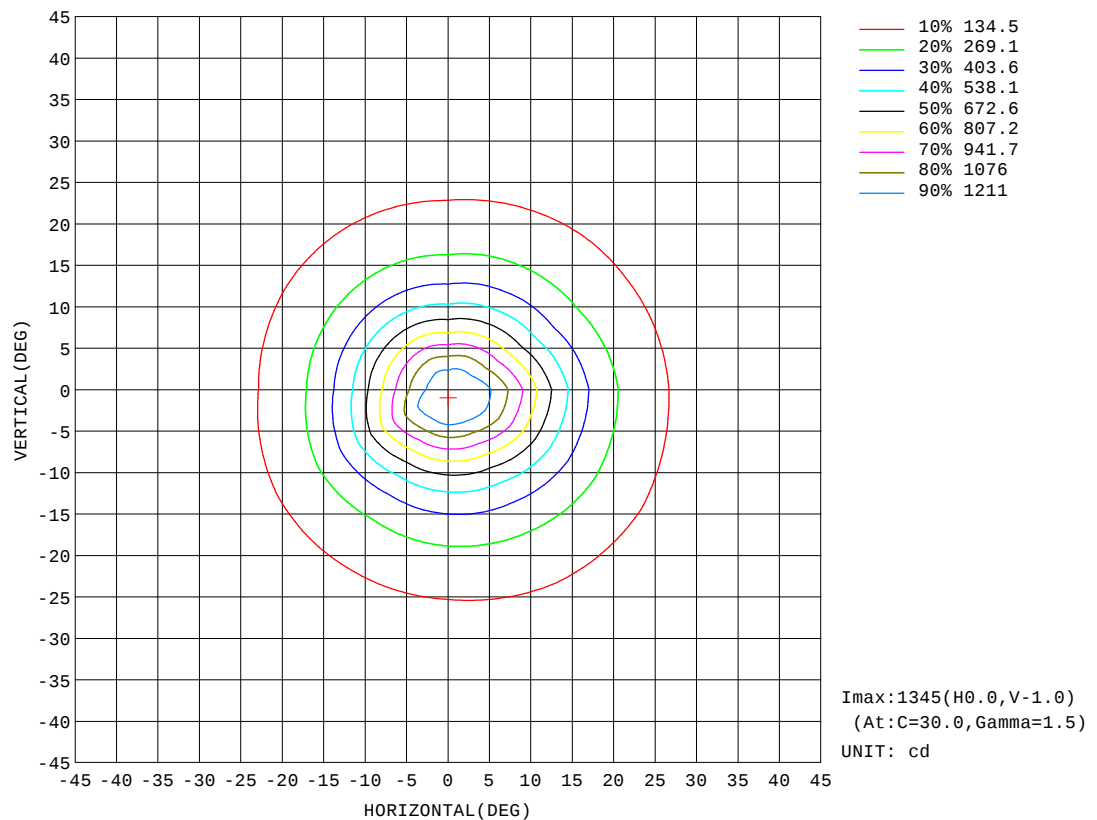


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeMini Recessed-500mm-RGBW 3000K-1525D-Rev2	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15x25 DEG	DIM.:500mm	SERIAL No.:IES000901-W
MFR.:	SUR.:	Shielding Angle:

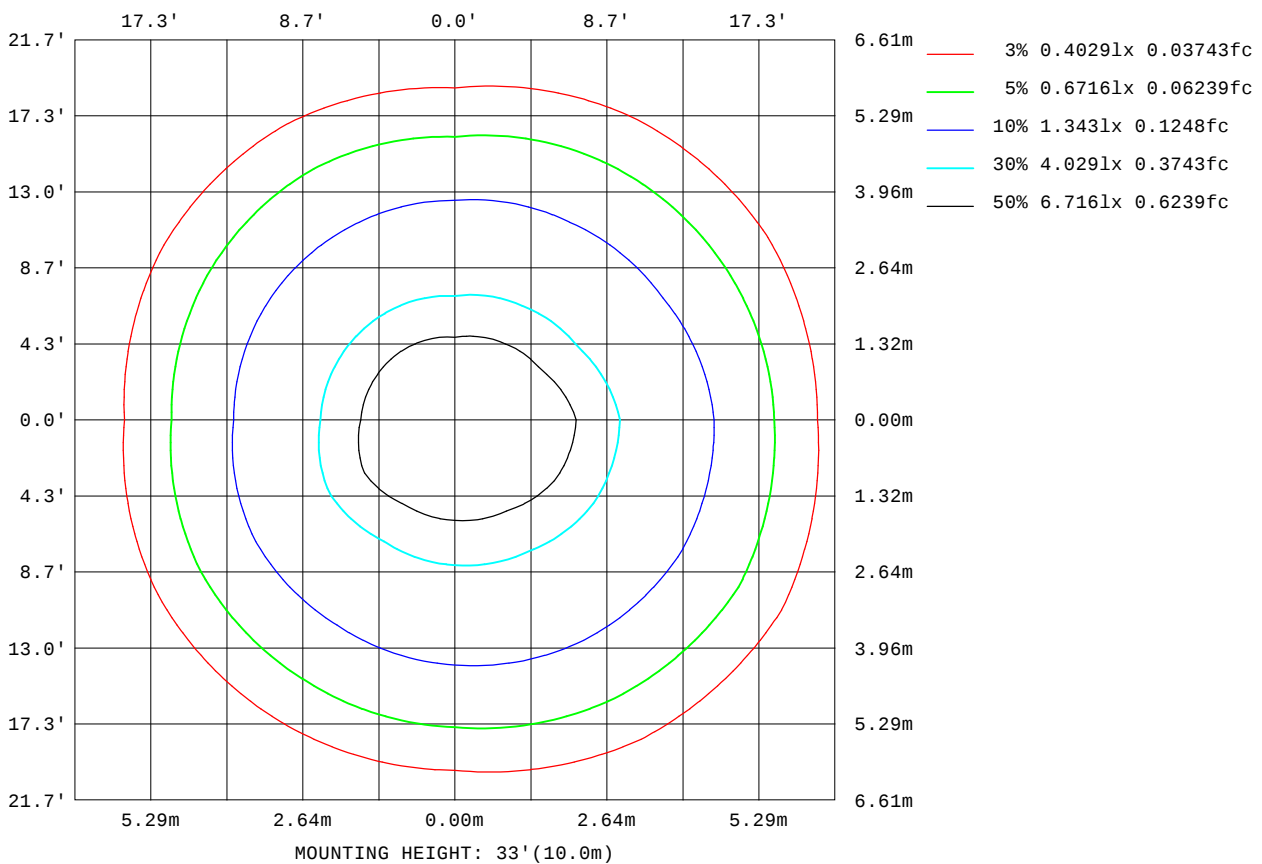

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-13

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

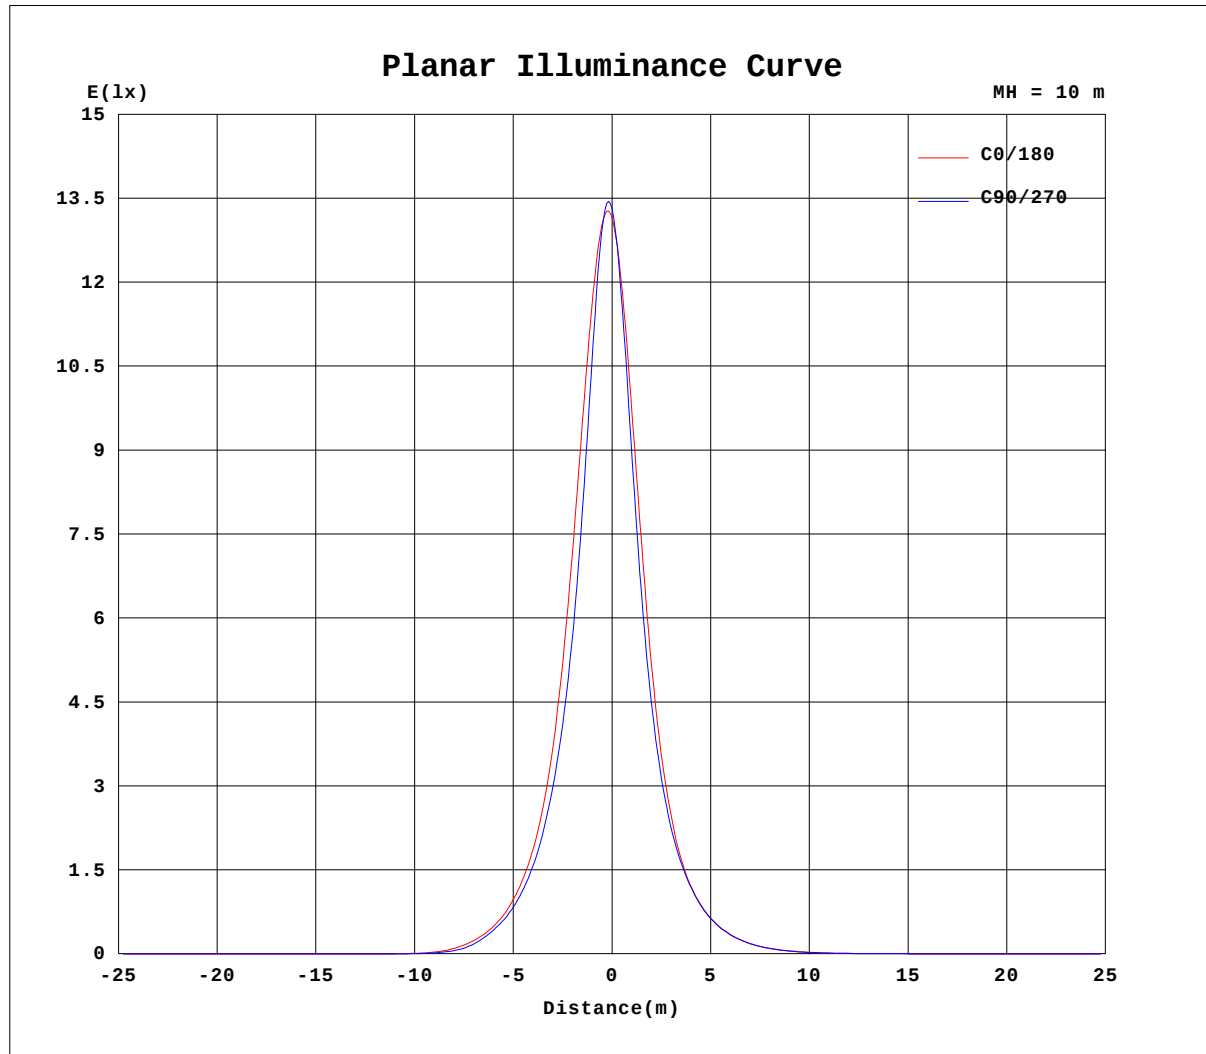


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-03-13

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeMini Recessed-500mm-RGBW 3000K-1525D-Rev2	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15x25 DEG	DIM.:500mm	SERIAL No.:IES000901-W
MFR.:	SUR.:	Shielding Angle:

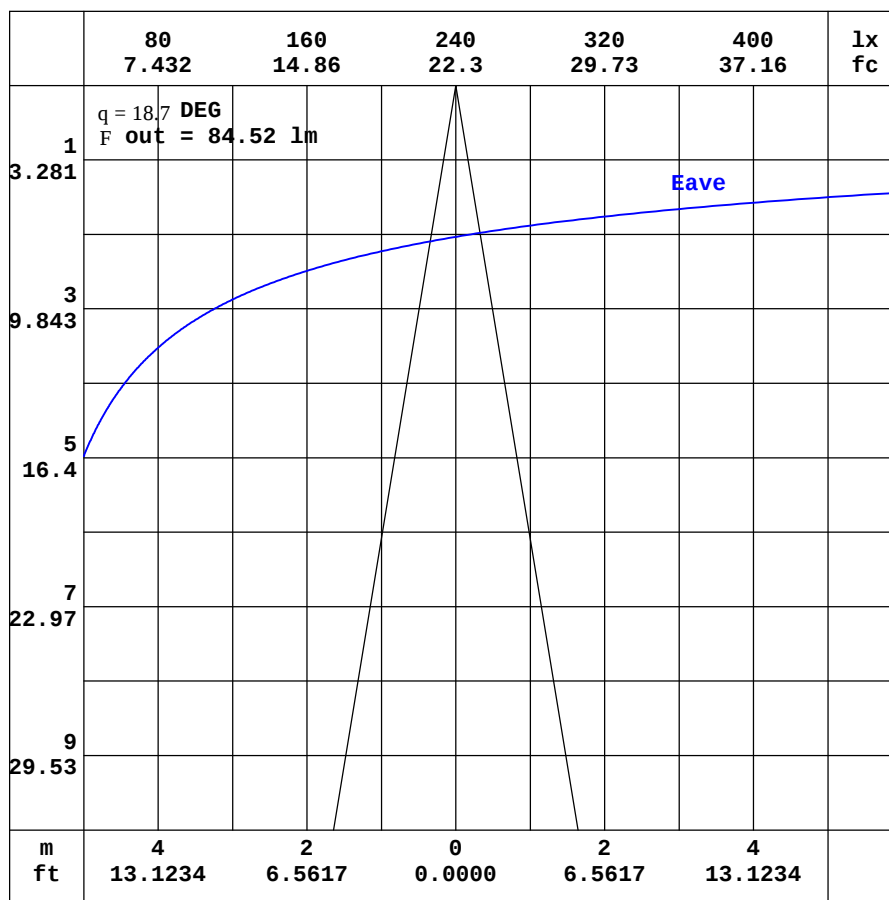

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-03-13

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW 3000K-1525D-Rev2	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15x25 DEG	DIM.:500mm	SERIAL No.:IES000901-W
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.95	0.87	0.76	0.76	0.79	0.89	1.06	1.33	1.65	2.00	2.28	2.46	2.51	2.50	2.45	2.39	2.30	2.21	2.22
-170	0.95	0.85	0.74	0.73	0.74	0.79	0.90	1.06	1.26	1.46	1.63	1.73	1.78	1.80	1.81	1.84	1.96	2.07	2.14
-160	0.95	0.84	0.73	0.70	0.69	0.70	0.73	0.79	0.85	0.91	0.95	0.96	0.98	1.19	1.40	1.57	1.71	1.81	1.85
-150	0.95	0.83	0.72	0.67	0.65	0.62	0.60	0.57	0.53	0.47	0.40	0.51	0.65	0.79	0.93	1.06	1.18	1.25	1.28
-140	0.95	0.82	0.72	0.65	0.61	0.57	0.51	0.43	0.34	0.30	0.31	0.32	0.36	0.43	0.49	0.57	0.63	0.68	0.69
-130	0.95	0.81	0.73	0.64	0.59	0.54	0.49	0.40	0.35	0.31	0.31	0.30	0.29	0.28	0.28	0.29	0.31	0.32	0.33
-120	0.95	0.81	0.74	0.64	0.57	0.52	0.46	0.42	0.42	0.40	0.39	0.37	0.36	0.34	0.32	0.30	0.29	0.28	0.27
-110	0.95	0.82	0.73	0.66	0.57	0.50	0.45	0.43	0.43	0.43	0.43	0.43	0.44	0.43	0.43	0.43	0.42	0.41	0.41
-100	0.95	0.83	0.73	0.64	0.57	0.50	0.43	0.43	0.42	0.42	0.42	0.42	0.42	0.42	0.43	0.43	0.43	0.44	0.44
-90	0.95	0.85	0.75	0.65	0.55	0.45	0.35	0.35	0.34	0.34	0.33	0.32	0.32	0.32	0.33	0.33	0.33	0.34	0.34
-80	0.95	0.87	0.78	0.68	0.56	0.43	0.28	0.25	0.23	0.21	0.18	0.16	0.14	0.14	0.13	0.13	0.13	0.14	0.14
-70	0.95	0.89	0.82	0.74	0.60	0.44	0.25	0.15	0.13	0.10	0.08	0.07	0.06	0.05	0.05	0.05	0.05	0.05	0.05
-60	0.95	0.92	0.90	0.81	0.68	0.47	0.27	0.10	0.08	0.07	0.06	0.05	0.06	0.06	0.06	0.06	0.06	0.06	0.05
-50	0.95	0.96	0.96	0.92	0.73	0.58	0.40	0.18	0.07	0.07	0.07	0.09	0.15	0.22	0.33	0.47	0.51	0.46	0.33
-40	0.95	1.00	1.05	0.95	0.86	0.78	0.66	0.49	0.21	0.13	0.59	1.56	2.90	4.34	6.07	8.30	9.84	10.2	8.99
-30	0.95	1.04	1.14	1.05	1.05	1.06	1.06	1.00	0.96	1.78	4.46	8.67	15.1	24.8	37.3	50.6	62.8	72.9	77.7
-20	0.95	1.08	1.24	1.18	1.27	1.40	1.57	1.75	2.42	5.02	10.9	21.6	37.4	59.5	89.4	129	173	215	238
-10	0.95	1.13	1.31	1.31	1.50	1.78	2.16	2.64	3.89	7.91	16.6	31.6	56.1	95.4	161	277	434	594	695
0	0.95	1.16	1.37	1.44	1.72	2.14	2.72	3.44	4.76	9.01	18.0	34.0	60.8	106	186	346	644	1048	1316
10	0.95	1.15	1.37	1.43	1.70	2.09	2.64	3.34	4.74	8.91	17.4	31.9	54.8	89.5	145	232	362	503	556
20	0.95	1.13	1.36	1.41	1.65	1.98	2.45	3.04	4.03	6.93	13.0	23.0	37.8	56.7	81.2	111	143	170	181
30	0.95	1.11	1.32	1.37	1.56	1.83	2.20	2.65	3.22	4.46	7.56	12.4	19.1	27.8	37.9	48.1	55.9	61.0	61.8
40	0.95	1.08	1.26	1.34	1.46	1.66	1.91	2.24	2.60	3.04	3.69	5.03	7.16	10.1	13.5	15.9	17.5	18.1	17.4
50	0.95	1.06	1.20	1.34	1.37	1.50	1.66	1.85	2.07	2.32	2.60	2.90	3.19	3.53	3.94	4.33	4.55	4.57	4.38
60	0.95	1.03	1.15	1.25	1.33	1.36	1.45	1.55	1.66	1.76	1.89	2.02	2.16	2.29	2.43	2.54	2.62	2.68	2.71
70	0.95	1.01	1.08	1.16	1.21	1.26	1.30	1.34	1.37	1.42	1.45	1.49	1.53	1.57	1.62	1.65	1.68	1.69	1.70
80	0.95	0.98	1.02	1.06	1.09	1.12	1.15	1.17	1.18	1.19	1.20	1.20	1.21	1.22	1.24	1.25	1.26	1.27	1.28
90	0.95	0.96	0.96	0.97	0.98	0.99	1.00	1.00	0.99	0.98	0.98	0.97	0.97	0.97	0.98	0.98	0.98	0.99	0.99
100	0.95	0.93	0.92	0.90	0.90	0.89	0.87	0.84	0.82	0.80	0.79	0.77	0.75	0.76	0.76	0.76	0.76	0.76	0.77
110	0.95	0.91	0.88	0.87	0.83	0.80	0.78	0.77	0.76	0.76	0.75	0.75	0.75	0.76	0.76	0.76	0.75	0.74	0.74
120	0.95	0.89	0.87	0.81	0.77	0.77	0.76	0.75	0.75	0.77	0.79	0.82	0.85	0.90	0.93	0.94	0.95	0.96	0.95
130	0.95	0.88	0.83	0.78	0.76	0.76	0.76	0.78	0.83	0.91	0.99	1.09	1.20	1.31	1.41	1.49	1.55	1.59	1.59
140	0.95	0.87	0.80	0.76	0.76	0.76	0.80	0.88	0.99	1.15	1.34	1.54	1.75	1.94	2.10	2.20	2.27	2.30	2.31
150	0.95	0.87	0.78	0.76	0.77	0.80	0.88	1.02	1.22	1.46	1.74	1.99	2.21	2.38	2.51	2.59	2.62	2.64	2.65
160	0.95	0.87	0.77	0.76	0.77	0.83	0.96	1.16	1.44	1.75	2.04	2.27	2.44	2.55	2.63	2.65	2.68	2.70	2.73
170	0.95	0.87	0.77	0.76	0.78	0.87	1.03	1.28	1.60	1.93	2.22	2.42	2.52	2.56	2.57	2.57	2.52	2.51	2.56
180	0.95	0.87	0.76	0.76	0.79	0.89	1.06	1.33	1.65	2.00	2.28	2.46	2.51	2.50	2.45	2.39	2.30	2.21	2.24

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-03-13

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeMini Recessed-500mm-RGBW 3000K-1525D-Rev2	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15x25 DEG	DIM.:500mm	SERIAL No.:IES000901-W
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	2.00	1.87	1.76	1.60	1.41	1.17	0.92	0.68	0.48	0.35	0.32	0.34	0.40	0.43	0.43	0.42	0.36	0.28
-170	2.02	1.94	1.81	1.63	1.39	1.14	0.88	0.64	0.45	0.35	0.32	0.34	0.39	0.43	0.43	0.42	0.36	0.28
-160	1.79	1.69	1.54	1.37	1.16	0.94	0.72	0.54	0.39	0.32	0.32	0.34	0.40	0.43	0.43	0.42	0.36	0.28
-150	1.24	1.17	1.05	0.91	0.77	0.63	0.50	0.40	0.34	0.32	0.32	0.36	0.41	0.43	0.43	0.42	0.36	0.28
-140	0.67	0.63	0.57	0.49	0.42	0.37	0.32	0.31	0.31	0.31	0.34	0.39	0.43	0.43	0.43	0.41	0.35	0.28
-130	0.32	0.31	0.29	0.28	0.29	0.29	0.30	0.31	0.33	0.35	0.38	0.43	0.43	0.43	0.42	0.40	0.34	0.28
-120	0.28	0.29	0.31	0.32	0.35	0.36	0.38	0.39	0.41	0.43	0.43	0.43	0.43	0.43	0.42	0.38	0.34	0.28
-110	0.41	0.42	0.42	0.42	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.42	0.39	0.36	0.33
-100	0.44	0.43	0.43	0.43	0.43	0.42	0.42	0.42	0.42	0.42	0.42	0.41	0.39	0.37	0.36	0.34	0.31	0.28
-90	0.34	0.33	0.32	0.32	0.31	0.30	0.31	0.31	0.32	0.33	0.33	0.34	0.33	0.32	0.31	0.30	0.29	0.28
-80	0.14	0.13	0.13	0.13	0.13	0.13	0.15	0.17	0.19	0.20	0.22	0.24	0.26	0.27	0.28	0.28	0.28	0.28
-70	0.05	0.05	0.05	0.05	0.05	0.05	0.06	0.07	0.08	0.11	0.14	0.16	0.18	0.20	0.23	0.25	0.28	0.28
-60	0.05	0.05	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.06	0.09	0.10	0.13	0.15	0.19	0.22	0.27	0.28
-50	0.47	0.52	0.46	0.32	0.19	0.11	0.07	0.05	0.05	0.05	0.06	0.07	0.09	0.11	0.15	0.20	0.25	0.28
-40	10.9	10.8	9.14	6.58	4.18	2.26	1.03	0.35	0.07	0.05	0.06	0.06	0.07	0.09	0.13	0.17	0.24	0.28
-30	78.7	72.9	62.6	47.6	31.7	17.8	7.85	2.80	0.79	0.14	0.08	0.07	0.07	0.08	0.10	0.16	0.23	0.28
-20	234	205	164	120	82.6	52.1	27.0	9.28	2.37	0.51	0.12	0.09	0.08	0.08	0.08	0.14	0.22	0.28
-10	641	507	352	223	138	80.1	41.2	15.6	4.07	0.89	0.18	0.11	0.09	0.07	0.08	0.14	0.22	0.28
0	1223	865	510	287	163	89.4	44.2	15.2	3.85	0.89	0.19	0.14	0.09	0.08	0.08	0.14	0.22	0.28
10	530	409	279	186	120	72.6	38.7	15.2	5.14	1.95	0.97	0.64	0.42	0.29	0.21	0.20	0.24	0.28
20	178	156	128	96.5	69.3	45.9	25.1	10.8	4.79	2.46	1.55	1.05	0.70	0.47	0.32	0.27	0.27	0.28
30	63.2	59.9	52.9	42.8	31.4	20.0	11.4	6.70	4.06	2.67	1.88	1.30	0.89	0.62	0.44	0.34	0.30	0.28
40	18.6	18.3	16.8	14.3	10.4	7.11	5.03	3.89	3.28	2.66	1.95	1.40	1.01	0.72	0.53	0.40	0.33	0.28
50	4.64	4.69	4.51	4.13	3.69	3.36	3.05	2.76	2.47	2.20	1.84	1.40	1.05	0.79	0.59	0.45	0.36	0.28
60	2.70	2.66	2.59	2.50	2.38	2.25	2.12	1.98	1.85	1.72	1.61	1.34	1.07	0.83	0.64	0.50	0.39	0.28
70	1.70	1.69	1.67	1.64	1.61	1.57	1.53	1.49	1.45	1.41	1.37	1.27	1.04	0.84	0.67	0.52	0.40	0.28
80	1.28	1.27	1.26	1.25	1.24	1.23	1.22	1.22	1.21	1.20	1.19	1.17	0.99	0.83	0.68	0.54	0.40	0.28
90	0.99	0.98	0.98	0.97	0.97	0.96	0.98	0.99	1.00	1.01	1.02	1.03	0.91	0.78	0.66	0.53	0.40	0.28
100	0.76	0.76	0.76	0.76	0.76	0.76	0.78	0.79	0.81	0.84	0.86	0.89	0.81	0.73	0.64	0.54	0.42	0.28
110	0.74	0.74	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.76	0.77	0.78	0.74	0.68	0.61	0.52	0.43	0.28
120	0.95	0.94	0.92	0.90	0.88	0.84	0.80	0.78	0.76	0.75	0.75	0.72	0.68	0.64	0.59	0.52	0.43	0.28
130	1.58	1.53	1.46	1.38	1.27	1.16	1.04	0.94	0.86	0.78	0.73	0.69	0.64	0.61	0.57	0.51	0.41	0.28
140	2.29	2.25	2.18	2.06	1.89	1.69	1.48	1.27	1.08	0.90	0.76	0.65	0.61	0.57	0.54	0.50	0.41	0.28
150	2.64	2.61	2.57	2.48	2.35	2.17	1.93	1.66	1.26	0.94	0.73	0.62	0.57	0.54	0.52	0.48	0.40	0.28
160	2.71	2.71	2.68	2.63	2.53	2.40	2.02	1.59	1.19	0.87	0.66	0.55	0.52	0.50	0.49	0.46	0.39	0.28
170	2.51	2.56	2.61	2.47	2.19	1.89	1.56	1.22	0.90	0.66	0.52	0.46	0.46	0.47	0.46	0.44	0.38	0.28
180	2.00	1.87	1.76	1.60	1.41	1.17	0.92	0.68	0.48	0.35	0.32	0.34	0.40	0.43	0.43	0.42	0.36	0.28

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-03-13

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: